

Sun Blade™ X6240 Server Module Operating System Installation Guide

Sun Microsystems, Inc. www.sun.com

Copyright © 2009 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, California 95054, U.S.A. All rights reserved.

Sun Microsystems, Inc. has intellectual property rights relating to technology embodied in the product that is described in this document. In particular, and without limitation, these intellectual property rights may include one or more of the U.S. patents listed at http://www.sun.com/patents and one or more additional patents or pending patent applications in the U.S. and in other countries.

Parts of the product may be derived from Berkeley BSD systems, licensed from the University of California. UNIX is a registered trademark in the U.S. and in other countries, exclusively licensed through X/Open Company, Ltd.

Sun, Sun Microsystems, the Sun logo, Java, Solaris, OpenSolaris, Sun Blade, docs.sun.com, Sun Fire and the Solaris logo are trademarks or registered trademarks of Sun Microsystems, Inc., or its subsidiaries, in the U.S. and other countries.

Microsoft is a trademark or registered trademark of Microsoft Corporation or its subsidiaries in the United States and Other countries. Windows is a trademark or registered trademark of Microsoft Corporation or its subsidiaries in the United States and Other countries. The Adobe. logo is a registered trademark of Adobe Systems, Incorporated.

Use of any spare or replacement CPUs is limited to repair or one-for-one replacement of CPUs in products exported in compliance with U.S. export laws. Use of CPUs as product upgrades unless authorized by the U.S. Government is strictly prohibited.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Copyright © 2009 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, California 95054, Etats-Unis. Tous droits réservés.

Sun Microsystems, Inc. détient les droits de propriété intellectuels relatifs à la technologie incorporée dans le produit qui est décrit dans ce document. En particulier, et ce sans limitation, ces droits de propriété intellectuelle peuvent inclure un ou plus des brevets américains listés à l'adresse http://www.sun.com/patents et un ou les brevets supplémentaires ou les applications de brevet en attente aux Etats - Unis et dans les autres pays.

Des parties de ce produit pourront être dérivées des systèmes Berkeley BSD licenciés par l'Université de Californie. UNIX est une marque déposée aux Etats-Unis et dans d'autres pays et licenciée exclusivement par X/Open Company, Ltd.

Sun, Sun Microsystems, le logo Sun, Java, Solaris, OpenSolaris, Sun Blade, docs.sun.com, Sun Fire et le logo Solaris sont des marques de fabrique ou des marques déposée de Sun Microsystems, Inc., ou ses filiales, aux Etats-Unis et autres pays.

Microsoft sont est marques de fabrique ou des marques déposées de Microsoft Corporation ou de sa filiale aux Etats-Unis et dans d'autres pays. Windows est une marque de fabrique ou une marques déposée de Microsoft Corporation ou de sa filiale aux Etats-Unis et dans d'autres pays. Le logo Adobe est une marque déposée de Adobe Systems, Incorporated.

L'utilisation de pieces detachees ou d'unites centrales de remplacement est limitee aux reparations ou a l'echange standard d'unites centrales pour les produits exportes, conformement a la legislation americaine en matiere d'exportation. Sauf autorisation par les autorites des Etats-Unis, l'utilisation d'unites centrales pour proceder a des mises a jour de produits est rigoureusement interdite.

LA DOCUMENTATION EST FOURNIE "EN L'ETAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFACON.





Contents

Preface ix

1. Overview 1

```
About Installing an Operating System on a Sun Blade X6240 Server Module 1
```

Supported Operating Systems 2

Installation Prerequisites 2

Installation Instructions 3

Installation Options 3

Related Documentation 4

2. Installing Red Hat Enterprise Linux 5

About the Red Hat Enterprise Linux Installation 5

Red Hat Installation and Administration Documentation 6

Task Map for the RHEL Installation 7

Preparing to Install the RHEL Operating System 7

Obtaining Updated RHEL Operating System Media Kits 8

Additional Software Updates or Patches 8

Installing the RHEL Operating System From Distribution Media 8

Before You Begin 8

Required Items 9

▼ To Install RHEL From Local Distribution Media 9

Installing the RHEL OS Using the Remote Console Application 19
--

▼ To Install RHEL Using the ILOM Remote Console Application 10
Installing Red Hat Enterprise Linux Using PXE 11

Task Map for the RHEL Installation Using PXE 12

Preconfiguring a Network to Support PXE Installation of RHEL 12

Required Items 13

- ▼ To Configure a DHCP Server 13
- ▼ To Install Portmap on the DHCP Server 14
- ▼ To Configure the TFTP Service on the DHCP Server 14
- ▼ To Install and Configure the neopxe Boot Server Daemon 15
- ▼ To Configure the NFS Service on the DHCP Server 16
- ▼ To Disable the Firewall 17

Rebooting the PXE/DHCP Server 18

Installing the RHEL Operating System From a PXE Server 18

Before You Begin 18

- ▼ To Install a RHEL Operating System From a PXE Server 18
- ▼ To Update the RHEL Drivers 19

Updating the RHEL Operating System 20

- ▼ To Update the RHEL 4 Software 20
- ▼ To Update the RHEL 5 Software 20

3. Installing SUSE Linux Enterprise Server 10 23

About the SUSE Linux Installation 24

Installing the SLES 10 Operating System 24

SLES 10 Installation and Configuration Documentation 24

Task Map for the SLES 10 Installation 25

Preparing to Install the SLES 10 Operating System 26

Installing the SLES 10 Operating System From Distribution Media 26

Required Items 26

▼ To Install SLES 10 From Distribution Media 26

Installing SLES 10 Operating System Using the Remote Console Application 27

▼ To Install SLES 10 Using the Remote Console Application 27

Preconfiguring the Network to Support PXE Installation of SLES 10 28

Required Items 28

Configuring the DHCP Server 29

▼ To Configure the DHCP Server 29

Installing Portmap 30

▼ To Install Portmap 30

Configuring the TFTP Service 30

▼ To Configure the TFTP Service 31

Installing and Configuring the neopxe Boot Server Daemon 31

▼ To Install and Configure the neopxe Boot Server Daemon 31

Configuring the NFS Service 33

▼ To Configure the NFS Service 33

Disabling the Firewall 34

▼ To Disable the Firewall 34

Installing the SLES 10 Operating System Using PXE 35

Before You Begin 35

Task Map for the SLES 10 Installation 35

Required Items 35

Configuring a SLES 10 PXE Install Image on the PXE Server 36

Setting Up and Copying SLES 10 Operating System to a Directory 36

▼ To Set Up and Copy the SLES 10 Operating System to a Directory 36

Creating Links to SLES 10 PXE Files 37

▼ To Create Links to the SLES 10 PXE Files 37

Installing SLES 10 From a PXE Server 37

Before You Begin 38

- ▼ To Install SLES 10 From a PXE Server 38
- Updating the SLES 10 Operating System 38
 - ▼ To Update the SLES Operating System 38
- Updating the SLES Drivers 39
 - ▼ To Update the SLES Drivers 39

4. Installing Solaris 10 41

- About the Solaris 10 Installation 42
- System Requirements 42
- Download Solaris OS 43
- Solaris Documentation 43
- Installation Methods 44
- Task Map for Solaris 10 Installation 46
- Preparing to Install the Solaris Operating System 47
 - Installation Prerequisites 47
- Booting a Server in a GRUB-Based Environment 48
- Booting a Server Over the Network Using PXE 49
 - Before You Begin 49
 - ▼ To Boot a Server Over the Network Using PXE 49
 - Boot the server over the network using PXE. 50
- Installing the Solaris Operating System From Distribution Media 50
 - ▼ To Install the Solaris OS From Distribution Media 50
- Installing the Solaris Operating System Using a Serial Console 51
 - Before You Begin 51
 - ▼ To Install the Solaris Operating System Using a Serial Console 52

5. Installing OpenSolaris 55

- About the OpenSolaris 10 Installation 55
- System Requirements 56
- Download OpenSolaris 56

OpenSolaris Documentation 57

Installation Methods 57

Task Map for OpenSolaris Installation 58

Installing OpenSolaris Operating System Using Local or Remote Media 59
Installation Prerequisites 59

▼ To Install OpenSolaris OS From Local or Remote Media. 60

Post OpenSolaris Installation Tasks 67

Install System Device Drivers to Support Additional Hardware 67
Install OpenSolaris Support Repository Updates 67
Enable Option for Wake On LAN 67

6. Installing VMware ESX Server 3.5 Software 69

Before You Begin 69

Task Map for VMware ESX Server 3.5 Installation 70

VMware Installation and Administration Documentation 70

Planning Network Interfaces 71

Select an Installation Method 71

VMware ESX Server 3.5 Update 1 Installation Overview 72

Downloading the VMware ESX Server 3.5 ISO Image 72

▼ To Download the VMware ESX Server 3.5 ISO Image 72

Installing the VMware ESX Server 3.5 From a Remote CD or Remote ISO Image 73

▼ To Install VMware ESX Server 3.5 From a Remote CD or Remote ISO Image 73

Installing the VMware ESX Server 3.5 Update 1 From a Local CD 75

Required Items 75

▼ To Install VMware ESX Server 3.5 From a Local CD 75

Updating the VMware Server 3.5 Software With Updates and Patches 77

Index 79

Preface

This Sun Blade X6240 Server Module Operating System Installation Guide contains operating system installation and initial software configuration procedures for bringing the server module to a configurable and usable state.

Product Updates

For product updates that you can download for the Sun Blade X6240 server module, visit the following web site:

```
http://www.sun.com/download/index.jsp.
```

Find the Hardware Drivers section and click x64 Servers & Workstations. The Sun Blade x6240 server module site contains updates for firmware and drivers, as well as CD-ROM . iso images.

Related Documentation

For a description of the document set for the Sun Blade X6240 Server Module, see the *Sun Blade X6240 Server Module Getting Started Guide* (820-3975) that is packed with your server module and also posted at the product's documentation site. Go to the following URL, then navigate to the Sun Blade X6240 product documentation:

```
http://docs.sun.com/
```

The documents listed in the following table are available at that site.

Title	Content	Part Number	Format
Sun Blade X6240 Server Module Product Notes	Late-breaking information about the server module.	820-3972	PDF HTML
Sun Blade X6240 Server Module Getting Started Guide	Basic installation information for setting up the server module.	820-3975	PDF Print
Sun Blade X6240 Server Module Installation Guide	Detailed installation information for setting up the server module.	820-3968	PDF HTML Print option
Sun Blade X6240 Server Module Operating System Installation Guide	Installation instructions for the Solaris and Linux operating systems.	820-3969	PDF HTML
Sun Blade X6240 Server Module Windows Operating System Installation Guide	Installation instructions for the Windows Server operating system.	820-3970	PDF HTML
Sun Blade X6240 Server Module Service Manual	Information and procedures for maintaining and upgrading the server module.	820-3971	PDF HTML
x64 Servers Utilities Reference Manual	Information for using applications and utilities common to x64 servers and server modules.	820-1120	PDF HTML
Sun Integrated Lights Out Manager 2.0 User's Guide	ILOM features and tasks that are common to servers and server modules that support ILOM.	820-1188	PDF HTML
Sun Integrated Lights Out Manager Supplement for Sun Blade X6240 Server Module	ILOM information that is specific to the server module.	820-3974	PDF HTML
Sun Blade X6240 Server Module Safety and Compliance Manual	Hardware safety and compliance information for the server module.	820-4411	PDF
Important Safety Information for Sun Hardware Systems	Multilingual hardware safety and compliance information for all Sun hardware systems.	816-7190	Print

Translated versions of some of these documents are available at the web site described above in French, Simplified Chinese, Traditional Chinese, Korean, and Japanese. English documentation is revised more frequently and might be more upto-date than the translated documentation.

Support, and Training

Sun Function	URL	
Support	http://www.sun.com/support/	
Training	http://www.sun.com/training/	

Using UNIX Commands

This document might not contain information about basic UNIX® commands and procedures such as shutting down the system, booting the system, and configuring devices. Refer to the following for this information:

- Software documentation that you received with your system
- SolarisTM Operating System documentation, which is at:

http://docs.sun.com

Third-Party Web Sites

Sun is not responsible for the availability of third-party web sites mentioned in this document. Sun does not endorse and is not responsible or liable for any content, advertising, products, or other materials that are available on or through such sites or resources. Sun will not be responsible or liable for any actual or alleged damage or loss caused by or in connection with the use of or reliance on any such content, goods, or services that are available on or through such sites or resources.

Typographic Conventions

Typeface*	Meaning	Examples
AaBbCc123	The names of commands, files, and directories; on-screen computer output	Edit your.login file. Use ls -a to list all files. % You have mail.
AaBbCc123	What you type, when contrasted with on-screen computer output	% su Password:
AaBbCc123	Book titles, new words or terms, words to be emphasized. Replace command-line variables with real names or values.	Read Chapter 6 in the <i>User's Guide</i> . These are called <i>class</i> options. You <i>must</i> be superuser to do this. To delete a file, enter rm <i>filename</i> .

^{*} The settings on your browser might differ from these settings.

Sun Welcomes Your Comments

Sun is interested in improving its documentation and welcomes your comments and suggestions. You can submit your comments by going to:

http://www.sun.com/hwdocs/feedback

Please include the following document title and part number with your feedback:

Sun Blade X6240 Server Module Operating System Installation Guide, 820-3969-11

Overview

This chapter provides an overview of the operating system (OS) installation process for the Sun Blade X6240 server module.

This chapter contains the following sections:

- "About Installing an Operating System on a Sun Blade X6240 Server Module" on page 1
- "Supported Operating Systems" on page 2
- "Installation Prerequisites" on page 2
- "Installation Instructions" on page 3
- "Installation Options" on page 3
- "Related Documentation" on page 4

Note − This document only covers supported Solaris[™], OpenSolaris, Linux, and VMware OS installation. For instructions on installing the Microsoft Windows Server 2003/2008 operating systems onto the Sun Blade X6240 server module, see the *Sun Blade X6240 Server Module Windows Operating System Installation Guide*, 820-3970.

About Installing an Operating System on a Sun Blade X6240 Server Module

There are several supported operating system (OS) distributions and several ways to install each. This document is intended only as a general guide that refers you to detailed procedures.

1

Supported Operating Systems

Solaris 10 or OpenSolaris 2009.06 is preinstalled on your Sun Blade X6240 server module, if ordered. You may also install these operating systems:

- Solaris 10 5/08 and later
- OpenSolaris 2009.06 or later
- Red Hat Enterprise Linux (RHEL) 4.6, 32-bit and 64-bit
- RHEL 5.1, 64-bit
- SUSE Linux Enterprise Server (SLES) 10 SP2, 64-bit
- VMware ESX Server 3.5 Update 1
- Microsoft Windows Server 2003 Enterprise R2 SP2, 32-bit and 64-bit
- Wicrosoft Windows Server 2008 Enterprise and Datacenter 32-bit and 64-bit

Note – The Solaris 10 5/08 Operating System or OpenSolaris 2009.06 Operating System is preinstalled on the Sun Blade X6240 server module boot disk.

Note – For instructions on installing the Windows operating systems onto the Sun Blade X6240 server module, see the *Sun Blade X6240 Server Module Windows Operating System Installation Guide* (820-3963).

Installation Prerequisites

You must complete the following prerequisite tasks before you can begin installing an OS.

- Install the server hardware.
- Configure the service processor.
- Ensure that the ILOM version installed on the Sun Blade X6240 server module is the same as the version installed on the chassis management module (CMM). ILOM version 2.0.3.9 is recommended.
- Gather needed information, such as IP address and netmask.

Installation Instructions

Chapter 2 (RHEL), Chapter 3 (SLES), Chapter 4 (Solaris), Chapter 5 (OpenSolaris), and Chapter 6 (VMware) provide the information you need to manually install these operating systems.

Tip – We recommend using the Sun Installation Assistant (SIA) to install the Red Hat Enterprise Linux and the SUSE Linux Enterprise Server operating systems. SIA is a convenient, front-end application designed to assist you in installing these operating systems on your server module. SIA supplements the standard installation utilities and procedures that ship with the operating system; it does not replace them. For more information, refer to the *Sun Installation Assistant User's Guide* (820-3357).

Installation Options

You have three options for installing an operating system:

- Local CD Installation. To install the operating system at the server, you will need to use a dongle cable connected to the front slot of the Sun Blade X6240 server module. The dongle can connect a physical USB CD drive, a keyboard, a mouse, and a monitor. Depending on the equipment you have, you may need a USB hub to increase the number of USB ports available (the Sun-supplied dongle only includes two USB ports).
- Remote Console Installation. You can use the ILOM Remote Console application to install the operating system from a server on your network. ILOM 2.0 or later is required. You can download the ILOM 2.0.3.9 firmware for your Sun Blade X6240 server module from the product download page at http://www.sun.com/downloads.
- **PXE Boot** The network ports for the Sun Blade X6240 server module are provided either through a network express module (NEM, NEM+) or PCI express module (PCI EM) installed on the back of the chassis.

Related Documentation

Refer to the following documentation for operating system information:

- Solaris 10 Installation Guide: Network-Based Installations at: http://docs.sun.com/app/docs/doc/817-5504
- Getting Started With OpenSolaris 2009.06 at: http://dlc.sun.com/osol/docs/content/2009.06/getstart/index.ht ml
- Red Hat Enterprise Linux System Administration Guide at: https://www.redhat.com/docs/manuals/enterprise/
- SUSE Linux Enterprise Server 10 Installation and Administration Guide on the first installation CD under the docu directory as the file sles-admin.pdf.
- Installation and Upgrade Guide for VMware Infrastructure at: http://www.vmware.com/support/pubs/vi_pubs.html
- Sun Integrated Lights Out Manager 2.0 User's Guide at: http://docs.sun.com/app/docs/doc/820-1188-11

Installing Red Hat Enterprise Linux

This chapter provides information about *manually* installing Red Hat Enterprise Linux on a Sun Blade X6240 server module.

This chapter contains the following sections:

- "About the Red Hat Enterprise Linux Installation" on page 5
- "Preparing to Install the RHEL Operating System" on page 7
- "Installing the RHEL Operating System From Distribution Media" on page 8
- "Updating the RHEL Operating System" on page 20
- "Installing the RHEL OS Using the Remote Console Application" on page 10
- "Installing Red Hat Enterprise Linux Using PXE" on page 11

About the Red Hat Enterprise Linux Installation

If you have installed Red Hat Enterprise Linux (RHEL) operating system (OS) on other Intel or AMD Opteron servers, you are already familiar with how to install it on a Sun Blade X6240 server module. The two most common methods to install RHEL on your server are to use:

- The RHEL distribution media
- The automatic KickStart installation from RHEL OS (installation tree) stored on a Preboot Execution Environment (PXE) network server

Tip – We recommend using the Sun Installation Assistant (SIA) to install the Red Hat Enterprise Linux operating system. SIA is a convenient, front-end application designed to assist you in installing the RHEL OS on your server module. SIA supplements the standard installation utilities and procedures that ship with the operating system; it does not replace them. For more information, refer to the *Sun Installation Assistant User's Guide* (820-3357).

Red Hat Installation and Administration Documentation

Before you install the RHEL OS on a Sun Blade X6240 server module, consult the following RHEL documentation.

TABLE 2-1 Sources for RHEL Documentation

Document	Description	Where to Find
README file	Contains late-breaking information about system requirements and system configuration for your version of the RHEL OS.	On the RHEL CD 1, and online from http://www.redhat.com/docs/
Red Hat Enterprise Linux Quick Installation Guide	Brief printed guide containing useful information to assist you during the installation of RHEL.	Included with the RHEL distribution media
Red Hat Enterprise Linux Installation Guide	Full version of the printed <i>Quick Installation Guide</i> .	Included on the Red Hat Documentation CD, and available for download from http://www.redhat.com/docs/
Red Hat Enterprise Linux Introduction to System Administration	Introductory information for RHEL system administrators.	Available for download from http://www.redhat.com/docs/manuals/enterprise/

TABLE 2-1 Sources for RHEL Documentation (*Continued*)

Document	Description	Where to Find
Red Hat Enterprise Linux System Administration Guide	Information on customizing the RHEL OS.	Available for download from http://www.redhat.com/docs/manuals/enterprise/
System Administration for Diskless Booting	Information on configuring your server and Red Hat Linux for diskless booting.	Available for download as the Red Hat Enterprise Linux Installation Guide for the x86, Itanium TM , and AMD64 Architectures at http://www.redhat.com/docs/manuals/enterprise/
Red Hat Enterprise Linux Security Guide	Guide for securing the RHEL OS.	Available for download from http://www.redhat.com/docs/manuals/enterprise/

Task Map for the RHEL Installation

Consult TABLE 2-2 to determine which topics documented in this guide are relevant to the installation tasks that you want to perform.

TABLE 2-2 Task Map for the RHEL Installation

Installation Task)	Relevant Topic
Collect information about your system and network.	"Preparing to Install the RHEL Operating System" on page 7
Install RHEL from distribution media using a local or network-attached CD or DVD drive.	"Installing the RHEL Operating System From Distribution Media" on page 8
Update the RHEL OS files and drivers.	"Updating the RHEL Operating System" on page 20

Preparing to Install the RHEL Operating System

You can install the RHEL OS from a local CD/DVD or from the network. However, you will need to collect some information about your system and your network before you proceed with either of these installation methods. Before you begin installing the RHEL OS, review the procedures listed in this chapter for your installation method.

Obtaining Updated RHEL Operating System Media Kits

The Sun Blade X6240 server module supports the latest versions of the RHEL OS: RHEL 4.6 and RHEL 5.1. To install either of these versions on the server module, you have to obtain either the RHEL 4.6 or RHEL 5.1 Update Media Kit, available at http://rhn.redhat.com.

You will need your Enterprise account information to download the updated ISO images. An Enterprise account is an account that the customer creates to access Red Hat's support network after purchasing the RHEL Update Media Kit.

Additional Software Updates or Patches

After installing the RHEL OS on the server module, you may also need to update the OS with updates or patches. For more information, see "Updating the RHEL Operating System" on page 20 for details.

Installing the RHEL Operating System From Distribution Media

RHEL provides both a text mode and graphical interface for installing and configuring the OS from distribution media. At the boot prompt, you can select the interface that you want to use. Both options are shown later in this section.

Before You Begin

Installing the RHEL OS from CDs consists of the following procedures:

- Download the RHEL Update Media Kit from http://rhn.redhat.com.
 See "Obtaining Updated RHEL Operating System Media Kits" on page 8.
- 2. Install the RHEL OS.
- Update the RHEL OS.See "Updating the RHEL Operating System" on page 20.

Required Items

Installation from distribution media requires the following items:

- Sun Blade X6240 server module equipped with the following four items:
 - USB keyboard and mouse
 - USB CD/DVD drive
 - Monitor
 - Multi-port dongle cable to plug into the front slot of the Sun Blade X6240 server module. Refer to the Sun Blade X6240 Server Module Installation Guide (820-3968).
- RHEL OS media CD-ROM set

▼ To Install RHEL From Local Distribution Media

1. Connect the multi-port dongle cable to the connector on the front of the Sun Blade X6240 server module.

For more information, refer to the *Sun Blade X6240 Server Module Installation Guide* (820-3968).

- 2. Connect the USB connector of the CD/DVD drive to the USB port of the dongle cable.
- 3. Power on the system.
- 4. Insert the RHEL Distribution CD-ROM #1 into the CD/DVD drive connected to the Sun Blade X6240 server module and reboot the server.

The server will boot from the CD-ROM and display a boot: prompt.

If the installation process does not recognize the CD-ROM, refer to the *Sun Blade X6240 Server Module Product Notes* (820-3972).

- 5. At the boot prompt, select one of the following:
 - For text mode, enter the following command:

boot: linux text

- For graphical mode, press **Enter**.
- 6. Refer to the Red Hat Enterprise Linux Installation Guide to guide you through the remainder of the installation process.
- 7. After completing the OS installation, proceed to "Updating the RHEL Operating System" on page 20.

8. Update the RHEL drivers.

See "To Update the RHEL Drivers" on page 19.

Installing the RHEL OS Using the Remote Console Application

This section explains how to install the RHEL OS on your server using the Integrated Lights Out Manager (ILOM) Remote Console application.

Use the following procedure to install the RHEL 4.6 (or later) OS using the ILOM Remote Console application.

Note – Refer to the *Sun Integrated Lights Out Manager 2.0 User's Guide* (820-1188) for more information on completing the following steps. This guide provides details on using the ILOM service processor web interface to redirect the console to the Remote Console.

▼ To Install RHEL Using the ILOM Remote Console Application

- 1. Locate your RHEL installation CD/DVD or the equivalent ISO images.
- 2. Connect to the ILOM service processor web interface.
- 3. Select the Remote Control tab, then select the Mouse Mode Settings tab.
- 4. If necessary, change the mouse mode to Relative Mouse Mode.

 See the "Remote Console Application" chapter of the Sun Integrated Lights Out Manager 2.0 User's Guide (820-1188) for further instructions.
- 5. Select the Redirection tab.
- 6. Click the Launch Redirection button to start the JavaRConsole application.
- 7. Log in to the JavaRConsole.
- 8. Select Keyboard and Mouse in the Devices menu to start keyboard and mouse redirection.

9. Start CD/DVD redirection.

From the JavaRConsole Devices menu, you can redirect the CD in two ways:

- If you are installing a physical CD-ROM into the remote console CD drive, insert the CD-ROM into the drive and select CD-ROM.
- If you are using an ISO image installed on the remote console, select CD-ROM image and provide the location of the ISO file.
- 10. Power on the server using the ILOM web interface.
- 11. When the boot prompt appears, type linux text.
- 12. When prompted to test the CD media before installation, select Skip if you do not want the media test to run.
- 13. Refer to the Red Hat Enterprise Linux Installation Guide to guide you through the remainder of the installation process.

Installing Red Hat Enterprise Linux Using PXE

The on-board network interface card (NIC) in your Sun Blade X6240 server module supports the Preboot Execution Environment (PXE) network booting protocol. The system BIOS and network interface BIOS on the server module automatically query the network for a Dynamic Host Configuration Protocol (DHCP) server. If a DHCP server on the network has been configured to support the PXE protocol and PXE image servers on the same network, then the BIOS on the server module can be used to install a bootable Red Hat Enterprise Linux (RHEL) image.

Tip – PXE is a powerful and convenient solution for setting up a number of Sun Blade X6240 server modules with identical configurations.

Task Map for the RHEL Installation Using PXE

If you do not have PXE set up on your network and you would like to take advantage of PXE to install RHEL on your network, you need to perform the following tasks:

TABLE 2-3 Task Map for PXE RHEL Installation

Installation Task	Relevant Topic
Obtain the RHEL Update Media Kit at http://rhn.redhat.com.	"Obtaining Updated RHEL Operating System Media Kits" on page 8.
Set up a Linux network and the PXE server.	"Preconfiguring a Network to Support PXE Installation of RHEL" on page 12.
Reboot the PXE server	"Rebooting the PXE/DHCP Server" on page 18
Install the RHEL OS from the PXE server.	"Installing the RHEL Operating System From a PXE Server" on page 18.

Preconfiguring a Network to Support PXE Installation of RHEL

This section describes how to preconfigure a network running the RHEL OS to support PXE installation of the RHEL OS on a server module. These procedures assume that you already have a bootable server that is running a version of the RHEL OS to use as a PXE server.

Perform the following procedures to preconfigure your network for PXE installation:

- Configure a DHCP Server See "To Configure a DHCP Server" on page 13.
- Install Portmap

 See "To Install Portmap on the DHCP Server" on page 14.
- Configure the TFTP Service

 See "To Configure the TFTP Service on the DHCP Server" on page 14.
- Install and Configure the neopxe Boot Server Daemon

 See "To Install and Configure the neopxe Boot Server Daemon" on page 15.
- Configure the NFS Service
 See "To Configure the NFS Service on the DHCP Server" on page 16.
- Disable the FirewallSee "To Disable the Firewall" on page 17.

Required Items

Preconfiguring your network for PXE installation requires the following items:

- RHEL server equipped with:
 - USB CD/DVD drive connected to server module through a dongle cable
 - USB keyboard
 - Monitor
- RHEL OS CD-ROM media set
- Tools and Drivers CD (708-0346)

▼ To Configure a DHCP Server

Complete the following steps to configure the server that will be your DHCP server.

- 1. Turn on the server and log in as superuser.
- 2. Determine whether the DHCP server package is already installed on the server. Type the following command:

```
# rpm -qa | grep dhcp-
```

- 3. If the DHCP server package is not listed, insert the RHEL OS media CD-ROM #5 into the DHCP/PXE server and install the DHCP server.
- 4. Type the following commands to install the DHCP server:

```
# mount /dev/cdrom /mnt/cdrom
```

- # rpm -Uvh /mnt/cdrom/RedHat/RPMS/dhcp-*.rpm
- # umount /mnt/cdrom
- 5. Remove the CD-ROM from the CD/DVD drive.
- 6. Set up your DHCP configuration file (for example, /etc/dhcpd.conf) so that only PXEClient requests receive PXEClient responses.

Enter the following entry to the DHCP configuration file. Refer to the dhcpd.conf man page for more information.

```
class "PXE" {match if substring(option vendor-class-
identifier, 0, 9) ="PXEClient"; option vendor-class-
identifier "PXEClient"; vendor-option-space PXE;}
```

Note – If the server does not already have a dhcpd.conf file in its /etc directory, you can copy the dhcpd.conf file from the sample DHCP configuration file in the /tmp/rhel4-pxefiles or the /tmp/rhel5-pxefiles directory.

- 7. To start the DHCP service, type:
 - # service dhcpd start
- 8. To configure the server to always start DHCP, type:
 - # chkconfig dhcpd on

▼ To Install Portmap on the DHCP Server

- 1. Determine whether the portmap server package is already installed on the server. Type:
 - # rpm -qa | grep portmap
- 2. If portmap is not listed, insert RHEL CD #2 and install the portmap service by entering the following commands:
 - # mount /dev/cdrom /mnt/cdrom
 - # rpm -Uvh /mnt/cdrom/RedHat/RPMS/portmap-*
 - # umount /mnt/cdrom
- 3. Remove the CD from the server.

▼ To Configure the TFTP Service on the DHCP Server

- 1. Determine whether the TFTP server package is already installed on the server. Type:
 - # rpm -qa | grep tftp-server
- 2. If the TFTP server package is not listed, insert RHEL CD #4 and install the TFTP service by typing the following commands:
 - # mount /dev/cdrom /mnt/cdrom
 - # rpm -Uvh /mnt/cdrom/RedHat/RPMS/tftp-server*
 - # umount /mnt/cdrom
- 3. Remove the CD from the server.
- 4. Edit and save the /etc/xinetd.d/tftp file.

Make the following changes:

- Change the -s /tftpboot entry to -v -s /home/pxeboot.
- Change the disable attribute to **no**.
- 5. Restart the inetd server. Type:
 - # service xinetd restart

▼ To Install and Configure the neopxe Boot Server Daemon

Complete the following steps on the DHCP server to install the neopxe boot server daemon. The neopxe server is designed for use with a DHCP server that is running on the same system.

- 1. Install the neopxe boot server daemon onto the system that is the DHCP server. Type:
 - # cd /tmp/rhel4-pxefiles/neopxe-0.2.0
 - # ./configure
 - # make
 - # make install
- 2. Append the path /usr/local/sbin/neopxe to the rc.local file by typing the following command, making sure to use two greater-than signs:
 - # echo "/usr/local/sbin/neopxe" >> /etc/rc.d/rc.local
- 3. Copy the PXE Linux image from the /tmp/ directory. Type:
 - # mkdir /home/pxeboot
 - # cp /tmp/rhel4-pxefiles/pxelinux.0 /home/pxeboot
- 4. Configure the PXE Linux image. Type:
 - # mkdir /home/pxeboot/pxelinux.cfg/
 - # touch /home/pxeboot/pxelinux.cfg/default
- 5. Edit the /usr/local/etc/neopxe.conf configuration file, which is read by neopxe at startup.
 - If the neopxe.conf file is not in the /usr/local/etc directory, copy it from the /tmp/rhel4-pxefiles/neopxe-0.2.0/ directory.
 - A valid configuration file must have entries for each of the following lines, including at least one service line.

```
ip_addr=n.n.n.n
prompt=boot-prompt-string
prompt_timeout=timeout
service=service-number,boot-server,boot-file,label
```

Where:

- *n.n.n.n* is the IP address of your PXE server.
- *boot-prompt-string* is the character string displayed during a network boot that prompts the user to press the F8 key for a boot menu.

- *timeout* is the number of seconds the prompt is displayed before the server defaults to the first service for booting.
- *service-number* is an integer in the range of 1 to 254 that identifies the boot service.
- boot-server is the IP address of the boot server for that boot service.
- boot-file is the name of the boot file that is read from your /home/pxeboot directory.
- *label* is the text string that is displayed when the boot menu is invoked by pressing the F8 key.

For example:

```
ip_addr=192.168.0.1
prompt=Press [F8] for menu.
prompt_timeout=10
service=1,192.168.0.1,pxelinux.0,Linux
service=2,192.169.0.1,nbp.unknown,Solaris
```

Note – Refer to the neopxe.conf man page for more information.

- 6. Start the neopxe daemon. Type:
 - # /usr/local/sbin/neopxe

▼ To Configure the NFS Service on the DHCP Server

- 1. Determine whether the NFS service package is already installed on the server. Type:
 - # rpm -qa | grep nfs-utils
- 2. If the NFS service package is not listed, insert RHEL CD #2 and install the NFS service by typing the following commands:
 - # mount /dev/cdrom /mnt/cdrom
 - # rpm -Uvh /mnt/cdrom/RedHat/RPMS/nfs-utils-*
 - # umount /mnt/cdrom
- 3. Remove the CD from the server.
- 4. Edit and save the /etc/exports file to add the following line:

```
/home/pxeboot *(no root squash,no subtree check,insecure)
```

16

- 5. Start the NFS service. Type:
 - # service nfs start
- 6. Configure the server to always start the NFS service. Type:
 - # chkconfig nfs on
 - # chkconfig nfslock on

Note – If you are using a DNS server, verify that DNS entries exist for the range of addresses defined in the PXE subnet dynamic-bootp entry in the dhcpd.conf file. If you are not using a DNS server, edit the /etc/hosts file to add the range of host addresses found in the PXE subnet dynamic-bootp entry in the dhcpd.conf file.

▼ To Disable the Firewall



Caution – Security vulnerability. When you disable the firewall protection on the system that is your PXE server, the security of the data on that server cannot be ensured. If this server is networked outside of your local intranet, be sure to reenable the firewall after downloading software to PXE clients.

If you enabled firewall security when you installed the RHEL OS on the system that will be your PXE server, complete the following steps to disable the firewall so that PXE clients can download from the server.

- 1. Stop the ipchains service. Type the command:
 - # service ipchains stop
- 2. Stop the iptables service. Type the command:
 - # service iptables stop
- 3. Stop the ipchains service from starting when you restart the server. Type the command:
 - # chkconfig ipchains off
- 4. Stop the iptables service from starting when you restart the server. Type the command:
 - # chkconfig iptables off

Note – You might encounter error messages if the ipchains service is not installed on the server. You can safely ignore these messages.

Rebooting the PXE/DHCP Server

When you have completed all the previous configuration steps, reboot the PXE/DHCP server and proceed to the next section, "Installing the RHEL Operating System From a PXE Server" on page 18.

Installing the RHEL Operating System From a PXE Server

This procedure describes how to configure your Sun Blade X6240 server module to initiate the request to download the RHEL OS boot image file from the PXE/DHCP server and how to install the boot image onto your Sun Blade X6240 server module.

Before You Begin

Before you install the RHEL OS from a PXE server, you must complete the following tasks:

- Configured your Linux network to support a PXE server. See "Preconfiguring a Network to Support PXE Installation of RHEL" on page 12.
- Reboot the PXE/DHCP server. See "Rebooting the PXE/DHCP Server" on page 18.

▼ To Install a RHEL Operating System From a PXE Server

1. Connect the PXE client to the same network as the PXE server, and power on the PXE client.

The PXE client is the target Sun Blade X6240 server module to which you are installing the RHEL OS.

- 2. When the PXE client prompts you for a network boot, press the F12 key.

 The PXE client connects to the PXE server and attempts to obtain an IP address from the DHCP server.
- 3. When prompted, press the F8 key to begin downloading the PXE boot image.
- 4. At the boot: prompt, enter in the label you gave the image when you installed the RHEL image on the PXE server.

The RHEL install image downloads onto the target Sun Blade X6240 server module.

- 5. To configure the RHEL OS for your server, refer to the manual that is shipped with your RHEL OS media kit.
- 6. Update the RHEL drivers.

See "To Update the RHEL Drivers" on page 19

7. Update the RHEL OS files.

See "Updating the RHEL Operating System" on page 20

▼ To Update the RHEL Drivers

1. Insert the Tools and Drivers CD for Sun Blade X6240 and mount it onto the directory /mnt it by typing the following command:

mount /dev/cdrom /mnt

2. To install the igb and nvsata drivers, type:

cdrom/drivers/linux/red hat/install.sh

- 3. If the server module has a REM that uses LSI drivers and you are using RHEL 4.6, do the following:
 - a. Type: # cd /mnt/drivers/linux/RAID/LSI/drivers/RHEL4-SLES9
 - b. Unzip the file linuxmpt_RH4_SLES9_3122700-1.zip
 - c. Type: # rpm -ivh nvsata-rhel4.6-3.2-1.24.x86_64.rpm
- 4. If the server module has a REM that uses LSI drivers and you are using RHEL 5, do the following:
 - a. Type: # cd /mnt/drivers/linux/RAID/LSI/drivers/RHEL5-SLES10
 - b. Unzip the file $linuxmpt_RH5_SLES10_4002100-1.zip$
 - c. Type: # rpm -ivh nvsata-rhel5u1-3.4-1.24.x86_64.rpm
- 5. If the server module has a REM that uses StorageTek drivers, do the following:
 - a. Type: # cd /mnt/drivers/linux/RAID/StorageTek/drivers/
 - b. Unzip the file linux_aac_1152455.zip
 - c. Type: # rpm -ivh aacraid-1.1.5-2455.rpm

The installation of the drivers is now complete.

6. Reboot the server module for the changes to take effect. Type:

reboot

Updating the RHEL Operating System

Since software is constantly being updated, your distribution media might not contain the most up-to-date versions of the OS.

The following procedures assume that you have already installed the RHEL OS on the Sun Blade X6240 server module. This procedure explains how to update the RHEL installation with the latest OS.

To use the RHEL 5 update program, your server must be registered with the Red Hat Network (RHN).

To update the RHEL OS, perform one of the following procedures as appropriate:

- "To Update the RHEL 4 Software" on page 20
- "To Update the RHEL 5 Software" on page 20

▼ To Update the RHEL 4 Software

This procedure assumes that your server module has access to the internet.

- 1. Set up the up2date program on the server module.
 - Refer to the documentation included with your RHEL Update Media Kit for details.
- 2. Run the up2date program.

Select the kernel packages in the available package updates section.

▼ To Update the RHEL 5 Software

Your server module must have access to the internet and be registered with the Red Hat Network.

1. To run the yum update program, type:

yum

The program checks that the machine is registered with Red Hat Network. If so, yum downloads necessary updates from the Red Hat Network repository.

2. Answer the questions and make your choices before the packages are downloaded and installed.

You should periodically update your system using yum.

For more information, refer to the man page. Type:

man yum

Installing SUSE Linux Enterprise Server 10

This chapter contains information about *manually* installing SUSE Linux Enterprise Server (SLES) 10 operating system (OS) on a Sun Blade X6240 server.

This chapter contains the following sections:

- "Installing the SLES 10 Operating System" on page 24.
- "Preconfiguring the Network to Support PXE Installation of SLES 10" on page 28
- "Installing the SLES 10 Operating System Using PXE" on page 35
- "Updating the SLES 10 Operating System" on page 38
- "Updating the SLES Drivers" on page 39

Tip — We recommend using the Sun Installation Assistant (SIA) to install the SUSE Linux Enterprise Server operating system. SIA is a convenient, front-end application designed to assist you in installing the SLES OS on your server module. SIA supplements the standard installation utilities and procedures that ship with SLES; it does not replace them. For more information, refer to the *Sun Installation Assistant Windows and Linux User's Guide*, 820-3357.

About the SUSE Linux Installation

The most common methods for installing SLES 10 on your server are:

- Installation from your SLES 10 distribution media from a local or remote CD (see "Preparing to Install the SLES 10 Operating System" on page 26).
- Installation from the network, either from a Preboot Execution Environment (PXE) image stored on a PXE server on your local network or from an image stored elsewhere on your network (see "Installing the SLES 10 Operating System Using PXE" on page 35)

Installing the SLES 10 Operating System

This section describes how to install the SLES 10 OS.

Note – The minimum supported SLES version is SLES 10 Service Pack 2 (SP2).

SLES 10 Installation and Configuration Documentation

Before you install SLES 10 on your server, refer to the SLES 10 documentation.

TABLE 3-1 Sources for SLES 10 Documentation

Document	Description	Where to Find
README file	This file contains late-breaking information about system requirements and system configuration for your version of SLES 10.	On the first SLES 10 installation CD
Release Notes	Product Release Notes	On the first SLES 10 installation CD under the docu directory

 TABLE 3-1
 Sources for SLES 10 Documentation (Continued)

Document	Description	Where to Find
SUSE Linux Enterprise Server 10 Start-Up Guide	This short manual provides a quick introduction to the installation.	On the first installation CD under the docu directory under the appropriate language directory as the file startup.pdf.
SUSE Linux Enterprise Server 10 Installation and Administration Guide	This manual provides detailed information about planning, deployment, configuration and administration of SLES 10.	On the first installation CD under the docu directory under the appropriate language directory as the file sles-admin.pdf.
SLES 10 Support Sites	SUSE provides considerable technical information about the SLES OS at its product and support web sites.	See the SLES 10 home page at http://www.novell.com/products/server/.

Task Map for the SLES 10 Installation

Consult the following table to determine which procedures documented in this help system are relevant to the installation task(s) that you need to perform.

TABLE 3-2 Task Map for the SLES 10 Installation

Installation Task	Relevant Topic
Install the SLES 10 SP2 OS from local or remote CD/DVD drive.	"Preparing to Install the SLES 10 Operating System" on page 26 or "Installing SLES 10 Operating System Using the Remote Console Application" on page 27
Install the SLES 10 SP2 OS using one of the following methods:	
 Install the SLES 10 SP2 OS from local or remote CD/DVD drive or PXE server. 	"Preparing to Install the SLES 10 Operating System" on page 26 or "Installing SLES 10 Operating System Using the Remote Console Application" on page 27
• Install the SLES 10 SP2 OS from an image stored on a networked system.	SUSE Linux Enterprise Server 10 Installation and Administration Guide
• Install the SLES 10 SP2 OS from a PXE server.	"Installing the SLES 10 Operating System Using PXE" on page 35

Preparing to Install the SLES 10 Operating System

You can install the SLES 10 OS from a local CD/DVD drive, remote CD/DVD drive, or the network; however, you need to collect some information about your system before you proceed with any one of these installation methods.

Before installing SLES 10 on your server, verify or collect the following information:

- Dynamic Host Configuration Protocol (DHCP) server name
- MAC address on system label
- SLES 10 SP2 CD set

Installing the SLES 10 Operating System From Distribution Media

The SLES 10 OS provides an easy-to-use graphical interface for installing and configuring the OS. Whether you are using Distribution CDs to install the SLES 10 OS from a locally attached CD/DVD drive or from a remote CD/DVD drive attached via KVMS, the installation procedure is fundamentally the same.

Required Items

- SLES 10 media base CD or DVD set
- SLES 10 installation guide, SUSE Linux Enterprise Server 10 Installation and Administration Guide (see "SLES 10 Installation and Configuration Documentation" on page 24)
- Sun Blade X6240 server module equipped with equipped the following four items:
 - USB keyboard and mouse.
 - USB CD/DVD drive.
 - Monitor.
 - Multi-port dongle cable to connect to the front of the Sun Blade X6240 server module. Refer to the Sun Blade X6240 Server Module Installation Guide (820-3968).

▼ To Install SLES 10 From Distribution Media

- 1. Connect the USB CD/DVD drive to the USB port of the dongle.
- 2. Power on the system.

- 3. Press F8 and select CDROM when prompted.
- 4. Insert SLES 10 CD #1 into your local CD/DVD drive.
- 5. Follow the installation instructions provided in the SUSE Linux Enterprise Server 10 Installation and Administration Guide to complete the installation of the system OS.

Installing SLES 10 Operating System Using the Remote Console Application

This section describes how to install the SLES 10 OS on your Sun Blade X6240 server module using the ILOM Remote Console application.

▼ To Install SLES 10 Using the Remote Console Application

- 1. Locate your SLES 10 OS installation CD/DVD or the equivalent ISO images.
- 2. Connect to the ILOM service processor web interface.

See the topic that describes how to log in to the Sun ILOM web interface in the Sun Integrated Lights-Out Manager 2.0 User's Guide (820-1188).

Note – There are multiple versions of ILOM. Be sure to refer to the guide that matches your server's installed version of ILOM.

- 3. Select the Remote Control tab, then the Mouse Mode Settings tab.
- 4. If necessary, change the mouse mode to Relative Mouse Mode.

See the "Remote Console Application" chapter of the Sun Integrated Lights Out Manager 2.0 User's Guide for more information (820-1188).

- 5. Select the Redirection tab.
- 6. Click the Launch Redirection button to start the JavaRConsole application.
- 7. Log in to the JavaRConsole.
- 8. Start keyboard and mouse redirection.

Select Keyboard and Mouse in the Devices menu.

9. Start CD/DVD redirection.

From the JavaRConsole Devices menu, you can redirect the CD in two ways:

- If you are installing a physical CD into the remote console CD ROM drive, insert the CD into the drive and select CD-ROM.
- If you are using an ISO image installed on the remote console, select CD-ROM image and provide the location of the ISO file.
- 10. Power on the server using the ILOM web interface.
- 11. When the SLES 10 OS installation menu appears, use the arrow keys to select Installation and press Enter.
- 12. Proceed with the SLES 10 OS installation as usual.

Preconfiguring the Network to Support PXE Installation of SLES 10

These procedures describe how to preconfigure your network running the 10 OS to support Preboot Execution Environment (PXE) installation of the SLES OS on your Sun Blade X6240 server. These procedures assume that you already have a bootable server that is running a version of the SLES 10 OS.

Preconfiguring your network for PXE installation involves the following procedures:

- "Configuring the DHCP Server" on page 29
- "Installing Portmap" on page 30
- "Configuring the TFTP Service" on page 30
- "Installing and Configuring the neopxe Boot Server Daemon" on page 31
- "Configuring the NFS Service" on page 33
- "Disabling the Firewall" on page 34

Required Items

Preconfiguring your network for PXE installation requires the following items:

- SLES 10 server equipped with:
 - CD/DVD drive
 - USB keyboard
 - Monitor (optional)
- SLES 10 media set
- Tools and Drivers CD (708-0346)

Configuring the DHCP Server

Complete the following steps on the server that will be your DHCP server.

▼ To Configure the DHCP Server

- 1. Power on the server and log in as superuser.
- 2. Determine whether the DHCP server package is already installed on the server. Type the following command:

```
# rpm -qa | grep dhcp-server
```

3. If the DHCP server package is not listed, install the package using YaST. Type the following command:

```
# yast -i dhcp-server
```

4. Set up the DHCP configuration file (for example, /etc/dhcpd.conf) so that only PXEClient requests receive PXEClient responses.

Add the following entry to the DHCP configuration file (refer to the dhcpd.conf man page for more information).

```
class "PXE" {match if substring(option vendor-class-
identifier, 0,9) = "PXEClient"; option vendor-class-
identifier "PXEClient"; vendor-option-space PXE; next-server
n.n.n.n;}
```

Where *n.n.n.n* is the IP address of the server.

Note – You can start with a sample DHCP configuration file in the /tmp/sles9-pxefiles or /tmp/sles10-pxefiles directory.

5. In the DHCP configuration file, edit the server-identifier entry:

```
server-identifier n.n.n.n
```

Where *n.n.n.n* is the PXE/DHCP server's IP address.

6. In the DHCP configuration file, find the subnet entry fields:

```
subnet 1.2.3.0 netmask 255.255.255.0 {
  range dynamic-bootp 1.2.3.100 1.2.3.200;
  option routers 1.2.3.1;
  option broadcast-address 1.2.3.225;
}
```

- 7. Edit the subnet, range, router and broadcast-address entries according to the PXE/DHCP server's network configuration.
- 8. Edit the /etc/sysconfig/dhcpd file and verify that the DHCPD_INTERFACE is set to the interface that is connected to the network you are planning to run the PXE server.

For example, if you are using Ethernet interface 0, the DHCPD_INTERFACE variable would be set as follows:

```
DHCPD_INTERFACE="eth0"
```

- 9. Start the DHCP service. Type the following command:
 - # /etc/init.d/dhcpd start
- 10. Configure the server to always start DHCP. Type the following command:
 - # chkconfig dhcpd on

Installing Portmap

Complete the following steps on your DHCP server to install the portmap server package.

▼ To Install Portmap

1. Determine whether the portmap server package is already installed on the DHCP server. Type the following command:

```
# rpm -qa | grep portmap
```

2. If portmap is not listed, install the package using YaST. Type the following command:

```
# yast -i portmap
```

Configuring the TFTP Service

Complete the following steps on your DHCP server to configure the TFTP service.

▼ To Configure the TFTP Service

1. Determine whether the TFTP server package is already installed on the DHCP server. Type the following command:

```
# rpm -qa | grep tftp
```

2. If the TFTP server package is not listed, install the package using YaST. Type the following command:

```
# yast -i tftp
```

- 3. Edit and save the /etc/xinetd.d/tftp file. Make the following changes:
 - Change the -s /tftpboot entry to -v -s /home/pxeboot
 - Change the disable attribute to no
- 4. Restart the inetd server. Type the following command:
 - # /etc/init.d/xinetd restart

Installing and Configuring the neopxe Boot Server Daemon

Complete the following steps ton the DHCP server to configure the neopxe boot server daemon. The neopxe server is designed for use with a DHCP server that is running on the same system.

▼ To Install and Configure the neopxe Boot Server Daemon

1. If a compiler is not installed on the server, use YaST to install gcc with the following commands:

```
# yast -i gcc
# yast -i make
```

2. Install the neopxe boot server daemon on the DHCP server. Depending on your OS version, type the following command:

```
For SLES 9:
```

```
# cd /tmp/sles9-pxefiles/neopxe-0.2.0
For SLES 10:
# cd /tmp/sles10-pxefiles/neopxe-0.2.0
```

- 3. Type the following commands:
 - # ./configure
 - # make
 - # make install
- 4. Append the path /usr/local/sbin/neopxe to the rc.local file by typing the following command, making sure to use two greater-than signs:
 - # echo "/usr/local/sbin/neopxe" >> /etc/rc.d/boot.local
- 5. Copy the PXE Linux image from the /tmp/ directory. Type the following commands:
 - # mkdir /home/pxeboot
- 6. Depending on your OS version, type the following command:

For SLES 9:

- # cp /tmp/sles9-pxefiles/pxelinux.0 /home/pxeboot For SLES 10:
- # cp /tmp/sles10-pxefiles/pxelinux.0 /home/pxeboot
- 7. Configure the PXE Linux image. Type the following commands:
 - # mkdir /home/pxeboot/pxelinux.cfg/
 - # touch /home/pxeboot/pxelinux.cfg/default
- 8. Edit the /usr/local/etc/neopxe.conf configuration file, which is read by neopxe at startup.

If the /usr/local/etc/ directory does not exist, create it with the following command:

mkdir /usr/local/etc

If you need to create the neopxe.conf file, you can copy it from the / tmp/slesX-pxefiles/neopxe-0.2.0/ directory. Where X is the OS version (9 or 10).

A valid configuration file must have entries for each of the following lines, including at least one service line.

ip_addr=n.n.n.n

prompt=boot-prompt-string

prompt_timeout=timeout

service=service-number, boot-server, boot-file, label

Where:

- *n.n.n.n* is the IP address of your PXE server.
- *boot-prompt-string* is the character string displayed during a network boot that prompts the user to press the F8 key for a boot menu.

- *timeout* is the number of seconds the prompt is displayed before the server defaults to the first service for booting.
- service-number is an integer in the range of 1 to 254 that identifies the boot service.
- *boot-server* is the IP address of the boot server for that boot service.
- boot-file is the name of the boot file that is read from your /home/pxeboot directory.
- *label* is the text string that is displayed when the boot menu is invoked by pressing the F8 key.

For example:

```
ip_addr=192.168.0.1
prompt=Press [F8] for menu...
prompt_timeout=10
service=1,192.168.0.1,pxelinux.0,Linux
service=2,192.169.0.1,nbp.unknown,Solaris
```

Note - Refer to the neopxe.conf man page for more information.

- 9. Start the neopxe daemon. Type the following command:
 - # /usr/local/sbin/neopxe

Configuring the NFS Service

Complete the following steps on your DHCP server to configure the NFS service.

▼ To Configure the NFS Service

1. Determine whether the NFS service package is already installed on the server. Type the following command:

```
# rpm -qa | grep nfs-utils
```

2. If the NFS service package is not listed, install the package using YaST. Type the following command:

```
# yast -i nfs-utils
```

3. Edit and save the /etc/exports file to add the following line to it:

```
/home/pxeboot *(sync,no_root_squash,no_subtree_check,insecure)
```

- 4. Start the NFS service. Type the following command:
 - # /etc/init.d/nfsserver start
- 5. Configure the server to always start the NFS service. Type the following commands:
 - # chkconfig nfslock on
 - # chkconfig nfsserver on

Note – If you are using a DNS server, verify that DNS entries exist for the range of addresses defined in the PXE subnet dynamic-bootp entry in the dhcpd.conf file. If you are not using a DNS server, edit the /etc/hosts file to add the range of host addresses found in the PXE subnet dynamic-bootp entry in the dhcpd.conf file.

Disabling the Firewall

If a firewall is enabled on your PXE/DHCP server, you must disable it before attempting to install a PXE image onto the client system.



Caution – Network security vulnerability. When you disable the firewall protection on the system that is your PXE server, the security of the data on that server cannot be ensured. If this server is networked outside of your local intranet, be sure to reenable the firewall after downloading software to PXE clients.

▼ To Disable the Firewall

- Execute the YaST command. Type the following command: yast
- 2. Select Security & Users.
- 3. Select Firewall.
 - Select none to disable the firewall for all network interfaces.
 - Select specific interfaces to enable the firewall on only those interfaces.

Installing the SLES 10 Operating System Using PXE

PXE is a powerful and convenient solution for setting up a number of Sun Blade X6240 server module so that their configurations are identical.

Before You Begin

The network interface card (NIC) in your Sun Blade X6240 server module supports the PXE network booting protocol. The system BIOS and network interface BIOS on the server module automatically query the network for a DHCP server.

Task Map for the SLES 10 Installation

Before you can perform PXE installations over the network, you need to complete the following tasks.

TABLE 3-3 Task Map for Installing SLES 10 Using PXE

Task	Related Topic
Set up your Linux network and PXE server.	"Preconfiguring the Network to Support PXE Installation of SLES 10" on page 28
Install a SLES 10 image on that PXE server.	"Configuring a SLES 10 PXE Install Image on the PXE Server" on page 36
Configure your server to boot from or to install from a SLES 10 image on a PXE server.	"Installing SLES 10 From a PXE Server" on page 37

Required Items

The PXE installation procedure requires the following items:

- The DHCP server that you set up when you preconfigured your network to support PXE installation equipped with a CD/DVD drive
- SLES 10 CD media set
- Tools and Drivers CD (708-0346)

Configuring a SLES 10 PXE Install Image on the PXE Server

This procedure describes how to configure a PXE install image on the DHCP server so that it can also act as your PXE server. The PXE server provides the OS files to your PXE client.

Perform the following procedures to create an SLES 10 image on the PXE server:

- "Setting Up and Copying SLES 10 Operating System to a Directory" on page 36
- "Creating Links to SLES 10 PXE Files" on page 37

Setting Up and Copying SLES 10 Operating System to a Directory

The following procedure describes how to create and set up the directory that will contain the SLES 10 files for PXE installation and how to copy the SLES 10 OS to the directory.

▼ To Set Up and Copy the SLES 10 Operating System to a Directory

Note – You can use a different target directory than the /home/pxeboot/sles10/directory shown. The examples in this procedure use this directory.

1. Set up the directory structure that will hold the SLES 10 image. Type the following commands:

```
# mkdir -p /home/pxeboot/sles10/CD1
# mkdir -p /home/pxeboot/sles10/CD2
# mkdir -p /home/pxeboot/sles10/CD3
# mkdir -p /home/pxeboot/sles10/CD4
```

2. Insert SLES 10 CD #1 into your server and copy its content to your PXE server. Type the following command:

```
# mount /dev/cdrom /mnt/cdrom
# cp -r /mnt/cdrom/* /home/pxeboot/sles10/CD1/
# umount /mnt/cdrom
```

3. Remove SLE S10 CD #1 from the server.

4. Repeat the above procedure for copying CD #2, #3 and #4 to their corresponding directories in /home/pxeboot/sles10/ as given below:

```
# cp -r /mnt/cdrom/* /home/pxeboot/sles10/CD2/
# cp -r /mnt/cdrom/* /home/pxeboot/sles10/CD3/
# cp -r /mnt/cdrom/* /home/pxeboot/sles10/CD4/
```

Creating Links to SLES 10 PXE Files

Perform the following procedure to create links to the PXE files.

▼ To Create Links to the SLES 10 PXE Files

 Copy the autoinst.xml file from the /tmp/sles10/ directory to the root of the PXE image. Type the following command:

```
# cp /tmp/sles10/autoinst.xml /home/pxeboot/sles10/
```

2. On your PXE server, modify the file home/pxeboot/pxelinux.cfg/default adding the following entry to it:

Note — Type the text block from append through autoinst.xml below as one continuous line with no returns.

```
default sles10
label sles10
kernel sles10/CD1/boot/x86_64/loader/linux
append textmode=1 initrd=sles10/CD1/boot/x86_64/loader/initrd
install=nfs://n.n.n.n/home/pxeboot/sles10/CD1
autoyast=nfs://n.n.n.n/home/pxeboot/sles10/autoinst.xml
Where n.n.n.n is the IP address of your PXE server.
```

3. Save and exit the file.

Installing SLES 10 From a PXE Server

This procedure describes how to configure your Sun Blade X6240 server module to initiate the request to download the boot image file from the PXE/DHCP server and how to install the SLES 10 boot image onto the Sun Blade X6240 server module.

Before You Begin

Before performing with this procedure, you must complete the following tasks:

- Configured your Linux network to support a PXE server. See "Installing the SLES 10 Operating System Using PXE" on page 35.
- Installed a SLES 10 image on that Linux PXE server. See "Configuring a SLES 10 PXE Install Image on the PXE Server" on page 36.

▼ To Install SLES 10 From a PXE Server

- 1. Connect the PXE client to the same network as the PXE server.
 - The PXE client is the target Sun Blade X6240 server module to which you are installing the SLES 10 OS.
- 2. Power on the PXE client and press F12 to select network boot.
- 3. When you are prompted at the boot: prompt, type in the label you gave the image when you installed it on the PXE server (sles10 in the example above).
- 4. To configure your SLES 10 Linux server, refer to the Installation and Administration Guide on SLES 10 CD #1.
- 5. Perform an Online Software Update to update the OS files (see "Updating the SLES 10 Operating System" on page 38).

Updating the SLES 10 Operating System

The SLES OS installation media might not contain the most up-to-date versions of the SLES OS. This procedure describes how to update the SLES OS on your server after you have installed it from a PXE server or distribution CDs.

▼ To Update the SLES Operating System

- 1. Log in as superuser.
- 2. Type the following command to run the YaST Online Update:
 - # 7011

Note that YaST can operate in both text and graphical modes. These directions apply to both.

- 3. If you are behind a network firewall and need to use a proxy server in order to access the internet, you must first configure YaST with the correct proxy information.
 - a. Select the Network Services tab on the left, then the Proxy screen on the right. Type the correct proxy URLs in both the HTTP and HTTPS fields.

Note – In order for the on-line update service to function correctly through a network HTTP proxy, the following additional configuration step must be performed.

b. Exit the YaST utility and run the following command:

rug set-prefs proxy-url *Proxy URL* where *Proxy URL* is the fully qualified URL of your proxy server (for example: http://proxy.yourdomain:3128/).

- c. After successfully running the command, launch YaST again.
- 4. Register with the Novell Customer Center.

Note – You will need your Novell Customer Center user name and password, as well as an SLES 10 product activation code.

- a. Select the Software tab on the left.
- b. Select Novell Customer Center Configuration and follow the directions.
- 5. Once registered, select the Online Update tab to perform the software update.

Updating the SLES Drivers

The SLES drivers need to be updated. Perform this procedure after you have installed and updated the SLES 10 OS.

▼ To Update the SLES Drivers

1. Insert the Tools and Drivers CD for Sun Blade X6240 and mount it onto the directory /mnt it by typing the following command:

mount /dev/cdrom /mnt

- 2. To install the igb and nvsata drivers, type:
 - # cdrom/drivers/linux/suse/install.sh
- 3. If the server module has a REM that uses LSI drivers and you are using SLES 10, do the following:
 - a. Type: # cd /mnt/drivers/linux/RAID/LSI/drivers/RHEL5-SLES10
 - b. Unzip the file linuxmpt_RH5_SLES10_4002100-1.zip
 - c. Type: # rpm -ivh nvsata-rhel5u1-3.4-1.24.x86_64.rpm
- 4. If the server module has a REM that uses StorageTek drivers, do the following:
 - a. Type: # cd /mnt/drivers/linux/RAID/StorageTek/drivers/
 - b. Unzip the file linux_aac_1152455.zip
 - c. Type: # rpm -ivh aacraid-1.1.5-2455.rpm

The installation of the drivers is now complete.

5. Reboot the server module for the changes to take effect. Type:

reboot

Installing Solaris 10

This chapter provides information about installing the Solaris 10 5/08 Operating System (Solaris 10 OS) on a Sun Blade X6240 server module.

This chapter includes the following sections:

- "About the Solaris 10 Installation" on page 42
- "System Requirements" on page 42
- "Download Solaris OS" on page 43
- "Solaris Documentation" on page 43
- "Installation Methods" on page 44
- "Task Map for Solaris 10 Installation" on page 46
- "Preparing to Install the Solaris Operating System" on page 47
- "Booting a Server in a GRUB-Based Environment" on page 48
- "Booting a Server Over the Network Using PXE" on page 49
- "Installing the Solaris Operating System From Distribution Media" on page 50
- "Installing the Solaris Operating System Using a Serial Console" on page 51

Note – The information in this chapter is intended for experienced system administrators who are familiar with using the Solaris Operating System on an x86 platform.

About the Solaris 10 Installation

Note – This chapter contains information about installing the Solaris 10 OS from network or media. If you are configuring the preinstalled Solaris 10 OS that is shipped with the server, refer to the *Sun Blade X6240 Server Module Installation Guide* (820-3961).

The sections in this chapter describe what you need to know to install Solaris OS on a Sun Blade X6240 server module. However, to complete the installation you will need to frequently reference procedures in other Solaris OS documentation. A list of the necessary additional documentation is provided in the section "Solaris Documentation" on page 43.

Note – In this chapter the term "x86" refers to the Intel 32-bit family of microprocessors and compatible 64-bit and 32-bit microprocessors made by AMD. For supported systems, see the Solaris Hardware Compatibility List at http://www.sun.com/bigadmin/hcl.

System Requirements

TABLE 4-1 summarizes the system requirements for installing Solaris 10 on a Sun Blade X6240.

TABLE 4-1 System Requirements

Requirement	Description
Hardware requirements	The server hardware and the initial service processor configuration must be installed before you install the Solaris OS.
Minimum Solaris OS	Solaris 10 5/08 OS.
Memory to install	Memory size is between 4 GB and 64 GB.
Disk space	12 GB or greater.

TABLE 4-1 System Requirements (Continued)

Requirement	Description
Swap area	512 MB is the default size.
x86/x64 processor requirements	x86/x64 120-MHz or faster processor is recommended. Hardware floating point support is required.
BIOS	Industry standard $x86/x64$ BIOS (resident in FLASH). The BIOS must be able to boot from CD or DVD media.

Download Solaris OS

- You can download or order the media for Solaris 10 5/08 at http://www.sun.com/servers/blades/downloads.jsp.
- Additional software is shipped separately on a Tools and Drivers CD. Contact your Sun service provider if you need to order the Solaris OS or if you are missing the Tools and Drivers CD.
- For updates on Solaris 10 versions and hardware compatibility, go to http://www.sunsolve.sun.com.

Note – The Solaris 10 OS is shipped with the CD and DVD media and documentation that you will need to install the Solaris OS for both SPARC and x86 platforms. For a Sun Blade X6240 server module, use the media for x86 platforms.

Solaris Documentation

Solaris OS documentation is available from the web at http://docs.sun.com/.

- For the Solaris 10 installation guides, see http://docs.sun.com/app/docs/col1/1236.8
- For the Solaris 10 administration guides, see http://docs.sun.com/app/docs/coll/47.16
- For information about upgrading your system, see http://docs.sun.com/app/docs/doc/820-4041
- For troubleshooting information, see Appendix A at http://docs.sun.com/app/docs/doc/820-4040

Note – The Solaris installation guides are provided as a collection of installation related documents. The URL for the installation guides listed above points to the installation collection for Solaris 10 5/08. A listing of installation collections for different versions of Solaris (including more recent versions if available) is provided at http://docs.sun.com/app/docs/prod/solaris.10

Solaris 10 documentation is also available on the Solaris Documentation DVD included with your Solaris OS software.

Installation Methods

The Sun Blade X6240 server module supports the following Solaris OS installation methods:

- Boot from the preinstalled Solaris 10 OS image on the hard drive.
- Install one server from DVD or CD-ROM media interactively with the Solaris Installation Program. The Solaris Installation Program is available on the Solaris 10 media and includes the Solaris Device Configuration Assistant. You can run the Solaris Installation Program with either a graphical user interface (GUI) or as an interactive text installer in a console session.
- Install one or several servers over the network with Preboot Execution Environment (PXE) technology and the following installation methods:
 - Solaris installation program over the network from remote DVD or CD images
 - JumpStart[™] installation
 - Diskless boot installation
 - Serial console installation

TABLE 4-2 summarizes the installation methods described in this chapter, and provides pointers to the installation instructions.

TABLE 4-2 Installation Methods

Method	Description	Instructions
Boot from the preinstalled image.	The Solaris 5/08 OS image is preinstalled on the Sun Blade X6240 server module hard drive.	Sun Blade X6240 Server Module Installation Guide (820-3968)
Install from DVD or CD-ROM media.	Use the Solaris Installation Program on the CD or DVD media to install one server interactively.	"Installing the Solaris Operating System From Distribution Media" on page 50
Install from the network using PXE.	Use a PXE to install the Solaris OS over the network from remote DVD or CD images or to automate the installation process and install several systems with a JumpStart installation. To boot over the network using PXE, you need to set up an install server and a DHCP server, and configure the BIOS on each server to boot from the network.	To set up for a PXE installation, see "x86: Guidelines for Booting with PXE," in the Solaris 10 Installation Guide: Network-Based Installations To boot by using PXE, see "Booting a Server Over the Network Using PXE" on page 49
Install from a serial console.	Use a serial console to install the Solaris OS in a PXE-based network installation.	"Installing the Solaris Operating System Using a Serial Console" on page 51
Perform a diskless boot.	Boot the Solaris OS on a Sun Blade X6240 server module without a hard drive. Use this method with a PXE-based network installation.	"x86: Booting and Installing Over the Network PXE," in the Solaris10 Installation Guide: Network-Based Installations

Note – The Solaris OS provides additional programs for installation, such as booting over a wide area network (WAN), but Sun Blade X6240 server modules support only those methods listed in this guide.

Task Map for Solaris 10 Installation

Use TABLE 4-3 to preview the installation process defined as a series of tasks. The table defines each task, describes it, and provides pointers to the instructions for that task.

TABLE 4-3 Task Map for the Solaris 10 Installation

Task	Description	Relevant Topic
Set up your server.	Install your server hardware and configure the service processor.	Sun Blade X6240 Server Module Installation Guide (820-3968)
Review the Sun Blade X6240 Server Module Product Notes.	The product notes contain late- breaking news about the Solaris OS software and patches.	Sun Blade X6240 Server Module Product Notes (820-3972)
Review the system requirements.	Verify that your server meets the minimum system requirements.	TABLE 4-1
Gather the information you need to install the Solaris OS.	The type of information you need to collect depends on your environment and the method you choose to install the Solaris OS.	"About the Solaris 10 Installation" on page 42
Locate the Solaris OS documentation.	The Solaris OS documentation included with your software contains most of what you need to know about installation.	"Solaris Documentation" on page 43
Install the Solaris OS.	Choose an installation method and locate the installation instructions.	TABLE 4-2
Install additional software, if necessary.	The Solaris OS drivers for the server are bundled in the Solaris OS. However, you may need to install additional software from the Tools and Drivers CD.	Sun Blade X6240 Server Module Product Notes (820-3972)
Install patches, if necessary.	Patches are available from the SunSolve Patch Portal at http://www.sunsolve.sun.com.	Sun Blade X6240 Server Module Product Notes (820-3972)

Preparing to Install the Solaris Operating System

You need to gather information about your system before you install the Solaris OS. The amount of planning and initial set up that you need to perform varies and depends on whether you are preparing for a local installation from CD/DVD, or you are preparing for a PXE-based network installation.

You also need to obtain the appropriate media for your installation.

TABLE 4-4 Installation Media

Media	Title
DVD	Solaris 10 OS 5/08 DVD
CD-ROM	Solaris 10 OS 5/08 Software CDs Solaris 10 5/08 Languages for x86 Platforms CD Tools and Drivers CD
Patches	See the <i>Sun Blade X6240 Server Module Product Notes</i> for information about patches.

Installation Prerequisites

You must complete the following tasks before you install the Solaris OS.

- 1. Verify that your system meets the minimum system requirements (see "System Requirements" on page 42).
- 2. If you are using the Solaris Installation Program GUI or text installer, you need a local CD/DVD drive or a network connection, a keyboard, and a monitor. You will also need the multi-port dongle cable to connect to the front of the server module. For more information, see the Sun Blade X6240 Server Module Installation Guide (820-3968).
- 3. Gather the information you need to install the Solaris OS.
- See the "Checklist for Installation," in Chapter 1 in Solaris 10 Installation Guide: Basic Installations at http://docs.sun.com/app/docs/doc/817-0544.
- For Solaris 10 installations go to http://docs.sun.com/app/docs/doc/819-5775.

- For a non-networked system, you need to know the host name of the system you are installing and the language and the locales that you intend to use on the system.
- For a networked system, use the checklist to gather the following information:
 - Host name of the system that you are installing
 - Language and locales that you intend to use on the system
 - IP address of the name server
 - Subnet mask
 - Type of name service (for example, DNS, NIS, or NIS+)
 - IP address of gateway
 - Domain name
 - Host name of the name server
 - IP address of the name server
 - Root password
- 4. If you are installing the Solaris OS over the network, you need to set up a PXE-based network installation before you install the Solaris OS.
 - For information about setting up a PXE-based network installation, see
 "Booting a Server Over the Network Using PXE" on page 49.

Note – Consult the appropriate platform guide that ships with Solaris 10 for detailed information about remote installation via USB. If USB-based installation is not supported, use PXE.

Booting a Server in a GRUB-Based Environment

Starting with the Solaris 10 1/06 (Solaris 10 version 1/06) release, x86-based systems use the open-source GNU Grand Unified Bootloader (GRUB). GRUB is the boot loader that is responsible for loading a boot archive into a system's memory. The boot archive contains the kernel modules and configuration files that are required to boot the system. For more information on GRUB, refer to the grub(5) man page.

For information on how to boot a Sun Blade X6240 server module that is running Solaris 10 in a GRUB-based environment, refer to the *Solaris 10 System Administration Guide: Basic Administration* at: http://docs.sun.com/app/docs/doc/819-2379

Booting a Server Over the Network Using PXE

Use this procedure along with the instructions in *Solaris 10 Installation Guide: Networked-Based Installations* at http://docs.sun.com/app/docs/doc/820-4040.

The Sun Blade X6240 server module implements the PXE specification required for a PXE network boot. PXE technology provides the server module with the capability to boot the Solaris OS over the network using the Dynamic Host Configuration Protocol (DHCP). Using a PXE-based network installation, you can install the Solaris OS onto a server module from the network with remote CD or DVD images. You can also automate the installation process and install the Solaris OS on several Sun Blade X6240 server modules using a JumpStart scenario.

A PXE network boot is a direct network boot. No boot media is required on the Sun Blade X6240 server module client system.

Before You Begin

Before you can boot over the network using PXE, you must complete the following tasks:

- 1. Set up an installation server.
- 2. Add the Sun Blade X6240 server module clients to be installed.
- 3. Set up a DHCP server.

▼ To Boot a Server Over the Network Using PXE

1. Perform the tasks in "Guidelines for Booting with PXE," located in Solaris 10 Installation Guide: Network-Based Installations, located at http://docs.sun.com/app/docs/doc/817-5504.

If you have already set up the systems you need for a PXE boot, review the Task Map (TABLE 4-3) to verify that you have performed all the steps.

▼ Boot the server over the network using PXE.

- 1. Complete the steps in Solaris 10 Installation Guide: Network-Based Installations at http://docs.sun.com/app/docs/doc/817-5504.
- 2. Follow the instructions on the screen.
- 3. When the BIOS screen appears, press F12 to perform a network boot from the PXE server.

Installing the Solaris Operating System From Distribution Media

Use this procedure to install the Solaris OS onto a Sun Blade X6240 server module from CD/DVD media. This procedure describes an interactive installation using the Solaris Installation Program.

The Solaris Installation Program on the Solaris 10 OS media can be run with a GUI or as an interactive text installer in a console session. The GUI or command-line interface (CLI) uses screens to guide you step-by-step through installing the OS.

Note – The Solaris 10 5/08 Operating System or Solaris 2009.06 Operating System is preinstalled on the Sun Blade X6240 server module boot disk. If Solaris 10 5/08 OS is installed, you do not have to use this procedure unless you are installing a newer version. Instructions for installing the Solaris 5/08 OS from the boot disk are provided in the *Sun Blade X6240 Server Module Installation Guide* (820-3968).

▼ To Install the Solaris OS From Distribution Media

Note – Before starting this procedure, perform the tasks described in "Preparing to Install the Solaris Operating System" on page 47.

- 1. Power down the server module.
- 2. Connect the multi-port dongle cable to the connector on the front of the server.

- 3. Connect a USB CD/DVD drive to the USB connector on the multi-port dongle cable.
- 4. Power on to boot the server module.

The server module BIOS supports booting from a CD/DVD.

- 5. Insert the Solaris 10 OS CD/DVD into your Sun Blade X6240 server module.
- 6. Continue the installation procedure by performing the steps in the procedure: "x86: To Install or Upgrade with the Solaris Installation Program," in Chapter 2 at http://docs.sun.com/app/docs/doc/817-0544.

Start the procedure at Step 4. When prompted, answer the configuration questions to complete the installation.

You can accept the default values on the screens to format the entire hard disk, use auto-layout file systems, and install a preselected set of software. Alternately, you can customize the installation to modify the hard disk layout, modify a Solaris fdisk partition, and select the software that you want to install.

Installing the Solaris Operating System Using a Serial Console

The Solaris text installer enables you to type information in to a terminal or a console window to interact with the Solaris OS Installation Program. You can use this procedure to install the Solaris 10 OS over the network using PXE.

Before You Begin

The network interface card (NIC) in your Sun Blade X6240 server supports the PXE network booting protocol. The system BIOS and network interface BIOS on your server module automatically query the network for a DHCP server.

Before you set up the serial console, you need to set up the following systems for a PXE-based network installation:

- DHCP server configured to support PXE-based network installations
- PXE server configured to support installation of the Solaris 10 OS.

To set up these systems, see *Solaris 10 Installation Guide: Network-Based Installations* at http://docs.sun.com/app/docs/doc/820-4040.

▼ To Install the Solaris Operating System Using a Serial Console

Note – For more information on Steps 1 through 3 of this procedure, see *Solaris 10 Installation Guide: Network-Based Installations* at

http://docs.sun.com/app/docs/doc/820-4040.

1. Connect a terminal to the serial port on the service processor.

You can use a terminal, a PC running terminal emulation software, or a terminal server.

- 2. Set the terminal to receive at 9600 baud.
- 3. Add an x86 install client to an install server and specify a boot device to use during the installation.

If you specify the boot device when you set up the install client, you are not prompted for this information by the Device Configuration Assistant during the installation.

The examples below use the following values:

- Client MAC address: 00:07:e9:04:4a:bf
- Server IP address (GRUB only): 192.168.0.123
- Client macro name (GRUB only): 01000039FCF2EF

Enter the commands specified in the examples below for the OS version that you are using:

Tip – See the man pages for these commands for more information on usage.

■ For the Solaris 10 5/08 OS system with GRUB booting:

```
# cd /export/boot/Solaris_10/Tools
# ./add_install_client -d -e "00:07:e9:04:4a:bf" \
-b "consolatory" i86pc
# datum -A -m 01000039FCF2EF \
-d ":BootSrvA=192.168.0.123:BootFile=01000039FCF2EF:"
# pntadm -f 01 -A $CLIENT_IP -i 01000039FCF2EF \
-m 01000039FCF2EF $CLIENT_NET
```

4. Log in to the service processor as an Administrator.

5. Type the following command to use the serial console:

start /SP/console

6. Boot the Sun Blade X6240 server module.

Refer to the instructions in *Solaris 10 Installation Guide: Network-Based Installations* at http://docs.sun.com/app/docs/doc/817-5504.

- 7. When prompted, press F12 at the BIOS menu.
- 8. After the OS is installed, log in to the system and type the following eeprom command to change bootenv.rc:

eeprom input-console=ttya

Installing OpenSolaris

This chapter provides information about installing the OpenSolaris Operating System (OpenSolaris 10 OS) on a Sun Blade X6240 server module.

This chapter contains the following sections:

- "About the OpenSolaris 10 Installation" on page 55
- "System Requirements" on page 56
- "Download OpenSolaris" on page 56
- "OpenSolaris Documentation" on page 57
- "Installation Methods" on page 57
- "Task Map for OpenSolaris Installation" on page 58
- "Installing OpenSolaris Operating System Using Local or Remote Media" on page 59
- "Post OpenSolaris Installation Tasks" on page 67

About the OpenSolaris 10 Installation

This chapter contains information about installing the OpenSolaris 10 OS from network or media. If you are configuring the preinstalled OpenSolaris 10 OS that is shipped with the server, refer to the *Sun Blade X6240 Server Module Installation Guide* (820-3961).

The sections in this chapter describe what you need to know to install OpenSolaris OS on a Sun Blade X6240 server module. However, to complete the installation you will need to frequently reference procedures in other OpenSolaris OS documentation. Refer to "OpenSolaris Documentation" on page 57.

Note – In this chapter the term "x86" refers to the Intel 32-bit family of microprocessors and compatible 64-bit and 32-bit microprocessors made by AMD.

System Requirements

TABLE 5-1 summarizes the system requirements for installing OpenSolaris on a Sun Blade X6240.

TABLE 5-1 System Requirements

Requirement	Description	
Hardware requirements	The server hardware and the initial service processor configuration must be installed before you install the OpenSolaris OS.	
Minimum OpenSolaris OS	OpenSolaris 2009.06 OS.	
Memory to install	Memory size is between 4 GB and 64 GB.	
Disk space	12 GB or greater.	
Swap area	512 MB is the default size.	
x86/x64 processor requirements	x86/x64 120-MHz or faster processor is recommended. Hardware floating point support is required.	
BIOS	Industry standard $x86/x64$ BIOS (resident in FLASH). The BIOS must be able to boot from CD or DVD media.	

Download OpenSolaris

You can download the OpenSolaris OS at the following sites:

- To download the OpenSolaris OS, go to: http://opensolaris.org/os/TryOpenSolaris/
- To download patches, go to: http://www.sunsolve.sun.com.

OpenSolaris Documentation

Instructions for using the OpenSolaris installation program are available at the following web site:

http://dlc.sun.com/osol/docs/content/2009.06/getstart/index.html

Installation Methods

TABLE 5-2 summarizes the installation methods described in this chapter, and provides pointers to the installation instructions.

TABLE 5-2 Installation Methods

Method	Description	Instructions
Boot from the preinstalled image.	The OpenSolaris image is preinstalled on the Sun Blade X6240 server module hard drive.	Sun Blade X6240 Server Module Installation Guide (820-3968)
Install from DVD or CD-ROM media.	Use the OpenSolaris Installation Program on the CD or DVD media to install one server interactively.	

Task Map for OpenSolaris Installation

Use TABLE 5-3 to preview the installation process defined as a series of tasks. The table defines each task, describes it, and provides pointers to the instructions for that task.

 TABLE 5-3
 Task Map for the OpenSolaris Installation

Step	Task	Description	Relevant Topic(s)
1	Review installation prerequisites.	Verify that all applicable requirements are met for installing an operating system to a Sun Blade X6240 server module.	• "Installation Prerequisites" on page 59
2	Choose an installation method.	Evaluate and select an installation method that meets the needs of your infrastructure.	• "Installation Methods" on page 57
3	Ensure that the BIOS factory defaults are set.	Verify that the factory default settings in the BIOS are set prior to performing the operating system installation.	Sun Blade X6240 Server Module Installation Guide
4	Gather OpenSolaris 2009.06 installation media.	The OpenSolaris OS is shipped with the CD and DVD media and documentation that you will need to install the OpenSolaris OS for both SPARC and x86 platforms. For the Sun Blade X6240 server module, use the media for x86 platforms.	 You can download or order the media for the OpenSolaris OS at: http://opensolaris.org/ os/downloads/
5	Perform the OpenSolaris OS installation.	The installation instructions in this chapter describe the initial steps for booting the installation media and launching the OpenSolaris Installation Program. For further information about installing OpenSolaris, refer to the Getting Started with OpenSolaris 2009.06 web site at:	• "Installing OpenSolaris Operating System Using Local or Remote Media" on page 59
		http://dlc.sun.com/osol/docs/content/2009.06/getstart/	
6	Install driver(s), post installation, if necessary.	If the OpenSolaris OS does not include the necessary device drivers to support your system, you might need to install additional device drivers.	• "Install System Device Drivers to Support Additional Hardware" on page 67
7	Install SRUs, post installation, if necessary.	If necessary, download and install OpenSolaris Support Repository Updates (SRUs). SRUs provide critical fixes to the OpenSolaris OS.	• "Install OpenSolaris Support Repository Updates" on page 67

Installing OpenSolaris Operating System Using Local or Remote Media

The following procedure describes how to boot the OpenSolaris 2009.06 Operating System installation from local or remote media. It assumes that you are booting the installation media from one of the following sources:

- OpenSolaris 2009.06 (or subsequent release) Live CD/DVD (internal or external CD/DVD)
- OpenSolaris 2009.06 (or subsequent release) Live CD ISO image (network repository)

Installation Prerequisites

You must complete the following tasks before you install the OpenSolaris OS.

- 1. Verify that your system meets the minimum system requirements (see "System Requirements" on page 56).
- 2. If you are using the OpenSolaris Installation Program GUI, you need a local CD/DVD drive or a network connection, a keyboard, and a monitor. You will also need the multi-port dongle cable to connect to the front of the server module. For more information, see the Sun Blade X6240 Server Module Installation Guide (820-3968).
- 3. Gather the information you need to install the OpenSolaris OS.
 - For a non-networked system, you need to know the host name of the system you are installing and the language and the locales that you intend to use on the system.
 - For a networked system, use the checklist to gather the following information:
 - Host name of the system that you are installing
 - Language and locales that you intend to use on the system
 - IP address of the name server
 - Subnet mask
 - Type of name service (for example, DNS, NIS, or NIS+)
 - IP address of gateway
 - Domain name
 - Host name of the name server
 - IP address of the name server
 - Root password

Note that the following procedure explains the initial steps for booting the install media and launching the OpenSolaris Installation Program.

After completing this procedure, you should review and perform the required post installation tasks described later in this chapter. For more details, see "Post OpenSolaris Installation Tasks" on page 67.

▼ To Install OpenSolaris OS From Local or Remote Media.

- 1. Power down the server module.
- 2. Connect the multi-port dongle cable to the connector on the front of the server.
- 3. Connect a USB CD/DVD drive to the USB connector on the multi-port dongle cable.
- 4. Ensure that the install media is available to boot.
 - For distribution CD/DVD. Insert the OpenSolaris 2009.06 Distribution Media (CD labeled 1 or the single DVD) into the local or remote CD/DVD-ROM drive.
 - For ISO image. Ensure that the ISO images are available and that the Sun ILOM Remote Console application is aware of the first ISO image location.
- 5. Reset the power on the server.

For example:

- From the ILOM web interface, select the Remote Control --> Remote Power Control tab, then select the Power Cycle option from the Host action drop-down list box.
- From the local server, press the Power button (approximately 1 second) on the front panel of the server module to turn the server module off, then press the Power button again to power on the server module.
- From the ILOM CLI on the server module SP, type: reset /SYS
- From the ILOM CLI on the CMM, type reset /CH/BLn/SYS Where *n* is the slot number of the server module in the chassis. The BIOS screen appears.

```
American
              Megatrends
AMIBIOS(C)2006 American Megatrends, Inc.
BIOS Date: 11/19/08 15:40:21 Ver: 08.00.15
Sun BIOS Revision: 07.01.30.00
Sun Fire X4170 Server CPU Power (TDP Limit) = 95 Watts
Product Serial Number:00000000000
CPU : Genuine Intel(R) CPU
                                      @ 0000 @ 2.67GHz
Speed: 2.66 GHz
                     Count: 16
Press F2 to run Setup (CTRL+E on Remote Keyboard)
Press F12 if you want to boot from the network (CTRL+N on Remote Keyboard)
Press F8 for BBS POPUP (CTRL+P on Remote Keyboard)
QPI Operational Speed at : 6.4GT/s
BMC Firmware Revision: 2.0.2.9
Enitializing USB Controllers ...
(C) American Megatrends, Inc.
64-3047-009999-00101111-111908-TYLSBURG-3ABON030-Y2KC
```

Note – The next events occur very quickly; therefore, focused attention is needed for the following steps. Please watch carefully for these messages as they appear on the screen for a brief time. You might want to enlarge the size of your screen to eliminate scroll bars.

6. In the BIOS power-on self-test screen, press F8 to specify a temporary boot device for the OpenSolaris installation.

The Please Select Boot Device menu appears.



7. In the Boot Device menu, select either the external or virtual CD/DVD device as the first (temporary) boot device, then press Enter.

In the sample Boot Device menu shown in Step 6, the virtual CDROM device is specified as the first boot device.

The device strings listed on Boot Device menu are in the format of: *device type*: *slot indicator*: *product ID string*.

Note — If you are performing the OpenSolaris installation from the Sun ILOM Remote Console application, select the AMI Virtual CDROM, or CDROM image as the first boot device.

The GRUB menu appears.



8. In the GRUB menu, select OpenSolaris 2009.06, then press Enter.

Note – In the GRUB menu, if you want to redirect the install output to a serial console, press "e" to edit the GRUB menu to support a serial console (-B console = ttya).

The system loads the OpenSolaris disk image into memory. This process can take several minutes.

The system discovers and configures the devices and interfaces. If the system discovers a keyboard, the Configure Keyboard Layout menu appears.

```
Done mounting Live image
USB keyboard
 1. Albanian
                                  23. Lithuanian
 2. Belarusian
                                  24. Latvian
                                  25. Macedonian
3. Belgian
 4. Brazilian
                                  26. Malta_UK
5. Bulgarian
                                  27. Malta_US
 6. Canadian-Bilingual
                                 28. Norwegian
                                  29. Polish
 7. Croatian
 8. Czech
                                  30. Portuguese
9. Danish
                                  31. Russian
                                  32. Serbia-And-Montenegro
10. Dutch
11. Finnish
                                  33. Slovenian
12. French
                                  34. Slovakian
13. French-Canadian
                                  35. Spanish
14. Hungarian
                                  36. Swedish
15. German
                                  37. Swiss-French
16. Greek
                                  38. Swiss-German
17. Icelandic
18. Italian
                                  39. Traditional-Chinese
                                  40. TurkishQ
19. Japanese-type6
                                  41. TurkishF
20. Japanese
                                  42. UK-English
                                  43. US-English
21. Korean
22. Latin-American
To select the keyboard layout, enter a number [default 43]:
```

9. In the Configure Keyboard Layout menu, select the appropriate keyboard layout, then press Enter to continue.

The system configures the keyboard layout selection and searches for configuration files. The Select Desktop Language menu appears.

```
To select the keyboard layout, enter a number [default 43]:
 1. Arabic
 2. Chinese - Simplified
 3. Chinese - Traditional
4. Czech
5. Dutch
6. English
7. French
8. German
9. Greek
10. Hebrew
11. Hungarian
12. Indonesian
13. Italian
14. Japanese
15. Korean
16. Polish
17. Portuguese - Brazil
18. Russian
19. Slovak
20. Spanish
21. Swedish
To select desktop language, enter a number [default is 6]:
```

10. In the Select Desktop Language menu, select the appropriate desktop language, then press Enter to continue.

After a few moments the OpenSolaris 2009.06 desktop screen appears.



11. In the OpenSolaris desktop screen, double-click the Install OpenSolaris icon to begin the OS installation.

The OpenSolaris Installer Welcome screen appears.



12. In the Welcome screen, click Next to begin the installation.

The OpenSolaris installation program will display several configuration screens.

13. Follow the on-screen instructions to complete the OpenSolaris installation.

For additional information, refer to the Getting Started with OpenSolaris 2009.06 web site at:

http://dlc.sun.com/osol/docs/content/2009.06/getstart

Note – If you did not configure the system to automatically reboot when the installation completes, you must manually reboot the system.

14. Proceed to the section "Post OpenSolaris Installation Tasks" on page 67 to perform the post OpenSolaris configuration tasks.

Post OpenSolaris Installation Tasks

After completing the OpenSolaris installation and rebooting the operating system, review the following post installation tasks and, if necessary, perform the tasks that are applicable to your system.

- "Install System Device Drivers to Support Additional Hardware" on page 67
- "Install OpenSolaris Support Repository Updates" on page 67
- "Enable Option for Wake On LAN" on page 67 (optional)

Install System Device Drivers to Support Additional Hardware

The Device Driver Utility enables you to connect to the Image Packaging System (IPS) and use it to search for device drivers for the devices on your system that do not have a driver attached with them.

To start the Device Driver Utility, click the Device Driver Utility icon on the OpenSolaris desktop.

Install OpenSolaris Support Repository Updates

A Support Repository Update (SRU) contains the latest released bug fixes for your OpenSolaris release.

Directions for accessing and installing SRUs can be found at:

http://sunsolve.sun.com/show.do?target=opensolaris

Enable Option for Wake On LAN

After installing the operating system, you might want to consider enabling the Wake On LAN (WOL) option in the BIOS Setup utility. This features enables you to power on the server from another location over the network.

Installing VMware ESX Server 3.5 Software

This chapter explains the procedure for installing VMware ESX Server 3.5 Update 1 on the Sun Blade X6240 server module.

This chapter contains the following sections:

- "Before You Begin" on page 69
- "VMware ESX Server 3.5 Update 1 Installation Overview" on page 72
- "Downloading the VMware ESX Server 3.5 ISO Image" on page 72
- "Installing the VMware ESX Server 3.5 From a Remote CD or Remote ISO Image" on page 73
- "Installing the VMware ESX Server 3.5 Update 1 From a Local CD" on page 75
- "Updating the VMware Server 3.5 Software With Updates and Patches" on page 77

Before You Begin

Review the following sections:

- "Task Map for VMware ESX Server 3.5 Installation" on page 70
- "VMware Installation and Administration Documentation" on page 70
- "Planning Network Interfaces" on page 71
- "Select an Installation Method" on page 71

Task Map for VMware ESX Server 3.5 Installation

The following table maps out the installation task order and points to the relevant section where you can find more information.

TABLE 6-1 Task Map for VMware ESX Server 3.5 Installation

Installation Task	Relevant Topic
Collect information about your system.	"VMware Installation and Administration Documentation" on page 70.
Plan your network interface.	"Planning Network Interfaces" on page 71
Choose an installation method.	"Select an Installation Method" on page 71
Download ISO image.	"Downloading the VMware ESX Server 3.5 ISO Image" on page 72.
Download ISO image and burn to CD.	"Downloading the VMware ESX Server 3.5 ISO Image" on page 72.
Identify a specific network interface.	"Planning Network Interfaces" on page 71
Complete the VMware ESX Server 3.5 software installation.	Refer to http://www.vmware.com/support/pubs/vi_pubs.html.
Update the VMware ESX Server 3.5 software if necessary.	"Updating the VMware Server 3.5 Software With Updates and Patches" on page 77

VMware Installation and Administration Documentation

Before you begin installing VMware ESX Server 3.0.1 software on a Sun Blade X6240 server module, collect the necessary information pertinent to your situation by consulting the following required documents at http://www.vmware.com/support/pubs/vi_pubs.html.

- Introduction to VMware Infrastructure
- Quick Start Guide
- Installation and Upgrade Guide
- Basic System Administration
- Virtual Infrastructure Web Access Administrator's Guide
- Server Configuration Guide

Planning Network Interfaces

- The Virtual Infrastructure 3 service console and management interface is dependent on a network interface. The service console does not automatically use the first interface with a live connection. A live interface must be associated with the service console for host management.
 - Refer to the *Sun Blade X6240 Server Module Service Manual* for detailed information concerning network interface cabling and the BIOS considerations of these interfaces.
- By default, vmnic0 is assigned for service console communications.

Select an Installation Method

The most common methods for installing VMware on your server are to use:

- A remote ISO image downloaded from the VMware website, redirected through the ILOM Remote Console application (JavaRConsole).
- A remote CD/DVD drive (with a CD-ROM burned from the ISO image downloaded from the VMware web site) redirected through the ILOM Remote Console application.
- A local CD/DVD drive (with a CD-ROM burned from the ISO image downloaded from the VMware web site).
- Automatic KickStart installation from VMware software (installation tree) stored on a Preboot Execution Environment (PXE) network server.

This chapter contains the procedures for the first three methods. For information about preparing for PXE installation, see the VMware *Installation and Upgrade Guide for VESX Server 3 and Virtual Center 2.0*, Chapter 6, "Remote and Scripted Installations." To access this document go to:

http://www.vmware.com/pdf/vi3_301_201_installation_guide.pdf

Alternately, go to the following web site and search for the document title:

http://www.vmware.com/support/pubs/vi_pubs.html

VMware ESX Server 3.5 Update 1 Installation Overview

Perform the following steps to install the VMware server software:

 Review the VMware ESX Server 3.5 documentation, available at http://www.vmware.com/support/pubs/vi_pubs.html.
 For a list of the documents, see "VMware Installation and Administration Documentation" on page 70.

2. Download the VMware server ISO image.

See "Downloading the VMware ESX Server 3.5 ISO Image" on page 72.

- 3. Depending on the installation method that you selected, use the appropriate procedure below to install the VMware server software:
 - Remote installation. From a remote ISO image or from a remote CD/DVD drive (with a CD-ROM burned from an ISO image) (see "Installing the VMware ESX Server 3.5 From a Remote CD or Remote ISO Image" on page 73).
 - Local installation. From a local USB CD/DVD drive (with a CD-ROM burned from an ISO image) connected to the Sun Blade X6240 server module (see "To Install VMware ESX Server 3.5 From a Local CD" on page 75).
- 4. Update the ESX Server 3.5 software with the latest updates and patches, if necessary.

See "Updating the VMware Server 3.5 Software With Updates and Patches" on page 77

Downloading the VMware ESX Server 3.5 ISO Image

Regardless of the method you choose to install VMware ESX Server, you must first download an ISO image of the software installation CD.

▼ To Download the VMware ESX Server 3.5 ISO Image

1. Download the ISO image using a network-connected system with CD-burning capabilities from:

http://www.vmware.com/download/vi/eval.html

2. Optionally, burn the image to a CD.

Installing the VMware ESX Server 3.5 From a Remote CD or Remote ISO Image

The following procedure describes how to use the Integrated Light Out Manager (ILOM) Remote Console to install VMware ESX Server 3.5 from a remote CD/DVD drive or a remote ISO image.

Note – Read the *Sun Integrated Lights Out Manager 2.0 User's Guide* (820-1188) before completing the following steps. This guide provides details on using the ILOM service processor web interface to redirect the console.

▼ To Install VMware ESX Server 3.5 From a Remote CD or Remote ISO Image

- 1. Locate your VMware ESX Server installation CD/DVD or the equivalent ISO image.
- 2. Connect to the ILOM service processor web interface.
- 3. Select the Remote Control tab, then the Mouse Mode Settings tab.
- 4. Select the Redirection tab.
- 5. Click the Launch Redirection button to start the JavaRConsole application.
- 6. Log in to the JavaRConsole.
- 7. Start keyboard and mouse redirection.

Select Keyboard and Mouse in the Devices menu.

8. Start CD/DVD redirection.

From the JavaRConsole Devices menu, you can redirect the CD in two ways:

- If you are installing a physical CD-ROM into the remote console CD drive, insert the CD-ROM into the drive and select CD-ROM.
- If you are using an ISO image installed on the remote console, select CD-ROM Image and provide the location.

Note — Depending on the number of USB devices in use, you *may* be prompted for the install location or device. This deviates from the normal installation. To continue installation under these circumstances, select CD-ROM Image. Then, when prompted to select a device driver, select Linux USB Driver.


9. Refer to the *Installation and Upgrade Guide for VMware Infrastructure* to guide you through the installation process.

From your network-connected system go to http://www.vmware.com/support/pubs/vi_pubs.html.

10. Identify the specific network interface for the Sun Blade X6240 server module.

In the service console window on the Sun Blade X6240 server module, identify the available network configuration alternatives. See FIGURE 6-1 for ESX Server 3.5 Update 1.

FIGURE 6-1 ESX Server 3.5 Update 1 Network Configuration Dialog Box

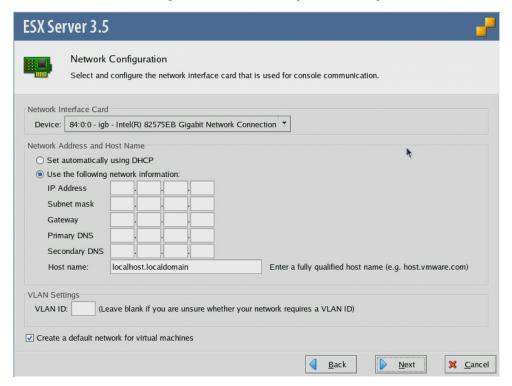

11. Update the ESX Server 3.5 software with the latest updates and patches, if necessary.

See "Updating the VMware Server 3.5 Software With Updates and Patches" on page 77

Note – Installing all critical and security patches is recommended for best performance.

Installing the VMware ESX Server 3.5 Update 1 From a Local CD

The following procedure describes how to install VMware ESX Server 3.5 from a CD-ROM installed in a locally connected USB CD/DVD drive.

Required Items

Installation from local distribution media requires the following four items:

- Sun Blade X6240 server module equipped with the following items:
 - USB keyboard and mouse.
 - USB CD/DVD drive.
 - Monitor.
 - Multi-port dongle cable to connect to the front of the Sun Blade X6240 server module.
- VMware ESX Server 3.5 media CD-ROM

▼ To Install VMware ESX Server 3.5 From a Local CD

To perform this procedure you must have the Sun Blade X6240 server module multiport dongle cable.

1. Connect the multi-port dongle cable to the front of the Sun Blade X6240 server module.

- 2. Connect the following to the USB ports on the dongle:
 - A CD/DVD drive
 - A USB Keyboard and Mouse

Note – You can also configure keyboard, video and mouse (KVM) access through a JavaRConsole.

- 3. Connect a monitor connected to the server module (this is not required if you are using Java KVM).
- 4. Power on the server module.
- 5. Insert the CD-ROM media into CD/DVD drive. The server will boot from the CD-ROM and display a boot prompt.

boot:

- 6. To access graphical mode, press Enter.
- 7. To work in text mode, enter the following:

esx text

8. Refer to the *Installation and Upgrade Guide for VMware Infrastructure* to guide you through the installation process.

From your network-connected system, go to http://www.vmware.com/support/pubs/vi pubs.html.

9. Identify the specific network interface for the Sun Blade X6240 server module.

In the service console window on the Sun Blade X6240 server module, identify the available network configuration alternatives (see FIGURE 6-1 for ESX Server 3.5 Update 1).

10. Complete the VMware installation.

This is detailed in the *Installation and Upgrade Guide for VMware Infrastructure* at http://www.vmware.com/support/pubs/vi_pubs.html.

11. Update the VMware ESX Server 3.5 software with the latest updates and patches, if necessary.

See "Updating the VMware Server 3.5 Software With Updates and Patches" on page 77.

Note – We strongly recommend installing all critical and security patches.

Updating the VMware Server 3.5 Software With Updates and Patches

Because software is constantly being updated, your distribution media might not contain the latest updates and patches.

VMware ESX Server 3.5 update images are available for download at http://www.vmware.com/download/vi/vi3_patches.html.

Index

В	G
BIOS Setup utility, 67	GRUB menu
Boot Device menu	OpenSolaris OS, 63
OpenSolaris OS, 62	GRUB-based booting, 48
boot server daemon, 31	
booting in GRUB, 48	
C Configure Keyboard Layout menu OpenSolaris OS, 63 configuring boot server, 31 configuring TFTP service, 30	installation task map OpenSolaris, 58 Red Hat Enterprise Linux, 7 Red Hat Enterprise Linux PXE installation, 12 Solaris 10, 46 Suse Linux Enterprise Server 10, 25 VMware, 70
device strings OpenSolaris OS, 62 DHCP server configuration, 13 documentation OpenSolaris, 57 Red Hat Enterprise Linux, 6 related to operating systems, 4 RHEL, 6 Solaris 10 Operating System, 43 SUSE Linux Enterprise Server, 24 VMware, 70	installing portmap, 14 installing an operating system OpenSolaris, 55 overview, 1 Red Hat Enterprise Linux, 5 Solaris 10, 42, 55 Suse Linux Enterprise Server 10, 24 VMware, 73 installing using the Remote Console application Red Hat Enterprise Linux, 10 Suse Linux Enterprise Server 10, 27 VMware, 73
F firewall, 39 disabling, 17	installing VMware from a local CD, 75 task map, 70
	L
	Local CD installation

VMware, 75	preconfiguring the network, 12
variate, 70	Solaris 10, 50
M	
media installation	R
Solaris 10, 50	Red Hat Enterprise Linux
	installing from media, 8
N	obtaining media kits, 8
neopxe daemon configuration, 15	prerequisites, 8
NFS service configuration, 16	PXE installation
	configuring NEC complex 16
0	configuring NFS service, 16 configuring TFTP service, 14
OpenSolaris OS	configuring the DHCP server, 13
Boot Device menu, 62	disabling the firewall, 17
Configure Keyboard Layout menu, 63	installing from the PXE server, 18
device strings, 62	installing portmap, 14
ILOM web interface, 60	preconfiguring the network, 12
install (2)	PXE installation task map, 12
GRUB menu, 63	software updates or patches, 8
post installation tasks, 67 resetting server power	Red Hat Enterprise Linux installation
interfaces supported, 60	PXE installation, 11
Sun ILOM Remote Console application, 62	remote console installation
Welcome screen, 66	VMware, 73
OpenSolaris OS install	
Sun ILOM Remote Console application, 60	S
**	serial console installation
P	Solaris 10, 51
portmap	Solaris 10 installation
installing, 14, 30	media installation, 50
oost installation tasks	overview, 42,55
OpenSolaris OS, 67	preparation,47, 59 PXE installation,50
oreparing for installation	serial console installation, 51
Solaris 10, 47, 59	Sun ILOM Remote Console application
SUSE Linux Enterprise Server, 26	OpenSolaris OS Install, 62
prerequisites	OpenSolaris OS install, 60
Red Hat Enterprise Linux media installation, 8	SUSE Linux Enterprise Server installation
proxy server, 39	preparation, 26
PXE installation	1 1 ,
preconfiguring for Red Hat Enterprise Linux, 12	Т
Red Hat Enterprise Linux, 11	TFTP service
configuring neopxe daemon, 15	configuring, 30
configuring NFS service, 16 configuring TFTP service, 14	TFTP service configuration, 14
configuring 1FTF service, 14 configuring the DHCP server, 13	typographic conventions, xii
disabling the firewall, 17	,
installing from PXE server, 18	U
installing portmap, 14	Updating, 20

٧

VMware installing from local CD, 75 installing from remote console, 73

W

Welcome screen, 66 WOL option OpenSolaris OS enabling, 67

Υ

YaST utility, 39