



StorageTek™ Storage Management Component (SMC) MSP software

Configuration and Administration Guide

Part Number: 312614001

Revision: B

Version: 6.1



StorageTek™ Storage Management Component (SMC)

MSP Software

Configuration and Administration Guide

Version 6.1

Sun Microsystems, Inc.
www.sun.com

Part No. 312614001
February, 2009 Rev. B

Copyright © 2009 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, California 95054, U.S.A. All rights reserved.

U.S. Government Rights - Commercial software. Government users are subject to the Sun Microsystems, Inc. standard license agreement and applicable provisions of the FAR and its supplements.

Sun, Sun Microsystems, the Sun logo and Sun StorageTek are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries.

UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd.

Products covered by and information contained in this service manual are controlled by U.S. Export Control laws and may be subject to the export or import laws in other countries. Nuclear, missile, chemical biological weapons or nuclear maritime end uses or end users, whether direct or indirect, are strictly prohibited. Export or reexport to countries subject to U.S. embargo or to entities identified on U.S. export exclusion lists, including, but not limited to, the denied persons and specially designated nationals lists is strictly prohibited.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Copyright © 2009 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, California 95054, Etats-Unis. Tous droits réservés.

Sun, Sun Microsystems, le logo Sun et Sun StorageTek sont des marques de fabrique ou des marques déposées de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays.

UNIX est une marque déposée aux Etats-Unis et dans d'autres pays et licenciée exclusivement par X/Open Company, Ltd.

see above Les produits qui font l'objet de ce manuel d'entretien et les informations qu'il contient sont regis par la legislation americaine en matiere de controle des exportations et peuvent etre soumis au droit d'autres pays dans le domaine des exportations et importations. Les utilisations finales, ou utilisateurs finaux, pour des armes nucleaires, des missiles, des armes biologiques et chimiques ou du nucleaire maritime, directement ou indirectement, sont strictement interdites. Les exportations ou reexportations vers des pays sous embargo des Etats-Unis, ou vers des entites figurant sur les listes d'exclusion d'exportation americaines, y compris, mais de maniere non exclusive, la liste de personnes qui font objet d'un ordre de ne pas participer, d'une facon directe ou indirecte, aux exportations des produits ou des services qui sont regi par la legislation americaine en matiere de controle des exportations et la liste de ressortissants specifiquement designes, sont rigoureusement interdites.

LA DOCUMENTATION EST FOURNIE "EN L'ETAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFACON.



Please
Recycle



Document Effectivity

| EC Number | Date | Doc Kit Number | Type | Effectivity |
|-----------|----------------|----------------|------------|--|
| 132246 | May, 2006 | --- | Revision A | This document applies to SMC (MSP), Release 6.1. |
| --- | February, 2009 | --- | Revision B | |

Contents

| | |
|---|-------------|
| What's New? | xiii |
| About this Guide | xvii |
| Audience | xvii |
| Organization of This Guide | xvii |
| Contact Us | xviii |
| Conventions Used in this Guide | xviii |
| Product Names | xviii |
| Typographic | xviii |
| Symbols | xviii |
| Syntax Flow Diagrams | xix |
| Control Statements | xxiv |
| Related Publications | xxv |
| Additional Information | xxvi |
| Sun's External Web Site | xxvi |
| Product Publications | xxvi |
| Partners Site | xxvi |
| Customer Support | xxvi |
| Customer-initiated Maintenance | xxvii |
| Sun's Worldwide Offices | xxviii |
| Chapter 1. Introduction | 1 |
| What is SMC? | 1 |
| Terminology | 2 |
| Chapter 2. SMC and Sun StorageTek Library Management | 5 |
| Overview | 5 |
| SMC LIBrary and SERVer Commands | 5 |
| Client Communication Monitor Subtask | 5 |
| Sun StorageTek HTTP Server for MSP | 6 |
| SMC Configuration Scenarios | 7 |
| Scenario 1: SMC and a Single Local HSC Library Configuration | 7 |
| Scenario 2: SMC and a Single Remote HSC Library Configuration | 9 |
| Scenario 3: SMC and a Single HSC Library Configuration with One Local and One Remote (alternate) Path | 11 |
| Scenario 4: SMC and a Single HSC Library Configuration with Multiple Remote Server Paths | 13 |
| Scenario 5: SMC with Two Libraries; One Local and One Remote | 15 |

| | |
|--|-----------|
| Scenario 6: SMC with Two Libraries; One Local and One Remote with Multiple Paths . . . | 17 |
| Client/Server Drive Address Mapping | 18 |
| SMC Drive Type Information Synchronization | 19 |
| SMC Library Subsystem Selection | 19 |
| Chapter 3. Starting the SMC | 21 |
| Overview | 21 |
| Creating the SMC START Procedure | 22 |
| SMC EXEC Statement | 23 |
| Executing the SMC START Procedure | 25 |
| Chapter 4. SMC Allocation in a JES Environment | 27 |
| Overview | 27 |
| Jobs Selected for SMC Allocation Management | 28 |
| SSI23 Dynamic Allocation | 28 |
| SSI24 Common Allocation | 28 |
| Exceptions | 28 |
| Drive Exclusion | 29 |
| Minimum Exclusion Level | 30 |
| Subsequent Levels | 30 |
| Intentionally Failing a Job | 31 |
| Specific Volume Request Drive Exclusion Criteria | 32 |
| Scratch Volume Request Drive Exclusion Criteria | 37 |
| Affinity Separation | 44 |
| Affinity Head-Of-Chain | 44 |
| User Policy Influence on Affinity Separation | 44 |
| Drive Prioritization | 48 |
| Deferring Mounts | 49 |
| Library Subsystem Selection | 49 |
| Chapter 5. SMC Message Handling | 51 |
| Overview | 51 |
| User Directed Message Handling | 51 |
| Message Handling Policies | 52 |
| MSP Policies | 52 |
| SMC Policies | 52 |
| Tape Management System Support | 53 |
| SMC Swap Processing | 53 |
| HSC Mount-Related Messages | 54 |
| Managing HSC Mounts from the SMC Client | 55 |
| Chapter 6. Commands and Control Statements | 57 |
| Overview | 57 |
| Issuing SMC Commands | 58 |
| Issuing SMC Commands Using the MSP Modify Command | 58 |
| Issuing SMC Commands Using the SMC Command Prefix | 58 |
| Specifying SMC Commands in the SMCPARMS or SMCCMDS Data Set | 59 |

| | |
|---|------------|
| SMC Commands that Specify JOBname, STEPname, and PROCstep | 59 |
| SMC Command and Control Statement Descriptions | 60 |
| ALLOCDef Command | 60 |
| ALLOCJob Command | 67 |
| CMDDef Command | 71 |
| DRIVemap Command | 73 |
| LIBrary Command | 76 |
| Llist Command | 79 |
| LOG Command | 81 |
| MOUNTDef Command | 84 |
| MSGDef Command | 87 |
| MSGJob Command | 90 |
| READ Command | 93 |
| RESYNChronize Command | 95 |
| SERVer Command | 96 |
| TAPEREQ (Tape Request) Control Statement | 101 |
| TCPip Command | 112 |
| TRace Command | 114 |
| TREQDef Command | 119 |
| UEXit Command | 121 |
| UNITAttr Command | 124 |
| USERMsg Command | 126 |
| Chapter 7. Recovery Procedures | 127 |
| Overview | 127 |
| SMC Recovery Procedures (JES) | 127 |
| Inactive SMC - Active Library Subsystem | 127 |
| Active SMC - Inactive Library Subsystem | 128 |
| Automating Mount Requests for Inactive Libraries | 128 |
| Lost MSP Mount Requests for Active Libraries | 128 |
| Chapter 8. SMC Tape Management Extract Utility | 129 |
| Overview | 129 |
| SMC Utility Return Codes and Messages | 129 |
| Tape Management Extract Utility | 130 |
| Running the SMC Scratch Extract Utility | 131 |
| Using SMCUDBX with CA-1 Release 4.9 or Below | 133 |
| Using SMCUDBX with CA-DYNAM/TLMS Release 5.3 or Below | 133 |
| Specifying Values for the PARM Parameter | 134 |
| Parameter Descriptions | 134 |
| Sample JCL | 136 |
| Sample Output | 137 |
| Chapter 9. SMC Messages | 139 |
| Overview | 139 |
| Message Format | 139 |

| | |
|--|------------|
| Message Descriptions | 140 |
| Variable Definitions | 140 |
| SMC System Message Listing | 141 |
| SMC Utility Message Listing | 193 |
| Chapter 10. Sun StorageTek HTTP Server Messages | 195 |
| Overview | 195 |
| Message Format | 195 |
| Sun StorageTek HTTP Server Message Listing | 196 |
| Appendix A. Intercepted Messages | 205 |
| Fujitsu Operating System Messages | 205 |
| Tape Management System Messages | 207 |
| CA-1 Messages | 207 |
| CONTROL-M/TAPE (formerly CONTROL-T) Messages | 208 |
| Appendix B. MEDia, RECtech, and MODel Values | 209 |
| Media Type (MEDia) | 209 |
| Recording Technique (RECtech) | 212 |
| MODel Type (MODel) | 215 |
| Appendix C. Differences Between SMC and HSC 6.0 and Below | 217 |
| Allocation Differences | 217 |
| Message Handling Differences | 218 |
| Appendix D. SMC Interaction with Other Software | 219 |
| Automated Operations | 219 |
| Open Type J | 219 |
| SAMS: DISK (DMS) | 219 |
| MSP Security Packages | 219 |
| Appendix E. Message Change Summary | 221 |
| New Messages | 221 |
| SMC Messages | 221 |
| Sun StorageTek HTTP Server Messages | 221 |
| Changed Messages | 221 |
| Deleted Messages | 222 |
| Glossary | 223 |
| Index | 233 |

Figures

| | |
|---|-----|
| Figure 1. NCS Local Library Configuration | 7 |
| Figure 2. NCS Remote Library Configuration | 9 |
| Figure 3. NCS Local Library with Alternate Path Configuration | 11 |
| Figure 4. NCS Remote Library Configuration with Two Server Instances | 13 |
| Figure 5. NCS with Two Libraries - One Local and One Remote with Multiple Paths | 15 |
| Figure 6. NCS with a Local Library and a Remote Library with Two Server Instances | 17 |
| Figure 7. Sample SMC START Procedure | 22 |
| Figure 8. TAPEREQ Control Statement | 102 |
| Figure 9. Scratch Synchronization Between SMC Client host and HSC CDS | 130 |
| Figure 10. Sample JCL for Scratch Extraction Utility | 136 |
| Figure 11. Scratch Extraction Utility Sample Output-Messages | 137 |

Tables

| | | |
|-----------|---|-----|
| Table 1. | SMC Client/Server Drive Address Mapping Scenarios | 18 |
| Table 2. | JES Drive Exclusion Levels (Specific Request) | 32 |
| Table 3. | JES Drive Exclusion Levels (Scratch Request) | 37 |
| Table 4. | Alternate Device Default Value | 109 |
| Table 5. | Variable Data Definitions | 140 |
| Table 6. | Intercepted Operating System Messages | 206 |
| Table 7. | Tape Management System Messages - CA-1 | 207 |
| Table 8. | Media Types | 209 |
| Table 9. | Media Type Defaults | 211 |
| Table 10. | Recording Techniques | 212 |
| Table 11. | Recording Technique Defaults | 214 |
| Table 12. | Model Types | 215 |

What's New?

SMC Release 6.1 includes the following enhancements and modifications:

| Enhancement/Modification | Publication(s)/ Primary Locations |
|---|--------------------------------------|
| Revision B: | |
| SMC exclusion level 1 for specific requests is updated to exclude all virtual drives for non-labeled (NL) specific volume requests. | Chapter 4 |
| The SMC ALLOCDef command includes the new VTVMAXvol parameter, used to set the volume count for a new allocation to 255 during MVS converter/interpreter (IDAX) processing when the JCL or SMC DFSMS ACS routine esoteric contains at least one virtual device. | Chapter 6 |
| The client communication monitor subtask feature provides periodic validation of active communication paths for all non-disabled TapePlexes. This feature is enabled using the MONitor parameter on the TCPip command. | Chapters 2, 6 |
| Support for the Sun StorageTek™ T10000 and T10000B tape drives | Chapter 6 Appendix B |
| Support for the Sun StorageTek™ T9840D tape drive | Chapter 6 Appendix B |
| Message changes and additions | Chapter 9 |
| Revision A: | |
| The SMC TAPEREQ control statement replaces the HSC TAPEREQ control statement. | Chapter 6 Appendix B |
| The SMC TREQDEF operator command replaces the HSC TREQDEF command and control statement. | Chapters 3, 6 |
| The new SMC UNITATTR command replaces the HSC UNITDEF command and UNITATTR control statement. It is used to set the model type for nonlibrary drives, and IGNORE as the model type for drives to be excluded from allocation. | Chapters 3, 6 Appendix B |
| The requirement has been removed for the SMC to be initialized before the HSC. | Chapter 3 |
| The new SMC DRIVEMAP command allows you to map device addresses used on the HSC server to the addresses used on the SMC client. | Chapters 2, 6 |
| The new SMC LOG command allows logging of XML payloads sent and/or received to local and remote library subsystems and servers. | Chapter 6 |

| | |
|--|----------------------------|
| The new SMC MOUNTDEF command is used to specify message handling and mount/dismount policies previously provided by the HSC. | Chapters 3, 5, 6 |
| The SMC ALLOCDEF command includes the following new parameters: DEFER, FETCHMSG, EXTVOLESOT, and ZEROSCR. | Chapters 3, 6 |
| The SMC LIBRARY command includes a new STATUS parameter, used to list current status (active/inactive/disabled) for all libraries, or a single named library. For an active library, the status lists the name of the current server or local subsystem. | Chapter 6 |
| The SMC READ command includes a new HOST parameter, used to specify that a READ command only be processed for a specific host. Additionally, the SMC READ command can now be issued from either the console or a file. | Chapter 6 |
| The SMC SERVER command is revised as follows: <ul style="list-style-type: none"> The new INITFail parameter can be used to specify the number of failures (before communication is established) before the specified server path is disabled or placed out of service. The Fail limit default for the SMC SERVER command is changed from 10 to 0. Rules for the <i>hostname</i> value (Host parameter) are changed. | Chapter 6 |
| SMC LIBRARY WTORDEST processing now applies to both local and remote servers. | Chapter 6 |
| SMC MSGDEF ECHOMNTERR processing now applies to both local and remote servers. | Chapter 6 |
| ALLOCDEF FAILNOINFO processing now applies to either specific volume allocations <i>only</i> , or to <i>all allocations</i> . | Chapter 6 |
| SMC exclusion level 1 for specific requests is updated to exclude all virtual drives for non-labeled (NL) specific volume requests. | Chapter 4 |
| SMC exclusion level 2 is updated for resident VTVs, excluding virtual drives only if they are in a VTSS to which the VTV cannot be migrated and recalled. | Chapter 4 |
| SMC exclusion level 5 is updated to exclude drives based on the SMC ALLOCDEF EXTVOLESOT esoteric. | Chapter 4 |
| SMC exclusion level 7 is updated to exclude drives based on the resident VTSS. This change allows customers with mixed density drives to set the minimum exclusion level to 3. | Chapter 4 |
| SMC exclusion MINLVL=0 is now valid for both ALLOCJOB and ALLOCDEF commands. MINLVL=0 is used to force SMC to proceed with allocation even if none of the allocation level criteria are satisfied. | Chapter 4 |
| Message changes, additions and deletions. | Chapters 9, 10, Appendix E |

Use the following table to identify the **SMC 6.1 replacement** for a command, control statement, macro, or specific parameter that was previously provided by the HSC.

| HSC 6.0 Component/Parameter | SMC 6.1 Replacement | Page |
|---------------------------------------|---|------|
| TAPEREQ control statement | TAPEREQ control statement | 101 |
| TREQDEF command and control statement | TREQDEF command | 119 |
| UNITATTR control statement | UNITATTR command (nonlibrary and IGNORE only) | 124 |
| UNITDEF command | UNITATTR command | 124 |
| ALLOC command: | ALLOCDEF command: | |
| DEFER | DEFER (Note: Default ON) | 63 |
| SPECVOL | EXTVOLESOT | 64 |
| ZEROSCR | ZEROSCR | 64 |
| AMPND/NOAMPND startup exec parameter | MOUNTDEF command: AUTOPENDMOUNT | 85 |
| MNTD command: | MOUNTDEF command: | |
| VOLWATCH | VOLWATCH | 86 |
| MOUNTMSG | ROLLMSG | 86 |
| SLILIBRY macro: | MOUNTDEF command: | |
| DELDISP | DISMSCRRReal/DISMSCRVirt | 85 |
| NNLBDRV | UNITATTR command | 124 |



Note: User exits 1, 2, 8, 9, and 10 are managed and invoked by the SMC. The SMC UEXit operator command is used to define the module that is invoked for a specific user exit. It also allows you to enable or disable a user exit. User exits are now documented in the *NCS User Exit Guide*.

About this Guide

Audience

This guide provides administration and configuration information for the Sun StorageTek™ Storage Management Component (SMC) software. It is intended for storage administrators, system programmers and operators responsible for configuring and maintaining the SMC software at their site.

Organization of This Guide

This guide contains the following chapters:

- Chapter 1, “Introduction” describes the SMC product; its general features and functions.
- Chapter 2, “SMC and Sun StorageTek Library Management” describes typical SMC configuration scenarios and provides an introduction to the SMC LIBRARY and SERVER commands as well as the Sun StorageTek™ HTTP Server for MSP.
- Chapter 3, “Starting the SMC” describes how to initialize the SMC software.
- Chapter 4, “SMC Allocation in a JES Environment” describes the SMC allocation function for a JES environment.
- Chapter 5, “SMC Message Handling” describes the SMC message intercept function.
- Chapter 6, “Commands and Control Statements” describes the SMC operator commands.
- Chapter 7, “Recovery Procedures” describes procedures used when SMC or an HSC library subsystem becomes inactive.
- Chapter 8, “SMC Tape Management Extract Utility” describes SMC system utilities.
- Chapter 9, “SMC Messages” describes the SMC system messages.
- Chapter 10, “Sun StorageTek HTTP Server Messages” describes Sun StorageTek HTTP Server messages.
- Appendix A, “Intercepted Messages” lists MSP and TMS messages that are intercepted by the SMC.

- Appendix B, “MEDia, RECtech, and MODEL Values” describes valid values for parameters used to specify media types, recording techniques, and model types.
- Appendix C, “Differences Between SMC and HSC 6.0 and Below” describes various differences between SMC and NCS 4.1, including those related to allocation and message handling.
- Appendix D, “SMC Interaction with Other Software” describes interaction with various third-party software packages.

An index and glossary are also included.

Contact Us

Sun welcomes your feedback.

Visit the Sun Documentation site at <http://docs.sun.com> and click on the FEEDBACK link at the bottom right of the screen to access the Opinion Lab feedback system.

Conventions Used in this Guide

Product Names

HSC refers to the MSP implementation of the Sun StorageTek™ Host Software Component.

Typographic

In the JCL examples in this guide, some fields appear in lower case. You must update these fields to match your installation requirements.

Symbols

The following symbols are used to highlight text in this guide:



Note: Information that may be of special interest to you. Notes are also used to point out exceptions to rules or procedures.



Warning: Information necessary to keep you from damaging your hardware or software.




Caution: Information necessary to keep you from corrupting your data.

Syntax Flow Diagrams


Syntax flow diagramming conventions include the following:

Flow Lines

Syntax diagrams consist of a horizontal base line, horizontal and vertical branch lines, and the text for a command, control statement, macro, or utility.



or

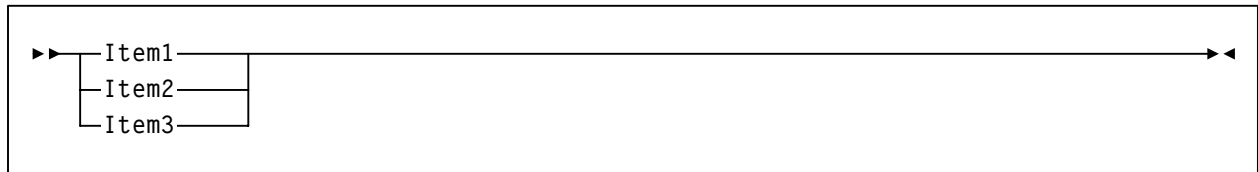


Diagrams are read left to right and top to bottom. Arrows indicate flow and direction.

- a statement begins with ►►
- a statement ends with ►◀
- diagrams continuing to the next line begin with ►
- fragments begin and end with |


Single Required Choice

Branch lines (without repeat arrows) indicate that a single choice must be made. If one of the items from which a choice is being made is positioned on the base line of the diagram, a single choice is required.

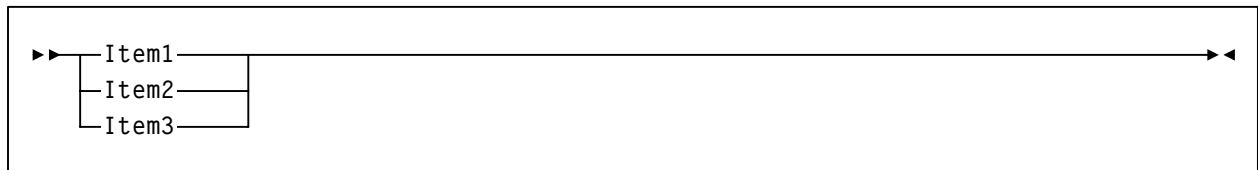


Single Optional Choice

If the first item is positioned on the line below the base line, a single choice of items in the stack is optional.

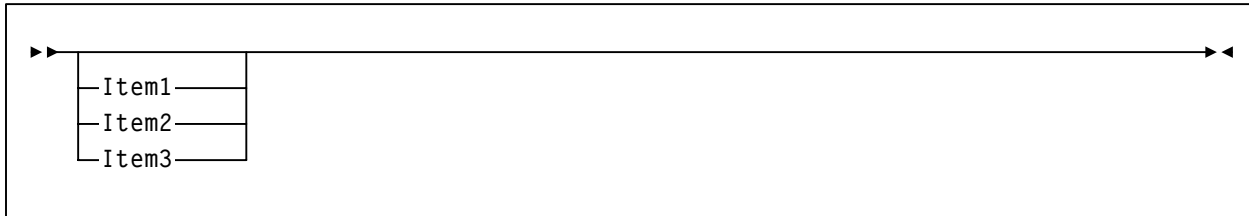


Defaults

Default values and parameters appear above the base line. In the following example, if a value is not specified with the command, the Default Value is used.

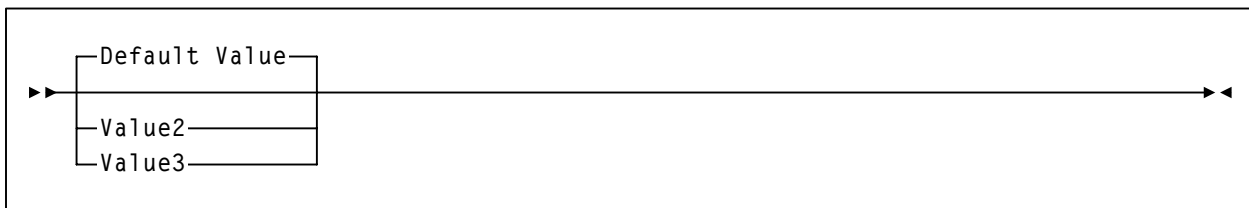

Some keyword parameters provide a choice of values in a stack. When the stack contains a default value, the keyword and the value choices are placed below the base line to indicate that they are optional, and the default value appears above the keyword line. In the following example, if the keyword is not specified with the command, the Default Value is used.

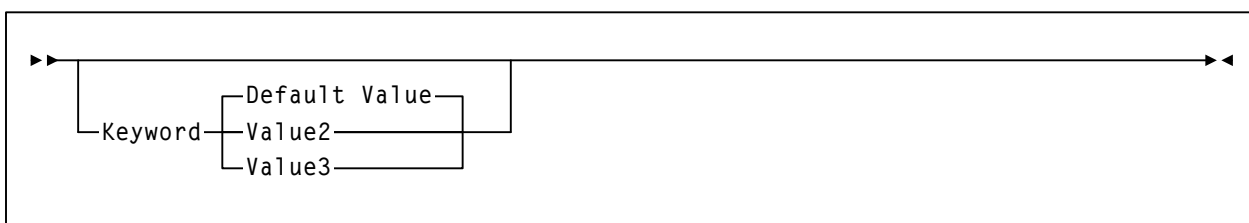

Repeat Symbol

A repeat symbol indicates that more than one choice can be made or that a single choice can be made more than once. The repeat symbol shown in the following example indicates that a comma is required as the repeat delimiter.



Keywords

All keywords are shown in uppercase or in mixed case. When keywords are not case sensitive, mixed case implies that the lowercase letters may be omitted to form an abbreviation.

Variables

Italic type is used to indicate a variable.

Alternatives

A bar (|) is used to separate alternative parameter values.

Delimiters

If parenthesis (), a comma (,), a semicolon (;), or any other delimiter is shown with an element of the syntax diagram, it must be entered as part of the statement or command unless otherwise stated.

Ranges

- An inclusive range is indicated by a pair of elements of the same length and data type, joined by a dash. The first element must be strictly less than the second element.
- A hexadecimal range consists of a pair of hexadecimal numbers (for example, 0A2-0AD, or 000-0FC).
- A decimal range consists of a pair of decimal numbers (i.e., 1-9, or 010-094). Leading zeros are not required. The decimal portion is referred to as an incremental range. The character positions of the incremental portion of both range elements must match, and the nonincremental characters of the first element must be identical to those of the second element.

- A numeric VOLSER range (*vol-range*) consists of a pair of VOLSER elements containing a decimal numeric portion of 1 to 6 digits (for example, ABC012-ABC025, or X123CB-X277CB). The decimal portion is referred to as an incremental range. The following additional restrictions apply:
 - The character positions of the incremental portion of both range elements must match.
 - The nonincremental characters of the first element must be identical to those of the second element.
 - You cannot increment two portions of a range element. If 111AAA is the first element, you cannot specify 112AAB for the second element.
 - If a VOLSER range contains more than one decimal portion, any portion is valid as the incremental range. For example:

A00B00 the largest range that can be specified is A00B00 through A99B99.

A0B0CC the largest range that can be specified is A0B0CC through A9B9CC.

000XXX the largest range that can be specified is 000XXX through 999XXX.

- An alphabetic VOLSER range (*vol-range*) consists of a pair of VOLSER elements containing an incremental portion of 1 to 6 characters (for example, 000AAA-000ZZZ, or 9AAA55-9ZZZ55). This portion is referred to as an incremental range. The following additional restrictions apply:
 - The character positions of the incremental portion of both range elements must match.
 - The nonincremental characters of the first element must be identical to those of the second element.
 - You cannot increment two portions of a range element. If 111AAA is the first element, you cannot specify 112AAB for the second element.
 - The alphabetic portion of the VOLSER range is defined as being from character A to Z. To increment multi-character sequences, each character increments to Z. For instance, ACZ is part of the AAA-AMM range. Examples are:

| | |
|----------------------|--|
| A00A0-A99A0 | increments VOLSERs A00A0 through A09A0, then A10A0 through A99A0. |
| 9AA9A-9ZZ9A | increments VOLSERs 9AA9A through 9AZ9A, then 9BA9A through 9ZZ9A. |
| 111AAA-111ZZZ | increments VOLSERs 111AAA through 111AAZ, then 111ABA through 111ZZZ |
| 999AM8-999CM8 | increments VOLSERs 999AM8 through 999AZ8, then 999BA8 through 999CM8 |
| A3BZZ9-A3CDE9 | increments VOLSERs A3BZZ9 through A3CAA9, then A3CAB9 through A3CDE9 |
| AAAAAA-AAACCC | increments VOLSERs AAAAAA through AAAAAZ, then AAAABA through AAACCC |
| CCCNNN-DDDNNN | increments VOLSERs CCCNNN through CCCNNZ, then CCCNOA through DDDNNN * |

* **Caution:** This is a very large range.

The number of volumes in an alphabetic VOLSER range depends on the number of elements in the incrementing portion of the VOLSER range. For an A to Z range in each character position, the number of volumes can be calculated by 26 to the power of the number of positions that are being incremented.

| | | |
|----------------------|--------|-------------|
| A-Z | 26^1 | 26 |
| AA-ZZ | 26^2 | 676 |
| AAA-ZZZ | 26^3 | 17,576 |
| AAAA-ZZZZ | 26^4 | 456,976 |
| AAAAA-ZZZZZ | 26^5 | 11,881,376 |
| AAAAAA-ZZZZZZ | 26^6 | 308,915,776 |

Lists

A list consists of one or more elements. If more than one element is specified, the elements must be separated by a comma or a blank space, and the entire list must be enclosed in parentheses.

Blanks

Keyword parameters and values may be separated by any number of blanks.

Control Statements

The standard syntax conventions for control statements are as follows:

- The only valid control statement information area is from column 1 to column 72. Columns 73-80 are ignored.
- Parameters may be separated by one or more blanks or a comma.
- A value is associated with a parameter by an equal (=) sign or by enclosing the value in parentheses, and concatenating it immediately after the parameter.
- Case (upper or lower) is ignored in actual control statements.
- Continuations are supported by including a plus (+) sign at the end of the line to be continued.
- /* and */ can be used to enclose comments in the job stream. Comments can be continued over multiple lines, but cannot be nested.
- The maximum length for a control statement is 1024 characters.

Related Publications

The following publications contain information about specific topics relating to the use of the Storage Management Component (SMC):

Sun StorageTek™ Nearline Control Solution (NCS) - MSP Implementation

- *NCS Installation Guide*
- *NCS User Exit Guide*

Sun StorageTek™ Host Software Component (HSC) - MSP Implementation

- *HSC Configuration Guide*
- *HSC Operator's Guide*
- *HSC System Programmer's Guide*
- *HSC Messages and Codes Guide*

Sun StorageTek™ Virtual Storage Manager (VSM) - MSP Implementation

- *VTCS Installation and Configuration Guide*
- *VTCS Administration Guide*
- *VTCS Messages and Codes Guide*
- *VTCS Command and Utility Reference*

Additional Information

Sun Microsystems, Inc. (Sun) offers several methods for you to obtain additional information.

Sun's External Web Site

Sun's external Web site provides marketing, product, event, corporate, and service information. The external Web site is accessible to anyone with a Web browser and an Internet connection.

The URL for the Sun external Web site is: <http://www.sun.com>

The URL for Sun StorageTek™ brand-specific information is:
<http://www.sun.com/storagetek>

Product Publications

The Sun Documentation Web site provides online access to Sun product publications:

<http://docs.sun.com>

To order hardcopy versions of Sun publications, contact a Sun sales or marketing representative.

Partners Site

The Sun Partners site is a web site for partners with a Sun Partner Agreement. This site provides information about products, services, customer support, upcoming events, training programs, and sales tools to support partners. Access to this site, beyond the Partners Login page, is restricted. On the Partners Login page, Sun employees and current partners who do not have access can request a login ID and password and prospective partners can apply to become Sun StorageTek resellers.

The URL for partners with a Sun Partner Agreement is:

<http://www.sun.com/partners/>

Customer Support

Customer support is available 24 hours a day, seven days a week, to customers with Sun or StorageTek maintenance contracts and to Sun employees. The URL for Sun StorageTek™ support is:

<http://www.sun.com/storagetek/support>

Customer-initiated Maintenance

Customer-initiated maintenance begins with a telephone call from you to Sun Microsystems StorageTek Support. You receive immediate attention from qualified Sun personnel, who record problem information and respond with the appropriate level of support.

To contact Sun Microsystems StorageTek Support about a problem:

1. Use the telephone and call:

☎ 800.872.4786 (1.800.USA.4SUN) (inside the United States)

☎ 800.722.4786 (Canada)

For international locations, go to

<http://www.sun.com/service/contacting/solution.html>

for the appropriate telephone number.

2. Describe the problem to the call taker. The call taker will ask several questions and will either route your call to or dispatch a support representative.

If you have the following information when you place a service call, the process will be much easier:

Account name

Site location number

Contact name

Telephone number

Equipment model number

Device address

Device serial number (if known)

Urgency of problem

Fault Symptom Code (FSC)

Problem description

Sun's Worldwide Offices

You may contact any of Sun's worldwide offices to discuss complete storage, service, and support solutions for your organization. You can find address and telephone number information on Sun's external Web site at:

<http://www.sun.com/worldwide/>

Chapter 1. Introduction

What is SMC?

SMC, the Storage Management Component, is the interface between Fujitsu's MSP/EX operating system and Sun StorageTek HSC automated library control systems. SMC operates on JES systems and is a **required** NCS component. Its primary functions are:

- Influencing tape allocation according to hardware requirements and customer policies to ensure that appropriate tape drives are selected.
- Intercepting tape management, and operating system mount, dismount, and swap messages and translating them in order to request the required tape hardware functions from the appropriate NCS automated library control system.
- Coordinating requests among multiple Sun StorageTek automated libraries.

SMC resides on every MSP host that accesses Sun StorageTek real and virtual tape hardware. SMC may communicate with any number of Sun StorageTek automated libraries, using cross address space facilities to communicate with HSC running on the same host, and TCP/IP to communicate with HSC systems executing on other hosts.



Note: For the purposes of this publication, HSC refers to the MSP implementation of the Sun StorageTek Host Software Component. The VM implementation of HSC is not supported by SMC.

Terminology

SMC introduces three important terms:

library

A single Sun StorageTek hardware configuration, normally represented by a single HSC Control Data Set (CDS). Note that a library may contain multiple Automated Cartridge Systems (ACSs) and Virtual Tape Storage Subsystems (VTSSs).

drive exclusion

The SMC function of excluding drives for an allocation request based on SMC exclusion criteria.

See Chapter 4, “SMC Allocation in a JES Environment” for more information about this term.

drive prioritization

The SMC function of influencing selection of a particular drive based on allocation criteria, including volume location.

See Chapter 4, “SMC Allocation in a JES Environment” for more information about this term.

Use the following table to identify the **SMC 6.1 replacement** for a command, control statement, macro, or specific parameter that was previously provided by the HSC.

| HSC 6.0 Component/Parameter | SMC 6.1 Replacement | Page |
|---------------------------------------|---|------|
| TAPEREQ control statement | TAPEREQ control statement | 101 |
| TREQDEF command and control statement | TREQDEF command | 119 |
| UNITATTR control statement | UNITATTR command (nonlibrary and IGNORE only) | 124 |
| UNITDEF command | UNITATTR command | 124 |
| ALLOC command: | ALLOCDEF command: | |
| DEFER | DEFER (Note: Default ON) | 63 |
| SPECVOL | EXTVOLESOT | 64 |
| ZEROSCR | ZEROSCR | 64 |
| AMPND/NOAMPND startup exec parameter | MOUNTDEF command: AUTOPENDMOUNT | 85 |
| MNTD command: | MOUNTDEF command: | |
| VOLWATCH | VOLWATCH | 86 |
| MOUNTMSG | ROLLMSG | 86 |
| SLILIBRY macro: | MOUNTDEF command: | |
| DELDISP | DISMSCRRReal/DISMSCRVirt | 85 |
| NNLBDRV | UNITATTR command | 124 |



Note: User exits 1, 2, 8, 9, and 10 are managed and invoked by the SMC. The SMC UEXit operator command is used to define the module that is invoked for a specific user exit. It also allows you to enable or disable a user exit. User exits are now documented in the *NCS User Exit Guide*.

Chapter 2. SMC and Sun StorageTek Library Management

Overview

This chapter describes sample SMC configuration scenarios and provides an introduction to the SMC LIBrary and SERVer commands as well as the Sun StorageTek HTTP Server for MSP.

The SMC provides the interface between Fujitsu's MSP/EX operating system and Sun StorageTek HSC library control systems. These library control systems can operate in several ways:

- The HSC can operate on the same local MSP host as the SMC
- The HSC can operate on a remote MSP host
- A combination of local and remote library control systems can be used.

In a complex configuration, where you wish to define remote HSC systems or enable simple server switching by defining multiple server paths to one or more libraries, you must use the SMC LIBrary and SERVer operator commands and the Sun StorageTek HTTP Server for MSP.

SMC LIBrary and SERVer Commands

In a configuration including both local and remote libraries, all libraries must be defined to SMC using the SMC LIBrary command. And, because a remote library can be shared by multiple instances of HSC running on different remote hosts, the path to each remote host is defined to SMC using the SMC SERVer command. See Chapter 6, "Commands and Control Statements" for more information about these commands.

Client Communication Monitor Subtask

This feature directs SMC to periodically validate whether an active communication path is available for all non-disabled libraries. It does not require SMC to process an allocation or mount event. Validation automatically occurs at a specified monitor scan interval. This interval is specified using the MONitor parameter on the TCPip command.

By default, the communication monitor subtask is automatically enabled at SMC startup. To disable this feature, issue the following SMC command:

```
TCPIP MONITOR(OFF)
```

One communication monitor subtask services all libraries defined to SMC and the TCPip MONitor and PREFprimary parameters apply to all non-disabled libraries.

If an active communication path is not available for a library, the monitor subtask attempts to communicate with each defined communication path beginning with the local path (if available) followed by the primary server path and each secondary server path in turn. If the monitor subtask re-establishes communication with the library, all pending mounts are automatically redriven.



Notes:

- The communication monitor subtask eliminates the need to specify the FAIL or INITFAIL parameters on the SERVER command. If specified, these parameters are ignored.
- The communication monitor subtask does not attempt to re-establish communication with disabled server paths.
- See Chapter 6, “Commands and Control Statements” for more information about the SMC TCPip and SERVER commands.

Sun StorageTek HTTP Server for MSP

The Sun StorageTek HTTP Server for MSP provides the middleware to allow communication between the SMC (client) and a remote HSC subsystem (server). The HTTP server executes as a separate subsystem on the MSP host where the remote HSC subsystem resides. The HTTP Server is not required on a host where only the SMC is executing.



Notes:

- Refer to the *NCS Installation Guide* for information about installing and configuring the Sun StorageTek HTTP server.
- The Sun StorageTek HTTP server is also included with the Virtual Storage Manager (VSM) GUI product. However, for performance reasons, it is recommended that you do not use the same instance of the HTTP server for both SMC server programs and VSM GUI programs. To execute multiple HTTP server subsystems on a single host, they must each listen on a unique PORT number.

Allocation and Multiple Sun StorageTek Libraries

If your configuration includes multiple Sun StorageTek library systems (as illustrated in Scenarios 5 and 6), SMC directs the allocation of each DD to the appropriate library based on TAPEREQ statements, user exits, specific volume locations, and scratch subpools.

SMC Configuration Scenarios

This section provides several scenarios for SMC in local, remote, and multiple library configurations.

Scenario 1: SMC and a Single Local HSC Library Configuration

In this scenario, the SMC and HSC execute on the same MSP host, as illustrated in the following figure:

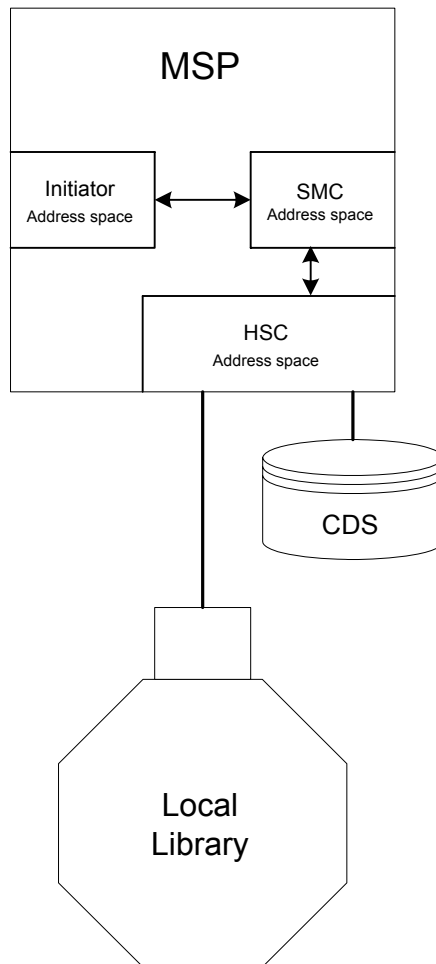


Figure 1. NCS Local Library Configuration

This configuration utilizes three address spaces:

- the Initiator Address Space from which allocation and mount events originate
- the SMC Address Space, which intercepts those events
- the HSC Address Space, to which SMC sends requests for drive and volume data, and mount requests.

This local configuration does not require the Sun StorageTek HTTP server, nor does it require any LIBrary or SERVer commands. In this scenario, the SMC automatically detects the local HSC subsystem by scanning the MSP Subsystem Communication Vector Table (SSCVT) chain. The SMC then routes requests to subsystems on the same host using MSP/EX facilities for cross address space communication.

Optionally, you can enter LIBrary commands to define the local subsystems. For example, the following LIBrary command is used to define the local HSC library:

```
LIBRARY NAME(LCLLIB) LOCSUBSYS(HSC)
```

where `LCLLIB` is the desired name of the local library, and `HSC` is the local MSP subsystem name for the HSC.



Note: When the SMC receives a LIBrary command, automatic library detection is disabled and only libraries identified with LIBrary commands are known to the SMC.

Scenario 2: SMC and a Single Remote HSC Library Configuration

In this scenario, the SMC communicates with a single HSC on a remote MSP host, as illustrated in the following figure:

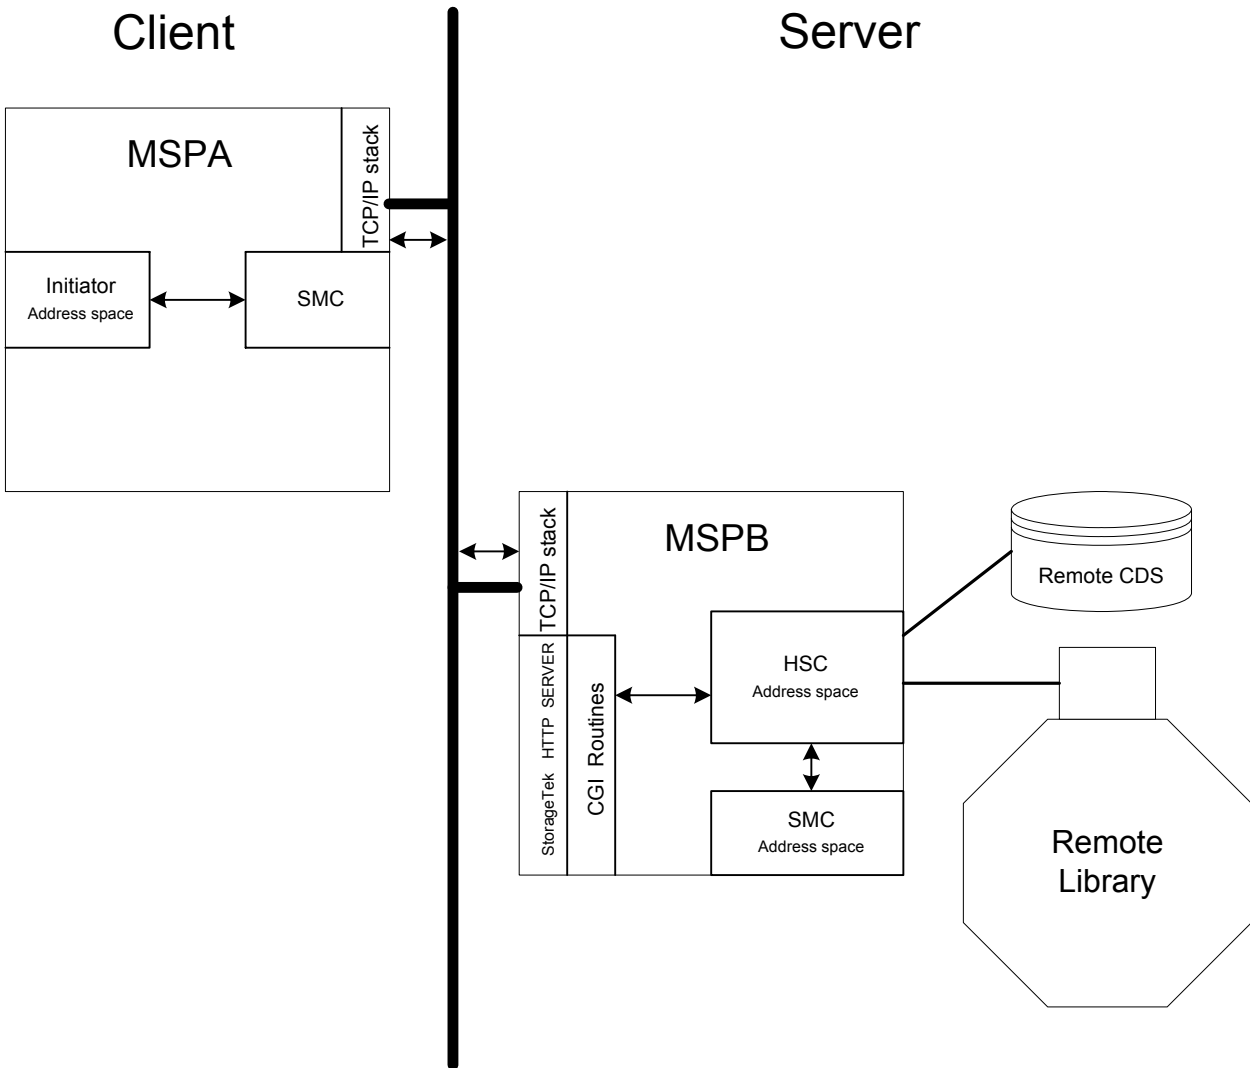


Figure 2. NCS Remote Library Configuration

In this scenario, the SMC acts as a client and the HSC acts as a server.

The SMC Address Space intercepts allocation and mount requests from an Initiator Address Space on MSPA and sends the requests through the TCP/IP stack to the designated Sun StorageTek HTTP server on a remote host (MSPB). The HTTP server on MSPB executes the SMC CGI routine, which routes the request to the HSC executing on MSPB using MSP/EX facilities for cross address space communication.

Any configuration that includes a remote library requires the Sun StorageTek HTTP server and LIBrary and SERVer commands. The following example illustrates the LIBrary and SERVer commands for the SMC on MSPA:

```
LIBRARY NAME(REMLIB)  
SERVER NAME(REMPATH) LIBRARY(REMLIB) HOST(MSPB)
```



Note: See “Client/Server Drive Address Mapping” on page 18 for additional requirements if different drive addresses are defined between client and server hosts.

Scenario 3: SMC and a Single HSC Library Configuration with One Local and One Remote (alternate) Path

When a single library hardware configuration is shared between multiple MSP hosts, you can define multiple paths to the library as shown in the following figure:

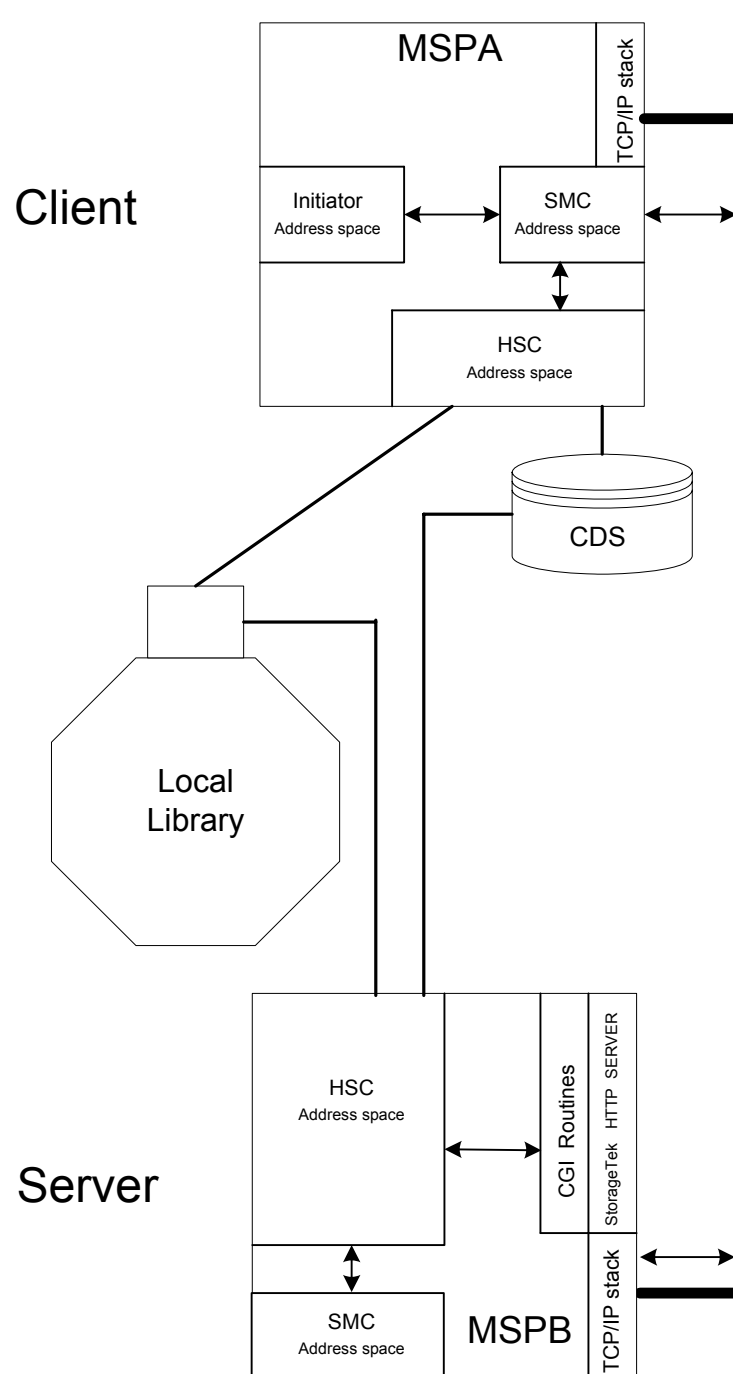


Figure 3. NCS Local Library with Alternate Path Configuration

The following example illustrates the LIBRARY and SERVER commands for the SMC on MSPA:

```
LIBRARY NAME(SHRLIB) LOCSUBSYS(HSC)
SERVER NAME(REMPATH) LIBRARY(SHRLIB) HOST(MSPB)
```

In this scenario, if the HSC is active on host MSPA, the SMC communicates with the local HSC as described in Scenario 1. If the HSC on MSPA is inactive, the SMC on MSPA communicates with the remote HSC on MSPB as described in Scenario 2.

Primary And Alternate Path Selection Hierarchy To A Single Library With A Local Path

The path utilized by the SMC in this scenario is dependent upon the following factors:

- Whenever a local path is enabled to a library, the SMC attempts to use it.
- If a local path to a library is not enabled, or the local HSC is inactive, the SMC attempts to communicate with the first defined remote SERVER path. Once successful communication is established for a remote SERVER, it becomes the active path. All subsequent requests use the active path unless the local path becomes active or the remote SERVER path becomes unavailable.
- If a remote SERVER path becomes unavailable, the SMC attempts to use the next available SERVER in the order the SERVER commands were entered.

In this example, when HSC is active on host MSPA, the SERVER path defined to MSPB is not used. However, if the HSC on MSPA becomes unavailable, the SMC attempts to send its requests to the library using the REMPATh SERVER definition. When the HSC on MSPA becomes active again, the SMC automatically adjusts to use the HSC on MSPA.



Note: See “Client/Server Drive Address Mapping” on page 18 for additional requirements if different drive addresses are defined between client and server hosts.

Scenario 4: SMC and a Single HSC Library Configuration with Multiple Remote Server Paths

In this scenario, the SMC runs on a host with no local HSC, but with multiple paths to a remote HSC, as illustrated in the following figure:

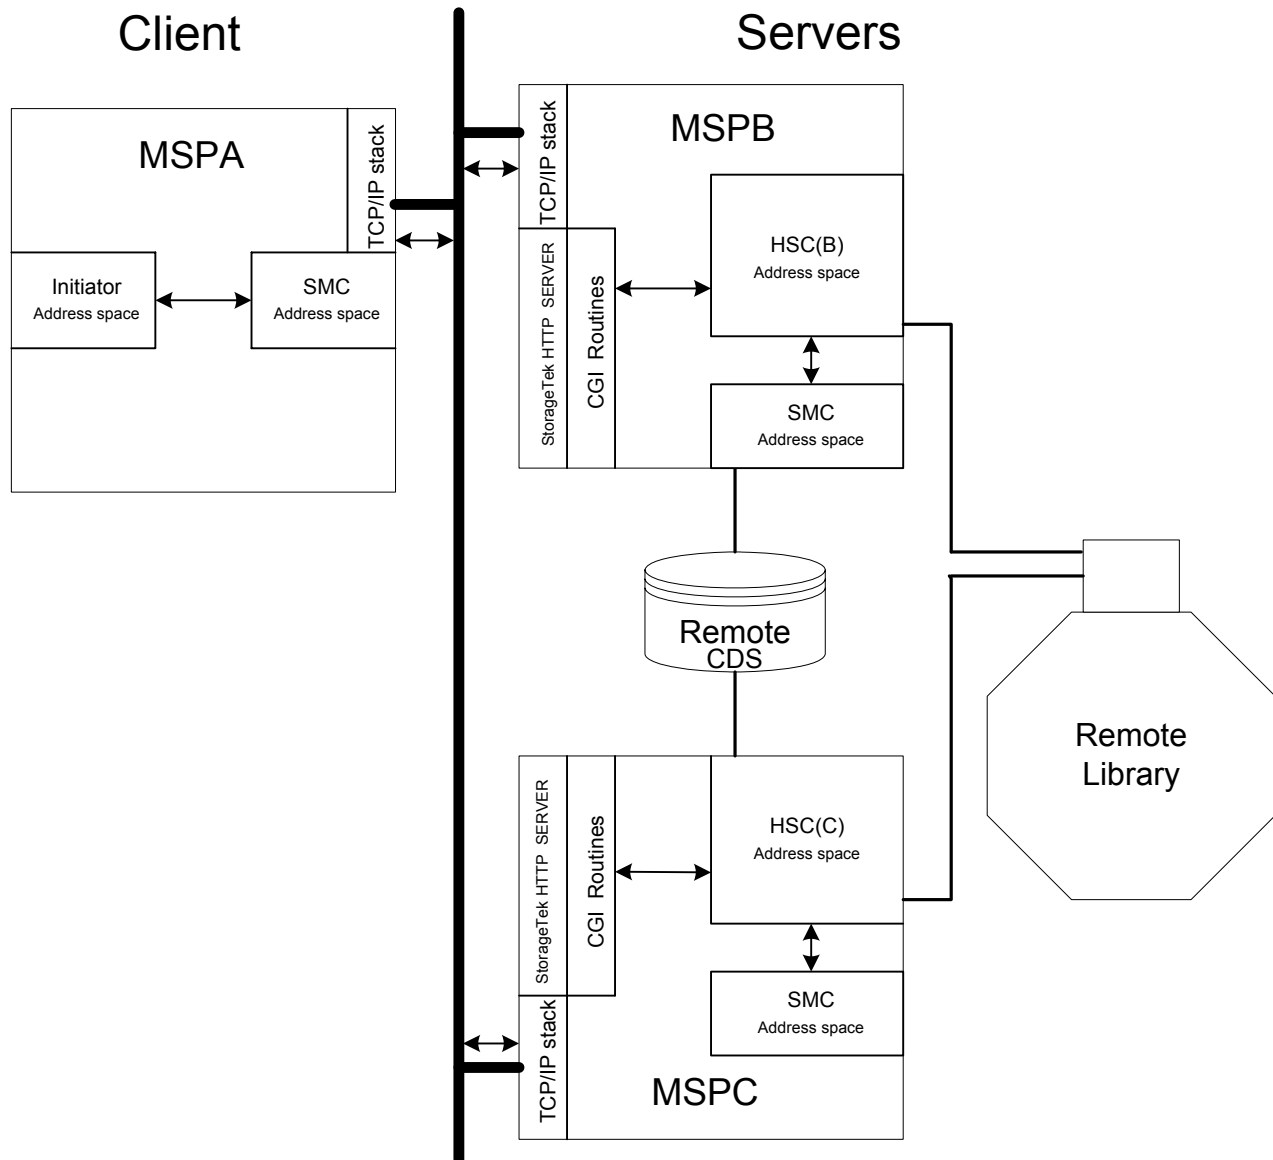


Figure 4. NCS Remote Library Configuration with Two Server Instances

The following example illustrates the LIBRARY and SERVER commands for the SMC on MSPA:

```
LIBRARY NAME(SHRLIB)
SERVER NAME(REMPATH1) LIBRARY(SHRLIB) HOST(MSPB)
SERVER NAME(REMPATH2) LIBRARY(SHRLIB) HOST(MSPC)
```

Requests originating in an Initiator Address Space on MSPA are intercepted by the SMC Address Space on MSPA. The SMC on MSPA sends requests for volume and drive data, and mount requests to the SERVER on MSPB or MSPC.

The SMC attempts to communicate with the first defined server (MSPB). If this attempt fails, the SMC attempts to communicate with MSPC. Once successful communication with MSPC is established, the active path is not changed even if the server on MSPB becomes available. Either of the following methods can be used to change the active path from MSPC to MSPB:

- Disable the REMPATH2 server using the following command:

```
SERVER NAME(REMPATH2) DISABLE
```

The SMC automatically attempts to communicate with the first server in the list (REMPATH1).

- Issue the RESYNChronize REStart command. See “RESYNChronize Command” on page 95 for more information.

See “SMC Drive Type Information Synchronization” on page 19 for information about how the SMC acquires drive type information from the HSC.

Scenario 5: SMC with Two Libraries; One Local and One Remote

In this scenario, the SMC can coordinate allocation and mount requests among multiple library hardware configurations as illustrated in the following figure.

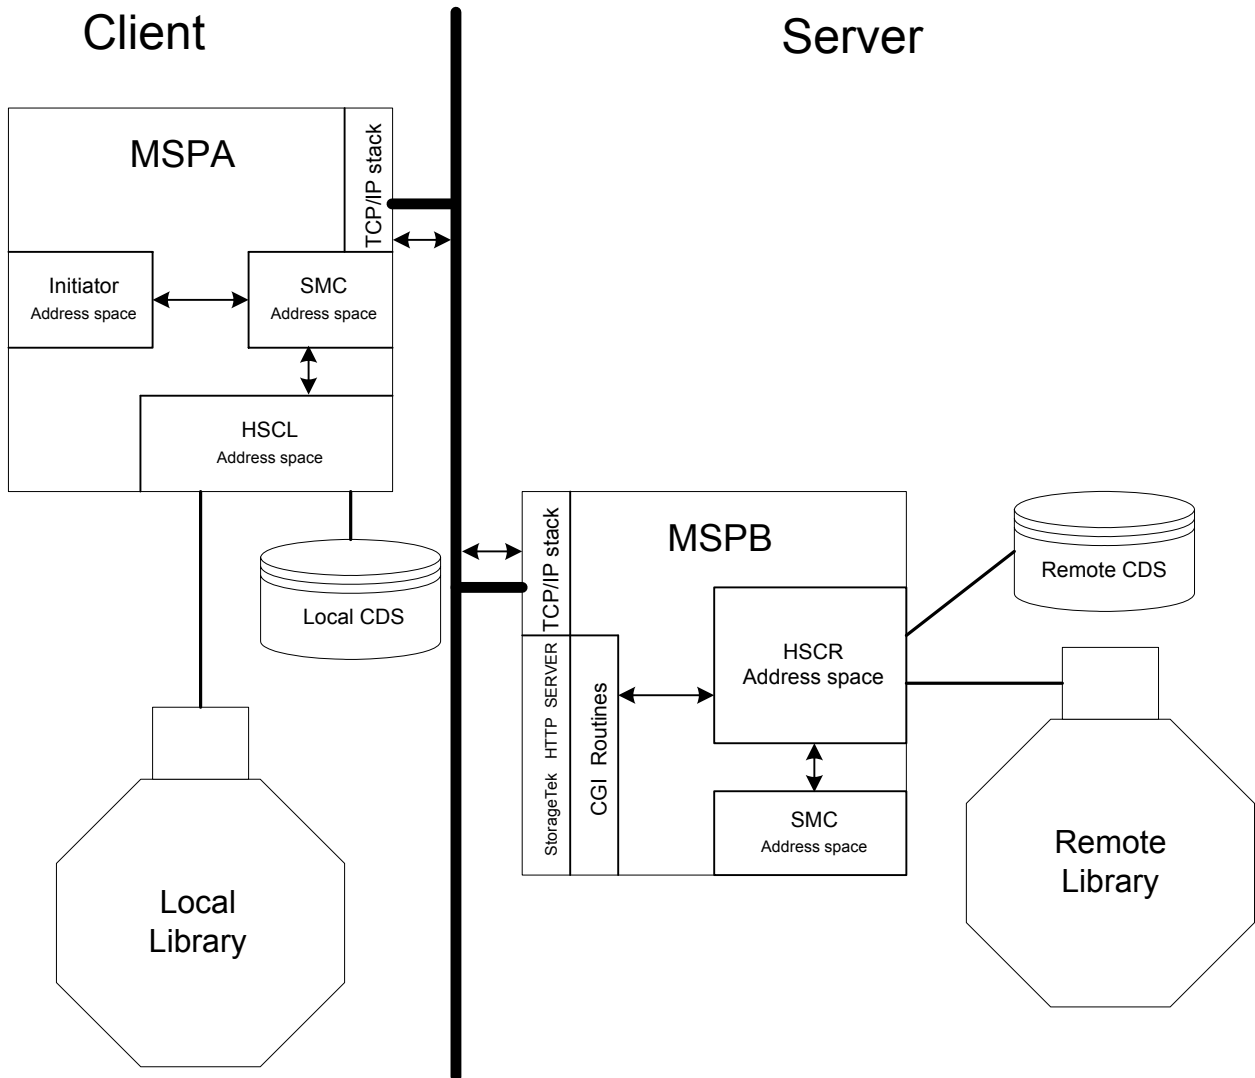


Figure 5. NCS with Two Libraries - One Local and One Remote with Multiple Paths

In this scenario, assume there are two separate libraries, each defined by a different CDS. SMC eliminates the need for LibraryStation in an MSP-only environment. The SMC can communicate directly with the remote HSC using the Sun StorageTek HTTP server.

Allocation and mount requests originating in an Initiator Address Space on MSPA are intercepted by the SMC on MSPA. These requests are then sent to either the local HSCL executing on the same host, or to the remote HSCR executing on the remote host MSPB.

The following example illustrates the LIBrary and SERVer commands for the SMC on MSPA:

```
LIBRARY NAME(LCLLIB) LOCSUBSYS(HSCL)
LIBRARY NAME(REMLIB)
SERVER NAME(REMPATH) LIBRARY(REMLIB) HOST(MSPB)
```

LIBrary commands are required to define both the local and remote libraries.

See “SMC Library Subsystem Selection” on page 19 for information on how the SMC selects among multiple library subsystems to determine an “owner” for each allocation request (i.e., each DD in a job step may have a different library subsystem owner).

Scenario 6: SMC with Two Libraries; One Local and One Remote with Multiple Paths

In this scenario, multiple libraries are configured with multiple paths as illustrated in the following figure.

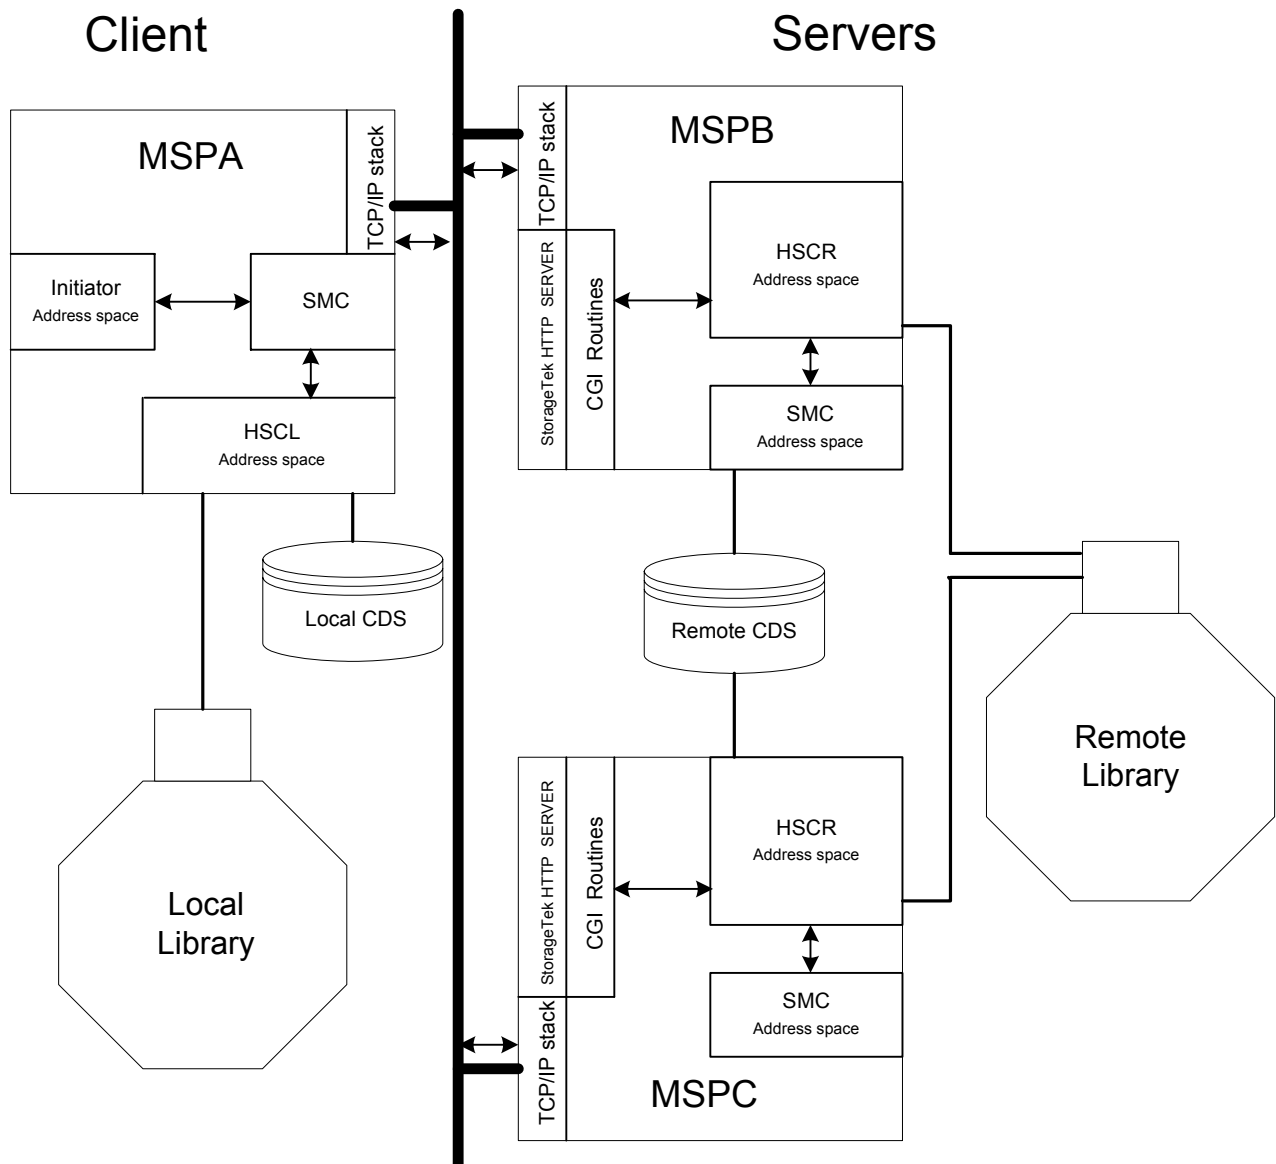


Figure 6. NCS with a Local Library and a Remote Library with Two Server Instances

This scenario is a combination of scenarios 1 and 4. The following example illustrates the LIBRARY and SERVer commands for the SMC on MSPA:

```
LIBRARY NAME(LCLLIB) LOCSUBSYS(HSCL)
LIBRARY NAME(REMLIB)
SERVER NAME(REMPATH1) LIBRARY(REMLIB) HOST(MSPB)
SERVER NAME(REMPATH2) LIBRARY(REMLIB) HOST(MSPC)
```

Client/Server Drive Address Mapping

SMC 6.1 and HSC 6.1 provide new facilities to allow drive addresses to be different between client and server hosts. The following table provides scenarios to help you determine whether client/server drive address mapping is required, and what actions and facilities are required.

Table 1. SMC Client/Server Drive Address Mapping Scenarios

| Scenario | Drive Address Mapping - Action Required |
|---|--|
| <ul style="list-style-type: none"> Client/server processing is not used. Each MSP host runs a copy of HSC. | None. |
| <ul style="list-style-type: none"> Client/server processing is used. Device addresses are identically defined for all hosts participating in a single client/server network. | None. |
| <ul style="list-style-type: none"> Client/server processing is used. Device addresses are identically defined for all hosts in a single client/server network, but not all devices are defined to all hosts. | Drive address mapping is not required. However, you must use the HSC SET SLIDRIVS utility to define all drive addresses on hosts that will be used as servers, even if the devices are not defined to the host. Refer to the <i>HSC System Programmer's Guide</i> for more information about the SET SLIDRIVS utility. |
| <ul style="list-style-type: none"> Client/server processing is used. Device addresses are identically defined to all HSC hosts, but one or more SMC client-only hosts use a different set of addresses for the same device. | Use the SMC DRIVemap operator command to map the SMC client host addresses to the HSC host addresses. SMC performs the necessary address translations in influencing allocations and requesting mounts from the server. See page 73 for more information about the SMC DRIVemap command. |
| <ul style="list-style-type: none"> Client/server processing is used. Two MSP hosts (MSP1 and MSP2), both running HSC and SMC. One MSP host (MSP3) running only SMC but defined as communicating to <i>either</i> of the two hosts as a server. Device addresses are defined differently among all three hosts. For example: <ul style="list-style-type: none"> MSP1 (AA0-AAF) MSP2 (BA0-BAF) MSP3 (CA0-CAF) | <ol style="list-style-type: none"> 1. Since the SMC on MSP3 can communicate with either the MSP1 or MSP2 host for a particular mount event, you must use the HSC SET utility, SET DRVHOST, to designate one of these hosts as the "drive host master." For example, MSP1 (AA0-AAF). Once the drive host master is specified in the HSC CDS, the addresses associated with that host master (AA0-AAF) are used by both MSP1 and MSP2 when communicating with the SMC. If desired, you can add a dummy host ID to be the HSC DRVHOST, and use nonexistent drive addresses to map to client addresses. For example, use the HSC SET NEWHOST utility to define hostname DRVDUMMY and define the device range as 000-00F. Refer to the <i>HSC System Programmer's Guide</i> for more information about the HSC SET DRVHOST utility and HSC SET NEWHOST utility. 2. Use the SMC DRIVemap operator command on clients MSP2 and MSP3 to map drive addresses BA0-BAF and CA0-CAF to the server addresses AA0-AAF. See page 73 for more information about the SMC DRIVemap command. |

SMC Drive Type Information Synchronization

The SMC acquires drive type information from the HSC library control system. For HSC subsystems, drive configuration changes are automatically recognized by the SMC for both local and remote systems.

The SMC UNITAttr command can be used to define device types for nonlibrary drives and to set MODEL=IGNORE for device addresses not available for the host.

SMC Library Subsystem Selection

When the SMC intercepts a specific or scratch allocation request, it selects an owning library to service the request. The following criteria are evaluated by the SMC in the order shown to determine which library subsystem controls the allocation request:

1. Libraries are interrogated in the order they are defined. If LIBRARY commands are defined to the SMC, the order of the LIBRARY commands is used. If LIBRARY commands are not defined to the SMC, the subsystem order in the MSP SSCVT subsystem table is used.
2. If the Eligible Device List (EDL) for the request does not contain drives owned by a specific library, that library cannot own the request unless overridden by explicit subsystem or library selection.
3. If the TAPEREQ esoteric contains only drives in a single library, it is selected as the request owner.
4. If a user exit explicitly selects a subsystem name or library name that is active, that library is the owner, even if it does not contain any drives in the EDL.
5. If a specific requested volume is found in a library, that library is considered the owner unless overridden by explicit subsystem or library selection. If the volume is not found in a library, but that library contains a VOLATTR for that volume, then the library is considered the owner if the specific volume is not found in any other library.
6. If a library indicates that it has scratch volumes for the request, it is considered the owner unless overridden by explicit subsystem or library selection. If the library does not have scratch volumes for the request, but the specified subpool name is known to the library, then the library will be considered the owner if scratch volumes are not found in any other library.



Note: Only a single version of an allocation user exit is executed, regardless of the number of libraries defined. Therefore, user exit return codes such as “USE LIBRARY DRIVES”, “USE VIRTUAL DRIVES”, etc. are **not** used to determine a request owner, nor does the user exit return code of “USE NONLIBRARY DRIVES” result in the selection of a “different” library.

The preferred way to select a library owner from among multiple libraries is through esoteric substitution on TAPEREQ. Alternatively, user exits can be used to specify a library name or esoteric.

Chapter 3. Starting the SMC

Overview

The SMC manages all interfaces with MSP for allocation and message handling, and therefore must be started as a task on every MSP host where tape processing occurs.

The SMC calls on HSC for volume and drive information. Therefore, HSC can be active on the same host, or HSC can be active on another host with the Sun StorageTek HTTP server.

Unlike previous releases, HSC 6.1 can be initialized before the SMC without producing error messages. However, an SMC subsystem must be active to influence tape allocations and intercept MSP messages.

SMC startup requires the following tasks:

- creating the SMC START procedure
- executing the SMC START procedure.



Note: Refer to the *NCS 6.1 Installation Guide* for SMC installation procedures.

Creating the SMC START Procedure

An SMC START procedure must be created in the procedure library of the host system. The MSP START command invokes this catalogued procedure, thus activating the SMC with the specified startup parameter settings.

Figure 7 provides a sample SMC START procedure.

```
//yourprocname PROC PRM='WARM'
//stepname EXEC PGM=SMCBINT,REGION=4M,TIME=1440,
// PARM='&PRM'
//*
//STEPLIB DD DISP=SHR,DSN=your.ncs.smc6100.smlink
// DD DISP=SHR,DSN=your.ncs.exitlib
// DD DISP=SHR,DSN=your.ncs.sos6100.slslink
//*
//SMCPARMS DD DSN=parmlib_name(parm_member_name),DISP=SHR
//*
//SMCCMDS DD DSN=cmdlib_name(cmd_member_name),DISP=SHR
//*
//TISPAPPL DD DSN=your.tisp.applnames,DISP=SHR
```

Figure 7. Sample SMC START Procedure




Notes:

- The first four characters of *yourprocname* specify the SMC subsystem name (unless the SSYS startup parameter is specified). Sun Microsystems recommends a value of SMCx, where *x* is any valid jobname character.
- Due to product dependencies, the HSC load library (SLSLINK) is required in the STEPLIB concatenation.
- The SMCPARMS and SMCCMDS DD statements are optional. Both statements are processed during initialization. The SMCCMDS data set may be re-processed during execution. See Chapter 6, “Commands and Control Statements” on page 57 for information about SMC commands that may be specified in either of these data sets.
- The TISPAPPL DD statement identifies the data set used to obtain the VTAM-G/TISP server application names for TCP communication with the HTTP Server.
- TIME=1440 must be coded to ensure that the SMC does not time out and terminate.

SMC EXEC Statement

The EXEC statement is used to define SMC startup parameter settings.

EXEC Statement Syntax

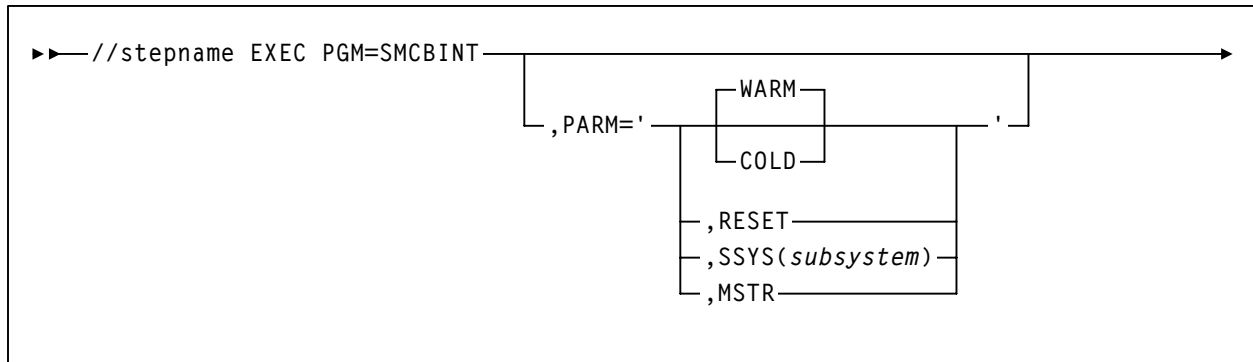

EXEC Statement Parameters

PARM=

defines the list of parameters passed to the SMC initialization routine.



Note: Execution parameters must be separated with commas. Separating parameters with blanks results in a syntax error.

WARM

specifies that the SMC main control block is not rebuilt. This is the default setting for normal operation.

COLD

specifies that all SMC control blocks are rebuilt. This parameter is mutually exclusive with WARM.



Warning: Do **not** use this parameter unless the SMC has terminated abnormally and cannot be restarted.

SSYS

specifies a *subsystem* ID that is different from the first four characters of the SMC START procedure. The SMC searches for this subsystem ID during initialization.

subsystem must be one to four characters in length.

RESET

specifies that the active subsystem status flag in the MSP Subsystem Communications Vector Table (SSCVT) for the SMC is reset. This parameter may correct a situation in which the SMC was terminated abnormally. It can be specified with WARM or COLD.



Warning: Using this parameter when an SMC subsystem is active and functional causes unpredictable results.

MSTR

specifies that the SMC start under the MSTR subsystem instead of under JES.

When specifying this parameter, you **must** also perform **one** of the following actions:

- Start the SMC subsystem using SUB=MSTR on the MSP Start command.
- Add the SMC subsystem to the SUBSYSxx subsystem table using the keyword format.



Note: If you wish to run the SMC under the master MSP subsystem, the PROCLIB containing the SMC START procedure must be present in the PROCLIB concatenation for the master address space. This concatenation is defined in SYS1.PARMLIB(MSTJCLxx), under DD KDJPSI.

Executing the SMC START Procedure

The MSP START command is used to initialize the SMC software. When this command is issued, the SMC subsystem initialization routine is invoked. This routine determines what parameters are in effect, performs any cleanup necessary, and begins normal processing.

Parameters associated with PARM= on the EXEC statement of the SMC Start Procedure can also be supplied via PARM= on the MSP START command. The PARM= specification on the MSP START command overrides the PARM= specification in the SMC Start Procedure. See “EXEC Statement Parameters” on page 23 for parameter descriptions.

MSP START Command Syntax

▶▶—START—*smc-proc-name*—————▶◀

MSP START Command Parameters

START or S

initiates the MSP START command

smc-proc-name

indicates the name of the SMC START procedure member.

Chapter 4. SMC Allocation in a JES Environment

Overview

This chapter describes SMC allocation in a JES environment. The following topics are discussed:

- jobs selected for SMC allocation management
- drive exclusion
- affinity separation
- drive prioritization
- deferring mounts
- multiple library subsystem support
- interaction with other software



Notes:

- See Appendix C for differences between SMC and NCS allocation.
- See for Appendix D for information about SMC interaction with other software.

Jobs Selected for SMC Allocation Management

All I/O device allocations on a JES system are examined by the SMC to determine if it should process the allocation request.

The SMC uses the MSP subsystem interface (SSI) IEFJFRQ Subsystem Function Request exit to gain control during tape allocation events. The SMC takes control in the JES environment for the SSI23 and SSI24 allocation functions.

SSI23 Dynamic Allocation

During SSI23 dynamic allocation processing, the SMC performs the same functions for dynamic allocations that the POSTSCAN C/I processes for common allocations:

- drive exclusion
- GDGALL affinity separation
- esoteric unit name replacement
- mount deferral.

SSI24 Common Allocation

During SSI24 common allocation processing, the SMC performs the following processes to arrive at the best set of eligible drives:

- drive exclusion
- unit affinity separation
- defer processing (when CA1RTS is set to ON)
- EDL updated with the drive exclusion results (when MIACOMPAT is set to ON)

The results of the drive exclusion process are not reflected in MSP control blocks until tape allocation time, unless MIACOMPAT is set to ON.

The results of unit affinity separation are used to update MSP VOLUNIT entries in the SIOT.

Exceptions

The SMC does not influence the following types of cartridge tape allocation:

- demand allocation (i.e., request for a specific drive(s))



Note: The SMC does perform DEFER processing for demand allocation.

- allocations excluded explicitly by entering the ALLOCJob command BYPASS parameter. Refer to the description of this command in Chapter 6, “Commands and Control Statements”.
- allocations where the list of eligible devices contains only devices that are "unknown" (i.e., not virtual, not library, and not defined in an SMC UNITAttr command).

Drive Exclusion

When the SMC determines an interest in an allocation event at common allocation time (SSI24 subsystem function), its first step is to narrow down the list of eligible drives to those that best support the allocation request. This step is called *drive exclusion*.

Like the HSC device separation process, the SMC drive exclusion process does **not** take into account the status of drives (e.g., offline, busy) when selecting drives that are eligible for the allocation request. If all drives compatible with the allocation request are unavailable, the job goes into allocation recovery.

The SMC performs drive exclusion by building a list of drives contained in the initial EDL and then by following a step-by-step process using an ordered list of exclusion criteria to remove drives from this list.

Before any drives are removed from consideration for the allocation, the SMC first determines whether a job step can be allocated.

For example:

```
//JOB1  JOB ...
//STEP1 EXEC PGM=...
//DD1   DD    UNIT=3490,...
//DD2   DD    UNIT=3490,...
      .
      .
      .
//DD25  DD    UNIT=3490,...
```

Assume STEP1 is requesting twenty-five 3490 drives. If the MSP EDL contains twenty-four 3490 drives in its lists of eligible devices, MSP cannot allocate the required drives for the job. In this instance, the SMC issues message SMC0042, which indicates the job cannot allocate before SMC modification, and allows the job to fail allocation.

Once the SMC determines a job step can be allocated, the SMC begins excluding drives based on an ordered list of criteria. Table 2 on page 32 and Table 3 on page 37 list these criteria and show the order the exclusion process follows. The lower the criteria level, the higher its importance. Thus, level 2 is considered more important than level 6.

Minimum Exclusion Level

By default, level 2 is the *minimum exclusion level*, that is, the desired minimum level of allocation exclusion, for both specific and scratch volume processing. However, if necessary, the ALLOCDef and ALLOCJob commands can reset the minimum exclusion level (refer to Chapter 6, “Commands and Control Statements” for descriptions of these commands).

In the first step of drive exclusion, the SMC determines if the job can be allocated at the minimum drive exclusion level. If not enough drives remain eligible at the minimum exclusion level, the SMC issues message SMC0043, which indicates the job is not allocatable at the minimum exclusion level. The SMC then excludes all devices, causing the job to fail allocation.

For example:

```
//JOB2 JOB ...  
//STEP1 EXEC  
//DD1 DD UNIT=3490,VOL=SER=984001,DISP=OLD  
//DD2 DD UNIT=3490,VOL=SER=984002,DISP=OLD  
//DD3 DD UNIT=3490,VOL=SER=984003,DISP=OLD
```

In this system environment, assume that twenty 3490-type drives have been configured. Only two of those twenty are actually T9840 drives. If all three volumes require a separate T9840 tape drive, then not enough T9840 drives exist for the job to allocate. Without SMC influence, MSP allows the job to proceed through allocation. However, with SMC influence, message SMC0043 is issued and the job fails.



Note: No exclusion criteria (including minimum level) are applied when the user specifies demand allocation (i.e., requests a specific drive or drives).

Subsequent Levels

Once the minimum level of exclusion has succeeded, the remaining exclusion levels are performed. Any level above the minimum level that fails is skipped and exclusion continues to the next level.



Note: A level fails if it results in too few drives for the DD statement to allocate. The only required exclusion levels are those at the minimum level or below.

After the last drive exclusion level is completed, the SMC examines the final drive lists. If the job step cannot be allocated because not enough drives remain eligible, drive exclusion regresses to the previous exclusion level for the failing DD statement. This process repeats until the job step can allocate.

Intentionally Failing a Job

Depending upon the characteristics of your installation, you may want specific jobs to fail at allocation time rather than execute them with nonoptimal devices. As an example, if you have two ACSs, one of which is located at a remote site, you may prefer to fail the job, rather than having to transfer the correct volume from one ACS to another.

For example:

```
//DD1 DD UNIT=CART,VOL=SER=INACS0,DISP=OLD  
//DD2 DD UNIT=AFF=DD1,VOL=SER=INACS1,DISP=OLD
```

Assume the following:

- Both volume INACS0 and INACS1 share common media characteristics.
- Volume INACS0 resides in ACS0, and volume INACS1 resides in ACS1.
- Only ACS0 contains a compatible drive.

If this affinity chain is not broken, then volume INACS1 must be ejected from ACS1 and entered into ACS0 for this job to execute, which may not be possible given the geographical locations of the ACSs.

In this case, failure at allocation time may be preferable to failure at run time. By specifying the correct MINLVL value (i.e., by issuing the ALLOCJob command with a MINLVL of 7 for this job), the job is failed at allocation time.



Caution: Setting the minimum exclusion level may cause jobs to fail unexpectedly. Whenever the SMC is unable to apply an exclusion criterion at or below the minimum level, the job fails allocation.

For example, if a TAPEREQ specifies a media of STANDARD for a scratch volume and the eligible device list contains only T9840 drives, when the SMC attempts to apply the “policy media” exclusion level, all drives are excluded. If the minimum level is set to 3 or higher, the job fails allocation. Therefore, it is recommended that the default exclusion level (as specified by the ALLOCDef command) should normally not be set to a level greater than 2.

Specific Volume Request Drive Exclusion Criteria

For a specific volume allocation, the SMC excludes drives in order from lowest exclusion level to highest based on the criteria in Table 2. The lower the level number, the more important the exclusion criteria.

Table 2. JES Drive Exclusion Levels (Specific Request)

| Level | Specific Volume Criteria | Keyword* |
|-------|---|----------------------------|
| 1 | For non-labeled (NL) specific volume requests, exclude all virtual drives. Exclude drives incompatible with the volume media. Primary source: external volume label Secondary source: VOLATTR MEDIA parameter The volume media can be obtained from the volume label or from an HSC VOLATTR statement MEDIA parameter. | VIRTUALLABEL MEDRECTECH |
| 2** | For virtual volumes only, exclude virtual drives that reside in a VTSS to which the VTV cannot be migrated and recalled. | AVAILVTSS |
| 3 | Exclude drives based on the required recording technique. Source: VOLATTR RECTECH parameter or volume density (i.e., 9840A/B and 9840C). | VOLATTRRECTECH |
| 4 | Exclude drives based on user location policies. Primary source: TAPEREQ ESOTERIC parameter. Secondary source: User Exit 08 or 10 return codes. | USERPOLICY |
| 5 | Exclude drives based on the SMC ALLOCDEF EXTVOLESOT esoteric. | EXTVOLESOT |
| 6 | Exclude drives based on volume location type, i.e., library or nonlibrary. | LOCTYPE |
| 7 | Exclude drives based on the ACS location of the volume (for library volumes), and the resident VTSS for virtual volumes. | ACSORVTSS |
| 8 | Exclude drives based on the requested recording technique. Primary source: TAPEREQ RECTECH parameter. | POLRECTECH |

* Keywords associated with each exclusion level are specified in the exclusion criteria displayed in message SMC0046.

** Level 2 is the default minimum level.

Exclusion Level 1

The SMC excludes drives that are not compatible with the volume media. The volume media can be obtained from the volume label or from an HSC VOLATTR statement MEDIA parameter.

The SMC excludes all virtual drives for non-labeled (NL) specific volume requests.



Note: Specifying MINLVL=0 allows the allocation to succeed even if the volume's media conflicts with the EDL. See "ALLOCJob Command" on page 67 for more information.

Exclusion Level 2

If the specific volume requested is a resident virtual volume, the SMC excludes virtual drives that reside in a VTSS to which the VTV cannot be migrated and recalled.

Refer to the VTCS documentation for more information about virtual volumes.

Exclusion Level 3

If an HSC VOLATTR statement specified the recording technique (RECTECH parameter) for this specific volume, the SMC excludes drives that do not provide that recording technique.

For example:

```
//DD1 DD UNIT=TLACS0,VOL=SER=VOL000,DISP=OLD
```

A VOLATTR statement has been defined to the HSC.

```
VOLATTR SERIAL(VOL000) RECTECH(36B) MEDIA(ECART)
```

VOL000 requires a 9490 drive, and if TLACS0 contains both 9490 and 9490EE drives, the 9490EE drives are excluded from consideration for this allocation.



Note: If your environment contains drives that support different densities for the same media, such as a combination of T9840A and T9840C drives, it is recommended that you set the default MINLVL to 3, so that jobs will fail rather than allocating volumes to a drive with an incompatible density.

Exclusion Level 4

If a TAPEREQ statement specifies an esoteric unit name for this allocation request, the SMC verifies the esoteric unit name is defined to MSP. If the esoteric passes this test, any drives in the original EDL that are not also defined to the esoteric unit name are excluded from consideration for this allocation.

For example:

```
//DD2 DD UNIT=CART,VOL=SER=TR0001,DSN=SYS4.TR1.DATA,DISP=OLD
```

The following TAPEREQ statement is defined to SMC:

```
TAPEREQ DSN(SYS4.TR1.** ) ESOT(TLACS1) RECT(LONGI)
```

The drives that are not defined to the esoteric TLACS1 are excluded from consideration for this allocation.

If no TAPEREQ statement specifies an esoteric for this allocation request, User Exit 08 or 10 return codes and values can define the criteria for drive exclusion at this level. The user exit return codes can direct the SMC to select nonlibrary drives, a specific ACS, or the user exit can return an esoteric name that contains customer-selected drives. Any drives in the current list of eligible devices that did not match the user exit return values are excluded here.

For example:

```
//DD1 DD UNIT=CART,VOL=SER=VOL001,DISP=OLD
```

User Exit 08 returns UX08ASUB and ACS0, which requests library drives and ACS0. The drives that are not in ACS0 are excluded from consideration for this allocation.

Exclusion Level 5

The ALLOCDEF EXTVOLESOT parameter is used to specify an esoteric to allocate specific external (nonlibrary) volumes. Additionally, the ALL modifier allows you to use this esoteric for all specific external volumes regardless of the value of the specific user exit return code.



Note: The EXTVOLESOT esoteric replaces the HSC ALLOC SPECVOL ACS list. The following describes how to use the SMC EXTVOLESOT to achieve the same functionality:

- If you used the UX08 SPECVOL return code, specify EXTVOLESOT(name,USEREXIT).
- If you used the SPECVOL list to force all nonlibrary volumes to be allocated inside the library (no defined NONLIB esoteric), use EXTVOLESOT (name, ALL).

Exclusion Level 6

The generic location of the volume (library or nonlibrary) reduces the remaining list of eligible drives.



Note: For exclusion level 6, nonlibrary drives are outside the library and contain **either** known (from the SMC UNITATTR command) or unknown device characteristics.

If the volume resides in a library, all drives outside the library are excluded, and if the volume resides outside the library, all library drives are excluded.

For example:

```
//DD1 DD UNIT=CART,VOL=SER=LIB001,DISP=OLD
```

Assume volume LIB001 resides in a library.

All drives outside the library are excluded from consideration for this allocation.

Exclusion Level 7

For volumes residing in the library, the ACS location of the volume reduces the remaining list of eligible drives. Any drives that remain that do not reside in the same ACS as the volume are excluded.

For example:

```
//DD1 DD UNIT=CART,VOL=SER=A00VL1,DISP=OLD
```

Assume volume A00VL1 resides in ACS00, and the drives reside in ACS00 and ACS01.

The drives residing in ACS01 are excluded from consideration for this allocation.

Additionally, for resident VTVs, drives that do not reside in the resident VTSS are excluded. This allows you to set your default minimum level to 3 if you use mixed density drives.

Exclusion Level 8

Exclusion levels 1 and 3 restrict the list of eligible drives to those compatible with the volume's actual media and its recording technique, if specified on the HSC server VOLATTR statement. Exclusion level 8 may further restrict the drives for the request based on the TAPEREQ recording technique.

The SMC TAPEREQ definitions can explicitly denote a recording technique for the allocation request.

For example:

```
//DD1 DD UNIT=CART,VOL=SER=TV9840,DISP=NEW,  
// DSN=SYS4.TR4.DATA
```

Assume the requested volume is a 9840 volume in the library with no recording technique specified on a VOLATTR. Assume an SMC TAPEREQ has been defined:

```
TAPEREQ DSN(SYS4.TR4.** ) RECT(STK1RB)
```

Previous exclusion levels restricted the list of devices to all T9840 models. In this example the TAPEREQ recording technique of STK1RB leaves only T9840B devices in consideration for this allocation.

Scratch Volume Request Drive Exclusion Criteria

For a scratch volume allocation, the SMC excludes drives in order from lowest exclusion level to highest based on the criteria in Table 3. The lower the level number, the more important the exclusion criteria.

Table 3. JES Drive Exclusion Levels (Scratch Request)

| Level | Scratch Volume Criteria | Keyword* |
|-------|---|--------------|
| 1 | For nonlabeled (NL) scratch volume requests, exclude all virtual drives. Exclude all MODEL=IGNORE drives. | VIRTUALLABEL |
| 2** | For virtual volumes only, exclude virtual drives that reside in a VTSS to which the VTV cannot be migrated and recalled. | AVAILVTSS |
| 3 | Exclude drives based on the requested media. Primary source: TAPEREQ MEDIA parameter. Secondary source: User Exit 02 request for virtual media | POLMEDIA |
| 4 | Exclude drives based on user location policies. Primary source: TAPEREQ ESOTERIC parameter. Secondary source: User Exit 02 and 10 return codes. | USERPOLICY |
| 5 | Exclude drives based on the media of available scratch volumes in subpool. Primary source: TAPEREQ SUBPOOL parameter. Secondary source: User Exit 02 subpool values. Tertiary source: scratch subpool 0. | SUBPOOL |
| 6 | Exclude drives based on available scratch location type, i.e., library, nonlibrary, or virtual. | LOCTYPE |
| 7 | Exclude drives based on the SMC ALLOCDef command ZEROSCR parameter. | ZEROSCRATCH |
| 8 | Exclude drives based on the requested recording technique. Primary source: TAPEREQ RECTECH parameter. | POLRECTECH |

* Keywords associated with each exclusion level are specified in the exclusion criteria displayed in message SMC0046.

** The MINLVL parameter value default, level 2 on the ALLOCDef or ALLOCJob command, applies to both scratch and specific volume requests. Even though level 2 has no meaning for scratch, level 2 is considered the default minimum level.

Exclusion Level 1

The SMC excludes virtual drives if the volume label type requested is NL (nonlabeled). This is the only required criterion. Refer to the VTCS documentation for more information about virtual volumes.

The SMC excludes all drives defined with the SMC UNITATTR MODEL=IGNORE.

Exclusion Level 2

For virtual allocation requests, the SMC excludes virtual drives that reside in a VTSS to which the VTV cannot be migrated and recalled.

Refer to the VTCS documentation for more information about virtual volumes.

Exclusion Level 3

The SMC TAPEREQ definitions can explicitly specify the media desired for the allocation request, or media can be derived from the TAPEREQ RECTECH. Drives that do not provide the requested media support are excluded at this level.

For example:

```
//DD1 DD UNIT=CART,DISP=(NEW,KEEP),DSN=SYS4.VIRT.DATA
```

No SMC TAPEREQ has been defined. Assume the User Exit 02 return code requested virtual media (UX02VIRT). The User Exit 02 media selected for this request is virtual. Only virtual drives remain in consideration for this allocation. The next example shows how TAPEREQ can override User Exit 02 return codes.

For example:

```
//DD1 DD UNIT=CART,DISP=(NEW,KEEP),DSN=SYS4.TR4.DATA
```

An SMC TAPEREQ has been defined:

```
TAPEREQ DSN(SYS4.TR4.** ) MEDIA(DD3A) RECT(DD3)
```

Assume User Exit 02 return code requested virtual media (UX02VIRT).

If no TAPEREQ definition applies to this allocation request, User Exit 02 return code, UX02VIRT, can explicitly request virtual media. Nonvirtual drives are excluded at this level.

However, the TAPEREQ media definition overrides the user exit return code, and the media selected for this request is helical. Only helical drives remain in consideration for this allocation. Messages SMC0045 and SMC0046 are issued indicating that the user exit request for virtual volumes was not honored.

Exclusion Level 4

If a TAPEREQ statement specifies an esoteric for this allocation request, the SMC determines the common drives between the TAPEREQ esoteric and the list of remaining eligible drives. If common drives exist, any drives remaining in the current list of eligible drives that are not also defined to the esoteric are excluded from consideration for this allocation.

If no TAPEREQ statement specifies an esoteric for this allocation request, User Exit 02 and User Exit 10 return codes and values can define this criterion for drive exclusion. The user exit return codes can direct the SMC to select library drives, nonlibrary drives, or a specific ACS, or the user exit can return an esoteric unit name that contains customer-selected drives. Any drives in the current list of eligible drives that did not match the user exit return values are excluded here.

For example:

```
//DD1 DD UNIT=CART,DSN=&&TEMP1,DISP=(NEW,PASS)
```

Assume User Exit 02 returns UX02LIB, which requests library drives.

The drives that are not in the library are excluded from consideration for this allocation.

A TAPEREQ example is:

```
//DD2 DD UNIT=CART,DSN=SYS4.TR1.DATA,DISP=(NEW,KEEP)
```

The following TAPEREQ statement is defined to the SMC.

```
TAPEREQ DSN(SYS4.TR1.** ) ESOT(TLIB9840) RECT(LONGI)
```

The drives that are not defined to the esoteric TLIB9840 are excluded from consideration for this allocation. Any User Exit 02 return codes would be ignored.

Exclusion Level 5

The combined media and specified recording technique of the volumes in a scratch subpool define this criterion for drive exclusion. An SMC TAPEREQ SUBPOOL parameter can specify a scratch subpool name for the request.

If no TAPEREQ SUBPOOL parameter is specified for this allocation, User Exit 02 can return a scratch subpool number or subpool name when it also sets the return code to use default processing or library drives. User Exit 10 can also apply to affinity chains here. Refer to “Affinity Separation” on page 44 for a discussion about the interaction between User Exit 02 and User Exit 10.



Note: When no specific subpool applies to the allocation, the default subpool, subpool 0, is used.

Drives that do not provide a recording technique compatible with a volume(s) in the subpool are excluded from consideration for this allocation.

For example:

```
//DD1 DD UNIT=CART,DSN=NEW.TRK36.DATA,DISP=(NEW,KEEP)
```

Assume HSC has scratches of media types 36TRACK and DD3 in a subpool named SUBPOOL3, and an SMC TAPEREQ entry exists:

```
TAPEREQ DSN(NEW.*) SUBPOOL(SUBPOOL3)
```

Drives providing 36-track recording and helical recording remain in consideration for this allocation.

A User Exit 02 example for this criteria:

```
//DD1 DD UNIT=CART,DSN=SYS4.MYGROUP.DATA,DISP=(NEW,KEEP)
```

Assume the following:

- User Exit 02 returns UX02LIB
- User Exit 02 returns MYSUBPL in UX02SNAM
- MYSUBPL has been defined to the HSC using a SCRPOOL statement in the SLSSYSxx PARMLIB member or SCRPEDEF file
- The library has scratch volumes defined in MYSUBPL scratch subpool.

The drives that are not in the library are excluded from consideration for this allocation during level 4 drive exclusion.

Exclusion Level 6

The generic location of available scratch volumes provides the next level of drive exclusion. If the library contains no scratch volumes, all library drives and virtual drives are excluded from selection, leaving only nonlibrary drives eligible. If the request is for a virtual scratch volume, eligible virtual drives are selected based on the TAPEREQ; VTSSs that cannot support the requested management class migration are excluded. Lastly, if the library contains scratch volumes and the request is not for a virtual volume, then all virtual drives and all nonlibrary drives are excluded, leaving only library drives eligible.

For example:

```
//DD1 DD UNIT=CART,DSN=MY.NEW.DATASET,DISP=(NEW,KEEP)
```

Assume that there are no SMC UNITAttr commands defined for nonlibrary drives, and the library contains no scratch volumes.

All HSC library drives are excluded from consideration for this allocation. When all drives are excluded during an exclusion level, and the level is not at or below minimum level, then the following occurs:

- messages SMC0045 and SMC0046 are issued
- all drives excluded at that level are restored to the list of eligible drives
- processing continues at the next level of exclusion.

In this case, all drives that were excluded by this criterion are now restored to the list. Processing continues at level 7.

Exclusion Level 7

The SMC ALLOCDef command parameter, ZEROSCR, determines whether or not to include drives in ACSs that do not contain any scratch cartridges of the required type. ZEROSCR(OFF), the default, indicates to include drives in all ACSs whether they contain scratch cartridges or not. ZEROSCR(ON) excludes drives in ACSs that do not contain any scratch volumes, but leaves all ACSs containing scratch volumes eligible for allocation.

For example:

```
//DD1 DD UNIT=CART,DSN=MY.NEW.DATASET,DISP=(NEW,KEEP)
```

Assume that ZEROSCR(OFF) has been specified, and two ACSs have scratch counts as follows: ACS0 has 400 and ACS1 has 0.

Drives in ACS0 and ACS1 remain eligible for the allocation.

Another example is:

```
//DD2 DD UNIT=CART,DSN=MY.OTHER.DATASET,DISP=(NEW,KEEP)
```

Assume ZEROSCR(ON) has been specified, and three ACSs have scratch counts as follows: ACS0 has 400, ACS1 has 500, ACS2 has 0.

Drives in ACS0 and ACS1 remain eligible. ACS2 drives are excluded from consideration because ACS2 does not contain any scratch volumes.

Exclusion Level 8

Exclusion level 3 restricts the list of eligible drives to those compatible with the TAPEREQ requested media. Exclusion level 5 restricts the list of eligible drives to those compatible with the scratch media in the requested subpool. Exclusion level 8 may further restrict the devices for the request based on the TAPEREQ data class recording technique.

The SMC TAPEREQ definitions can explicitly specify a recording technique for the allocation request.

This criterion is the last to be applied to the drives that are eligible for the allocation. Any drive that does not provide the requested recording technique is excluded from consideration for the allocation.

For example:

```
//DD1 DD UNIT=CART,DISP=(NEW,KEEP),DSN=SYS4.TR4.DATA
```

Assume an SMC TAPEREQ has been defined:

```
TAPEREQ DSN(SYS4.TR4.** ) RECT(STK1RB)
```

Previous exclusion levels restricted the list of devices to all T9840 models. In this example, the TAPEREQ recording technique of STK1RB leaves only T9840B devices in consideration for this allocation.

Affinity Separation

Explicit unit affinity is an MSP facility that allows volumes associated with two separate JCL DD statements, or allocation requests, to be mounted serially on the same drive. A request for all generations of a GDG group (GDG ALL chain) can be considered as a GDGALL affinity.

The SMC makes no distinction between these two types of affinity. When processing an affinity chain, the drive exclusion process examines each allocation in the chain separately up to and including the minimum exclusion level. The chain is always separated when the minimum exclusion level processing results in lists of eligible drives, for two or more members of the chain, that do not contain common drives.

For example:

```
//DD1   DD UNIT=CART,DSN=MY.STK1R.DATASET,DISP=OLD  
//DD2   DD UNIT=AFF=DD1,DSN=MY.LONGI.DATASET,DISP=OLD
```

DD1 specifies a data set on 9840 or T9840B media and DD2 specifies a data set on longitudinal media. Drive exclusion level 1 for specific volumes creates a list of eligible drives for each DD according to volume media required. The two lists do not contain a common drive. As a result, DD1 and DD2 no longer represent one drive allocation but two separate allocation requests. At this point, the SMC breaks the affinity chain between them.

Affinity Head-Of-Chain

For SMC affinity chain processing, the “head” of the affinity chain containing only scratch or only specific volumes is the first DD statement in the chain. If an affinity chain contains both scratch and specific volumes, the first specific volume is the “head.”

User Policy Influence on Affinity Separation

After the minimum level of drive exclusion and affinity separation completes, user policy influences the remaining affinity separation decisions.

Further affinity chain processing decisions are based on the first value found between the following:

- User Exit 10 return code separation decision
- ALLOCDef or ALLOCJob command SEPLvl parameter value.

User Exit 10

User Exit 10 sends an entire affinity chain to the user for examination. The user can decide whether the affinity chain remains together or separates during exclusion processing after the minimum level.

If User Exit 10 returns UX10SEP, indicating the chain members can be separated, the SMC proceeds as if ALLOCDEF SEPLVL=MAX were specified.

If User Exit 10 returns UX10LDRV, UX10NDRV, UX10ESUB, or UX10ASUB, the affinity chain remains together for the remainder of drive exclusion processing. The location requested (e.g., library drives if UX10LDRV is returned) replaces any location value provided by User Exits 02 or 08. This location information is used by drive exclusion level 4. Refer to Table 2 on page 32 and Table 3 on page 37 for drive exclusion level information.

For example:

```
//DD1 DD UNIT=CART,DSN=SYS4.DATASET1,VOL=SER=NOLIB1,DISP=OLD
//DD2 DD UNIT=AFF=DD1,DSN=SYS4.DATASET2,VOL=SER=INLIB2,DISP=OLD
```

Assume the following:

- DD1 requests a nonlibrary volume and DD2 requests a library volume.
- User Exit 08 returns a nonlibrary esoteric for DD1 (UX08ESUB).
- User Exit 10 returns a no separate decision and a library location (UX10LDRV).

The affinity chain stays together. Drive exclusion ignores the esoteric returned by User Exit 08 for DD1 and excludes all but library drives as requested by User Exit 10.

Any one of the four return values UX10LDRV, UX10NDRV, UX10ESUB, and UX10ASUB from User Exit 10 causes the SMC to operate as if ALLOCDEF SEPLvl=MIN were specified.



Note: Any User Exit 10 separation decision overrides the SEPLvl parameter of the ALLOCDef or ALLOCJob commands.

SEPLvl Parameter Value

If the decision to separate or keep the affinity chain together still has not been made, further affinity chain processing depends on the SEPLvl parameter value of the ALLOCDef and ALLOCJob commands (refer to Chapter 6, “Commands and Control Statements,” for descriptions of these commands and setting an affinity separation level).

The SEPLvl parameter operates in three distinct ways depending on the value specified. The SEPLvl MAX parameter allows drive exclusion to be performed to the maximum level for each allocation element in the affinity chain. At the end of the drive exclusion process, if two or more elements of the chain no longer have common drives, the affinity chain is separated.

For example:

```
//DD1 DD UNIT=3490,VOL=SER=INACS0,DSN=MY.DSN1,DISP=OLD
//DD2 DD UNIT=AFF=DD1,VOL=SER=INACS1,DSN=MY.DSN2,DISP=OLD
```

Assume the following:

- Both volume INACS0 and INACS1 share common media characteristics.
- Volume INACS0 resides in ACS0, and volume INACS1 resides in ACS1.
- ALLOCDEF SEPLVL(MAX) has been specified.

During specific volume exclusion level 7, the list of eligible drives in DD1 are all located in ACS0 and the list of eligible drives in DD2 are all located in ACS1. No drives are common to both lists. This affinity chain separates.



Note: MAX is the default value for SEPLvl.

The SEPLvl parameter can be specified as MIN. The value MIN requests that any affinity chains that remain together after the minimum level of drive exclusion should not be separated during the remaining levels of drive exclusion processing.

Using the same example:

```
//DD1 DD UNIT=3490,VOL=SER=INACS0,DSN=MY.DSN1,DISP=OLD
//DD2 DD UNIT=AFF=DD1,VOL=SER=INACS1,DSN=MY.DSN2,DISP=OLD
```

Once again, assume:

- Both volume INACS0 and INACS1 share common media characteristics.
- Volume INACS0 resides in ACS0, and volume INACS1 resides in ACS1.
- ALLOCDEF SEPLVL(MIN) has been specified.

During specific volume exclusion level 7, the list of eligible drives for DD1 is all located in ACS0. DD1 is considered the “head” of the chain and exclusion is performed to ACS0. Only drives in ACS0 remain eligible for the allocation, and the affinity chain remains together.

The SEPLvl parameter can also be set to a specific drive exclusion level. The level number indicates the highest drive exclusion level at which separation can occur. Using the previous example, if the user specifies

```
ALLOCDEF SEPLVL=6
```

The chain remains together through drive exclusion level 6 because each level produces a drive list containing common drives for both DD1 and DD2.

Another example:

```
//DD1 DD UNIT=3490,VOL=SER=INACS0,DSN=VIRTUAL.DATASET1,DISP=OLD
//DD2 DD UNIT=AFF=DD1,VOL=SER=INACS1,DSN=VIRTUAL.DATASET2,DISP=OLD
//DD3 DD UNIT=AFF=DD1,VOL=SER=NL0001,DSN=REAL.DATASET,DISP=OLD
```

Assume the following:

- ALLOCDEF SEPLVL=5 has been specified.
- Volume INACS0 is in ACS0 and VOLATTR MEDIA(ECART) RECTECH(36B) has been defined.
- Volume INACS1 is in ACS1 and VOLATTR MEDIA(ECART) RECTECH(36B) has been defined.
- Volume NL0001 is a nonlibrary volume and VOLATTR MEDIA(DD3A) has been defined.

At drive exclusion level 1, two chains result because of incompatible media (ECART and DD3A). Statements DD1 and DD2 are still chained together and continue through exclusion levels 2 through 5 because the exclusion criteria do not create disparate sets of eligible drives for the two DD statements.

No further separation of the DD1/DD2 chain can occur because the SEPLVL parameter has been set to level 5.

After the last drive exclusion level is completed for the job, the SMC examines the final drive lists. If the job cannot be allocated because not enough drives remain eligible, drive exclusion regresses to the previous exclusion level of the failing DD statement and a separated chain may be rejoined. This process repeats until the job can allocate.



Note: The SEPLvl parameter replaces the function of the HSC ALLOC command UNITAFF and GDGALL parameters. These parameters are no longer supported.

If your installation previously specified UNITAFF(NOSEP) and GDGALL(NOSEP), to preserve that behavior, specify a SEPLvl value of 3 on the ALLOCDef command. If your installation previously specified UNITAFF(SEP) and GDGALL(SEP), no SEPLVL parameter change is required, since the default SMC behavior separates affinity chains at the maximum separation level.

Refer to the ALLOCDef and ALLOCJob commands in Chapter 6, “Commands and Control Statements,” for more information about setting an installation default minimum exclusion level and unit affinity separation level.

Drive Prioritization

After drive exclusion has occurred during the SSI24 common allocation event, the SMC then proceeds to assign a priority value to each remaining eligible drive.



Note: Between a common allocation event (SSI24) for a tape and its tape allocation event, MSP may make drives ineligible. When this occurs, the SMC retests the job step to ensure that it is allocatable with the remaining drives. If it is not, drives that were excluded by the SMC SSI24 process are reincluded until the job step is allocatable.

One exception to the reinclusion process occurs when the ALLOCDef MIAcompat parameter is set to ON. In this case, exclusion is already done, so drive reinclusion cannot take place, and the job is allowed to fail.

The SMC drive priority is assigned based on the following criteria:

- For specific volumes, drives in LSMs closest to the volume are preferred. The SMC sets equal priority value for drives that are located the same number of passthru from the volume.
- For scratch volumes, drives in LSMs with the largest number of scratch volumes are preferred.
- The TAPEREQ DEVTPREF parameter causes drives with specific recording techniques to be preferred.
- The TAPEREQ SCOPE parameter determines the relative priority of LSM location and drive type preferencing.

The following parameters, control statements, and user exits also influence the drive priority:

- HSC ALLOC command parameters LOWSCR, LSMPREF, and SCRTECH
- SLSUX02 (HSC format user exit 02).

After a final list of drives has been selected for allocation, the preference order of the eligible drives, after considering LSM and drive type preferencing, is selected based on a “last use” algorithm.

To reduce excessive wear on allocated drives, the SMC allocates drives by rotation based on the “last mount time” for each drive. This value is examined for every drive in the final drive list. The drive that had the most recent mount is located, and the drive immediately following it in the list is selected as the most preferred for the current allocation.



Note: This algorithm does not apply to virtual drives.

Deferring Mounts

The SMC can also set the deferred mount status if the installation chooses to defer the mount of library volumes. The SMC ALLOCDef command DEFER parameter can set defaults for an installation.

Defer(ON)

The volume mount is deferred until the data set is opened. This is the default.

Defer(OFF)

The volume mount is deferred only if the user's JCL requests it.

For optimal performance, it is recommended that you set Defer(ON).



Note: Virtual mounts are always deferred.

Library Subsystem Selection

In order to support the execution of SMC on a different host from the library subsystem, all allocation and message processing user exits are now managed and invoked by the SMC.

It is recommended that you carefully review the contents of your existing user exits to determine the most effective method to direct allocations to the correct library. Specifically, the use of the user exit return code “use nonlibrary drives” to direct allocation to another library subsystem is no longer supported. It is recommended that you use TAPEREQ or user exit esoterics to direct allocations to the appropriate library subsystem.

An alternative method to select a library subsystem is to alter your scratch or specific allocation user exit to use the new HSC format, and explicitly select a LIBRARY name to direct a request.

See “SMC Library Subsystem Selection” on page 19 for information on how the SMC selects among multiple library subsystems to determine an “owner” for each allocation request (i.e., each DD in a job step may have a different library subsystem owner).

Chapter 5. SMC Message Handling

Overview

The SMC intercepts specific MSP and Tape Management System (TMS) messages related to mount, dismount, and swap operations. When the intercepted message includes a drive defined to an HSC library subsystem, the SMC directs the owning library subsystem to perform the requested operation.

Messages that are intercepted by the SMC are listed in Appendix A, “Intercepted Messages” on page 205.

User Directed Message Handling

If the SMC does not currently support the Tape Management System at your installation, you can still direct the SMC to intercept the specific messages issued by your TMS. Use the USERMsg operator command to define these additional messages. See “USERMsg Command” on page 126 for more information.

User Exit 01 allows you to change or enhance actions taken on intercepted messages, and can direct the SMC to perform actions on messages that are not in the intercepted message list.

The SMC calls the library subsystem user exit for each intercepted message. This includes the default messages listed in Appendix A, “Intercepted Messages” and all messages defined using the USERMsg command.



Notes:

- Only messages intercepted by the SMC are passed to the user exit.
- The SMC does not support the user exit 01 return code of REPLY.

Message Handling Policies

The SMC honors the following MSP and SMC policies related to mount, dismount, and swap message handling:

MSP Policies

The System Authorization Facility (SAF) can be used to protect tapes at the volume level (CLASS=TAPEVOL) using your current security software. If defined, the SMC honors the policies defined through the SAF interface regarding the write-protect requirement for a volume mounted on a library transport. The SMC invokes the SAF interface by issuing a RACROUTE macro, and protects read-only volumes through the ACS Virtual Thumbwheel (VTW) support.

SMC Policies

The SMC MOUNTDef command is used to control message handling (i.e., mount/dismount) options previously controlled by the HSC MNTD command in addition to HSC input parameters and LIBGEN options.

These options control the automation of pending mounts, delete disposition at dismount time, whether messages are produced when a library volume is mounted outside the library, and when mount messages are rolled off the console.



Note: This command is new for SMC release 6.1.

See “MOUNTDef Command” on page 84 for more information.

Tape Management System Support

The SMC interprets Mount, Dismount, and Swap messages from the following Tape Management Systems:

- CA-1
- CA-DYNAM/TLMS
- AutoMedia (Zara)
- CONTROL-T

For tape management systems that supply a subpool, the subpool is interpreted by the SMC and used as the requested subpool name, unless overridden by user exit 01 or a TAPEREQ statement. Related messages include:

- CTS002
- CTT101A
- CTT104A
- TMS002

SMC Swap Processing

The SMC automates the swap process (I/O error or operator initiated) in the same manner as HSC enhanced swap processing. This eliminates the need for operators to find a compatible “swap-to” device when DDR has chosen an incompatible device. If the SMC cannot find a compatible swap-to device, or if all compatible devices are busy, the SMC issues a message and control is returned to DDR processing with no further SMC involvement. Note that enhanced swap processing is the only mode supported in SMC.

The SMC swap process begins when one of the following messages is issued:

```
KHE200I SWAP XXX1 TO XXX2 - I/O ERROR  
  
KHE203I ERROR ON XXX1, SELECT NEW DEVICE  
  
KHE205I SWAP XXX1 - I/O ERROR
```

If device *XXX1* is known to the SMC as a library or nonlibrary device defined with an SMC UNITATTR command, the SMC suppresses the message and begins the automatic swap process.

The SMC issues one of two messages:

```
SMC0108  No compatible drive found for SWAP processing
```

Or when a compatible drive can be selected by the SMC:

```
SMC0107  SWAP volser from XXX1 to XXX2
```

Device *XXX2* is the SMC-selected device that has been determined to be compatible for the swap. The SMC next suppresses the MSP KHE201D or KHE206D message and replaces the message with:

```
SMC0110  Allow swap of volser from XXX1 to XXX2;  
Reply 'Y', or 'N' or DEVICE
```

The operator may approve the device selected, cancel the swap or choose a different device. If the operator selects a different device, the SMC accepts the device with no further compatibility checking.

If the reply is 'Y' or a new device, MSP issues the following message:

```
KHE202I  PROCEED WITH SWAP OF XXX1 TO XXX2
```

If *XXX1* is a library owned device, the dismount of the volume is automated.

If *XXX2* is a library owned device, the mount of the volume is automated.



Note: Ensure that your MSP security package (e.g., RACF, TopSecret) is configured to grant SMC the necessary authority to respond to MSP swap messages KHE201D and KHE206D.

HSC Mount-Related Messages

Certain mount-related messages may still be issued by the HSC due to error conditions.

- SLS0088D is issued when, due to an error condition, a repeated mount for the same volume is required.
- SLS1075D is issued when a dismounted volume encounters an I/O or other type of error.

In addition, the following HSC messages are replaced by SMC messages:

- SLS4306I and SLS4308I are replaced by SMC0106.
- SLS4310D is replaced by SMC0110.

Managing HSC Mounts from the SMC Client

The SMC client server architecture provides the ability to perform management of certain mount/dismount exception conditions from the client console rather than from the server console. Conditions handled by the SMC include the following:

- Displaying messages on the drive and console indicating the volume and its location for manual mounts when an LSM is offline.
- When a drive is found to be loaded with another volume during a mount request from a job in execution, the dismount is forced and the mount is automatically redriven based on the UCB outstanding mount status).



Note: When a mount or dismount message is intercepted by SMC and directed to an HSC server, the SLS0107D message is not issued on the server or client. When a loaded drive condition is detected by the HSC for an SMC directed dismount, the HSC waits one minute for the drive to unload, and then terminates the dismount. If the dismount is performed as part of a mount request from the SMC, the loaded drive status is returned to the SMC, and the SMC then redrives the mount request if the mount is still pending.

- When a drive or volume is in use by another process, verifying that the mount is still pending, periodically retrying the request, and allowing the operator to cancel or retry the request at any time.
- When the LIBrary WTORdest Client option is selected, certain WTOR messages are not issued on the HSC server but are sent directly to the client console instead. The operator response to the message is then transmitted back to the server, as SMC redrives the mount or dismount to the server. The following HSC mount/dismount WTOR messages are currently supported with this option:
 - SLS0134
 - SLS0905
 - SLS2126
 - SLS2905
 - SLS2984
 - SLS0109
 - SLS4084

Refer to the *HSC Messages and Codes Guide* for more information about these messages.

Chapter 6. Commands and Control Statements

Overview

This chapter provides information for the following SMC commands and control statements:

- ALLOCDef
- ALLOCJob
- CMDDef
- DRIVemap
- LIBrary
- LIst
- LOG
- MOUNTDef
- MSGDef
- MSGJob
- READ
- RESYNChronize
- SERVer
- TAPEREQ (control statement)
- TCPip
- TRace
- TREQDEF
- UEXit
- UNITAttr
- USERMsg

Issuing SMC Commands

SMC operator commands can be issued using the following methods:

- Issuing SMC commands using the MSP Modify command
- Issuing SMC commands using the SMC command prefix
- Specifying SMC commands in the SMCPARMS or SMCCMDS data set(s).

Issuing SMC Commands Using the MSP Modify Command

The following information is included when an SMC command is issued using the MSP Modify (F) command:

- MSP Modify command (F)
- SMC started task name
- command name
- parameters (optional or required).

SMC commands are entered in the following format:

```
F started-task-name,command-name [parameter]
```

The following example illustrates the MSGDef command:

```
F SMC1MSP,MSGDEF LVL=4
```



Notes:

- The started task name and command name **must** be separated with a comma. Spaces are **not** allowed between the subsystem name and command name.
- Parameters and values can be separated with any number of spaces, and may optionally include an equal (=) sign. Values may also be included in parentheses. The following are all equivalent commands:

```
F SMC1MSP,MSGDEF LVL 4  
F SMC1MSP,MSGDEF LVL=4  
F SMC1MSP,MSGDEF LVL(4)
```

Issuing SMC Commands Using the SMC Command Prefix

SMC operator commands can be issued using an SMC command prefix. This prefix is defined using the SMC CMDDef command. See “CMDDef Command” on page 71 for more information about this command.

Specifying SMC Commands in the SMCPARMS or SMCCMDS Data Set

SMC operator commands can be specified in the SMCPARMS or SMCCMDS data set. These commands are automatically processed at startup. See “Control Statements” on page xxiv for syntax conventions used when specifying commands in the SMCPARMS or SMCCMDS data set.

- The SMCCMDS data set can be reprocessed while the SMC is active using the READ operator command. The following is a sample SMCCMDS member entry:

```
MSGDEF CASE(MIXED) LVL(4)
TREQDEF DSN('MY.PARMLIB(TREQ)')
```

- The SMCPARMS data set is used for user-configured items that cannot be changed while the SMC is active. The SMCPARMS data set **cannot** be reprocessed using the READ command. The following is a sample SMCPARMS member entry:

```
CMDDEF PREFIX(B@F$)
```



Note: It is recommended that you include **only** the CMDDef PREFIX and USERMsg ID parameter settings in the SMCPARMS data set. Specify all other commands in the SMCCMDS data set.

SMC Commands that Specify JOBname, STEPname, and PROCstep

SMC ALLOCJOB, MSGJOB, and TRACE commands that allow specification of JOBname, STEPname, or PROCstep, are evaluated by the SMC in order of most specific to least specific job name specification. Therefore, commands can be entered in any order. Consider the following example:

Two ALLOCJOB commands are entered:

```
ALLOCJOB JOBNAME=NOALLOC* MINLVL=4
ALLOCJOB JOBNAME=NOALLOC1 MINLVL=3
```

Regardless of the order in which these commands are entered, job name NOALLOC1 is processed with MINLVL 3 because this command's job name is more specific than job name NOALLOC*.



Note: The above behavior does **not** apply to TAPEREQ statements, which are **always** evaluated in the order in which they appear in the TREQDEF DD.

SMC Command and Control Statement Descriptions


This section describes SMC operator commands and control statements. Syntax, parameter descriptions, and examples are included for each command or statement.

See “Syntax Flow Diagrams” on page xix for syntax flow diagramming conventions.

ALLOCDef Command

The SMC ALLOCDef command is used to specify system default parameters used within the SMC subsystem to control allocation.

Syntax

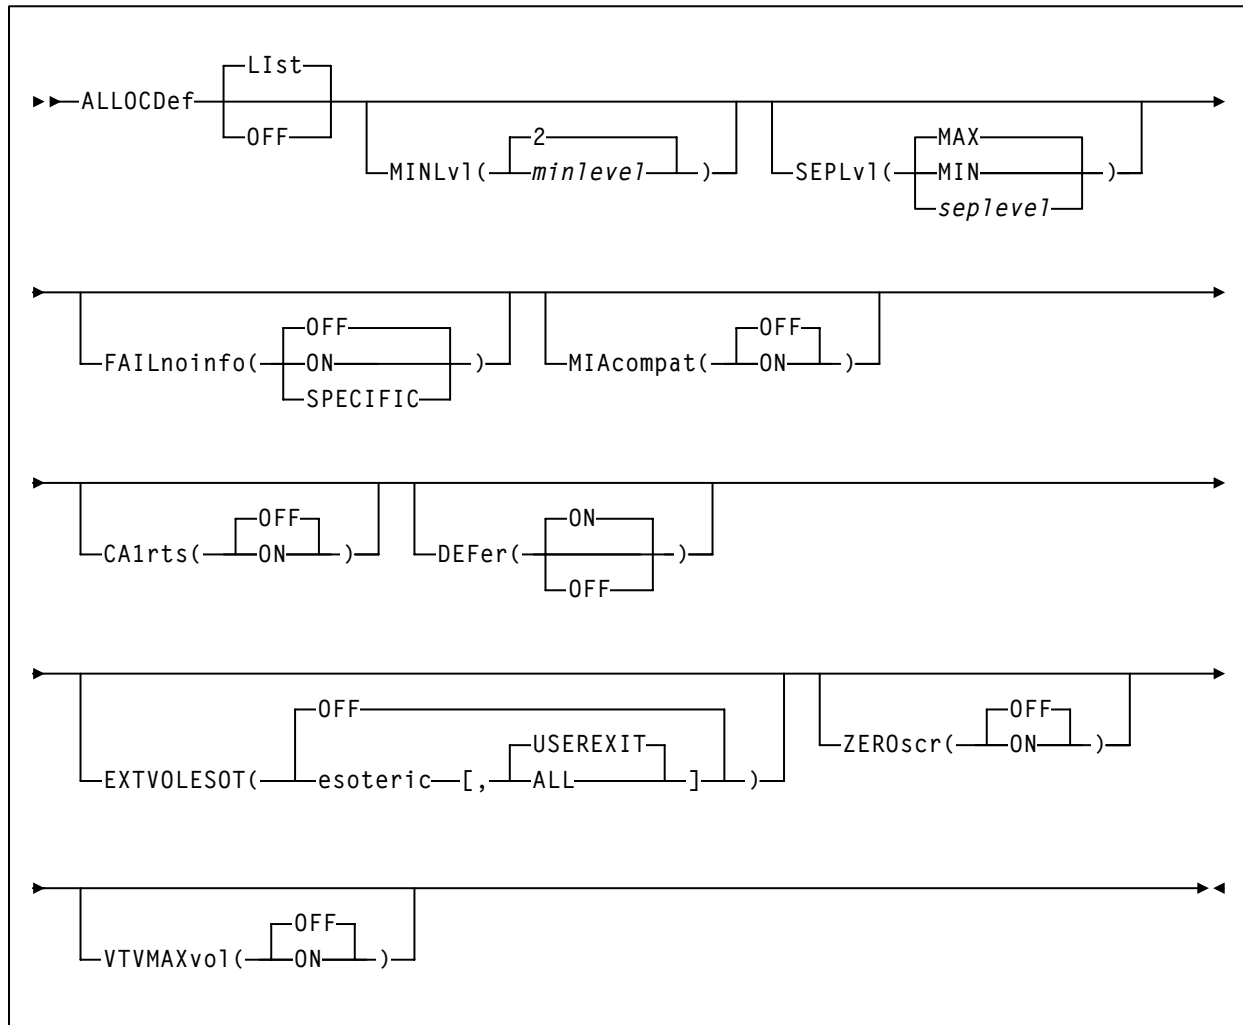

Command Name**ALLOCDDef**

initiates the ALLOCDDef command.

Parameter Descriptions**List**

optionally, lists current default allocation settings.

This is the default if no parameters are specified. It **cannot** be specified with any other parameter.

OFF

optionally, resets all default allocation values to original SMC default settings. It **cannot** be specified with any other parameter.

MINLvl

optionally, specifies the desired minimum level of drive exclusion. If a job is not allocatable at the minimum exclusion level, the SMC still excludes drives to the minimum level and allows the job to fail.

minlevel

indicates the desired minimum allocation exclusion level. Valid values are 0-8. 0 indicates that the SMC will not exclude any drives, even if all drives would be excluded during level 1 exclusion processing. 2 is the default setting. See Chapter 4, “SMC Allocation in a JES Environment” for more information regarding SMC exclusion levels.

**Notes:**

- Setting MINLVL=0 indicates that the job will not be failed by the SMC even if the device and specific volume are incompatible. MINLVL=0 may be used to force SMC to allow allocation to succeed when a “foreign” tape cartridge has the same volume serial number as an existing library or virtual volume.
- Increasing *minlevel* has no effect unless message SMC0045 or SMC0091 has been issued for a specific job step.

SEPLvl

optionally, specifies the exclusion level at which affinity and GDG chains are separated.



Note: If HSC allocation previously specified UNITAFF(NOSEP) and GDGALL(NOSEP), the default SMC exclusion tables can specify SEPLvl=3 in order to preserve existing behavior for scratch affinity chains with different media types.

MIN

do **not** separate chains beyond the minimum level.

MAX

separate chains for conflicting exclusion criteria whenever sufficient drives are available. This is the default value.

seplevel

indicates a separation level between the minimum and maximum levels. When sufficient drives exist, the SMC attempts to separate chains at this level. See Chapter 4, “SMC Allocation in a JES Environment” for more information regarding SMC exclusion levels.



Note: The *seplevel* value **cannot** be less than the *minlevel* value.

FAILnoinfo

optionally, specifies whether the SMC fails a job step during allocation when a communication failure prevents the retrieval of volume information from a library subsystem or library server, or if no libraries are available.

OFF

do not fail a job step when a communication failure occurs during the volume lookup process, or if no libraries are available. This is the default setting.

ALL or ON

if a communication failure occurs during the volume lookup process, or if no libraries are available, then mark all devices ineligible and fail the job step.

SPECIFIC

if a communication failure occurs during the volume lookup process for a specific volume, or if no libraries are available and the step contains allocations for specific volumes, then mark all devices ineligible and fail the job step.

If the job step contains only scratch allocations, then the job step is allowed to proceed and allocation is based solely on TAPEREQ policy specifications.

MICompat

optionally, specifies whether or not the EDL is to be modified at SSI24 time for compatibility with Computer Associates Unicenter CA-MIA Tape Sharing for z/OS and OS/390 product.

OFF

do not update the EDL at SSI24 time. This is the default value.

ON

update the EDL at SSI24 time. Specify this value if you use Unicenter CA-MIA.

CA1rts

optionally, specifies whether DEFER processing is performed at SSI24 time for compatibility with Computer Associates Real Time Stacking feature of its CA-1 tape management system.

OFF

do not update DEFER status at SSI24 time. This is the default value.

ON

update DEFER status at SSI24 time. Specify this value if you use the Real Time Stacking feature of CA-1.

DEFer

enables or disables deferred mount processing for library mounts. With deferred mounting enabled, a library resident volume is mounted when the data set is opened. If the data set is not opened, the cartridge is not mounted, freeing the robot to perform other work. If the data set is opened, however, the job waits until the cartridge is mounted.

ON

enables deferred mount processing. This overrides the user's JCL and defers all ACS mounts until the data set is opened. **This is the default setting for JES environments.**

OFF

disables deferred mount processing and honors user JCL specifications.

EXTVOLesot

optionally, instructs the SMC to use the specified esoteric to allocate a specific external volume (i.e., a volume that is not in the library). When this esoteric is used depends upon the setting of the modifier value specified after the esoteric, as well as whether the specified esoteric is valid (intersects with the original esoteric specification).

OFF

indicates that EXTVOLesot processing is disabled. If OFF, then nonlibrary drives will be selected if possible when a specific external volume is allocated. This is the default value.

esoteric,USEREXIT

specifies an esoteric to be used to allocate a specific external volume when the “use specvol” user exit return code is specified. If the specific volume user exit returns the “use specvol” return code for this DD, then any drives in the specified esoteric that intersect with the original esoteric will be selected for allocation. This is the default value if esoteric is specified.

esoteric,ALL

specifies that whenever an external volume is allocated, the drives in the specified esoteric are to be selected.

ZEROscr

specifies whether the SMC is to exclude the drives in one or more ACSs from the list of eligible drives when a scratch mount is requested in a multiple ACS environment.

OFF

indicates that all drives in all ACSs are to remain eligible for selection. This is the default value.

ON

indicates one of the following:

- If scratch subpools are not being used, and one or more ACSs contain zero scratch volumes, then drives in those ACSs will be excluded from the list of eligible devices.
- If a scratch subpool is being requested (either through TAPERREQ or User Exit 04), and one or more ACSs contain zero scratch volumes in the requested subpool, then drives in those ACSs will be excluded from the list of eligible devices.

VTVMAXvol

optionally, specifies whether the SMC sets the volume count for a new allocation to 255 during MVS converter/interpreter (IDAX) processing when the JCL or SMC DFSMS ACS routine esoteric contains at least one virtual device.

OFF

do not adjust the volume counts for virtual allocations.
This is the default value.

ON

if the JCL (or IDAX-substituted) esoteric contains virtual devices for a scratch allocation, then set the volume count to 255.

Example


In the following example, the ALLOCDef command sets the minimum level of allocation exclusion to 4 and specifies that unit affinity and GDGALL chains are separated based on levels 1-4. It also specifies that when a user exit returns “use specvol”, the allocation should be directed to drives in the esoteric SACS0.

```
ALLOCDEF MINLVL=4 SEPLVL=MIN EXTVOL=(SACS0,USEREXIT)
```


ALLOCJob Command

The SMC ALLOCJob command is used to override SMC default allocation parameters by job name, step name, and PROC step.

Syntax

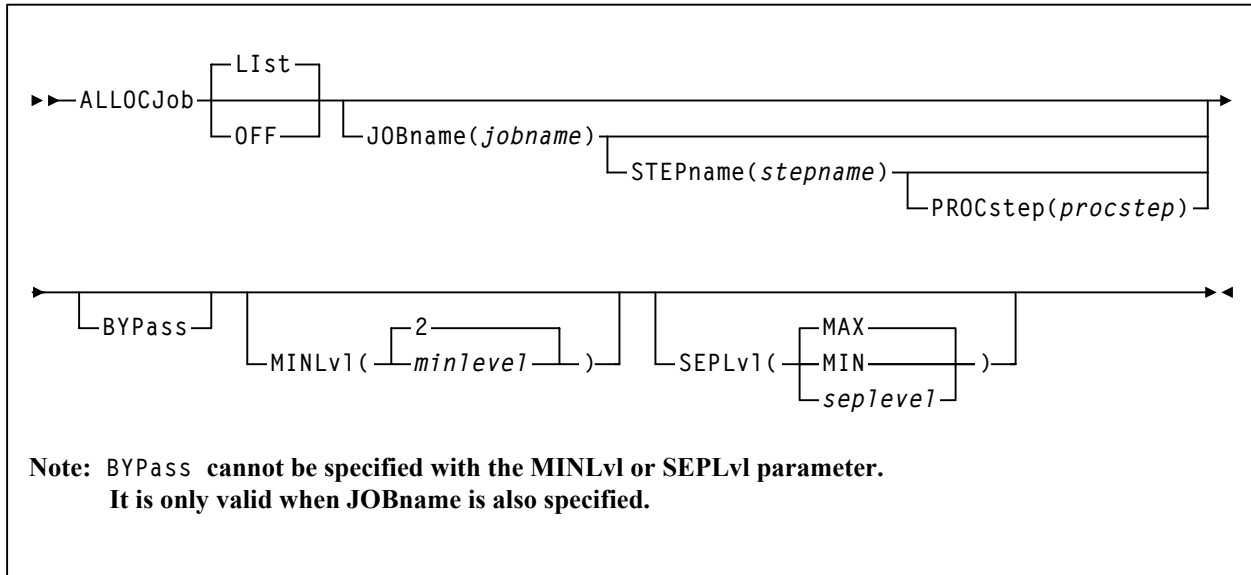

Command Name

ALLOCJob

initiates the ALLOCJob command.

Parameter Descriptions

LISt

optionally, lists current default allocation settings and override settings (in the order they are processed) by job name, step name, and PROC step.

This is the default if no parameters are specified. It **cannot** be specified with any other parameter.

OFF

optionally, removes all job name, step name, and PROC step overrides for allocation.

- If no other parameters are specified, allocation overrides are removed for all jobs.
- If only JOBname is specified, allocation overrides are removed for ALL ALLOCJob entries for that job name.
- If JOBname, STEPname and PROCstep are specified, allocation overrides are removed **only** for the specified entry.

Global allocation settings are not affected by this parameter.

JOBname

optionally, specifies a job name.

This parameter is required unless LList or OFF is specified.

jobname

indicates the job name.

The value entered **must** be one to eight characters in length. An asterisk (*) can be used as a wildcard when included as the last character. ALLOCJob is set for all jobs whose job names match the characters preceding the asterisk.

STEPname

optionally, specifies a step name. This parameter is **only** valid when JOBname is also specified.

stepname

indicates the step name.

The value entered **must** be one to eight characters in length. An asterisk (*) can be used as a wildcard when included as the last character.

PROCstep

optionally, specifies a PROC step. This parameter is **only** valid when JOBname and STEPname are also specified.

procstep

indicates the PROC step.

The value entered **must** be one to eight characters in length. An asterisk (*) can be used as a wildcard when included as the last character.

BYPass

optionally, specifies that SMC allocation influencing is **not** performed for the indicated job (job step, step name, PROC step).

This parameter **cannot** be specified with the MINLvl or SEPLvl parameter. It is **only** valid when JOBname is also specified.



Note: It is recommended that you use MINLV=0 instead of BYPASS, except when no mounts will be performed (i.e., IEFBR14 jobs).

MINLvl

optionally, specifies the desired minimum level of drive exclusion. If a job is not allocatable at the minimum exclusion level, the SMC still excludes drives to the minimum level and allows the job to fail.

This parameter **cannot** be specified with the BYPass parameter. It is **only** valid when JOBname is also specified.

minlevel

indicates the desired minimum allocation exclusion level. Valid values are 0-8. 0 indicates that the SMC will not exclude any drives, even if all drives would be excluded during level 1 exclusion processing. The default is the current value of the ALLOCDEF MINLVL setting. See Chapter 4, “SMC Allocation in a JES Environment” for more information regarding SMC exclusion levels.

**Notes:**

- Setting MINLVL=0 indicates that the job will not be failed by the SMC even if the device and specific volume are incompatible. MINLVL=0 may be used to force SMC to allow allocation to succeed when a “foreign” tape cartridge has the same volume serial number as an existing library or virtual volume.
- Increasing ***minlevel*** has no effect unless message SMC0045 or SMC0091 has been issued for a specific job step.

SEPLvl

optionally, specifies the exclusion level at which affinity and GDG chains are separated.

This parameter **cannot** be specified with the BYPass parameter. It is **only** valid when JOBname is also specified.

MIN

do **not** separate chains beyond the minimum level.

MAX

separate chains for conflicting exclusion criteria whenever sufficient drives are available. This is the default value.

seplevel

indicates a level between the minimum and maximum levels. When sufficient drives exist, the SMC attempts to separate chains at this level. See Chapter 4, “SMC Allocation in a JES Environment” for more information regarding SMC exclusion levels.



Note: The *seplevel* value **cannot** be less than the *minlevel* value.

Example


In the following example, the ALLOCJob command specifies that job PRODJOB1 with stepnames beginning with STEP1 be allowed to allocate even though SMC determines that volumes are not compatible with any drives in the EDL or esoteric.

```
ALLOCJOB JOB=PRODJOB1 STEP=STEP1* MINLVL=Ø
```

CMDDef Command

The SMC CMDDef command is used to assign an SMC command prefix.

Syntax

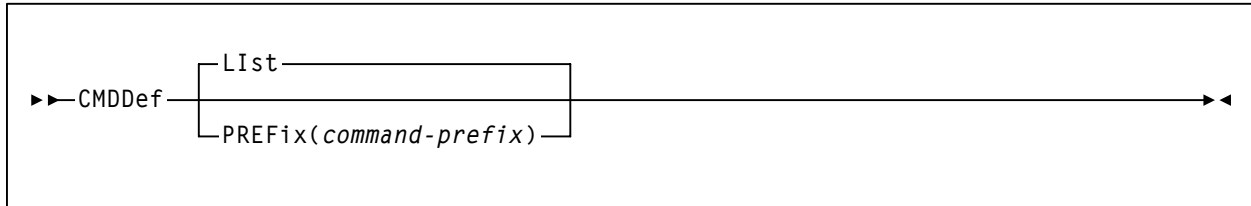

Command Name

CMDDef

initiates the CMDDef command.

Parameter Descriptions

LIst

optionally, lists the current command prefix.

This is the default if no parameters are specified. It **cannot** be specified with any other parameter.

PREFfix

optionally, specifies a command prefix for the SMC subsystem.



Note: This parameter may **only** be specified in the SMCPARMS data set.

command-prefix

indicates the desired command prefix characters.

The value entered **must** be one to eight characters in length and **must** meet the following requirements:

- Valid characters include:

A-Z 0-9 @ ¢ \$ # . / < > * & + - | ! ; : % _ ?

- The command prefix **cannot** include a command string, a command abbreviation, or any string that invokes a command.
- The command prefix **cannot** include a string that is a subset or superset of an existing prefix beginning with the same character.
- The command prefix used for SMC must be different from the prefix used for HSC or any other defined subsystem. Otherwise, unpredictable results may occur.

Example

In the following example, the CMDDef command is specified in the SMCPARMS data set as follows:

```
CMDDEF PREFIX(B@F$)
```

As a result, SMC operator commands can be entered as follows:

```
B@F$MSGDEF CASE(MIXED)
```


DRIVemap Command

The SMC DRIVemap command is used to map client drive addresses to server drive addresses. This command allows users to specify different MSP device addresses on different hosts for the same library or virtual drives in client-server mode. See Chapter 2, “SMC and Sun StorageTek Library Management” for more information about drive mapping.



Note: See “Client/Server Drive Address Mapping” on page 18 for information about using DRIVemap commands and the HSC DRVHOST parameter when client and server addresses differ.

Syntax

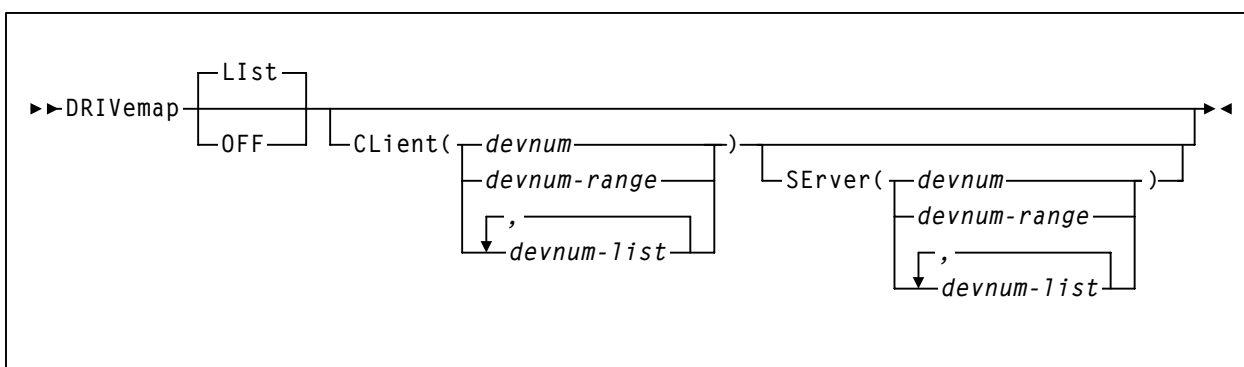

Command Name

DRIVemap

initiates the DRIVemap command.

Parameter Descriptions

List

optionally, lists all current DRIVemap mappings. This is the default if no parameters are specified.

OFF

optionally, removes all current DRIVemap mappings. If specified with CLient, this parameter removes DRIVemap ranges specified in the CLient parameter.

CLient

specifies the device numbers mapped by the DRIVemap command.

SErver

specifies the device numbers that are defined on the HSC server. The ranges and lists must match those in the CLient parameter.

LIBrary

For example, CL(AA0-AA2) SE(BA0-BA2) is valid; CL(AA0-AA2) SE(BA0, BA1, BA2) is invalid.

Example

In the following example, the DRIVemap command maps a set of client drive addresses (BA0-BAF) to a set of server drive addresses (AA0-AAF):

```
DRIVemap CLient(BA0-BAF) SErver(AA0-AAF)
```

LIBrary Command

The SMC LIBrary command defines a specific Sun StorageTek tape hardware configuration, normally represented by a single CDS.




Notes:

- LIBrary and SERVER commands are required to access remote HSC libraries.
- If a LIBrary command is specified, then all libraries must be explicitly defined.
- If the LIBrary command is not specified, the SMC uses active HSC subsystems defined in the host's SSCVT chain.

The LIBrary command can also be used to list libraries that the SMC tries to communicate with, and report their status.

Syntax

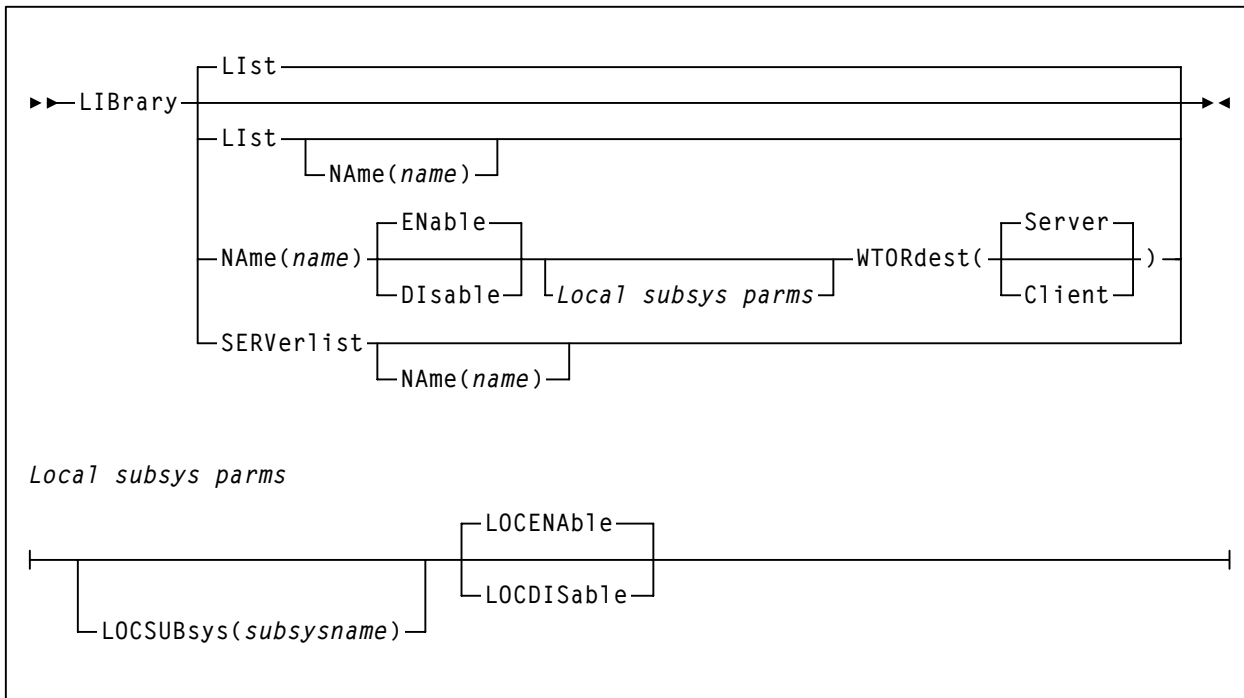

Command Name**LIBrary**

initiates the LIBrary command

Parameter Descriptions**List**

optionally, lists the specified library. If no library name is specified, all libraries are listed.

NAME

specifies the library name to be listed

name

indicates the library name

NAME

specifies the library name to be defined or modified.

name

indicates the library name. The following rules apply:

- The first character must be an alpha character.
- The last character must be either an alpha character or digit.
- Any character between the first and last must be either an alpha character, digit, or hyphen.

ENable

enables the specified library to be selected for allocation or mount requests.

DISable

disables the specified library. The library is not used for any allocation or mount requests.

LOCSUBsys

specifies a local HSC subsystem

subsysname

indicates the subsystem

LOCENable

enables the specified HSC subsystem to be used as a local path to the library.

LOCDISable

disables the specified HSC subsystem. LOCDISable can be used to force the SMC to ignore the local subsystem and access the library via a remote server.

WTORdest

optionally, specifies the console to which HSC WTOR messages are directed. See “Managing HSC Mounts from the SMC Client” on page 55 for messages that apply.

Client

the remote HSC returns selected WTORs to the SMC client without issuing the WTOR message. The SMC client then issues the WTOR to the operator of the system that the SMC executes on. The SMC redrives the mount or dismount request to the server supplying the WTOR response.

Server

WTOR messages are issued on the HSC server console. This is the default.

SERVerlist

lists defined libraries, their attributes and associated servers. The SERVerlist parameter may also be specified with the NAME parameter to limit the display to a single library.

NAME

specifies the library name for which servers are to be listed

name

indicates the library name

Example

In the following example, the LIBrary command defines a local HSC subsystem executing on the same host as the SMC.

```
LIBRARY NAME(DENVER) LOCSUB(HSC0)
```

In the following example, the LIBrary command specifies that the remote subsystem (OMAHA) return selected WTORs to the SMC client without the remote HSC issuing the WTOR message.

```
LIBRARY NAME(OMAHA) WTORDEST(CLIENT)
SERVER NAME(OMAHA1) LIBRARY(OMAHA) HOST(OMA1) PORT(8888)
SERVER NAME(OMAHA2) LIBRARY(OMAHA) IP(11.22.33.44) +
    PORT(7777)
```




Note: The SERVer command must be specified to define the path to the remote library.

List Command

The SMC List command is used to display storage accessible from the SMC started task address space.

Syntax

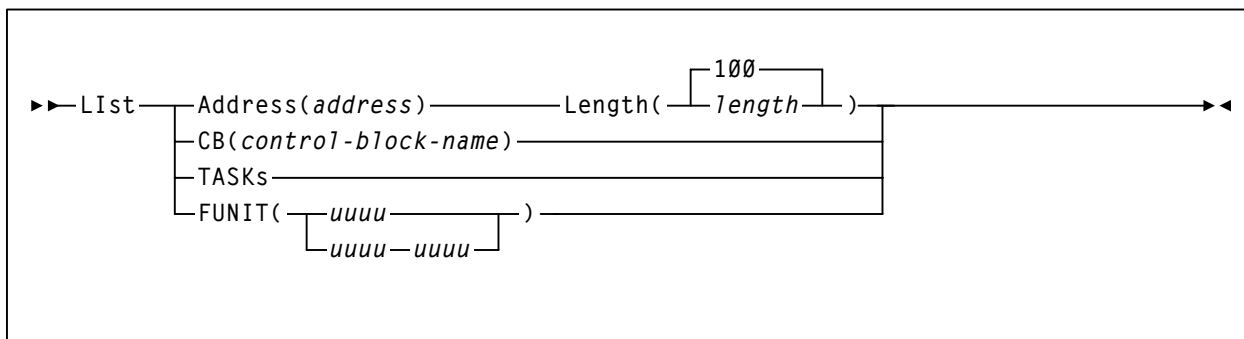

Command Name

List

initiates the List command.

Parameter Descriptions

Address

specifies the address at which to begin listing SMC memory contents.

address

indicates the address. The value entered **must** be a valid hexadecimal address.

Length

optionally, specifies the length of SMC memory (bytes) to be listed.

length

indicates the length. The value entered **must** be a valid hexadecimal value between 1 and FFFF. Memory is listed beginning at the location specified in the *address* parameter. The default value is 100 (decimal 256).

CB

specifies the internal SMC control block to be listed.

control-block-name

indicates the control block name.

SMC control blocks are listed for diagnostic purposes. Specify *control-block-name* only as directed by Sun Microsystems Software Support.

TASKs

Lists the tasks in the SMC subsystem address space.

FUNIT

Lists SMC control blocks associated with the specified unit address(es).

uuuuu

indicates the unit address(es).

Example

In the following example, the LList command displays the given length (FFF) of accessible storage beginning with address 01FE00.

```
LIST A=01FE00 L=FFF
```

LOG Command

The SMC LOG command logs XML transactions sent and/or received from library subsystems and servers to an SMCLOG file. Outgoing requests and incoming responses can be logged from both local and remote libraries. This command is intended to be used primarily as directed by Sun Microsystems support personnel.


In addition, you may specify command parameters to control the following:

- length of the log data line written (independently of the SMCLOG DCB attributes)
- whether log data is appended to an existing file
- handling of SMCLOG EOF conditions.



Note: EOFRESTART, used to restart logging at SMCLOG EOF, simply restarts the log at EOF and does not wrap the log (i.e., all data prior to EOF is lost).

Syntax

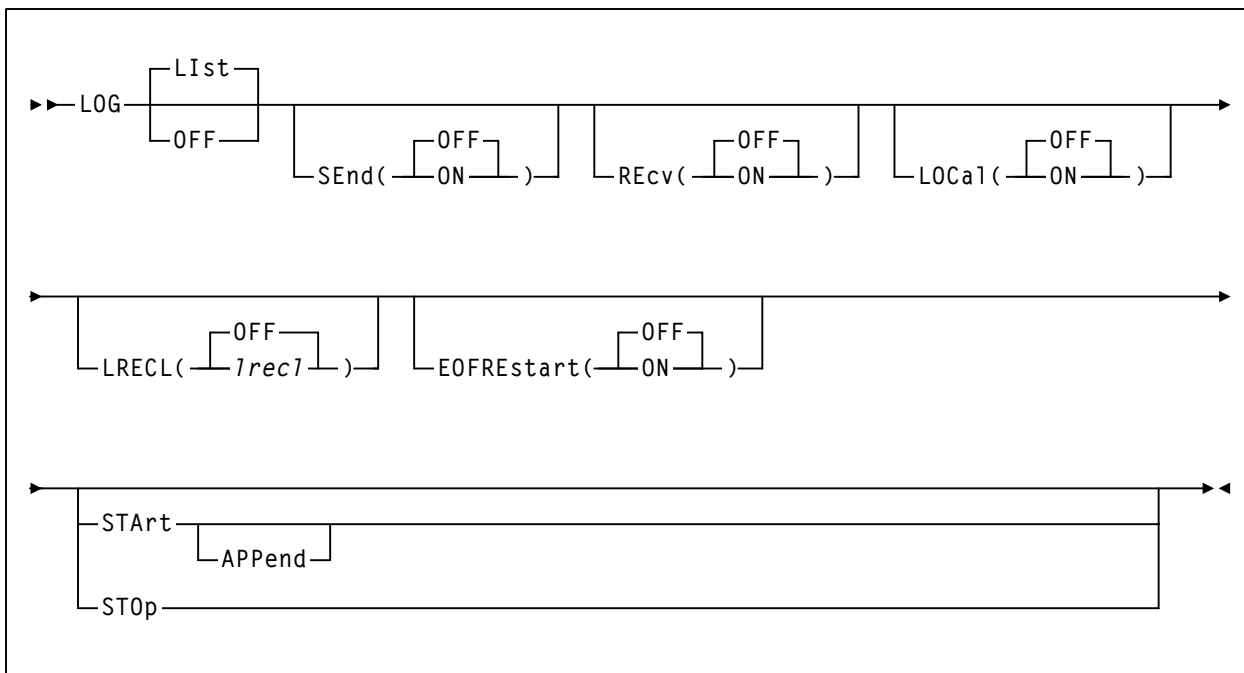

Command Name

LOG

initiates the LOG command.

Parameter Descriptions

List

optionally, lists current SMC LOG settings. This is the default if no parameters are specified. It **cannot** be specified with any other parameter.

OFF

optionally, resets all LOG settings to original SMC default settings and stops SMC logging (if started). It **cannot** be specified with any other parameter.

SEnd

specifies whether the SMC logs request data sent to a library subsystem or server.

OFF

do not log requests sent to a library subsystem or server to the LOG file. This is the default value.

ON

log requests sent to a library subsystem or server to the LOG file.

REcv

specifies whether the SMC logs response data received from a library subsystem or server.

OFF

do not log responses received from a library subsystem or server to the LOG file. This is the default value.

ON

log responses received from a library subsystem or server to the LOG file.

LOCal

specifies whether the SMC logs local data in addition to remote (TCP/IP) requests and responses.

OFF

do not log data sent and received from a local library subsystem using cross memory services. This is the default setting.



Note: Data sent and received over TCP/IP to remote servers is logged.

ON

log data sent and received from a local library subsystem using cross memory services, in addition to data sent and received over TCP/IP to remote servers.

LRECL

specifies the line length written to the LOG file.

OFF

use the DCB LRECL to control the maximum line length. The LOG record is appended to the log date and time stamp. This is the default setting.

nnnnn

a value from 60 to 32767, used to limit the logical line length. If the data sent or received exceeds the specified LRECL, then multiple lines are written. If LRECL is specified, then the log date and time stamp are written as separate LOG records. If this value exceeds the DCB LRECL, then the DCB LRECL is used.

EOFREstart

specifies the SMC response when the LOG file reaches End of File (EOF).

OFF

stop logging at EOF.

ON

close and re-open the LOG file at EOF, and continue logging.

STArt

specifies that logging is to be started.

APPend

specifies that when logging is started, data is appended to the current LOG file. If not specified, then data is added to the LOG file from the beginning of the log file, and any data currently in the log file is lost. APPend can only be specified when START is also specified.

STOp


specifies that logging is to stop. Current LOG settings are preserved.

MOUNTDef Command

The SMC MOUNTDef command is used to control message processing (i.e., mount/dismount) options previously controlled by the HSC MNTD command, HSC input parameters and LIBGEN options.

These options control the automation of pending mounts, delete disposition at dismount time, whether messages are produced when a library volume is mounted outside the library, and when mount messages are rolled off of the console.

Syntax

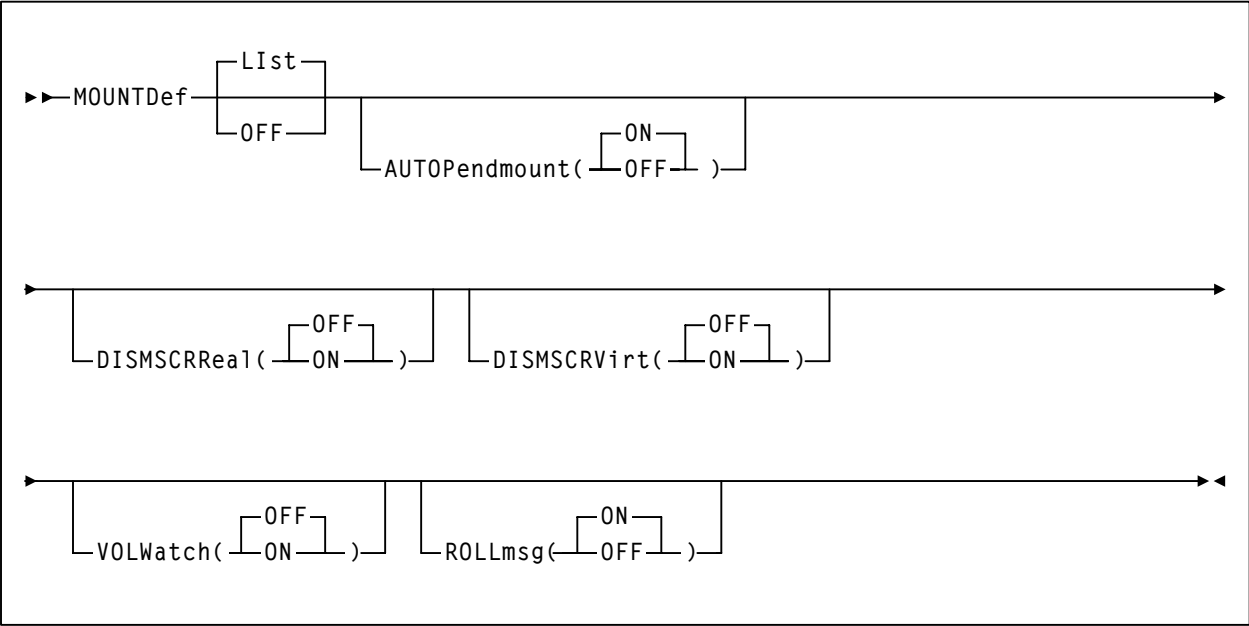

Command Name

MOUNTDef
initiates the MOUNTDef command.

Parameter Descriptions

List
optionally, lists current SMC MOUNTDef settings. This is the default if no parameters are specified. It **cannot** be specified with any other parameter.

OFF
optionally, resets all MOUNTDef settings to original SMC default settings. It **cannot** be specified with any other parameter.

AUTOPendmount

specifies whether the SMC automates pending mounts for library drives found when SMC is first initialized and the owning NCS library subsystem or server is first activated.

ON

automate pending mounts for library drives when the SMC determines that the owning library subsystem or server is first activated. This is the default setting.

OFF

do not automate pending mounts.



Note: If AUTOPendmount is OFF, you must issue an HSC MOUNT command to complete any pending mounts found when a library is first activated.

DISMSCRRReal

specifies how the SMC interprets the delete disposition on a dismount message for real (nonvirtual) volumes.



Note: The DISMSCRRReal and DISMSCRVirt parameters replace the DELDISP= parameter of the HSC LIBGEN SLILIBRY macro.

OFF

Retain the real cartridge as nonscratch when MSP indicates delete disposition in the dismount message. This is the default setting, and is recommended for CA-1 or CA-TLMS users to leave volumes in a consistent nonscratch status during the CA-1 and CA-TLMS grace period.

ON

Scratch the real cartridge when MSP indicates delete disposition in the dismount message.

DISMSCRVirt

specifies how the SMC interprets the delete disposition on a dismount message for virtual volumes.



Note: The DISMSCRRReal and DISMSCRVirt parameters replace the DELDISP= parameter of the HSC LIBGEN SLILIBRY macro.

OFF

Retain the virtual volume as nonscratch when MSP indicates delete disposition in the dismount message. This is the default setting.

ON

Scratch the virtual volume when MSP indicates delete disposition in the dismount message.

VOLWatch

specifies whether the SMC issues a message when a library volume is to be mounted on a nonlibrary drive.

OFF

Do not issue a message when a library volume is to be mounted on a nonlibrary drive.

ON

Issue a console message when a library volume is to be mounted on a nonlibrary drive. The message identifies the VOLSER that must be ejected from the library to satisfy the mount.

ROLLmsg

specifies whether mount messages handled by the SMC are allowed to roll off the operator console before mount requests are satisfied.

ON

Mount messages are allowed to roll off the console screen before mounts are satisfied. This is the default setting.



Note: You can limit the rolling of specific mount messages (e.g., TMS007) by presetting the messages xxxxRCDC (Request to Change Descriptor Codes) flag word xxxxRFBF1. The SAMPLIB includes a sample MPF USEREXIT to preset the xxxxRCDC flag.


OFF

Mount messages remain on the console screen until mount requests are satisfied.

MSGDef Command

The SMC MSGDef command defines the appearance of SMC system messages, and controls which messages are displayed and suppressed.

Syntax

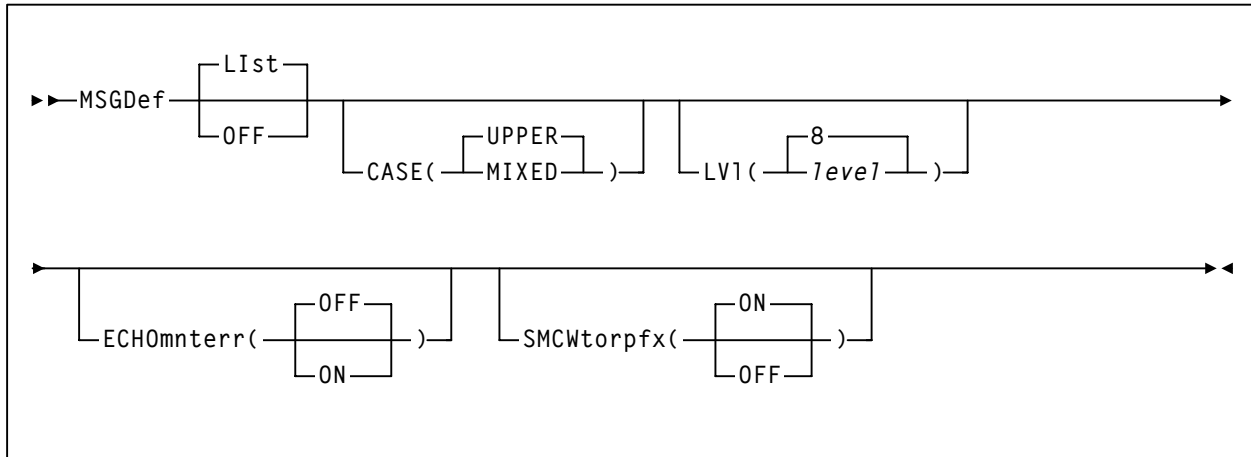

Command Name

MSGDef

initiates the MSGDef command.

Parameter Descriptions

LIst

optionally, lists current default SMC message settings.

This is the default if no parameters are specified. It **cannot** be specified with any other parameter.

OFF

optionally, resets all MSGDef values to original SMC default settings. It **cannot** be specified with any other parameter.

CASE

optionally, specifies the message case. Valid values are UPPER or MIXED. If no value is specified, the default value UPPER is used.

LVI

optionally, specifies the default level used to control which SMC messages are displayed and suppressed.

level

indicates the default level. Valid values include the following:

- 0 Display error messages **only**.
- 4 Display error and warning messages from the SMC subsystem.
- 8 Display all SMC subsystem messages and allocation job log warning messages. This is the default value if the MSGDef parameter is not specified.

If no value is specified, the default value of 8 is used.



Note: Levels higher than 8 are used for diagnostic purposes and should **only** be specified as directed by Sun Microsystems Software Support.

ECHOmnterr

optionally, specifies whether mount errors generated by the HSC are echoed directly to the console for the SMC client.

ON

mount errors generated by the HSC are echoed directly to the console for the SMC client.



Note: This parameter is valid for both local and remote servers.

OFF

mount errors generated by the HSC are not echoed to the console for the SMC client. This is the default.

SMCWtorpfx

optionally, specifies whether the SMC0137 prefix is displayed for HSC WTOR messages generated by WTORDEST(CLIENT) on the LIBRARY command.

ON

The SMC0137 prefix is displayed for HSC WTOR messages. This is the default.

OFF

The SMC0137 prefix is not displayed for HSC WTOR messages.

Example


In the following example, the MSGDef command specifies that SMC messages are displayed in mixed case. The command also specifies that **only** error and warning messages from the SMC subsystem are displayed.

```
MSGD CASE(MIXED) LVL(4)
```

MSGJob Command

The SMC MSGJob command allows an override of the default message level by job name, step name, and PROC step.

Syntax

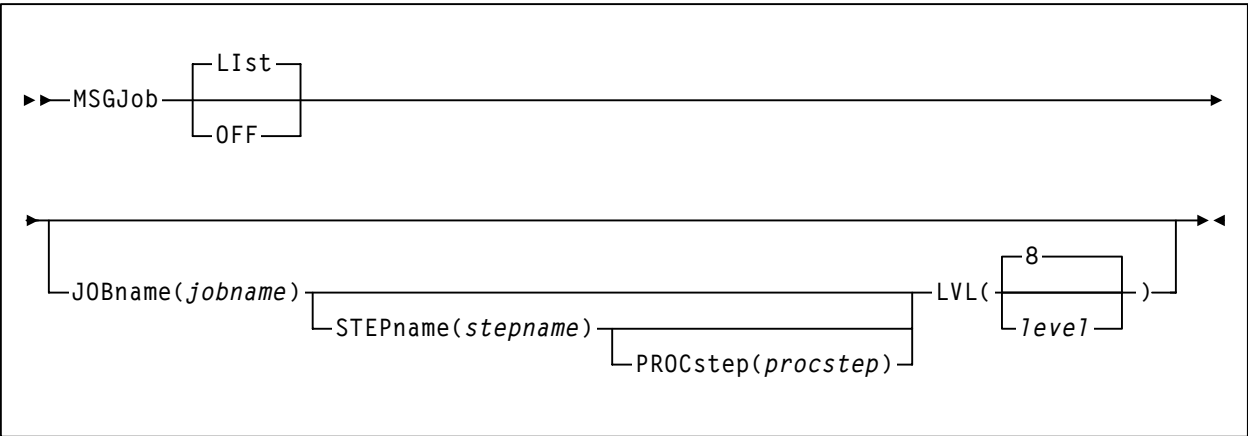

Command Name

MSGJob

initiates the MSGJob command.

Parameter Descriptions

List

optionally, lists current default SMC message settings and job name, step name, and PROC step exceptions (in the order of evaluation).

This is the default if no parameters are specified. It **cannot** be specified with any other parameter.

OFF

optionally, removes MSGJob overrides.

- If no other parameters are specified, MSGJob overrides are removed for all jobs.
- If only JOBname is specified, MSGJob overrides are removed for ALL MSGJob entries for that job name.
- If JOBname, STEPname and PROCstep are specified, MSGJob overrides are removed **only** for the specified entry.

The global MSGDef is not affected by this parameter.

JOBname

optionally, specifies a job name.

jobname

indicates the job name.

The value entered **must** be one to eight characters in length. An asterisk (*) can be used as a wildcard when included as the last character. In this case, the message level is set for all jobs whose job names match the characters preceding the asterisk.

STEPname

optionally, specifies a step name. It is **only** valid when JOBname is also specified (may be "JOB=*").

stepname

indicates the step name.

The value entered **must** be one to eight characters in length. This parameter is **only** valid if JOBname is also specified.

PROCstep

optionally, specifies a PROC step. It is **only** valid when JOBname and STEPname are also specified.

procstep

indicates the PROC step.

The value entered **must** be one to eight characters in length. This parameter is **only** valid if JOBname and STEPname are also specified.

LVL

optionally, specifies the default level used to control which SMC messages are displayed. This parameter is required when JOBname is specified.

level

indicates the default level. Valid values include the following:

- 0 Display error messages **only**.
- 4 Display error and warning messages from the SMC subsystem.
- 8 Display all SMC subsystem messages and allocation job log warning messages.

If no value is specified, the default value of 8 is used.



Note: Levels higher than 8 are used for diagnostic purposes and should **only** be specified as directed by Sun Microsystems Software Support.

READ

Example


In the following example, the MSGJob command specifies that **only** error and warning messages are displayed for job PRODJOB1, step STEP3, PROC step REPORT.

```
MSGJOB JOB(PRODJOB1) STEP(STEP3) PROC(REPORT) LVL(4)
```

READ Command

The SMC READ command is used to enter a series of commands using an input data set instead of console commands.

Syntax

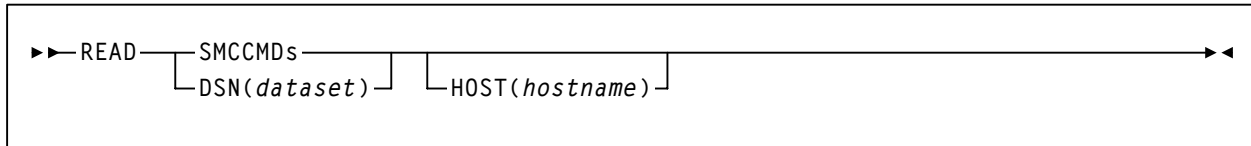

Command Name

READ

initiates the READ command.

Parameter Descriptions

SMCCMDs

re-processes commands contained in the data set specified in the SMCCMDS DD statement of the SMC START procedure.

DSN

processes commands contained in the specified data set.

dataset

indicates the specified data set.



Note: If the DSN parameter specifies a member name, the full data set **must** be enclosed in single quotes.

HOST

optionally, specifies a host name for which this READ command is valid. If this parameter is specified, the READ command is only processed when the specified hostname matches the MSP host. If this parameter is not specified, the READ command is processed regardless of the MSP host.

hostname

indicates the hostname



Note: Specification of the HOST parameter allows you to share a single SMC parameter file set across multiple MSP hosts as shown in the following example:

your.parmlib(COMMCMDs)

```
MSGDEF CASE(MIXED)
...other common SMC parameter settings...
READ DSN('your.parmlib(MSP1CMDs)') HOST(MSP1)
READ DSN('your.parmlib(MSP2CMDs)') HOST(MSP2)
```

your.parmlib(MSP1CMDs)

```
DRIVEMAP CL(AB0-AB7) SE(BB0-BB7)
```

your.parmlib(MSP2CMDs)

```
DRIVEMAP CL(CB0-CB7) SE(BB0-BB7)
```

The file COMMCMDs contains SMC parameter settings applicable to all hosts, and the READ commands with HOST specifications for your MSP hosts. The file MSP1CMDs contains SMC specifications applicable only to MSP host MSP1, while the file MSP2CMDs contains SMC specifications applicable only to MSP host MSP2.

Example

In the following example, the READ command is used to process commands included in the MYCMDs member of the MY.COMMAND.PDS data set.

```
READ DSN('MY.COMMAND.PDS(MYCMDs)')
```


RESYNChronize Command

The SMC RESYNChronize command is used to re-establish connections to all defined libraries for the purpose of acquiring drive configuration information from all libraries.

This action is automatically performed when the SMC first activates a new path to a library, when an HSC subsystem (local or remote) reports a configuration change, or when an active local path to a library is accessed during an MSP allocation or mount event. However, the operator **must** issue the RESYNChronize command in the following instances:

- When the user wants to automate pending mounts for a newly activated HSC library, and does not want to wait for an MSP allocation or mount event to trigger the reconnection.
- To attempt to redrive outstanding mounts that may have been lost due to hardware or communication errors.

Syntax

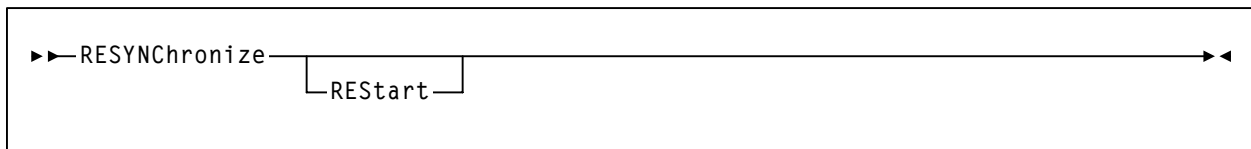

Command Name

RESYNChronize
initiates the RESYNChronize command.

Parameter Descriptions

REStart
starts the RESYNChronize attempt at the first SERVER, regardless of the last active path. REStart also attempts to redrive any outstanding mounts.



Notes:

- The SMC RESYNChronize command is not required when communicating with HSC, but may be used to redrive outstanding mounts that may have failed due to hardware or communication errors with **either** a local or remote HSC.
- Use of the RESYNChronize command to automate pending mounts for newly active HSC systems requires that the SMC MOUNTDef AUTOPendmount ON option is specified.
- Use of the RESYNChronize command to automate pending mounts for newly active HSC systems should be issued after the HSC system has reached FULL service level.

SERVer Command


The SMC SERVer command defines a named path to a remote library server; an HSC subsystem executing on another host. The SERVer command describes the communication path to the Sun StorageTek HTTP server.



Notes:


- Before a SERVer is defined, the LIBrary that it references must be defined using a LIBrary command. The library name associated with a SERVer **cannot** be changed. See “LIBrary Command” on page 76 for more information.

Syntax

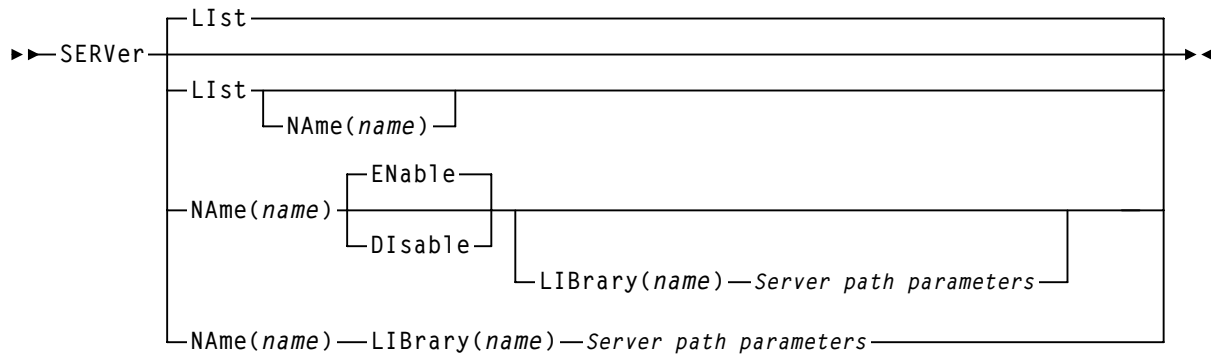

Note: A LIBrary name **must** be specified when the SERVer NAME is first defined.

Server path parameters

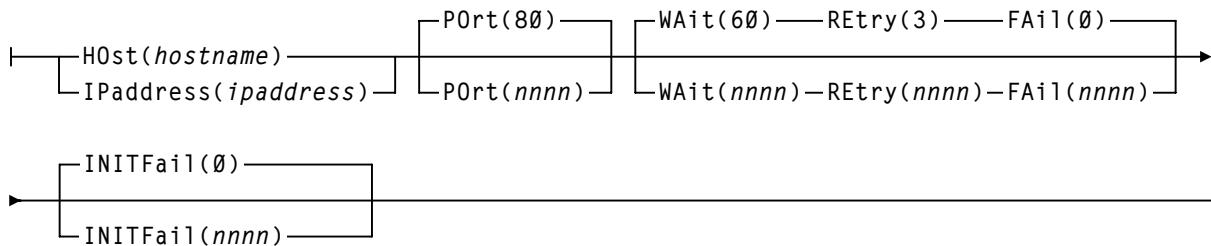

Command Name**SERVer**

initiates the SERVer command.

Parameter Descriptions**List**

optionally, displays status information for all library server paths. This is the default if no parameters are specified.

Name

optionally, specifies a server path for which status is displayed.

name

indicates the server path

Name

optionally, specifies the communication path or route to the server.

name

indicates an identifier for the path parameters. This name is reported in any communication error messages. The following rules apply:

- The value must be one to eight characters in length.
- The first character must be an alpha character.
- The last character must be either an alpha character or digit.
- Any character between the first and last must be either an alpha character, digit, or hyphen.

ENable

optionally, enables the specified server path to be selected for allocation or mount requests.

Disable

optionally, disables the specified server path. If this is the only path to the library, the library is unavailable for allocation or mount requests.

LIBrary

optionally, specifies the library name associated with an actual ACS hardware configuration. The LIBrary parameter **must** be specified when a new server is defined.

name

indicates the library name. This name is reported in any library error messages. The following rules apply:

- The value must be one to eight characters in length.
- The first character must be an alpha character.
- The last character must be either an alpha character or digit.
- Any character between the first and last must be either an alpha character, digit, or hyphen.



Note: If you are using the Sun StorageTek HTTP server, there can be multiple NAMED paths to a single LIBrary configuration. See Chapter 2, “SMC and Sun StorageTek Library Management” for more information.

HOst

optionally, specifies the host on which the subsystem resides.

hostname

indicates the host name. The following arpanet rules apply:

- The first character must be an alpha character.
- The last character must be either an alpha character or digit.
- Any character between the first and last must be either an alpha character, digit, hyphen, or period.
- The host name can be a maximum of 128 characters.

IPaddress

optionally, specifies the subsystem IP address

ipaddress

indicates the IP address



Note: IPaddress and HOst are mutually exclusive.

POrt

optionally, specifies the server port.

nnnn

indicates the server port. The default is 80.

WAI

specifies the maximum wait time for any single request made over the network.

nnnn

indicates the wait time in seconds. The default is 60.



Note: The default for a mount or dismount request is 10 minutes (600 seconds) or more if the specified WAIT time is greater than 600 seconds.

REtry

specifies the number of retries to be attempted for any single request before the task is allowed to resume, and a failure recorded.

nnnn

indicates the number of retries. The default is 3.

FAil

optionally, specifies the number of failures (**after** communication is established) before the server path is disabled or placed out of service.



Note: The FAil limit count **only** applies **after** successful communication has been established on this SERVER path.

nnnn

indicates the number of failures. The default is 0.

If 0 is specified, the named SERVER is never automatically disabled due to communications errors. Specify this value when there are no backup SERVER paths to a named LIBRARY.

After successful communication is established with a LIBRARY, the error severity and SERVER FAil count are used to determine whether a SERVER path should be automatically disabled.

INITFail

optionally, specifies the number of failures (**before** communication is established) before the server path is disabled or placed out of service.



Note: The INITFail limit count **only** applies **before** successful communication has been established on this SERVER path.

nnnn

indicates the number of failures. The default is 0.

If 0 is specified, the named SERVER is never automatically disabled due to communications errors.

Examples

In the following example, two libraries (DENVER and OMAHA) are defined

The first library, DENVER, has both a local HSC (HSC0, on the SMC host) and a backup remote path on MSP system DEN1. SMC uses the local path unless the local subsystem is inactive or is disabled using the command LIB NAME(DENVER) LOCDIS. If the backup remote path is used, selected HSC messages are displayed on the client host.

```
LIBRARY NAME(DENVER) LOCSUBSYS(HSC0) WTORDEST(CLIENT)
SERVER NAME(DENBKUP) LIBRARY(DENVER) HOST(DEN1) PORT(8888)
```

The second library, OMAHA, is always accessed using a remote server. The SMC attempts to use the first defined server, OMAHA1. If this server becomes inactive, inaccessible, or is disabled, the SMC uses the next defined server, OMAHA2. If the SMC is unable to communicate with either server, no library requests are directed to the OMAHA library.

```
LIBRARY NAME(OMAHA) WTORDEST(CLIENT)
SERVER NAME(OMAHA1) LIBRARY(OMAHA) HOST(OMA1) PORT(8888)
SERVER NAME(OMAHA2) LIBRARY(OMAHA) IP(11.22.33.44) +
PORT(7777)
```

MSP hosts DEN1, OMA1, and the host represented by the IP address 11.22.33.44 must each have an instance of the Sun StorageTek HTTP server executing on them in order for SMC to communicate with the HSC on these hosts. The Sun StorageTek HTTP server port must be defined as 8888 for the first two hosts and 7777 for the third host.

TAPEREQ (Tape Request) Control Statement

The SMC TAPEREQ statement specifies tape request attributes. These attributes define the media type and recording technique or model number used for a particular data set or group of data sets.

TAPEREQ statements are placed in the definition data set (DDname) specified by the SMC TREQDEF command. SMC allocation calls on these TAPEREQ statements to help ensure that the correct media type is used to satisfy a request, and that the cartridge is mounted on the appropriate device. TAPEREQ statements must be placed in the definition data set; they **cannot** be issued as an operator command.



Notes:

- The SMC TAPEREQ control statement replaces the HSC TAPEREQ control statement.
- See page 119 for information about the TREQDEF Command.
- See Chapter 4, “SMC Allocation in a JES Environment” for information about SMC allocation.
- If your environment contains multiple types of 36-track drives (recording technique 36Atrack, 36Btrack, or 36Ctrack), it is recommended that you use device preferencing to manage device allocation. Entering specific 36-track device types in TAPEREQ statements (i.e., 36A, 36B, 36C) causes the SMC to break unit affinity chains based on incompatible device types; using device preferencing allows the affinity chains to be maintained.
- Parameters from TAPEREQ lookup, including SUBPool and ESOTeric, always take precedence over values derived from a user exit.

Disabling a TAPEREQ Definition

Use the following procedure to disable a TAPEREQ definition.

1. Edit the definition data set containing the current TAPEREQ control statements.
2. Delete the parameters of the TAPEREQ control statement you want to disable, or delete the TAPEREQ control statement.
3. Issue the TREQDEF operator command to reload the definition data set.

To disable all TAPEREQ definitions, load a definition data set that contains only one TAPEREQ control statement with no parameters.

Syntax

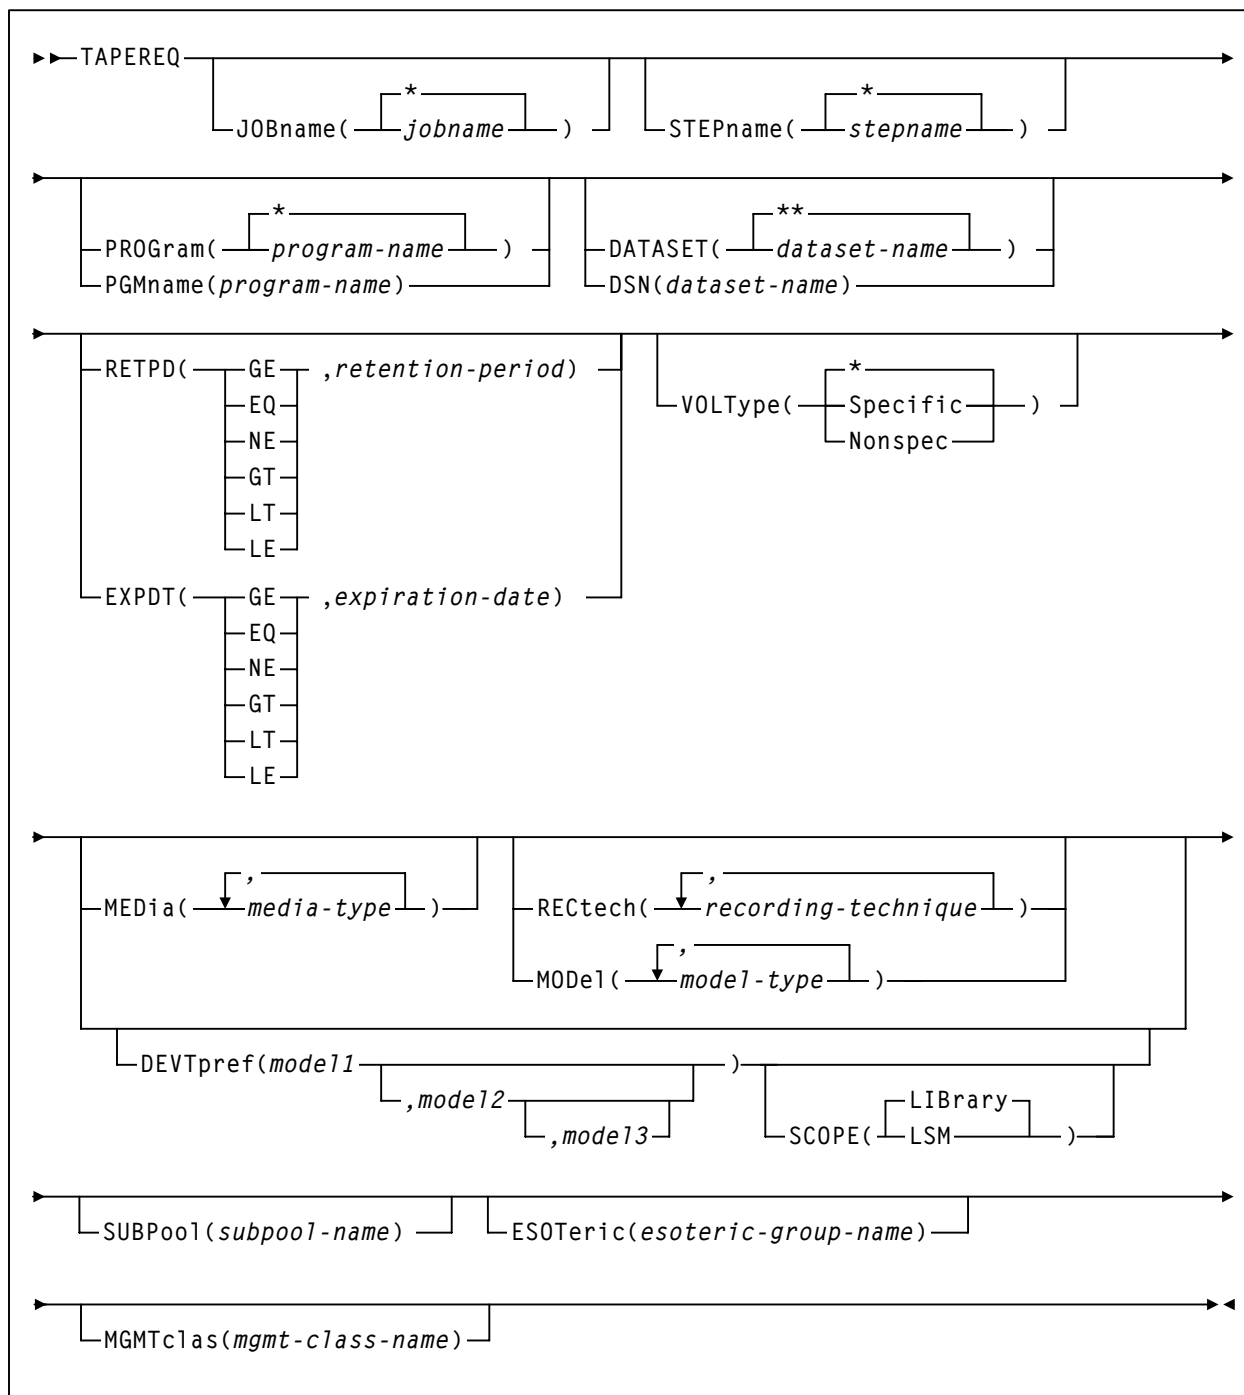


Figure 8. TAPEREQ Control Statement



Note: See Appendix B for valid media types, recording techniques, and model types.

Control Statement Name**TAPEREQ**

initiates the TAPEREQ control statement.

If any of the following conditions exist:

- there is no TAPEREQ control statement specified in the definition data set to match a request
- no matching TAPEREQ statement specifies the MEDia, RECtech, or MODel parameters
- no definition data is loaded

then the MEDia and RECtech or MODel parameters are set to undefined, which matches all requests. Any available device is eligible for allocation.

Parameters

The TAPEREQ control statement is in essence an IF-THEN statement. **IF** the Input (selection criteria) parameters match the current tape request variables, **THEN** the Output (media and format) parameters may apply.

TAPEREQ input and output parameters are described in the following sections.

Input Parameters



Note: The JOBname, STEPname, PROGram, and DATASET parameter values can include the following wild card characters:

- % or ? any single nonblank character
- * any character string (length zero to 8) not to exceed one qualification level. For example, A.B.* matches A.B and A.B.C, but does not match A.B.C.D.
- ** used only in DATASET. Indicates any number of qualifiers (zero or more). Cannot be used with any other characters within a qualifier. For example, A.B.** matches A.B, A.B.C, A.B.C.D, A.B.C.D.E, and so forth.

The TAPEREQ input (selection criteria) parameters include:

JOBname

Optionally, identifies the job name. If JOBname is not specified, the default value is *.

jobname

Specifies the name of the job for which the TAPEREQ control statement is processed.

The TAPEREQ control statement is used only when the specified *jobname* matches the job name in the request.

STEPname

Optionally, specifies the step name. If the STEPname parameter is not specified, the default value is *.

stepname

Specifies the name of the step for which the TAPEREQ control statement is processed. The TAPEREQ control statement is used only when the specified *stepname* matches the step name in the request.

PROGram or PGMname

Specifies the program name.

The program name used is the job step program name. The default value is *.

program-name

Specifies the program name for which the TAPEREQ control statement is processed.

The TAPEREQ control statement is used only when the specified *program-name* matches the program name in the request.

DATASET or DSN

Specifies the data set name.

The default value is **.

dataset.name

Specifies the data set name for which the TAPEREQ control statement is processed.

The TAPEREQ control statement is used only when the specified *dataset.name* matches the data set name in the request.



Note: The name you specify on this parameter might be different from the value coded in the DSN parameter on a DD statement. For example,

The name you specify on this parameter might be different from the value coded in the DSN parameter on a DD statement. For example,

```
DSN=&&ABC
```

may be coded on a DD statement if a data set is temporary. However, the actual data set name is not &&ABC. Similarly, if the DSN parameter refers back to a previous DD statement, the data set name is resolved to the referred-to data set. Thus, the data set name referred to must be coded on the DATASET parameter in order for the TAPEREQ control statement to be processed.

RETPD

Specifies the retention period and the relationship that must exist. If you do not specify either RETPD or EXPDT, the default value is RETPD(GE,0) (any expiration date will match this criterion).

- EQ** equal to.
- NE** not equal to.
- GT** greater than.
- GE** greater than or equal to.
- LT** less than.
- LE** less than or equal to.

retention-period

Specifies the retention period in days for the data set. Specify the number of days as a 1- to 4-digit decimal number.

EXPDT

Specifies the expiration date and the relationship that must exist.

- EQ** equal to.
- NE** not equal to.
- GT** greater than.
- GE** greater than or equal to.
- LT** less than.
- LE** less than or equal to.

expiration-date

Specifies the expiration date of the data set in *YYDDD* or *YYYY/DDD* format.

VOLType

Specifies whether or not a nonspecific volume is being requested. If VOLType is omitted, the default value is * (either specific or nonspecific matches).

Specific

Specifies that the request is for a specific volume.



Note: The TAPEREQ parameter never overrides the actual media type of the specific volume returned by the LCS.

Nonspec

Specifies that the request is for a nonspecific (scratch) volume.

Output Parameters

The TAPEREQ output (media and format) parameters include:

MEDia

Specifies the desired type of media for a data set being created. You can enter a list of media types, but they must be separated by commas.

media-type

indicates the media type. See Table 8 on page 209 for a list of valid *media-type* values.

**Notes:**

- A list specifies a generic pool from which a selection is made. There is no implied priority.
- This parameter is ignored for an existing data set if the media characteristics are determined by the volume information contained in the LCS's control data set (CDS).
- If this parameter is not specified, a default is chosen based on the value of the RECtech parameter. See Table 9 on page 211 for default values used if the MEDia parameter is omitted.
- To avoid problems, it is recommended that all TAPEREQ statements specify MEDia and RECtech consistently. Be sure to include one or both parameters on each statement. If both media type and recording technique are omitted, all available devices are eligible for allocation.

RECtech

Optionally, specifies the method used to record data tracks on the tape surface for the desired data set. You can enter a list of recording techniques, but they must be separated by commas.



Note: A list specifies a generic pool from which a selection is made. There is no implied priority.

recording-technique

indicates the recording technique. See Table 10 on page 212 for a list of valid *recording-technique* values.



Notes:

- RECtech and MODEL are mutually exclusive.
- If this parameter is not specified on any matching TAPEREQ, a default is chosen based on the value of the MEDIA parameter. See Table 11 on page 214 for default values used if the MEDIA parameter is omitted.
- To avoid problems, it is recommended that all TAPEREQ statements specify MEDIA and RECtech consistently. Be sure to include one or both parameters on each statement. If both media type and recording technique are omitted, all available devices are eligible for allocation.

MODEL

Optionally, specifies the model number of a transport. You can enter a list of models, but they must be separated by commas. MODEL provides the same type of information as RECtech, but a user may find it more convenient to specify a transport model rather than a recording technique.



Note: A list specifies a generic pool from which a selection is made. There is no implied priority.

model-type

indicates the model type. See Table 12 on page 215 for a list of valid *model-type* values.



Note: MODEL and RECtech are mutually exclusive.

DEVTpref

Requests device preferencing for a particular allocation request. The use of device preferencing is restricted to Sun StorageTek 36-track class transport models: 4490, 9490, and 9490EE.



Note: The following rules apply when using the MEDia, MODel, and RECtech parameters in conjunction with DEVTpref:

- The MODel parameter must include the models specified in the DEVTpref parameter.
- The RECtech parameter must include valid values for each model specified in the DEVTpref parameter.
- The MEDia parameter must include valid values for each model specified in the DEVTpref parameter.



Note: Device preferencing is managed by the SMC. If DEVTpref is specified and the list of devices includes 36-track and other devices (e.g., 18-track) the SMC preferences 36-track drives first, followed by other types in the list. Refer to the *SMC Configuration and Administration Guide* for more information.

model1

Specifies the transport model number of the preferred device. These transports are given a higher selection probability than the alternate transport model.

model2

Optionally, specifies the transport model number of the first alternate device. It must be separated from the *model1* by either a comma or a blank.

model3

Optionally, specifies the transport model number of the second alternate device. It must be separated from *model2* by either a comma or a blank.

If *model3* is omitted, the transport model number not specified by *model1* or *model2* is assumed to be the second alternate device.

The following table shows the alternate device order if only *model1* is entered:

Table 4. Alternate Device Default Value

| <i>Preferred Device (model1):</i> | <i>First Alternate Device (model2):</i> | <i>Second Alternate Device (model3):</i> |
|--|--|---|
| 4490 | 9490 | 9490EE |
| 9490 | 4490 | 9490EE |
| 9490EE | 4490 | 9490 |

Entering DEVTpref(9490,4490) is functionally equivalent to DEVTpref(9490,4490,9490EE).

SCOPE

Specifies whether device preferencing should be performed across the entire library complex (single or multiple-ACS), or at the individual LSM level. The SCOPE parameter may be used in an attempt to reduce pass-thru events. SCOPE is valid only when the DEVTpref parameter is specified on the same TAPEREQ statement.

LIBrary

Specifies that all of the preferred models in the ACS are to be given a higher selection probability than all of the alternate models, while maintaining the ability to automate tape mounts. LIBrary is the default value.

In a multiple-ACS configuration, the way that the SMC processes SCOPE(LIBrary) depends on the following:

- The ability to automate the mount
- The type of request; specific versus scratch

A specific volume request is confined to the ACS where the volume resides so that the mount can be automated. The transports in all other ACSs, and all nonlibrary transports are marked ineligible for selection. The SMC then applies SCOPE(LIBrary) to one ACS, giving all of the preferred models in that ACS a higher selection probability.

A scratch request can be directed to any ACS, whether or not it contains scratch volumes. In this case, the SMC applies SCOPE(LIBrary) to all ACSs, giving all of the preferred models in all ACSs a higher selection probability.



Note: To prevent a scratch request from being directed to an ACS with no scratch volumes, use ALLOCDef Zeroscr (ON). See “ALLOCDef Command” on page 60.

LSM

Specifies that all of the preferred models within an LSM are to be given a higher selection probability than all of the alternate models within that same LSM, while maintaining the ability to automate tape mounts.

Each LSM is processed individually without regard to the models attached to other LSMs in the ACS. This means that if the preferred model is not available in the LSM where the volume resides, an alternate transport in the same LSM is allocated preventing a pass-thru of the volume to a different LSM.

SCOPE(LSM) should be requested if reducing pass-thru events is more important than allocating a preferred transport in a different LSM.

SCOPE applies only when DEVTpref is specified. LIBrary is the default value for the SCOPE parameter.

SUBPool

optionally, specifies the subpool used to satisfy a scratch request.

subpool-name

Specifies the subpool name.

ESOTeric

optionally, specifies the esoteric defining the list of eligible transports to be used to satisfy a tape request.

esoteric-group-name

Specifies the esoteric group name. The name specified can consist of one to eight alphanumeric or national (#, @, \$) characters. A slash (/) or hyphen (-) is also valid.

MGMTclas

optionally, specifies a Management Class you defined on the VTCS MGMTclas control statement. Refer to the *VTCS Command and Utility Reference* for more information.

mgmt-class-name

the Management Class name




Caution: If you specify a Management Class on the MGMTclas parameter, you must specify both Media(V) and RECtech(V).

TCPip Command

The SMC TCPip command alters or lists the current TCPNAME and ADSNAME defaults for your TCP/IP communications environment. It allows you to direct TCP/IP requests to a specific TCP/IP stack on an MSP host. The TCPip command can be issued at any time.

Syntax

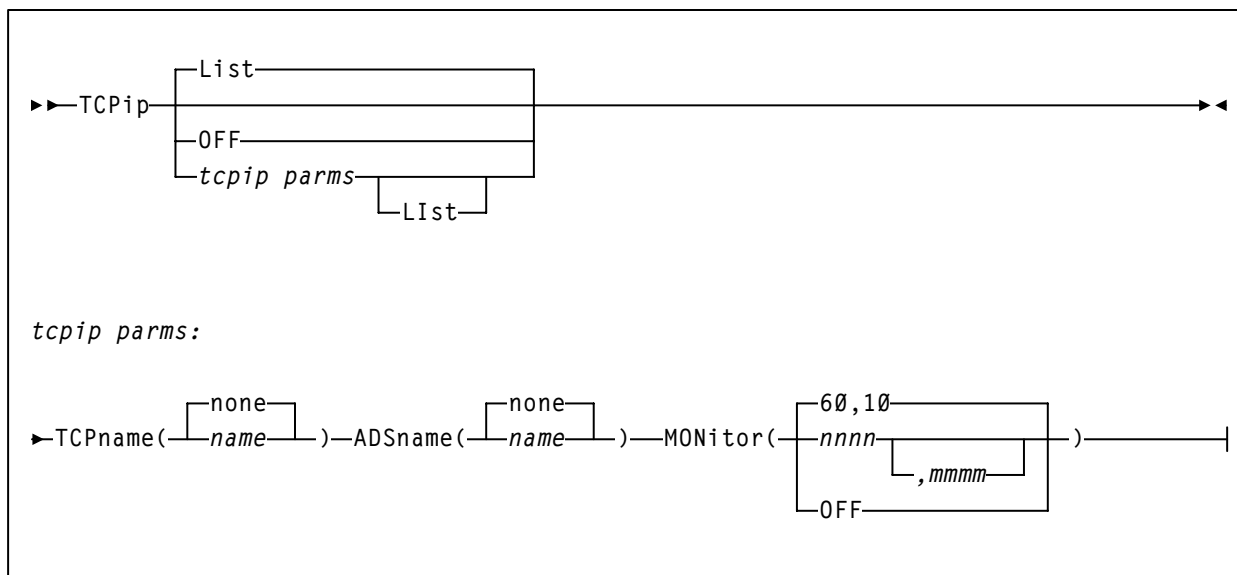

Command Name

TCPip

initiates the TCPip command.

Parameter Descriptions

List

optionally, lists current TCPNAME and ADSNAME TCP/IP defaults.

OFF

optionally, specifies that system defaults are used for TCP/IP communications.

TCPname

optionally, specifies the TCPNAME value for a specific TCP/IP stack on an MSP host.

name

indicates the TCPNAME value

ADSname

optionally, specifies the ADSNAME value for a specific TCP/IP stack on an MSP host. ADSNAME is the jobname of the TCP/IP startup job. Refer to the IBM

publication *TCP/IP for MSP Application Programming Interface Reference* for more information about ADSNAME.

name

indicates the ADSNAME value.

MONitor

optionally, specifies the communication monitor subtask scan interval and communication monitor subtask message interval.

nnnn

indicates the monitor scan interval in seconds. The communication monitor wakes every nn seconds to perform library communication validation. Specify a value between 10 and 9999 or OFF. The default is 60. OFF disables the communication monitor subtask.

It is recommended that you preserve the default setting of 60 to enable a monitor scan every minute. A value that is too low can potentially degrade performance when inactive libraries exist. A value that is too high can delay a return to the primary server if PREFPRIMARY(ON) is specified, or delay the redriving of mounts when there is no allocation or mount activity but a communication path becomes available.

mmmm

optionally, indicates the monitor scan interval in number of scans. Communication error messages are displayed according to this interval. The default is 10.

The default MONITOR(60,10) setting specifies a monitor scan interval of 60 seconds, and a monitor message interval of 10 scans. A scan is performed every minute, but error messages are only produced once every 10 scans.

An *mmmm* value of 0 disables all non-fatal or non-disabling error messages issued by the communication monitor subtask. However, errors resulting in the disabling of a server communication path are still issued.

TRace


TRace Command

The SMC TRace command enables SMC tracing using the GTF trace facility and optionally provides a snap dump of the address space before and after control block modification.



Warning: This command may impact system performance and should be used **only** as directed by Sun Microsystems Software Support.

Syntax

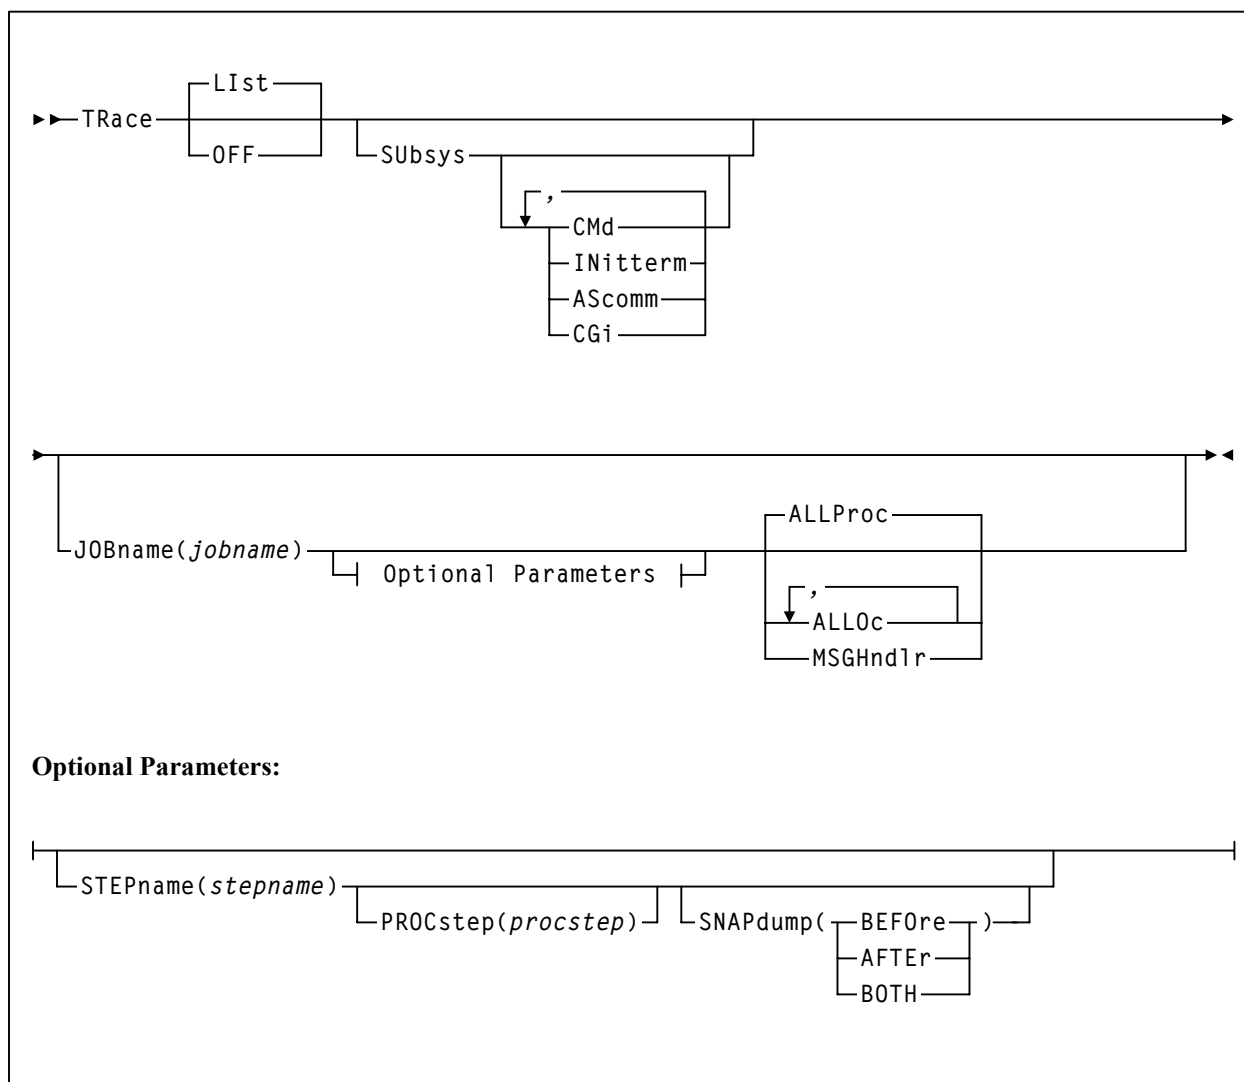

Command Name**TRace**

initiates the TRace command.

Parameter Descriptions**List**

optionally, lists current SMC trace settings for both the SMC subsystems and SMC components by job name, step name, and PROC step.

If no JOBname is specified, all jobs with SMC components being traced are listed. If JOBname is specified, **only** those jobs with SMC components being traced whose job name matches the specified job JOBname are listed. In either case, all SMC subsystem components being traced are listed.

This is the default if no parameters are specified.

OFF

optionally, disables SMC tracing.

- If no other parameters are specified, tracing is disabled for all jobs.
- If only JOBname is specified, tracing is disabled for all entries for that job name.
- If JOBname, STEPname and PROCstep are specified, tracing is disabled **only** for the specified entry.

SUbsys

optionally, enables or disables SMC tracing for one or more SMC subsystem components or subtasks.

OFF

disables tracing for all SMC subtasks.

CMd

enables tracing for the SMC subtask that processes all SMC operator commands.

INitterm

enables tracing for the SMC subtask that performs SMC initialization and termination.

AScomm

optionally, enables tracing for the SMC address space component. Tracing of library and configuration requests is performed **only** if tracing is also enabled for the jobname making the request.

CGi

optionally, enables tracing to the log of the Sun StorageTek HTTP server. Tracing of HTTP server requests is performed **only** if tracing is also enabled for the jobname making the request.

JOBname

optionally, specifies a job name.

jobname

indicates the job name.

The value entered **must** be one to eight characters in length. An asterisk (*) can be used as a wildcard when included as the last character. In this case, all jobs whose job names match the characters preceding the asterisk are traced or listed. To trace all jobs, specify TRACE JOB(*).

STEPname

optionally, specifies a step name.

stepname

indicates the step name.

The value entered must be one to eight characters in length. This parameter is **only** valid if JOBname is also specified.

PROCstep

optionally, specifies a PROC step.

procstep

indicates the PROC step.

The value entered **must** be one to eight characters in length. This parameter is **only** valid if JOBname and STEPname are also specified.

SNAPdump

optionally, requests a snap dump.



Note: A snap dump may impact system performance, and should be used **only** as directed by Sun Microsystems Software Support.

BEFORe

perform a snap dump before allocation influencing.

AFTEr

perform a snap dump after allocation influencing.

BOTH

perform a snap dump both before and after allocation influencing.

ALLProc

enables tracing for all SMC components. This is the default if no parameters are specified.

ALLOc

optionally, enables tracing for the SMC allocation component that performs drive exclusion and drive prioritization.

MSGHndlr

optionally, enables tracing for the SMC message handler component that processes all MOUNT, DISMOUNT, and SWAP messages and issues robotic movement commands to the Sun StorageTek tape library.

Examples

In the following example, tracing is enabled for any job whose name begins with “TESTJOB.”

```
TRACE JOB=TESTJOB*
```

In the following example, the TRace command specifies that tracing is disabled for all SMC initiator processes and SMC subsystem subtasks.

```
TR OFF
```

In the following example, tracing is enabled for SMC initiator allocation and message handling processes for any job with jobname ABC.

```
TR JOBN=ABC ALLOC MSGHN
```

In the following example, tracing is enabled for the SMC subsystem command component.

```
TR SUBSYS CMD
```

In the following example, tracing is disabled for all SMC subsystem subtasks.

```
TR SUBSYS OFF
```

In the following example, tracing is disabled for all jobs whose job name begins with “PROD.”

```
TR OFF JOB=PROD*
```

TREQDef Command


The TREQDEF command specifies and loads the definition data set containing your tape request (TAPEREQ) parameter statements.

This command may be issued from the SMCPARMS or SMCCMDS data set, or it may be issued by an operator.



Note: The SMC TREQDEF operator command replaces the HSC TREQDEF command and control statement.

Syntax

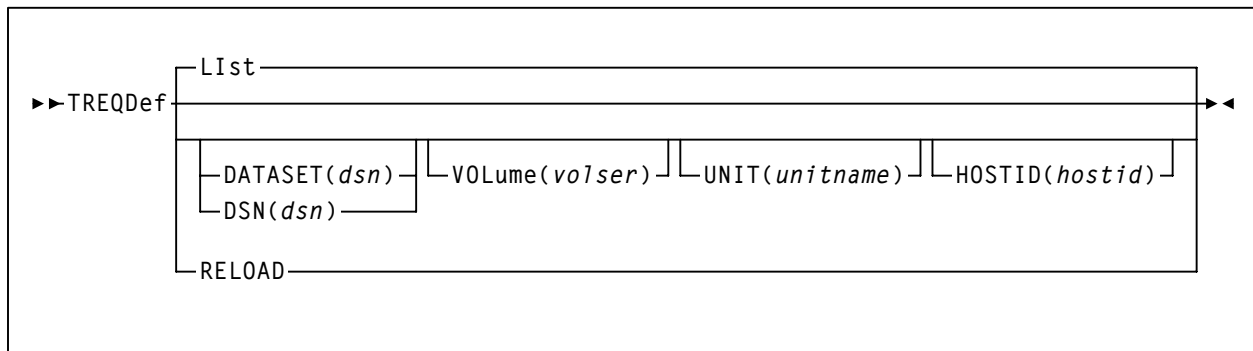

Command Name

TREQDef

initiates the TREQDef command.

Parameter Descriptions

List

lists information about the definition data set containing TAPEREQ control statements that are currently loaded. Information includes:

- data set name
- member name
- identifying string (if the data set contains an OPTion TITLE statement)
- date and time parameters were loaded

DATASET or DSN

specifies the name of the data set containing the TAPEREQ control statements to be processed and, optionally, an OPTion TITLE statement.

dsn

the data set name. This data set can be a fixed length 80-byte sequential data set, or a fixed length 80-byte member of a PDS. If the data set name includes a member name, you must enclose the *dsn* in quotes. For example:

```
DATASET( 'YOUR.PDS.DSN(MEMBER)' )
```

VOLume

specifies the volume serial number of the DASD volume on which the data set resides. This parameter is optional. Specify the VOLume parameter if the data set is not cataloged.

volser

the volume serial number for the definition data set.

UNIT

specifies the unit name where the definition data set is located. This parameter is optional. Specify the UNIT name if the data set is not cataloged.

unitname

the unit name. If the definition data set is not cataloged, and the *unitname* is omitted, a unit name of SYSALLDA is the default.

HOSTID

specifies the hostid from which to execute this control statement. This parameter is valid only for use in PARMLIB, to allow multiple systems to share a parmlib member containing multiple TAPEREQ control statement members.

hostid

the name of one or more hosts from which to execute this control statement. Multiple host names must be separated by commas.

RELOAD

reloads the currently loaded TAPEREQ control statements from the same data set. This parameter can be used after a TREQDEF DSN(*dsn*) command is issued, and changes may then be made to the contents of that data set.

Example

The following example illustrates the use of the TREQDEF command.

Load the TAPEREQ Parameters from YOUR.DSN(MEMBER)

```
TREQDEF DSN( 'YOUR.DSN(MEMBER)' )
```

UExit Command


User exits 1, 2, 8, 9, and 10 are invoked and managed by the SMC. The UExit command defines which load module is invoked for a specific user exit, and whether the user exit is enabled or disabled. HSC user exit formats are supported. The UExit command specifies the desired format.



Notes:

- Use this command to load each user exit you wish to use. If a user exit is not loaded, it will **not** be called.
- All user exits are executed on the host where the SMC resides, regardless of where the library server resides.
- HSC User exit 7 (SLSUX07) is no longer supported.
- These user exits must reside in a library accessible to the subsystem (SMC STEPLIB, JOBLIB, or your system's LINKLIB concatenation)
- Refer to the *NCS User Exit Guide* for information about each user exit.

Syntax

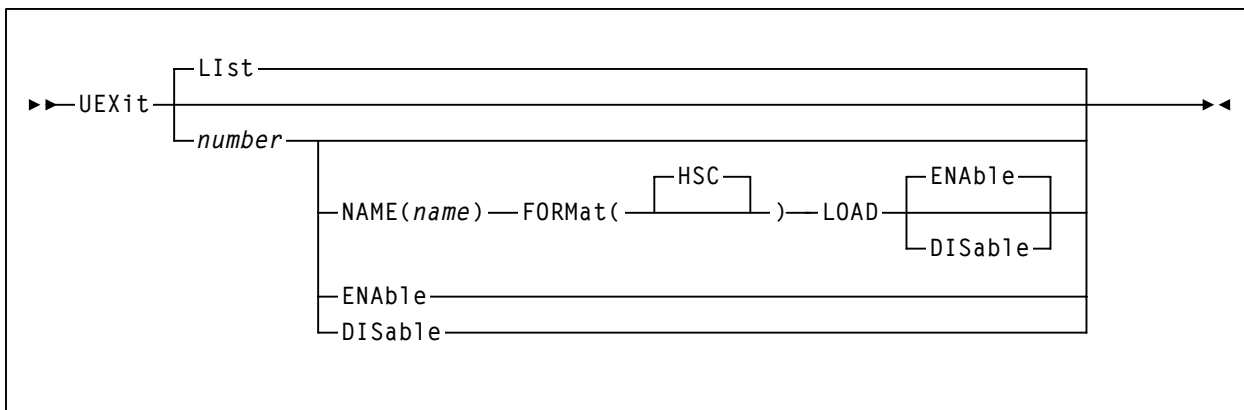

Command Name

UEXit

Initiates the UEXit command.

Parameter Descriptions

List

optionally, displays status information for all user exits. This is the default if no parameters are specified.

number

optionally, specifies the user exit number. Valid values are 1, 2, 4, 8, 9, 10, 11, 12, and 13.

NAME

optionally, specifies the user exit's load module name

name

indicates the load module name (e.g., SLSUX01)

FORMat

optionally, specifies the format of user exit to be enabled or disabled.

HSC

indicates the HSC user exit format.

LOAD

optionally, loads the specified user exit, making it available for use.



Notes:

- If a user exit is not loaded, it will **not** be called.
- A subsequent load of a module for the same user exit causes the currently active copy of the load module to be deleted when its use count reaches zero.

ENable

optionally, enables a user exit that was previously disabled due to a problem.

DISable

optionally, disables a user exit to allow for problem resolution.

Example

In the following example, the UEXit command is used to load the HSC format (SLSUX01) of user exit 01.

```
UEXIT 01 NAME(SLSUX01) FORMAT(HSC) LOAD
```

SLSUX01 is loaded from the SMC STEPLIB, JOBLIB, or your system's linklib concatenation.

UNITAttr Command


The SMC UNITAttr command specifies device addresses and allows the user to define the model types for nonlibrary drives. This command can also be used to set MODEL=IGNORE for device addresses not available for the host.



Notes:

- The SMC UNITATTR command replaces the HSC UNITDEF command and UNITATTR control statement. It is used to set the model type for nonlibrary drives, and IGNORE as the model type for drives to be excluded from allocation.
- SMC does not support a UNITDEF command. Each UNITATTR command is parsed and processed independently.
- HSC nonlibrary and MODEL=IGNORE UNITATTR statements are no longer returned to SMC on a configuration query. Therefore, if you use UNITAttrs to bypass devices for allocation or to define the device type of nonlibrary drives, you must define these UNITATTR commands to the SMC subsystem.

Syntax

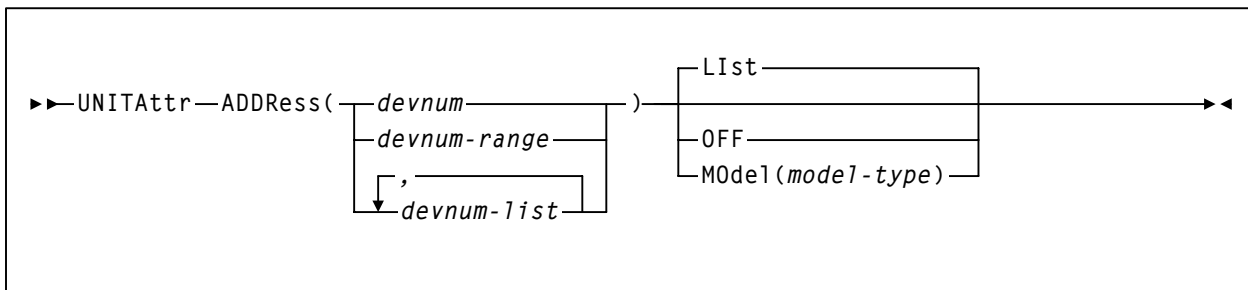

Command Name

UNITAttr

initiates the UNITAttr command.

Parameter Descriptions

ADDRESS

specifies the device numbers to be processed by the UNITAttr command.

List

lists the UNITAttr model information for the device numbers specified by the ADDRESS parameter.

MOdel

specifies the model type of the transport to be assigned the device numbers specified by the ADDRESS parameter.

model-type

indicates the model type. See Table 12 on page 215 for a list of valid *model-type* values.

OFF

specifies that the model type for the device numbers specified by the ADDRESS parameter should be determined from the device UCB, or, for a device which was previously set to MODEL=IGNORE, that the MODEL information from the library server should be restored.

Example


In the following example, model 9840C devices outside of an NCS library are defined.

```
UNITATTR ADDR(2910,2911) MODEL(T9840C)
```

USERMsg Command

The USERMsg command allows you to specify additional message identifiers for messages to be intercepted and passed to the library subsystem's user exit 01. This command can also be used to list the message identifiers of those messages that have been defined using the USERMsg command.

Syntax

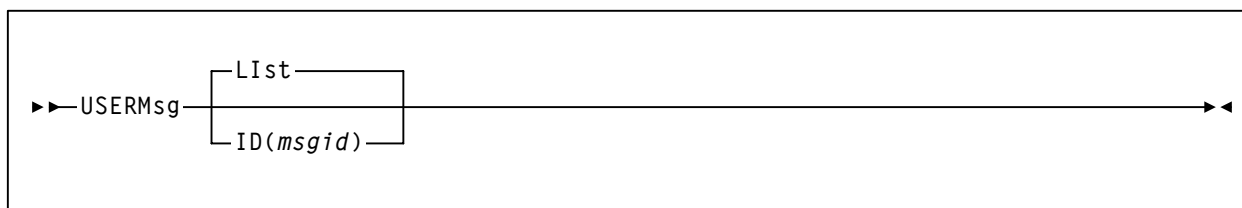

Command Name

USERMsg
initiates the USERMsg command.

Parameter Descriptions

List

optionally, lists the message identifiers in the customer-defined message table. This is the default if no parameters are specified.

ID

optionally, specifies a message to be added to the customer-defined message table. This message is passed to any active library subsystem user exit 01 (SLSUX01/SCSUX01).



Note: This parameter may **only** be specified in the SMCPARMS data set.

msgid

indicates the message identifier for the message to be added.

Example

In the following example, the USERMsg command is used to list message identifiers for messages included in the customer-defined message table.

```
USERMsg LI
```

Chapter 7. Recovery Procedures

Overview

This chapter describes recovery procedures used when the SMC or a library subsystem becomes inactive.

SMC Recovery Procedures (JES)

This section describes recovery procedures for the following problem scenarios:

- Inactive SMC - Active library subsystem
- Active SMC - Inactive library subsystem
- Automating mount requests for inactive libraries
- Lost MSP mount requests for active libraries

Inactive SMC - Active Library Subsystem

When the SMC fails while a library subsystem remains active, the following functions are **not** performed:

- allocation processing
- automation of mount/dismount/swap messages

When this occurs, re-start the SMC.

Common allocations can be postponed by holding the job queue or purging all initiators. Refer to the appropriate Fujitsu publication for more information about JES operator commands.

If the SMC MOUNTDef AUTOPendmount (ON) option was specified, outstanding mount messages are re-driven.

Active SMC - Inactive Library Subsystem

When a library subsystem fails or is terminated, volumes and drives owned by that subsystem become unknown to SMC. The following functions are **not** performed:

- volume lookup for allocation influencing
- automated mount processing

When this occurs, re-start the library subsystem and issue the SMC RESYNC command. The SMC automatically re-establishes communication with the library and automates any outstanding mounts, regardless of the SMC MOUNTDef AUTOPendmount setting. See “Automating Mount Requests for Inactive Libraries” below for more information.

Certain software products allow you to suspend processing that may require dynamic allocation. Common allocations can be postponed by holding the job queue or purging all initiators. Refer to the appropriate Fujitsu publication for more information about JES operator commands.



Note: You can provide a backup path to a remote library that is automatically activated when the local HSC is discovered to be inactive.

Automating Mount Requests for Inactive Libraries

MSP mount requests for drives owned by inactive library subsystems are automatically redriven when the corresponding HSC library subsystem is activated.

Lost MSP Mount Requests for Active Libraries

An MSP mount request may be lost when an LMU error occurs. Use this procedure if you suspect lost mounts.

1. Issue the following MSP command on the system requesting the mount to determine if any drives have a mount request pending:

D R,L

2. Issue the following MSP command on the same system to determine which VOLSER to mount:

D U,,uuuu,1

3. If the drive is defined to an HSC library, issue the HSC Mount command for the volume on the MSP system on which the HSC is active.

Chapter 8. SMC Tape Management Extract Utility

Overview

This chapter provides information for the Tape Management Extract utility, used to support scratch synchronization between the SMC client host and the HSC CDS.

SMC Utility Return Codes and Messages

SMC utilities may return the following return codes:

- A return code of 0 is returned when the utility program completes successfully with no errors or warnings.
- A return code of 4 is returned when a warning message is detected.
- A return code of 8 is returned when an error that prevents the utility from completing is detected.

For a listing of SMC messages that may be returned by SMC utilities, see page 193. These messages are identified by the `SMCU` prefix.

Tape Management Extract Utility

The SMC utility SMCUDBX supports scratch synchronization between the SMC client host and the HSC CDS. Using common tape extract modules (SLUDRCA1, SLUDRTL, SLUDRRMM, and SLUDRZAR) with HSC, the SMC accesses the client tape management system to produce an extract file that can be read as input by the HSC scratch tape conversion module SLUCONDB. This process is illustrated in the following figure:

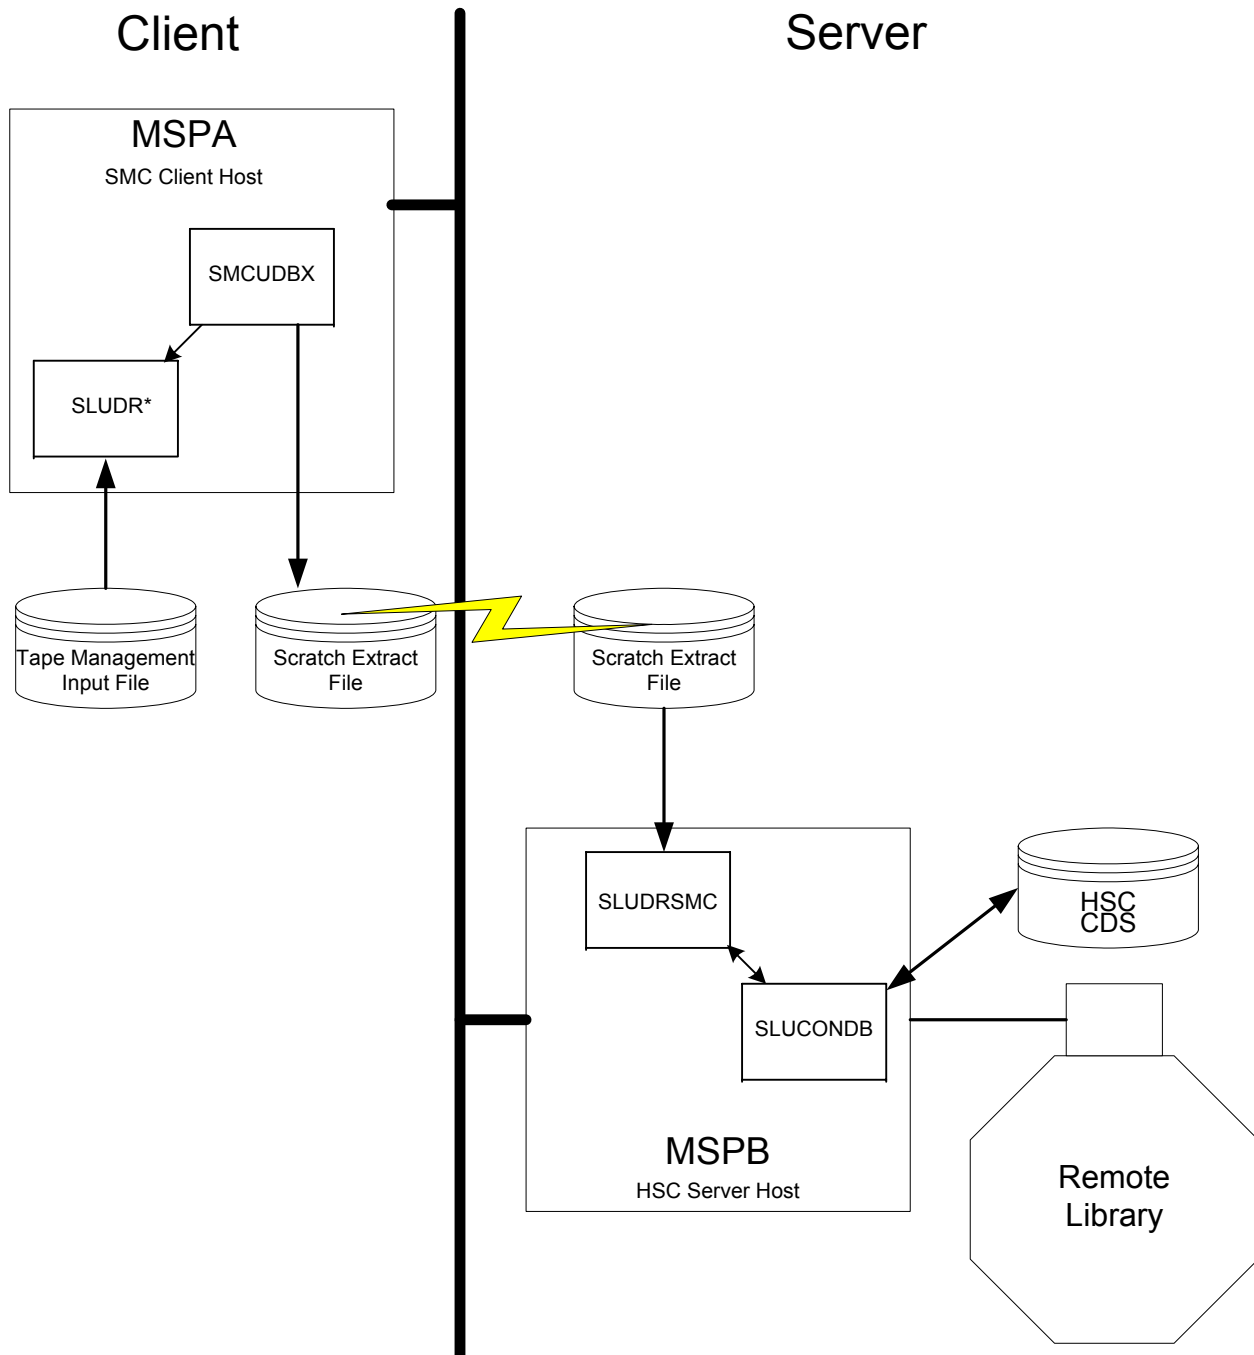


Figure 9. Scratch Synchronization Between SMC Client host and HSC CDS

If the client and server share a tape management system, the HSC utility SLUCONDB may be run directly using the common tape management system data base as input.

If, however, the client host has a tape management system that is not accessible to the HSC host, the SMC utility SMCUDBX can be used to extract scratch volumes from the tape management system using label and date parameters. The SMCUDBX output can then be used as input on the HSC host to the SLUCONDB utility. The SMC process supports timing synchronization by comparing the GMT time of the SMCUDBX run with the last select time of the HSC CDS volume record. If the volume was selected after the SMC scratch run, it is not eligible for scratch by SLUCONDB.

Running the SMC Scratch Extract Utility

You can run the SMC scratch extract utility regardless of whether the SMC is executing on the host.

SMCUDBX processes the CA-1 Tape Management Catalog (TMC), the CA-DYNAM/TLMS Volume Master File (VMF), or the Zara database, and selects the volume serial numbers for processing based on information specified on the PARM parameter of the JCL EXEC statement.

For CA-1 and CA-DYNAM/TLMS, SMCUDBX calls the appropriate tape management system database READ routine. For Zara, SMCUDBX invokes the SLUDRZAR module, which in turn invokes an application programming interface (API) to read Zara's database. The data returned from these routines is used to format the SMC scratch extract file.

The following list describes the READ routines that are called for the CA-1, CA-DYNAM/TLMS, and Zara tape management systems.

SLUDRCA1

Called to read the CA-1 TMC when CA-1 is defined as the tape management system. This routine uses CA-1 macros to map the layout of the TMC.

SLUDRTLMS

Called to read the CA-DYNAM/TLMS VMF when CA-DYNAM/TLMS is defined as the tape management system. This routine uses a CA-DYNAM/TLMS COPY member to map the layout of the VMF.

SLUDRZAR

Called to invoke an API to read Zara's database when Zara is defined as the tape management system.



Note: Both source and load module versions of the SLUDR* tape management extract routines are provided as part of the SMC product installation. Source modules are provided in the SMC SAMPLIB file and load modules are provided in the HSC SLULINK distribution library.

If your installation uses a different tape management system, you can develop a program modeled on one of the supplied examples SLUDRCA1, SLUDRTLTM, or SLUDRZAR, or you can write your own program to produce an extract file in the following format:

| Position | Field | Format |
|----------|----------------|--------|
| 1 | Scratch volume | CL6 |
| 7 | GMT of run | XL8 |
| 15 | Unused | CL2 |

The time filed in the SMC scratch extract file is a character representation of the first four bytes of the output of the MSP STCK macro. For example, if the STCK macro produces a result of X'B0912345 6789ABCD', the GMT field of the SMC extract contains the character value C'B0912345'.

SMCUDBX, SLUDRCA1, SLUDRTLTM, and SLUDRZAR are provided as load modules. You can use the current versions of these load modules with CA-DYNAM/TLMS Release 5.4 and above, CA-1 Release 5.0 and above, and Zara 1.2. The HSC SAMPLIB file on the base installation tape contains the sample source code.



Notes:

- If there are local modifications to your tape management system, you must reassemble the associated READ routine.
- If your tape management system is CA-1 Release 4.9 or below, you must modify and reassemble the SLUDRCA1 routine. See “Using SMCUDBX with CA-1 Release 4.9 or Below” for information about modifying and reassembling this routine.
- If your tape management system is CA-DYNAM/TLMS Release 5.3 or below, you must reassemble the SLUDRTLTM routine. See “Using SMCUDBX with CA-DYNAM/TLMS Release 5.3 or Below” for information about reassembling this routine.
- If your tape management system is Zara, the SMCUDBX utility must be able to access the data set that contains the Zara API module (ZARAAPI1). You can either store this module in the LINKLIST, or include a JOBLIB or STEPLIB DD statement in the SMCUDBX JCL that points to the library containing the module.
- Any routine that you modify and reassemble must be re-linked as non-reentrant (NORENT parameter) with AMODE=24 and RMODE=24.

Using SMCUDBX with CA-1 Release 4.9 or Below

To use SMCUDBX with CA-1 Release 4.9 or below, you must modify and reassemble the SLUDRCA1 routine. The CA-1 MACLIB containing the TMRECORD MACRO must be accessible during the assembly.

Perform the following steps for CA-1 Release 4.9:

1. Delete the asterisk in column 1 of the following line:

```
TMRECORD
```

2. Add an asterisk in column 1 of the following line:

```
TMMTMREC
```

3. Reassemble the SLUDRCA1 routine.


Using SMCUDBX with CA-DYNAM/TLMS Release 5.3 or Below

Perform the following steps to use SMCUDBX with CA-DYNAM/TLMS Release 5.3 or below:

1. Verify that the CA-DYNAM/TLMS Release 5.3 MACLIB containing the VMFBASE MACRO is accessible for the re-assembly of the SLUDRTLTM routine.
2. Reassemble the SLUDRTLTM routine; no modifications to the source code are required.

Specifying Values for the PARM Parameter

You can specify the following values for the PARM parameter on the JCL EXEC statement when running the Scratch Extraction utility.

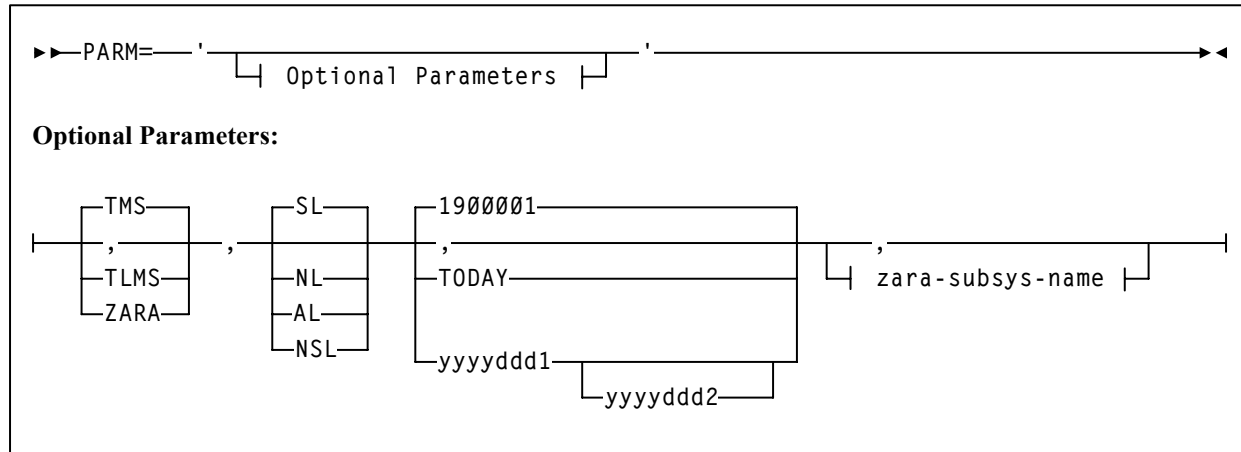

The keywords for the PARM parameter are positional. If the PARM parameter is not specified, default values are used.

Parameter Descriptions

This section describes the values you can specify for the PARM parameter on the JCL EXEC statement.

TMS

Specifies the CA-1 tape management system.

This is the default value.

TLMS

Specifies the CA-DYNAM/TLMS tape management system.

ZARA

Specifies the Zara tape management system.

SL

specifies standard label type for the scratch volume selection.
This is the default value.

NL

specifies nonlabeled type for the scratch volume selection.

AL

specifies ANSI label type for the scratch volume selection.

NSL

specifies nonstandard label type for the scratch volume selection.

1900001

Specifies January 1, 1900 as the date. This is the default date.



Note: You must specify a four-year format for year 2000 dates. For example, specify 2000001 for January 1, 2000.

TODAY

Specifies the current system date.

yyyyddd1

Specifies a single date in four-year format. This date becomes the *from* date. The *to* date is the current system date (which is not specified). All dates must be specified in Julian notation (year-day).

yyyyddd1-yyyyddd2

Specifies a range of dates in which the volumes became scratch. Neither date specified can be greater than the current system date, and the first date cannot be greater than the second date.



Note: A comma (,) or no keyword (blank) results in the system default date of January 1, 1900 (1900001).

MIXED

Specifies to print all report headings and messages in mixed-case characters (uppercase and lowercase).



Note: A comma (,) or no keyword (blank) results in headings and messages being printed in uppercase characters.

zara-subsys-name

Specifies the subsystem name for the Zara tape management system, where *zara-subsys-name* is the four-character name. The default subsystem name is ZARA.

Sample JCL

The following definitions apply to the JCL used for the SMC Scratch Extract utility.

DBTMS

Input to the Scratch Extract utility in the form of the CA-1 TMS or the CA-DYNAM/TLMS VMS. This DD statement is not required for Zara.

STDOUT

Output messages from the Scratch Extraction utility. This DD statement is required.

DBEXTFIL

Output file from the Scratch Extract Utility. If a DCB LRECL is specified, it must specify a 16-byte value.

If Zara is the tape management system, the Zara API module must either reside in the MSP LINKLIST, or you must include one of the following JCL statements to access the module.

```
//STEPLIB DD DISP=SHR, DSN=your.zaraapi1.library
           DISP=SHR, DSN=your.tmsextract.library
           or
//JOB LIB DD DISP=SHR, DSN=your.zaraapi1.library
```

Figure 10 shows sample JCL used to invoke the Scratch Extraction utility to process the CA-DYNAM/TLMS VMF for all tapes scratched in 2003.

```
//yourstd JOB card
//STEP0 EXEC PGM=SMCUBX,PARM='TLMS,,2003001-2003365'
//STEPLIB DD DISP=SHR,DSN=your.SMCLINK
//          DD DISP=SHR,DSN=your.SLUDRxxx.LINKLIB
//DBTMS DD DISP=SHR,DSN=your.tlms.database
//DBEXTFIL DD DISP=(NEW,KEEP),DSN=scratch.extract.file,
//          SPACE=(TRK,(5,1)),UNIT=SYSDA
//STDOUT DD SYSOUT=*
/*
```

Figure 10. Sample JCL for Scratch Extraction Utility

Sample Output

Output resulting from the execution of the Scratch Extraction utility includes:

- Messages associated with error conditions resulting from an unsuccessful attempt to execute scratch extraction processing.
- Messages indicating errors or actions occurring during processing.
- An output data set containing Scratch Update utility control statements.

Figure 11 shows sample output from the SMCUDBX utility.

| | | |
|---|----------------------------|-----------------|
| SMCUDBX 6.1.0 | SMC TMS DB SCRATCH EXTRACT | Page 0001 |
| TIME 15:26:41 | | Date 2003-08-14 |
| Total records extracted for scratch volumes = 977 | | |

Figure 11. Scratch Extraction Utility Sample Output-Messages

Chapter 9. SMC Messages

Overview

This chapter provides information about SMC messages. This information is provided to help system programmers and operators:

- initialize the SMC
- monitor SMC activity
- diagnose and correct SMC problems

See Chapter 10, “Sun StorageTek HTTP Server Messages” for information about messages issued by the Sun StorageTek HTTP Server for MSP.

Message Format

Messages are displayed on the console in the following format:

SMCnnnn message-text

where:

- SMC identifies the Storage Management Component (SMC).
- *nnnn* is the four-character message number.
- *message-text* is the actual text displayed on the job log or system log.

Message Descriptions

This chapter provides a description for each SMC message. In addition to the message number and message text, this description includes the following:

Message Level

The message level represents a message category. Using the MSGDEF or MSGJOB operator command, the message level is specified in order to control which categories of messages are issued. See “MSGDef Command” on page 87 for more information.

Explanation

The explanation describes the message.

System Action

The system action describes how the SMC reacts when a message-triggering event occurs.

User Response

The user response describes how the user should respond to the message. In many cases, no response is required.

Variable Definitions

Italicized text indicates variable data that is replaced by actual values when messages are issued. Message specific variable data is symbolized as follows:

Table 5. Variable Data Definitions

| Variable Data | Definition |
|--|--|
| <i>AA</i> | ACSid |
| <i>n</i> | decimal value |
| <i>X</i> | hexadecimal value |
| various letters (<i>C, N, K</i> , etc.) | variable information (character data) |
| numbers (<i>1, 2</i> , etc.) (combined with letters) | related variable information i.e., commands <i>CCCCCCCC1</i> and <i>CCCCCCCC2</i> |
| { } | multiple choices |
| [] | optional field (may not appear in message) |

SMC System Message Listing

The following SMC messages are listed numerically.

SMC0001 SMC subsystem initializing

Message Level: 0

Explanation: The MSP start command was entered for the SMC, and the SMC subsystem initialization process has begun.

System Action: None.

User Response: None.

SMC0002 CCCCCCCCCCCCCC failed; return code=XXXX1, reason code=XXXX2

Message Level: 0

Explanation: MSP facility or macro CCCCCCCCCCCCCC completed with the specified nonzero return code XXXX1 and reason code XXXX2.

System Action: Depending upon the type of error, initiation/termination may try to continue. If the MSP facility is listed as *Requested SDUMP*, the error occurred during the TRACE SNAP process, and processing will continue without producing the requested SDUMP.

User Response: Look for Fujitsu related messages in the SYSLOG or job log, and refer to Fujitsu documentation for the explanation.

SMC0003 SMC subsystem SSSS terminating

Message Level: 0

Explanation: The MSP stop command was entered for the SMC, and the SMC subsystem termination process has begun.

System Action: None.

User Response: None.

SMC0004 MSP release is down-level

Message Level: 0

Explanation: An attempt was made to initialize the SMC on an MSP system that does not support the necessary services required by this version of SMC.

System Action: The SMC subsystem terminates.

User Response: Upgrade MSP to the required release level.

SMC0005 Invalid command CCCCCCCC [at line nnnn of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: An undefined command, CCCCCCCC, was encountered by the SMC.

System Action: Processing continues. The command is ignored.

User Response: Ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0006 SMC subsystem not dynamic

Message Level: 0

Explanation: The SMC was defined as a nondynamic subsystem using the positional form of the SUBSYSxx parmlib member. The SMC must run as a dynamic subsystem.

System Action: The SMC subsystem terminates.

User Response: Use the keyword format of the subsystem definition in the SUBSYSxx parmlib member to define the SMC subsystem, or remove the SMC subsystem from the SUBSYSxx parmlib member.

SMC0007 SMCCVT incompatible with previous version; defaulting to COLD start

Message Level: 4

Explanation: During initialization, the SMC subsystem detected that the prior SMC subsystem of the same name was an incompatible version. The COLD start parameter was not specified.

System Action: Initialization continues, but in COLD start mode (the SMC subsystem CVT is rebuilt).

User Response: None.

SMC0008 Not running from an authorized library; SMC subsystem terminating

Message Level: 0

Explanation: The SMC subsystem initialization module, SMCBINT, was executed from an unauthorized library.

System Action: The SMC subsystem terminates.

User Response: Ensure that the SMC link library is APF authorized.

SMC0009 Job *JJJJJJJJ* JOBnnnn active at termination

Message Level: 4

Explanation: The SMC subsystem received the MSP stop ('P') command, but there is an active job, *JJJJJJJJ*, in tape allocation. The SMC0012 message was issued previously, but the job allocation has not completed after waiting one minute.

System Action: Termination continues. No allocation influencing is performed for *JOBnnnn*.

User Response: None.

SMC0010 Unable to acquire storage for *CCCCCCCC*; return code=*XXXX*

Message Level: 0

Explanation: During initialization, the SMC subsystem could not acquire sufficient storage for the specified dynamic control block or module, *CCCCCCCC*.

System Action: The SMC subsystem terminates.

User Response: Ensure that there is sufficient CSA storage available. Refer to Fujitsu documentation for the explanation of return code *XXXX*.

SMC0011 Load failed for module *MMMMMMMM*

Message Level: 0

Explanation: The SMC subsystem could not load the required module *MMMMMMMM*.

System Action: The SMC subsystem terminates.

User Response: Ensure that the SMC startup procedure has access to all SMC distributed load libraries in its steplib concatenation.

SMC0012 Termination waiting for job *JJJJJJJJ* JOBnnnnn [in allocation|in message handling]

Message Level: 0

Explanation: The SMC subsystem received the MSP stop command, but there is an active job *JJJJJJJJ* in tape allocation or message handling.

System Action: The SMC waits for 30 seconds or until all active processes are complete.

User Response: Ensure that there are no jobs performing tape allocation or message handling when the SMC is terminated. Respond to any MSP allocation recovery messages.

SMC0013 TRACE settings:
CCCC....CCCC

Message Level: 0

Explanation: The TRACE command was specified with the LIST keyword. The SMC0013 multiline message lists the current settings for the SMC subsystem. Refer to the TRACE command for parameter descriptions.

System Action: None.

User Response: None.

SMC0014 Unmatched [quote|or invalid parenthesis] detected; command ignored
[at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command containing an unterminated quoted string, or invalid or unmatched parenthesis.

System Action: Processing continues. The command is ignored.

User Response: Ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0015 Invalid keyword *KKKKKKKK* for the *CCCCCCCC* command [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command that specified an invalid keyword *KKKKKKKK*.

System Action: Processing continues. The command is ignored.

User Response: Ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0016 Invalid value *VVVVVVVV* for keyword *KKKKKKKK* of the *CCCCCCCC* command [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command that specified keyword *KKKKKKKK* with an invalid value *VVVVVVVV*.

System Action: Processing continues. The command is ignored.

User Response: Ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0017 Keyword *KKKKKKKK* of the *CCCCCCCC* command requires a value [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command that specified keyword *KKKKKKKK* without an accompanying value (required by most keywords).

System Action: Processing continues. The command is ignored.

User Response: Ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0018 Keyword *KKKKKKKK* of the *CCCCCCCC* command is not allowed for *EEEEEEEE* [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command that specified keyword *KKKKKKKK*, which is not valid in the current operating environment *EEEEEEEE*.

System Action: Processing continues. The command is ignored.

User Response: Ensure that the specified keyword is valid in your environment.

SMC0019 Duplicate keyword *KKKKKKKK* specified for the *CCCCCCCC* command [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command that specified the same keyword, *KKKKKKKK*, more than once.

System Action: Processing continues. The command is ignored.

User Response: Ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0020 Keyword *KKKKKKK1* of the *CCCCCCCC* command is mutually exclusive with keyword *KKKKKKK2* [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command that specified multiple keywords, two of which (*KKKKKKK1* and *KKKKKKK2*), are mutually exclusive.

System Action: Processing continues. The command is ignored.

User Response: Ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0021 {COLD|WARM} start failure

Message Level: 0

Explanation: During initialization, the SMC subsystem detected an error.

System Action: The SMC subsystem terminates.

User Response: Look for SMC related messages in the SYSLOG or job log. Associated messages may be (but are not limited to) SMC0002, SMC0004, SMC0006, SMC0008, SMC0010, or SMC0011.

SMC0022 Invalid format or missing keywords for the *CCCCCCCC* command [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command *CCCCCCCC* that contained either too many or too few keywords in the command line.

System Action: Processing continues. The command is ignored.

User Response: Ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0023 *CCCCCCCC* command successfully processed [at line *nnnn* of
SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The *CCCCCCCC* command was successfully validated and processed by the SMC.

System Action: None.

User Response: None.

SMC0024 SSSS subsystem initialization complete

Message Level: 0

Explanation: The SMC initialization process is complete. The SMC is ready to begin normal operations.

System Action: None.

User Response: None.

SMC0025 No {*CCCCCCCC*|control block} entries to list

Message Level: 0

Explanation:

One of the following occurred:

- Command *CCCCCCCC* was specified with the LIST keyword. However, no entries were found in the SMC queue for the specified command.
- A LIST command was specified with a control block keyword. However, no control blocks of the specified type were found.

System Action: None.

User Response: None.

SMC0027 Keyword *KKKKKKK1* of the *CCCCCCCC* command requires keyword *KKKKKKK2* [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command that specified keyword *KKKKKKK1*, but not the required co-requisite keyword, *KKKKKKK2*.

System Action: Processing continues. The command is ignored.

User Response: Ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0028 STOP command received

Message Level: 0

Explanation: The MSP stop ('P') command was received by the SMC, and the SMC subsystem termination process is set to begin.

System Action: The SMC subsystem begins termination processing.

User Response: None.

SMC0029 *CCCCCCCC* command processing error; [matching entry not found|command line truncated; will be ignored|parameter truncated; command ignored] [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: An error was found processing the *CCCCCCCC* command.

System Action: Processing continues. The command is ignored.

User Response: Use the LIST keyword to list the current SMC queue of entries; then ensure that the syntax in the command data set is correct, or enter the corrected command.

SMC0030 TRACE JOBNAME=*JJJJJJJJ* [STEPNAME=*SSSSSSSS*]
[PROCSTEP=*PPPPPPPP*] [SNAPDUMP *DDDDDDDD*] *CCCCCCCC*

Message Level: 0

Explanation: The TRACE command was specified with the LIST keyword. The SMC0030 message lists the jobs, step, and PROC steps and the associated processes which have been specified for tracing.

System Action: None.

User Response: None.

SMC0031 No SMC start mode specified; defaulting to WARM start

Message Level: 4

Explanation: During SMC initialization, the subsystem detected that neither a WARM or COLD start was specified in the initialization program's execution parameters.

System Action: Initialization continues in WARM start mode.

User Response: None.

SMC0032 Number of SMC startup parameters specified exceeds maximum of *n*

Message Level: 0

Explanation: During initialization, the SMC subsystem initialization program encountered an execution parameter string containing too many parameters.

System Action: The SMC subsystem terminates.

User Response: Correct the subsystem initialization startup procedure to specify the correct execution parameter string.

SMC0033 SMC startup parameter *PPPPPPP* may not have a value

Message Level: 0

Explanation: During initialization, the SMC subsystem initialization program encountered a valid execution parameter, but it was specified as a keyword=value pair, where no value is allowed.

System Action: The SMC subsystem terminates.

User Response: Correct the subsystem initialization startup procedure to specify the correct execution parameter string.

SMC0034 SMC startup parameter *PPPPPPP* must have a value

Message Level: 0

Explanation: During initialization, the SMC subsystem initialization program encountered a valid execution parameter, but it was not specified as a keyword=value pair, and a value is required.

System Action: The SMC subsystem terminates.

User Response: Correct the subsystem initialization startup procedure to specify the correct execution parameter string.

SMC0035 Error processing SMC startup parameter *PPPPPPPP; CCCCCCCCCCCC*

Message Level: 0

Explanation: During initialization, the SMC subsystem initialization program encountered an error in the execution parameter string. The string *CCCCCCCCCCCC* indicates the type of error encountered.

System Action: The SMC subsystem terminates.

User Response: Correct the subsystem initialization startup procedure to specify the correct execution parameter string.

SMC0036 SMC startup parameter *PPPPPPPP* successfully processed

Message Level: 4

Explanation: During SMC initialization, the execution parameter *PPPPPPPP* was successfully verified and processed.

System Action: None.

User Response: None.

SMC0037 Invalid SMC startup parameters; subsystem terminating

Message Level: 0

Explanation: During initialization, the SMC subsystem initialization program detected an error processing the execution parameter string.

System Action: The SMC subsystem terminates.

User Response: Look for SMC related messages in the SYSLOG or job log. Associated messages may be (but are not limited to) SMC0032 SMC0033, SMC0034, or SMC0035.

SMC0038 Another SMC system SSSS is already active

Message Level: 0

Explanation: During initialization, the SMC subsystem initialization program detected a different SMC subsystem, SSSS, already active on the system.

System Action: The initializing SMC subsystem terminates.

User Response: Only one SMC can be active on a system at a time.

- If SMC SSSS is active, and is preventing the current SMC from initializing, terminate SMC SSSS.
- If SMC SSSS was terminated abnormally and is not truly active, restart the current SMC subsystem with the RESET execution parameter.

SMC0039 Identically named subsystem SSSS is already active

Message Level: 0

Explanation: During initialization, the SMC subsystem initialization program detected an identically named subsystem SSSS already active on the system.

System Action: The initializing SMC subsystem terminates.

User Response: Start the SMC with a different subsystem name.

SMC0040 SMC subsystem SSSS is already active; RESET specified; startup continuing

Message Level: 4

Explanation: During initialization of SMC subsystem SSSS, the initialization program detected that the prior SMC subsystem terminated abnormally, but the user specified the RESET execution parameter to ignore this condition.

System Action: None.

User Response: None.

SMC0041 {Command|Comment} beginning at line *nnnn* of {SMCCMDS|SMCPARMS} is unterminated

Message Level: 4

Explanation: A command or comment beginning at line *nnnn* of an input command file ended with a continuation character (+), but no continuation was found.

System Action: Processing continues. The command containing the unterminated string is ignored.

User Response: Ensure that the syntax in the command data set is correct.

SMC0042 Job *JJJJJJJJ* step *SSSSSSSS* not allocatable before SMC modification

Message Level: 4

Explanation: During execution of job *JJJJJJJJ* step *SSSSSSSS*, the SMC allocation component detected that the job step was not allocatable before any allocation influencing was performed.

System Action: None. The job is failed by MSP or express-canceled by JES.

User Response: Correct the JCL.

SMC0043 Job *JJJJJJJJ* step *SSSSSSSS* not allocatable at MINLVL=*nn*; failing DD *DDDDDDDD*

Message Level: 4

Explanation: During execution of a job with tape allocation, the SMC allocation component detected that the job is not allocatable at the specified minimum exclusion level (MINLVL).

System Action: The job is failed by MSP or express-canceled by JES.

User Response: Correct the JCL, or change the MINLVL for the specified job.

SMC0044 SMC subsystem termination in progress; no allocation influence for job *JJJJJJJJ* step *SSSSSSSS*

Message Level: 8

Explanation: During execution of job *JJJJJJJJ* step *SSSSSSSS*, the SMC allocation component detected that the SMC subsystem was being terminated.

System Action: No allocation influencing is performed for the job.

User Response: None.

SMC0045 Conflicting exclusion criteria for job *JJJJJJJJ* step *SSSSSSSS* DD *DDDDDDDD*

Message Level: 8

Explanation: Messages SMC0045 and SMC0046 are always produced together. See the explanation for message SMC0046 for more information.

System Action: None.

User Response: None.

SMC0046 *CCCCCCCCCCCCCCCC* would have excluded all devices; not honored

Message Level: 8

Explanation: When the SMC allocation component attempted to apply the exclusion criteria *CCCCCCCCCCCCCCCC* for job *JJJJJJJJ* step *SSSSSSSS* DD *DDDDDDDD*, no devices remained in the current exclusion level EDL. The SMC0045 and SMC0046 messages are always produced together.

For information about exclusion criteria, refer to the keyword column of the “JES Drive Exclusion Levels” in the *SMC Configuration and Administration Guide*.

System Action: None. The criteria that would have eliminated all devices is ignored.

User Response: None.

SMC0047 Esoteric *EEEEEEEE* contains no known devices; ignored for job *JJJJJJJJ* step *SSSSSSSS* DD *DDDDDDDD*

Message Level: 8

Explanation: During execution of job *JJJJJJJJ* step *SSSSSSSS*, the SMC allocation component encountered a user policy esoteric, *EEEEEEEE* (from TAPEREQ or user exit), that did not contain any tape devices in the current EDL.

System Action: The specified esoteric is ignored.

User Response: None.

SMC0048 ACS ID AA contains no known devices; ignored for job JJJJJJJJ step SSSSSSSS DD DDDDDDDD

Message Level: 8

Explanation: During execution of job JJJJJJJJ step SSSSSSSS, the SMC allocation component encountered an user exit policy requesting exclusion to ACS ID *aa*. However, the EDL at the current exclusion level does not include tape devices in the requested ACS.

System Action: The ACS ID policy request is ignored.

User Response: None.

SMC0049 No eligible libraries for job JJJJJJJJ

Message Level: 8

Explanation: During execution of job JJJJJJJJ, the SMC allocation component did not find any libraries at the correct release level.

System Action: If ALLOCDEF FAILnoinfo is specified, the SMC marks all devices ineligible. Otherwise, no allocation influencing is performed for the job.

User Response:

- If libraries are implied using the MSP SSCVT chain or via the LIBrary command LOCSubsys parameter, ensure that the HSC on the host are active and at the correct level.
- If libraries on another host are defined using the LIBrary command, ensure that the HSC on the remote host defined by the SERVer command is active and at the correct level. Also ensure that the HTTP server is active on the remote host.

SMC0051 SMC subsystem interface error for job JJJJJJJJ; reason=SSSSSSSS function=CCCCCCCC

Message Level: 4

Explanation: SMC processing in an MSP initiator address space attempted to communicate with the SMC subsystem in order to process an allocation or mount request but encountered an error. The reason for the failure is SSSSSSSS while the function attempted was CCCCCCCC.

System Action: The SMC will not be able to continue processing the allocation or mount request.

User Response: Investigate the cause of the error by looking for related SMC subsystem or MSP error messages.

SMC0052 User exit *nn* {inactive|abended and disabled}

Message Level: 8

Explanation: During execution of a job with tape allocation, the SMC allocation component invoked the user exit *nn* from an HSC subsystem. However, the user exit is currently inactive or has abended and is now disabled for both the SMC and the owning HSC subsystem.

System Action: Allocation influencing continues for the job.

User Response: Correct the user exit.

SMC0053 ***** SMC U1099 ABEND at CCCCCCCC*n* *****

Message Level: 0

Explanation: An SMC task has abended in module CCCCCCCC at abend sequence number *n*.

System Action: If the abend occurs in the address space of a tape allocation job, the SMC subsystem does not influence the job's allocation. If the abend occurs in the SMC started task address space, a restart of the SMC subsystem may be required.

User Response: Look for SMC or Fujitsu related messages in the SYSLOG or job log. Save the associated logs, dump data set, and JCL, and contact Sun Microsystems Support.

SMC0054 MSGJOB LVL=*nn* for {DEFAULT SETTING|JOBNAME=JJJJJJJJ}
[STEPNAME=SSSSSSSS][PROCSTEP=PPPPPPPP]

Message Level: 0

Explanation: A MSGJOB command was specified with the LIST keyword. Each unique job, job step, and PROC step entry found in the MSGJOB queue is displayed in a separate SMC0054 message, followed by the SMC defaults in a final SMC0054 message. *nn* indicates the message level, and any messages at that indicated level or lower are produced on that job's job log in JES.

System Action: None.

User Response: None.

SMC0055 ALLOCJOB {BYPASSEd|MINLVL=*nn*}[SEPLVL=MIN|MAX|*nn*] for
 {JOBNAME=JJJJJJJJ}[STEPNAME=SSSSSSSS][PROCSTEP=PPPPPPP][SNAPDUMP
 DDDDDD] PPPPPPPP

Message Level: 0

Explanation: An ALLOCJOB command was issued with the LIST keyword. Each unique job, job step, and PROC step entry found in the ALLOCJOB queue is displayed in a separate SMC0055 message. The BYPASSEd message indicates that the specified job, job step, or PROC step will not have any of its tape allocations influenced by the SMC. MINLVL=*nn* indicates the desired minimum exclusion level at which affinity and GDG chains are separated.

System Action: None.

User Response: None.

SMC0056 *nn* Bytes:
 AAAAAAAAA +00000| XX.XX XX.XX XX.XX XX.XX | CC..CC |
 AAAAAAAAA +00010| XX.XX XX.XX XX.XX XX.XX | CC..CC |
 AAAAAAAAA +00000| XX.XX XX.XX XX.XX XX.XX | CC..CC |

Message Level: 0

Explanation: An SMC LIST command was issued. The SMC0056 multiline message lists the *nn* bytes of storage in translated hexadecimal (*xx.xx*) and character (*cc.cc*) format, each line listing the next 16 bytes (X'10') bytes of storage, beginning at hexadecimal address *aaaaaaaa*.

System Action: None.

User Response: None.

SMC0057 No {SMCPARMS|SMCCMDS} DDNAME statement found

Message Level: 8

Explanation: During SMC initialization, the specified SMCPARMS DD or SMCCMDS DD was not present in the SMC startup procedure.

System Action: Initialization continues.

User Response: None.

SMC0058 Error opening {DDNAME {SMCPARMS|SMCCMDS}|DSNAME DDDDDDDD}

Message Level: 0

Explanation: The SMC encountered a READ command, but the specified DDNAME or DSNAME could not be opened.

System Action: The READ command is ignored.

User Response: Look for Fujitsu related messages in the SYSLOG or job log, and refer to Fujitsu documentation for more information.

SMC0059 Identically named subsystem SSSS is initializing

Message Level: 0

Explanation: During initialization, the SMC subsystem initialization program detected an identically named SMC subsystem, SSSS, already being initialized (but not yet fully active).

System Action: The currently initializing SMC subsystem terminates.

User Response: Only one SMC can be active on a system at a time. If the prior SMC subsystem, SSSS, was terminated abnormally, and is not truly active, then restart SMC SSSS with the RESET execution parameter.

SMC0060 I/O error reading {DDNAME {SMCPARMS|SMCCMDS}|DSNAME DDDDDDDD}

Message Level: 0

Explanation: The SMC received an I/O error attempting to read the SMCPARMS or SMCCMDS data set specified in the SMC started procedure or a data set specified on a READ command.

System Action: The indicated data set is not processed.

User Response: Determine the cause of the error. If the input data set is a PDS, ensure that a member name was specified.

SMC0061 Command beginning at line *nnnn* of {SMCCMDS|SMCPARMS} is too long; input ignored

Message Level: 4

Explanation: The SMC encountered a multi-line command beginning at line *nnnn* of the specified file. This command exceeds 1024 characters in length.

System Action: Processing continues. The entire multi-line is ignored.

User Response: Ensure that the command data set has the correct syntax.

SMC0062 Command *CCCCCCCC* [with parameter *PPPPPPPP*] is not allowed [{from console|at line *nnnn* of SMCCMDS|SMCPARMS}]

Message Level: 0

Explanation: The SMC encountered a command or a command parameter that is not supported for the indicated command origin. For example, the READ command is not supported if encountered during processing of another READ command.

System Action: The command is ignored.

User Response: Issue the command from a valid command origin.

SMC0063 MSGDEF settings:
CCCC....CCCC

Message Level: 0

Explanation: A MSGDEF command has been issued with the LIST keyword. The SMC0063 multiline message lists the current settings for the SMC subsystem. Refer to the MSGDEF command for parameter descriptions.

System Action: None.

User Response: None.

SMC0066 ALLOCDEF settings:
CCCC....CCCC

Message Level: 0

Explanation: An ALLOCDEF command has been issued with the LIST keyword. The SMC0066 multiline message lists the current settings for the SMC subsystem. Refer to the ALLOCDEF command for parameter descriptions.

System Action: None.

User Response: None.

SMC0067 SMSDEF settings:
CCCC...CCCC

Message Level: 0

Explanation: An SMSDEF command has been issued with the LIST keyword. The SMC0067 multiline message lists the current settings for the SMC subsystem. Refer to the SMSDEF command for parameter descriptions.

System Action: None.

User Response: None.

SMC0069 SMCERSLV release level LLLLLL1 does not match SMC release level LLLLLL2

Message Level: 0

Explanation: Module SMCERSLV is at release level LLLLLL1 which does not match SMC release level LLLLLL2.

System Action: The SMC does not initialize.

User Response: Reassemble SMCERSLV at the correct release level and restart the SMC.

SMC0070 SMC maintenance has been applied; reassemble SMCERSLV

Message Level: 0

Explanation: SMC maintenance was applied and affected the module SMCERSLV, but SMCERSLV was not reassembled.

System Action: The SMC does not initialize.

User Response: Reassemble SMCERSLV using the correct level of SMC macros and restart the SMC.

SMC0074 Unsupported virtual label type for job *JJJJJJJJ* step *SSSSSSSS* DD
DDDDDDDD

Message Level: 8

Explanation: All virtual devices were previously excluded for the DD because of an unsupported label type (NL). A subsequent exclusion criteria requesting virtual drives could not be honored. Message SMC0046 describes the criteria not honored.

System Action: The DD is allocated to a nonvirtual drive. Nonlibrary drives are preferred over library drives.

User Response: Change the JCL to request a supported label type, or change the policy to direct the allocation to a different device type.

SMC0075 SEPLVL cannot be less than MINLVL on the *CCCCCCCC* command [at line
nnnn of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The SMC encountered a command that specified either a SEPLVL that is lower than the applicable MINLVL or a MINLVL higher than the applicable SEPLVL.

System Action: Processing continues. The command is ignored.

User Response: Ensure that command MINLVL and SEPLVL values are correct in the command data set, or enter the corrected command.

SMC0077 Subtask *CCCCCCCC* terminating at retry count *n*; please start and
restart SMC subsystem

Message Level: 0

Explanation: The specified SMC subsystem task abnormally terminated *N* times, and could not be restarted. The subsystem is now operating without a required service.

System Action: Processing continues. However, specific allocation or command facilities may be affected.

User Response: Stop and restart the SMC subsystem. If the named subtask is SMCOCMD, use the MSP CANCEL command to terminate the subsystem.

SMC0078 No command prefix defined

Message Level: 0

Explanation: No CMDDEF command specified a command prefix in the SMCPARMS data set.

System Action: Processing continues.

User Response: If a command prefix is desired, add the CMDDEF command to the SMCPARMS data set. The command is processed the next time SMC is initialized.

SMC0079 The command prefix is *PPPPPPPP*

Message Level: 0

Explanation: The command prefix for the subsystem is set to *PPPPPPPP*.

System Action: The SMC now accepts commands prefixed with *PPPPPPPP*.

User Response: None.

SMC0080 Command prefix value *VVVVVVVV* contains invalid character *C* at line *nnnn* of SMCPARMS

Message Level: 0

Explanation: The command prefix value *VVVVVVVV* of the CMDDEF command contained an invalid character *C*.

System Action: Processing continues. The command is ignored.

User Response: Review the list of valid characters for the command prefix listed with the CMDDEF command description. Update the CMDDEF command in the SMCPARMS data set with the new prefix value. The command is processed the next time the SMC is initialized.

SMC0081 Command prefix not added; [prefix is not unique|CPF system error]

Message Level: 0

Explanation: The command prefix was disallowed by the CPF facility because the prefix was not unique or a system error occurred.

System Action: Processing continues. The command is ignored.

User Response: If the prefix is not unique, compare the prefix with those of the other subsystems. The command prefix **cannot** include a command string, a command abbreviation, or any string that invokes a command. The command prefix **cannot** include a string that is a subset or superset of an existing prefix beginning with the same character.

SMC0082 Command prefix already set

Message Level: 0

Explanation: The command prefix can be specified only once while the SMC is initializing and cannot be changed during execution.

System Action: Processing continues. The command is ignored.

User Response: To change the command prefix, update the CMDDEF statement in the SMCPARMS data set and recycle the SMC.

SMC0084 *MMM DD YYYY HH:MM:SS SSSS active on hostid HHHH*

Message Level: 4

Explanation: The date (*MMM DD YYYY*), time (*HH:MM:SS*), subsystem name (*SSSS*) and MSP hostid (*HHHH*) are displayed once a day at midnight and during SMC initialization.

System Action: None.

User Response: None.

SMC0085 SMCBPREI: IEFSSI failed RC=XX RS=XXXX

Message Level: 0

Explanation: The SMC subsystem pre-initialization routine (SMCBPREI) encountered an error.

System Action:

- If the Return Code (RC) is 4 or less, the SMC subsystem was defined.
- If the Return Code (RC) is 8 or higher, the SMC subsystem was not defined.

User Response: Investigate the Return Code (RC) and Reason (RS) and take the necessary action. The return code and reason are documented in the Fujitsu manual *Task Management Macro Instructions Reference Manual*.

SMC0086

SMC SUBSYSTEM TASKS:

| A(PCE) | A(TCB) | USE | CT-S | PROGRAM | JOBNAME | JOBID | LAST |
|----------|----------|-------|------|---------|----------|-------|--------|
| XXXXXXXX | XXXXXXXX | 00001 | BB-W | SMCBINT | JJJJJJJJ | Jnnnn | TTTTTT |
| XXXXXXXX | XXXXXXXX | 00001 | BM-W | SMCBMID | JJJJJJJJ | Jnnnn | TTTTTT |
| XXXXXXXX | XXXXXXXX | 00001 | QM-W | SMCQMGR | JJJJJJJJ | Jnnnn | TTTTTT |
| XXXXXXXX | XXXXXXXX | 00001 | J | | | | |
| XXXXXXXX | XXXXXXXX | 00001 | O -W | SMCOCMD | JJJJJJJJ | Jnnnn | TTTTTT |
| XXXXXXXX | XXXXXXXX | 00001 | BL-W | SMCBLOG | JJJJJJJJ | Jnnnn | TTTTTT |
| XXXXXXXX | XXXXXXXX | 00001 | QW-X | SMCQWRK | JJJJJJJJ | Jnnnn | TTTTTT |
| | | | | | | | |
| XXXXXXXX | XXXXXXXX | nnnnn | QW-X | SMCQWRK | JJJJJJJJ | Jnnnn | TTTTTT |

SMCQWRK executing tasks=nn waiting tasks=nn requests=nn

Message Level: 0

Explanation: An SMC LIST TASK command was issued. The SMC0086 multiline message lists status of each SMC subsystem task. The last line lists the number of SMCQWRK tasks currently executing, waiting for work, as well as the total number of requests processed.

System Action: None.**User Response:** None.**SMC0087**

EXTVOLESOT esoteric EEEEEEE not found [at line nnnn of
SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: An ALLOCDEF command was issued with the EXTVOLESOT keyword specifying EEEEEEE. However, the specified *esoteric-name* is not a valid MSP esoteric.

System Action: The specified ALLOCDEF command is not processed.**User Response:** Reissue the ALLOCDEF command specifying a valid MSP esoteric name.**SMC0088**

Unable to [acquire/release] resource CCCCCCCC; attempt by JJJJJJJJ
XXXXXXXXX1 owned by XXXXXXXX2

Message Level: 0

Explanation: A shared SMC resource could not be acquired or freed successfully. Job JJJJJJJJ is the task currently attempting to acquire or free the resource, but cannot because another task holds the resource.

System Action: Jobname JJJJJJJJ may not be processed correctly.**User Response:** Contact Storage Technology technical support.

SMC0089 Unable to start subtask CCCCCCCC

Message Level: 0

Explanation: During initialization, the indicated SMC subsystem task could not be successfully attached.

System Action: The SMC subsystem terminates.

User Response: Look for related MSP or SMC messages in the SYSLOG or SMC job log.

SMC0090 Unable to restart subtask CCCCCCCC

Message Level: 0

Explanation: During subsystem processing the indicated SMC subsystem task abended and could not be restarted.

System Action: Processing continues. However, subsystem processing or command facilities may be affected.

User Response: Stop and restart the SMC subsystem. If the indicated subtask is SMCOCMD, use the MSP CANCEL command to terminate the subsystem.

SMC0091 Could not allocate job JJJJJJJJ step SSSSSSSS after applying all exclusion levels; backing up until allocatable

Message Level: 8

Explanation: The indicated job step would not allocate when all exclusion criteria were applied to all DDs in the step. This means that the remaining set of drives is insufficient for each DD to be assigned a unique drive.

System Action: The SMC backs out exclusion criteria on selected DDs in the step until the set of remaining drives is sufficient to allocate to all DDs in the step.

User Response: None.

SMC0093 TCPIP TCPNAME=CCCCCCCC ADSNAME=CCCCCCCC

Message Level: 0

Explanation: A TCPIP LIST command was issued. The current values of the TCPNAME and ADSNAME are displayed. If the SMC is using the default settings, "default" is displayed.

System Action: None.

User Response: None.

SMC0094 MOUNTDEF SETTINGS:
CCCC....CCCC

Message Level: 0

Explanation: A MOUNTDEF command has been issued with the LIST keyword. The SMC0094 multiline message lists the current settings for the SMC subsystem. Refer to the MOUNTDEF command for a description of keywords and their meanings.

System Action: None.

User Response: None.

SMC0095 UX01 function code UX01RPLY not supported

Message Level: 4

Explanation: The function code return of UX01RPLY (reply to a WTOR message) is not supported by SMC.

System Action: None. The user exit is ignored.

User Response: None.

SMC0096 Invalid UX01 function code X'XX'

Message Level: 4

Explanation: A user exit 01 returned an invalid function code of X'XX'.

System Action: All data returned by this invocation of UX01 is ignored.

User Response: Correct the UX01 to return only function codes documented in the *NCS User Exit Guide*.

SMC0097 UX01 function code X'XX' not valid for message MMMMMMMM

Message Level: 4

Explanation: The SMC detected that the action code returned for a message (mount, dismount, or swap) did not match the action for an SMC default message.

System Action: All data returned by this invocation of UX01 is ignored.

User Response: Correct the UX01 to return a function code compatible with the message.

SMC0098 UX01 drive *XXXX1* does not match message drive *XXXX2*, using UX01 drive

Message Level: 4

Explanation: The device address returned from UX01 does not match the address specified in the message.

System Action: The device address returned from UX01 is used in the message processing.

User Response: Ensure that UX01 is functioning as desired.

SMC0099 Drive *XXXX* not a library drive

Message Level: 4

Explanation: A user exit 01 returned a drive *XXXX*, which is not a library or virtual drive.

System Action: All data returned by this invocation of UX01 is ignored.

User Response: Ensure that UX01 is functioning as desired.

SMC0100 Invalid UX01 drive *XXXX*

Message Level: 4

Explanation: A user exit 01 returned an invalid drive address of *XXXX* which is not defined as a valid tape device on this system.

System Action: All data returned by this invocation of UX01 is ignored.

User Response: Correct the UX01.

SMC0101 Invalid UX01 or TAPEREQ subpool *SSSSSSSSSSSSSS* from LIBRARY *LLLLLLLLL* for job *JJJJJJJJ*

Message Level: 4

Explanation: A user exit 01 or TAPEREQ specified an invalid subpool name.

System Action: The default subpool 0 is used.

User Response: Correct the UX01 or TAPEREQ to specify a valid subpool.

SMC0102 Invalid UX01 volser VVVVVV

Message Level: 4

Explanation: A user exit 01 returned a volume serial containing invalid characters.

System Action: The volume serial returned by this invocation of UX01 is ignored.

User Response: Correct the UX01 to return a valid volume serial.

SMC0103 Unrecoverable mount error on device XXXX volser VVVVVV for JOB
JJJJJJJJ

Message Level: 0

Explanation: The SMC detected a volume mount error in response to an IAT5310 message for a mount requested in message IAT5210.

System Action: The SMC breaks the mount loop and issues a dismount to the indicated device XXXX. The job remains in the MDS VERIFY queue.

User Response: Refer to the IAT5310 message for the cause of the mount error and take corrective action.

SMC0104 Default recording technique set for device XXXX

Message Level: 0

Explanation: During initialization of the SMC drive table, a device with an unrecognized recording technique was detected.

System Action: A recording technique is defaulted based on the UCB device type. Processing continues.

User Response: Verify that any maintenance for new device types has been applied to all NCS products, including SMC.

SMC0105 KEYWORD KKKKKKKK of the CCCCCCCC command is required

Message Level: 0

Explanation: The command CCCCCCCC was issued without the required keyword KKKKKKKK.

System Action: The command is not processed.

User Response: Re-issue the command with the required keyword.

SMC0106 Mount of HSC volser VVVVVV in LIBRARY LLLLLLLL on device XXXX not in library

Message Level: 0

Explanation: An SMC MOUNTDEF VOLWATCH option is ON. The SMC has detected that a volume resident in library LLLLLLLL is being requested to be mounted on a drive outside all libraries.

System Action: None.

User Response: Cancel the job requesting the mount, or eject the volume to satisfy the mount request.

SMC0107 Swap VVVVVV from XXXX1 to XXXX2

Message Level: 4

Explanation: The SMC has intercepted DDR swap processing. XXXX2 is either the original device selected to swap to or a device selected by SMC that more closely matches the device characteristics of XXXX1.

System Action: DDR swap processing continues.

User Response: None.

SMC0108 No compatible drive found for SWAP processing

Message Level: 0

Explanation: The SMC has intercepted DDR swap processing. The original device chosen to swap to is not compatible with the swap from device and the SMC could not locate a compatible alternate device.

System Action: DDR swap processing continues.

User Response: If no compatible device is available, reply NO to message KHE201D or KHE206D to stop the swap process. If a compatible device is offline, vary it online and reply with its device number to message KHE201D or KHE206D.

- SMC0109** The SMC subsystem is running in key *n*; results are unpredictable; reply 'Y' to continue or 'N' to terminate
- Message Level:** 0
- Explanation:** During initialization SMC detected that it is running in key *n*, not 1 through 7.
- System Action:** The SMC waits until a reply is received.
- User Response:** A reply of N stops SMC. A reply of Y causes SMC to continue initialization, though results are unpredictable. Possible problems are S0C1 and S0C4 ABENDs. To prevent this message, update the Program Properties Table (PPT) with "PPT PGMNAME(SMCBINT),SYST,KEY(*n*)", where *n* is between 1 and 7, inclusive.
- SMC0110** Allow swap of VVVVVV from XXXX1 to XXXX2; Reply 'Y', 'N' or DEVICE
- Message Level:** 0
- Explanation:** The SMC has intercepted DDR swap processing. The SMC is awaiting operator approval to allow the swap.
- System Action:** The SMC continues processing; however, the swap cannot complete until an operator reply is entered.
- User Response:** To allow the swap to proceed using the selected device XXXX2, reply Y. To select a different swap to device, reply with its device address. The SMC does not validate a new device address. To cancel the swap, reply N. If an I/O error on device XXXX1 caused the swap, a reply of N causes the job to fail.
- SMC0111** USER defined message ID: MMMMMMMM
- Message Level:** 0
- Explanation:** The SMC has listed the messages that were added using the USERMsg command.
- System Action:** Both SMC default and USERMsg added messages are sent to user exit 01 for each library subsystem. SMC processes USERMsg added messages according to the response from user exit 01.
- User Response:** None.

SMC0112 Cannot add duplicate message ID *MMMMMMMM* at line *nnnn* of
SMCPARMS

Message Level: 0

Explanation: The USERMsg command was issued to add a new message ID that SMC will intercept. The supplied message ID *MMMMMMMM* is a duplicate of a message already defined to SMC.

System Action: The message is not added.

User Response: None.

SMC0113

```

SERVER=SSSSSSSS CCCCCCCC
Status={active|never active|inactive|disabled}
Messages=nnnn
Retries=nnnn
Init errors=nnnn
Errors=nnnn

```

Message Level: 0

Explanation: A SERVER command has been issued with the LIST keyword. The SMC0113 multiline message lists the server settings and status for each SERVER defined to the SMC subsystem. Refer to the SERVER command for parameter descriptions.

- **STATUS** indicates the status of the server.
 - **active** indicates that this server is the current path through which the specified library will be accessed.
 - **never active** indicates that communication was never attempted on this path, or was attempted but never succeeded.
 - **inactive** indicates that another server path is active, or that the last communication attempt on this path failed.
 - **disabled** indicates that the SERVER has been disabled by a discovered incompatibility, by reaching the FAIL limit, or by an operator command.
- **Messages** indicates the number of logical messages (volume lookup requests, mounts, dismounts) on this server path.
- **Retries** indicates how many message retries have been attempted.
- **Init errors** indicates the current count of number of errors for an inactive server.
- **Errors** indicates the total number of errors on this server.

System Action: None.

User Response: None.

SMC0116 Cannot find LIBRARY LLLLLLLL for SERVER SSSSSSSS [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: A SERVER command was issued with a LIBRARY name that was not previously defined.

System Action: The SERVER is not added or updated.

User Response: Specify a LIBRARY command to define the library, then specify the SERVER command.

SMC0117 Cannot change LIBRARY name for existing SERVER SSSSSSSS [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: A SERVER command was issued with the NAME of an existing SERVER and a LIBRARY name, but the LIBRARY name of the existing server did not match the library name in the new command.

System Action: The command is rejected.

User Response: Omit the library name, change the library name to match the existing server, or change the SERVER name to add a new server to the specified library.

SMC0118 No LOCSUBSYS for [LOCENABLE|LOCDISABLE] parameter on LIBRARY command [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: A LIBRARY command was issued with a LOCENABLE or LOCDISABLE parameter, but the library was not defined with a LOCSUBSYS subsystem name.

System Action: This message is a warning. The LIBRARY will be added or modified, but the LOCENABLE or LOCDISABLE parameter is ignored.

User Response: None.

SMC0119 [SERVER|LOCSUBSYS] CCCCCCCC now disabled

Message Level: 0

Explanation: The SMC detected TCP/IP errors in excess of the FAIL count or detected a fatal error for a local subsystem. See the preceding SMC0128/SMC0129 messages for the reason for the disable.

System Action: None. If there are no additional server paths defined for the associated library, the library hardware is no longer accessible from this host.

User Response: Correct the problem with the TCP/IP network, SMC server, host operating system, or the HSC subsystem, and re-ENABLE the SERVER or LOCSUBsys.

SMC0120 NAME must be specified to add or modify a SERVER [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: The user entered a SERVER command to add a new SERVER or modify an existing SERVER path, but the SERVER path NAME was not specified.

System Action: None.

User Response: Enter the SERVER command specifying the SERVER path NAME.

SMC0121 UEXIT *nn* is now [ENABLED/DISABLED]

Message Level: 0

Explanation: The user entered a UEXIT *nn* ENABLE or DISABLE command, or the SMC detected an abend in the specified user exit. The specified user exit is now ENABLED or DISABLED.

System Action: None.

User Response: If the SMC automatically disabled the user exit due to an abend, the exit cannot be re-enabled unless it is also reloaded.

SMC0122 UEXIT=*nn*
STATUS={ACTIVE|DISABLED|ABENDED}
CCCC...CCCC
SEQUENCE=*nn*
LOADED=YYYY-MM-DD HH:MM:SS
CHANGED=YYYY-MM-DD HH:MM:SS

Message Level: 0

Explanation: A UEXIT command was issued with the LIST keyword. The SMC0122 multiline message lists the user exit status for each user exit defined to the SMC subsystem. REfer to the UEXIT command for parameter descriptions.

- *nn* indicates the SMC user exit number (type).
- **STATUS** indicates the user exit status.
 - ACTIVE indicates that the exit is loaded and active.
 - DISABLED indicates that the exit is loaded but was de-activated by the UEXIT DISABLE keyword.
 - ABENDED indicates the user exit abended. A new version must be loaded for this exit to be re-activated.
- **SEQUENCE** indicates how many loads have been performed for this user exit.
- **LOADED** indicates when this version of the module was loaded.
- **CHANGED** indicates when this version of the module was activated or disabled.

System Action: None.

User Response: None.

SMC0123 Drive range mismatch between CLIENT XXXX1-XXXX2 and SERVER
XXXX3-XXXX4

Message Level: 0

Explanation: A DRIVemap command was issued. One of the specified CLient range did not match the format of the corresponding Server range.

System Action: None.

User Response: Reissue the command, ensuring that the CLIENT parameter and the SERVER parameter have corresponding formats and number of drives.

SMC0124 ABENDED or INACTIVE UEXIT *nn* must be reloaded to ENABLE [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: A UEXIT *nn* ENABLE command was issued for a user exit that had previously abended, or inactivated itself via a return code.

System Action: None.

User Response: Use the UEXit command with the LOAD keyword to reload the exit.

SMC0125 UEXIT *nn* already [ENABLED/DISABLED][at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: A UEXIT *nn* ENABLE or DISABLE command was issued but the exit was already in the specified state.

System Action: None.

User Response: Verify the exit number you are trying to alter.

SMC0126 UEXIT *nn* not valid [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: A UEXIT command was issued for a user exit number not valid for this configuration.

System Action: None.

User Response: Verify the user exit number for your configuration.

SMC0127 Cannot resolve HOST name *HHHHHHHH* [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: A SERVER command was issued using the HOST keyword specification. However, the SMC could not resolve the IP address using the specified HOST *name*.

System Action: The SERVER command is ignored.

User Response: Enter the correct HOST name or use the IPADDRESS keyword instead.

SMC0128 Library error:
 Job=JJJJJJJJ transaction=TTTT LIBRARY=LLLLLLLLL {SERVER=SSSSSSSS}
 {Interface error: CCC...CCC|
 Fatal comm error: CCC...CCC|
 Comm error *nnn* {of *nnn*}: CCC...CCC |
 Comm error limit (*nnn*) exceeded: CCC....CCC |
 Initialization error *nnn*:CCC...CCC}
 {Response from HTTP server follows: RRR...RRR}

Message Level: 4

Explanation: The SMC encountered an interface or communication error attempting to communicate with a library subsystem or server. The SMC0128 multiline message first lists the jobname, transaction type, and libraryname associated with the error.

If the communication error was produced for a local library subsystem using cross memory services on this same host (i.e., not using a server) then the next line will list the interface error.

If the communication error was produced for a remote HTTP server or its associated remote HSC library subsystem using TCP/IP, then one of the message reason lines will be displayed.

Examples of the reason strings include:

- Specific TCP/IP function errors (connect, send, recv, etc.)
- Data error (incomplete or invalid data response)
- Subsystem inactive, not found, or at an incompatible release level
- Subsystem function error
- HTTP server not authorized
- HSC ASCOMM error
- Interface or communication timeout



Note: Certain remote errors may result in a display of the entire HTTP server response as follows:

```
Response from HTTP server follows:
HTTP 1.0 401 Unauthorized
```

If the message indicates “Comm error limit (*nnn*) exceeded” then the SMC0128 message will be followed by an SMC0119 message and the SERVER path will be disabled by the SMC.

If the message indicates an “Initialization error” then the error occurred before any successful communication to the named SERVER path. Such errors are not counted against the cumulative error count on the server path, and will not result in the named SERVER being automatically disabled by the SMC.

Also, “Initialization error” messages will not be generated for every request, but will only be generated at 5 minute intervals until the path is successfully activated.

System Action: The allocation or mount event may not be processed by the SMC.

User Response: Use the specified error reason to determine the cause of the problem. If the error was produced for a remote server, verify that the HTTP server is active.

SMC0129 {ERROR|WARNING}: No cartridge transport(s) for *XXXX1*- [*XXXX2*] for {UNITATTR|DRIVEMAP} {ADDRESS|CLIENT}

Message Level: 0

Explanation: A UNITATTR or DRIVEMAP command was issued specifying a device *XXXX1* or range *XXXX1*-*XXXX2*. None of the specified devices is a cartridge transport device.

System Action:

- If the message indicates an ERROR, the command is not processed.
- If the message indicates a WARNING, the SMC stores the value and may use it to translate addresses for non-MSP-defined RTD devices.

User Response: Review the devices specified in the command and re-issue the command if they are incorrect.

SMC0130 LIBRARY *LLLLLLLLL1* has same LOCSUBSYS *SSSS* as LIBRARY *LLLLLLLLL2* [at line *nnnn* of SMCCMDS|SMCPARMS]

Message Level: 0

Explanation: A LIBRARY command was issued with a different library name *LLLLLLLLL1* but the same LOCSUBSYS name as an existing library *LLLLLLLLL2*.

System Action: The LIBRARY command is not executed.

User Response: Correct the error and resubmit the command.

SMC0131 Cannot use [LIBRARY|SUBSYSTEM]=CCCCCCCC returned from user exit;
{not active or disabled|not in initial EDL}

Message Level: 4

Explanation: A user exit returned a library or subsystem name, but the specified name was invalid, or the referenced library had no defined drives in the Eligible Device List from the JCL.

System Action: The library or subsystem name returned from the user exit is ignored. Other data from the exit, such as subpool, is honored.

User Response: Verify that the specified SUBSYSTEM or LIBRARY is active, or correct the exit to specify a valid SUBSYSTEM or LIBRARY name.

SMC0132 Mount retry limit exceeded for volser=VVVVVV device=XXXX from
LIBRARY=LLLLLLLL SERVER=SSSSSSSS

Message Level: 4

Explanation: When SMC mount or mount TAPEREQ retrieval processing determines that an MSP mount is still pending and should be retried, it waits before attempting the retry. After the mount or mount policy retrieval retry limit is reached, the SMC0132 message is displayed.

System Action: The SMC will not continue to process the mount request after this message is issued.

User Response: Investigate the cause of the HSC mount problem. After resolving the problem, issue the SMC RESYNChronize REStart command or the HSC MOUNT command if necessary.

SMC0133

```

LIBRARY=LLLLLLLL
Library status={disabled|active|inactive|never active}
Requests=nnnn
CCCC....CCCC
[SERVER=SSSSSSSS
Server status={disabled|active|inactive|never active}]

```

Message Level: 0

Explanation: A LIBRARY command was issued with the LIST keyword. The SMC0133 multiline message lists the library status for each library defined to the SMC subsystem. Refer to the LIBRARY command for parameter descriptions. Optionally, if the SERVER keyword was specified, the server status for all servers associated with this library is also displayed.

Library status indicates the status of the library.

- **disabled** indicates that the LIBRARY has been disabled by an operator command.
- **active** indicates that the last communication to this library was successful.
- **inactive** indicates that a communication path to this LIBRARY is no longer active, although one was previously active.
- **never active** indicates that a communication path to this LIBRARY was never successfully established.

Requests indicates the total number of requests (configuration, volume lookup, mount, dismount, and swap) that were directed to the specified LIBRARY.

If the SERVER keyword was specified, then each server path defined for this library will also be displayed, along with its status.

System Action: None.

User Response: None.

SMC0134

No UNITATTR specified for device XXXX

Message Level: 0

Explanation: A UNITATTR command was issued specifying device XXXX and also specifying either the LIST parameter or the OFF parameter. No UNITATTR was associated with the device.

System Action: The UNITATTR command does not process this device.

User Response: None.

SMC0135 {Mount/dismount message|Client response WTOR message|WTOR message issued by server} from LIBRARY=LLLLLLLL SERVER=SSSSSSSS

SMC0136 *HSC mount or dismount message*

Message Level: 4

Explanation: The WTORDEST(CLIENT) or ECHOMNTERR(ON) option is in effect. A mount or dismount was performed on an HSC library but did not complete successfully. The SMC0135 message indicates the LIBRARY name and SERVER name where the mount or dismount was requested. The SMC0136 merely echoes the HSC server mount or dismount message on the SMC client.

System Action: None.

User Response: Correct the problem indicated in the HSC mount or dismount message.



Note: Messages SMC0135 and SMC0136 are issued for all mount errors if the message level is 12 or greater, regardless of the WTORDEST or ECHOMNTERR setting, and for all HSC mount and dismount messages if the message level is 16 or greater.

SMC0137 *HSC mount or dismount WTOR message*

Message Level: 4

Explanation: A mount or dismount was performed on an HSC library with the LIBRARY WTORDEST(CLIENT) set. HSC issued a WTOR that is to be handled by the client. The SMC0135 message indicates the LIBRARY name and SERVER name where the mount or dismount was requested.

System Action: The SMC redrives the mount or dismount to the server, transmitting the specified message response.

User Response: See the *HSC Messages and Codes Guide* for the corresponding HSC message, and respond as directed.



Note: The MSGDef command SMCWtorpfx parameter can be used to suppress the SMC0137 portion of the message.

SMC0138 XML {input|output} parse error RC=*nnn*; transaction=*TTTTTTTT*
LIBRARY=*LLLLLLLL*

Message Level: 0

Explanation: The SMC encountered an XML parse error. Input XML errors are produced when the input XML transaction cannot be parsed. Output XML errors occur when transaction response data cannot be converted to XML. The transaction type and library-name are also displayed.

System Action: Depending upon the type of error, and server characteristics, the allocation or mount event may not be processed by the SMC.

User Response: Contact Sun Microsystems support.

SMC0139 UNITATTR for device *DDDD* is model *MMMMMMMM*

Message Level: 0

Explanation: A UNITATTR command was issued specifying device *DDDD* and the LIST parameter. The model associated with device *DDDD* is model *MMMMMMMM*.

System Action: None.

User Response: None.

nnnnnnnn SMC0140 DFSMS message

Message Level: 0

Explanation: The DFSMS ACS routine has issued the DFSMS message. *nnnnnnnn* will be the JCL statement number or the DDNAME if it is a dynamic allocation.

System Action: None.

User Response: None.

nnnnnnnn SMC0141 UNIT=value VVVVVVVV1 replaced by VVVVVVVV2

Message Level: 0

Explanation: The DFSMS ACS routines has changed the esoteric.

- *nnnnnnnn* is the JCL statement number or the DDNAME if it is a dynamic allocation.
- *VVVVVVVV1* is the esoteric that was in the JCL. If a UNIT parameter was not used in the JCL, this will be NULL-UNIT.
- *VVVVVVVV2* is the esoteric that was supplied by the DFSMS ACS routines.

System Action: Use the new esoteric supplied by the DFSMS ACS routines for the allocation.

User Response: None.

SMC0142 Invalid reply to prior message from LIBRARY=LLLLLLLL
SERVER=SSSSSSSS

Message Level: 0

Explanation: The WTORDEST(CLIENT) option was specified for LIBRARY *LLLLLLLL*, and SMC has communicated a mount or dismount request to HSC via server *SSSSSSSS*. When SMC attempted to redrive the request, HSC returned an indication that the response was invalid.

System Action: SMC redisplay the HSC message.

User Response: Refer to the *HSC Messages and Codes Guide* for the valid responses for the indicated message.

SMC0143 Response {timeout|wait cancelled by SMC STOP} for job=JJJJJJJJ
volser=VVVVVVVV device=XXXX from LIBRARY=LLLLLLLL SERVER=SSSSSSSS

Message Level: 0

Explanation: SMC has communicated a request to LIBRARY *LLLLLLLL* via SERVER *SSSSSSSS*. Either the response timed out, or the SMC subsystem received an MSP STOP command.

System Action: None.

User Response: Check the network and server subsystem for problems. If the mount was not performed, issue a manual mount command to the HSC.

SMC0144 Mount of volser=VVVVVV on device=XXXX; drive is in use; reply 'C' to cancel mount or 'R' to retry

Message Level: 0

Explanation: SMC has communicated a mount or dismount request to HSC. HSC has responded with a message indicating that the drive is in use.

System Action: If the mount is still outstanding, the SMC automatically redrives the mount every 30 seconds. The message is DOMed if the mount is no longer pending, or the drive becomes available.

User Response: Wait for the drive to become available, or reply 'C' to cancel the request, or 'R' to retry immediately.

SMC0145 Mount of volser=VVVVVV on device=XXXX; volume is in use; reply 'C' to cancel mount or 'R' to retry

Message Level: 0

Explanation: SMC has communicated a mount or dismount request to HSC. HSC has responded with a message indicating that the drive is in use.

System Action: The SMC verifies that the mount is still outstanding. If the mount is still outstanding, the SMC automatically redrives the mount every 30 seconds. The message is DOMed if the mount is no longer pending, or the volume becomes available.

User Response: Wait for the volume to become available, or reply 'C' to cancel the request, or 'R' to retry immediately.

SMC0146 All devices marked ineligible for job JJJJJJJJ step SSSSSSSS due to volume lookup failure

Message Level: 4

Explanation: When SMC allocation attempted to acquire volume information, a communication failure with the library server occurred. The ALLOCDEF option FAILNOINFO was specified.

System Action: The SMC marks all devices as ineligible for allocation. The job is failed by MSP or express-canceled by JES.

User Response: Investigate the cause of the communication failure and resubmit the job.

SMC0147 *PPPPPPPP1* is incompatible with *PPPPPPPP2* on the TAPEREQ command line
nnnn of TREQDEF DSN

Message Level: 0

Explanation: An incompatibility exists between *PPPPPPPP1* and *PPPPPPPP2* at line
nnnn in the data set specified on the TREQDEF command.

System Action: The SMC continues to process the TAPEREQ statements, flagging
additional errors.

User Response: Correct the errors and re-issue the TREQDEF command.

SMC0149 TREQDEF specifications not installed, reason code *nn*

Message Level: 0

Explanation: The TAPEREQ statements in the data set specified on the TREQDEF
command were not installed.

08 - Syntax error on a TAPEREQ statement
12 - The TAPEREQ structure has not been initialized

System Action: None.

User Response: Correct the errors and re-issue the TREQDEF command.

SMC0150 TREQDEF specifications installed from *DDDDDDDD*

Message Level: 0

Explanation: The TAPEREQ statements in the data set specified on the TREQDEF
command were successfully installed.

System Action: None.

User Response: None.

SMC0151 TREQDEF status:
Loaded from *DDDDDDDD*
Title: *TTTTTTTT*
Loaded on *YYYY-MM-DD* at *HH:MM:SS*

Message Level: 0

Explanation: The TAPEREQ command was issued with the LIST keyword. The current
TAPEREQ statements were loaded from data set *DDDDDDDD*. The title *TTTTTTTT* is
displayed if one was specified in the OPTION statement.

System Action: None.

User Response: None.

SMC0152 TREQDEF DSN command has not been previously issued

Message Level: 0

Explanation: The TAPEREQ LIST or RELOAD commands have been specified without a prior TREQDEF DSN command.

System Action: None.

User Response: Issue a TREQDEF command with the DSN keyword prior to issuing the TREQDEF with the LIST or RELOAD keyword.

SMC0153 Dynamic allocation failed for *DDDDDDDD*

Message Level: 0

Explanation: Data set name *DDDDDDDD*, specified in a READ command, could not be allocated by the SMC.

System Action: The command is not processed.

User Response: Review the specified data set name to ensure that it is a cataloged MSP data set, and re-issue the command.

SMC0154 UNITATTR model *MMMMMMMM* ignored for library device *XXXX*

Message Level: 0

Explanation: A UNITATTR command has been issued specifying device *XXXX*. The device is defined to a library subsystem known to SMC. The SMC obtains the device model from the library subsystem.

System Action: The UNITATTR command does not process the device.

User Response: None.

SMC0155 LOG settings:
CCCC....CCCC
 Logging currently {INACTIVE|ACTIVE}

Message Level: 0

Explanation: A LOG command was issued with the LIST keyword. The SMC0155 multiline message lists the current settings and status for the SMC subsystem. Refer to the LOG command for parameter descriptions.

In addition, a log status of ACTIVE indicates that logging has been started; INACTIVE indicates that logging has not been started, or has been stopped at EOF.

System Action: None.

User Response: None.

SMC0156 SMCLOG file is not currently opened

Message Level: 0

Explanation: A LOG command has been issued with the STOP keyword. However logging is not currently active.

System Action: The LOG command is ignored.

User Response: None.

SMC0157 SMCLOG file is already opened

Message Level: 0

Explanation: A LOG command has been issued with the START keyword. However, the logging is already active.

System Action: The LOG command is ignored.

User Response: None.

SMC0158 No SMCLOG DD; logging cannot be started

Message Level: 0

Explanation: A LOG command has been issued with the START keyword. However, there was no SMCLOG DD in the SMC subsystem startup JCL.

System Action: The LOG command is ignored.

User Response: Add an SMCLOG DD to the SMC subsystem startup JCL, then restart the SMC subsystem.

SMC0159 Logging {started|stopped}

Message Level: 0

Explanation: A LOG command has been issued with the START or STOP keyword.

System Action: SMC logging is started or stopped.

User Response: None.

SMC0160 Invalid or overlapping range *XXXX1-XXXX2* for keyword ADDRESS of the UNITATTR command

Message Level: 0

Explanation: A UNITATTR command has been issued specifying a device range *XXXX1-XXXX2*, where *XXXX1* is larger than *XXXX2*.

System Action: The UNITATTR command does not process this device range.

User Response: Reissue the command specifying a valid range.

SMC0161 Restoring all default settings for the *CCC...CCC* command

Message Level: 0

Explanation: The *CCC...CCC* command has been issued with the OFF parameter. All SMC values have been restored for the SMC subsystem.

System Action: None.

User Response: None.

SMC0162 *CCC...CCC* object successfully {added|updated|deleted}

Message Level: 0

Explanation: The *CCC...CCC* command has been successfully processed.

System Action: None.

User Response: None.

SMC0163 DRIVEMAP settings:
CLIENT=*XXXX1*{-*XXXX2*} SERVER=*XXXX3*{-*XXXX4*}

Message Level: 0

Explanation: A DRIVEMAP command has been issued with the LIST keyword. The SMC0163 multiline message lists the currently active DRIVEMAPs. One line is produced for each CLIENT/SERVER range.

System Action: None.

User Response: None.

SMC0164 CLIENT range *XXXX1*{-*XXXX2*} not found for the OFF parameter of the DRIVEMAP command

Message Level: 0

Explanation: The DRIVEMAP command has been issued with the OFF parameter and CLIENT parameter. No matching DRIVEMAP range matching the CLIENT parameter was found.

System Action: None.

User Response: None.

SMC0165 Keyword {CLIENT/SERVER} range *XXXX1*{-*XXXX2*} overlaps with previous DRIVEMAP entry

Message Level: 0

Explanation: A DRIVEMAP command was issued containing a CLIENT or SERVER range that overlaps a range specified on a previously issued DRIVEMAP command.

System Action: The DRIVEMAP command is not processed.

User Response: Issue the DRIVEMAP LIST command to view the list of currently active DRIVEMAP ranges. Correct the DRIVEMAP command to specify a new range. Or, use the DRIVEMAP CLIENT(*XXXX1*-*XXXX2*) OFF command to de-activate the existing overlapping range and re-specify the command with unique ranges.

SMC0166 Excessive READ depth at line *nn* of DSN *DDDDDDDD*

Message Level: 0

Explanation: A READ command was issued from a file. However, too many command files are already open, and the read command depth has been exceeded. Read command depth is defined as the number of files that can be open simultaneously due to imbedded Read commands.

System Action: The READ command is not processed.

User Response: Restructure your command files to reduce the READ command depth.

SMC0167 {LIBRARY|RESYNCH} summary:
 LIBRARY LLLLLLLL is {disabled|inactive|active on {LOCAL SUBSYS
 SSSS|REMOTE SERVER SSSSSSSS}}

All LIBRARY(s) active
 %i of %i LIBRARY(s) active
 WARNING: All LIBRARY(s) inactive
 WARNING: No LIBRARY(s) defined
 WARNING: No LIBRARY(s) enabled

Message Level: 0

Explanation: A RESYNCH or LIBRARY STATUS command was issued. Each LIBRARY will be represented by a line in the multiline WTO displaying its status.

System Action: None.

User Response: None.

SMC0168 WARNING: No TREQDEF command processed

Message Level: 4

Explanation: No TREQDEF command was found in the SMCPARMS or SMCCMDS file at startup.

System Action: TAPEREQ processing is not performed for allocation or mount requests.

User Response: If your installation previously specified TREQDEF in HSC, issue the TREQDEF command to SMC and add the TREQDEF command to the SMCCMDS (or SMCPARMS) file.

SMC0169 WARNING: {SMCCMDS|SMCPARMS} processing TIMEOUT; startup continuing

Message Level: 4

Explanation: During SMC subsystem startup, startup command processing could not complete the indicated command file.

System Action: The SMC continues startup processing, but not all startup commands may have been processed.

User Response: None.

SMC0170 {Request timeout|SMC subsystem terminating}; request to subsystem SSSS aborted

Message Level: 4

Explanation: The SMC issued a request to subsystem SSSS, but no response was received within the time limit, or the SMC subsystem was terminated.

System Action: The SMC continues processing without waiting for the HSC response. In addition, if a request timeout is indicated, the SMC SERVER path to the specified subsystem is disabled.

User Response: Check the status of the subsystem that is not responding to SMC, and correct the problem. After correcting the problem, enable the appropriate SERVER path.

SMC0171 Allocatability test matrix retries exceeded

Message Level: 0

Explanation: The SMC could not determine allocatability of the job step using its test matrix in the calculated number of retries.

System Action: Normally, processing continues, with SMC “backing out” exclusion conditions until the job step is allocatable.

User Response: If possible, rerun the job with allocation trace turned on. Save trace and log output and contact Sun Microsystems Software Support.

SMC0174 ASCOMM ACK timeout for job=JJJJJJJJ (DS=nnnn-nnnn)

Message Level: 0

Explanation: The SMC replied to a request from job JJJJJJJJ, but no acknowledgment was received within the time limit.

System Action: The SMC continues processing without waiting for the acknowledgment.

User Response: None.

SMC0175 Communication initialized on `LIBRARY=name {SERVER=name}`

Message Level: 8

Explanation: The SMC has successfully communicated with the specified LIBRARY for the first time. Additionally, if the communication path selected was a remote SERVER, then the SERVER is also displayed.

System Action: Processing continues.

User Response: None.



Note: This message is produced each time communication switches from one server to another, or communication is re-established after an error.

SMC0192 Specific volume lookup failure(s) during job `JJJJJJJJ`

Message Level: 4

Explanation: During execution of job `JJJJJJJJ`, the SMC could not complete a volume lookup request for one or more specific volumes.

System Action: The SMC continues processing the request using available policy information.

User Response: If other policy information is not sufficient to allocate the specific volume, investigate whether `FAILNOINFO(SPECIFIC)` should be specified.

SMC0193 Scratch volume lookup failure(s) during job `JJJJJJJJ`

Message Level: 8

Explanation: During execution of job `JJJJJJJJ`, the SMC could not complete a volume lookup request for one or more scratch volumes.

System Action: The SMC continues processing the request using available policy information.

User Response: If other policy information is not sufficient to allocate the scratch volume correctly, investigate whether `FAILNOINFO(ALL|ON)` should be specified.

SMC0226 Path switch from SERVER=SSSSSSSS to SSSSSSSS for LIBRARY=LLLLLLLLL

Message Level: 4

Explanation: The SMC automatically switched the communication path from the secondary server *SSSSSSSS* to primary server *SSSSSSSS* for library *LLLLLLLLL*.

System Action: Processing continues.

User Response: None.

SMC9999 *MMMMMMMM* Variable text

Message Level: 12, 16, 20, 24, 28

Explanation: SMC9999 messages are intended for Sun Microsystems Support problem determination and resolution. *MMMMMMMM* is the name of the issuing module.

System Action: None.

User Response: None. A message level (LVL) of 12 or higher should generally be specified only when directed by Sun Microsystems Support.

SMC Utility Message Listing

SMCU0008 SMCUDBX input parameter error

Explanation: An error was detected in the input PARM for the SMCUDBX utility. A detailed description of the error follows.

System Action: The utility processing terminates with a return code of 8.

User Response: Correct the indicated error and resubmit the job.

SMCU0009 Unable to load TMS interface routine {SLUDRCA1|SLUDRTLM|SLUDRRMM|SLUDRZAR}

Explanation: Explanation: Based on the input TMS parameter, the SMCUDBX utility attempted to load the corresponding tape management access routine, but the load failed.

System Action: The utility processing terminates with a return code of 8.

User Response: Ensure that a load library containing the appropriate SLUDR* routine for your tape management system is available to the SMCUDBX utility through a JOBLIB, STEPLIB, or MSP LINKLIST library.

SMCU0010 Error opening file DDNAME {DBTMS|DBEXTFIL|

Explanation: Explanation: The SMCUDBX program or tape management extract program was unable to open the tape management data base file or extract file.

System Action: System Action: The utility processing terminates with a return code of 8.

User Response: User Response: Correct the execution JCL to provide the required DD statement.

SMCU0011 Error processing ZARA interface for subsystem SSSS

Explanation: The user requested an extract from the ZARA tape management system with subsystem ID CCCC. A detailed description of the error follows the message.

System Action: The utility processing terminates with a return code of 8.

User Response: Correct the indicated error and resubmit the job.

SMCU0012 Unexpected return code XXXX from TMS interface

Explanation: An unexpected return code XXXX was received from the TMS extract routine.

System Action: The utility processing terminates with a return code of 8.

User Response: If user modifications have been made to the TMS extract routine, correct the routine. Otherwise, contact Sun Microsystems Software Support for assistance.

Chapter 10. Sun StorageTek HTTP Server Messages

Overview

This chapter provides information about Sun StorageTek HTTP server messages. See Chapter 2, “SMC and Sun StorageTek Library Management” for more information about the HTTP Server.

Message Format

Messages are displayed on the console in the following format:

SMCnnnn message-text

where:

- SMC identifies the Storage Management Component (SMC).
- *nnnn* is the four-character message number.
- *message-text* is the actual text displayed on the job log or system log.

Sun StorageTek HTTP Server Message Listing

The following HTTP Server messages are listed numerically.

| | |
|----------------|--|
| SKY001I | <i>name Server version starting on system running MSP level</i> Explanation: This is the HTTP server startup message |
| SKY002E | Error binding server socket - terminating Explanation: The server cannot bind to the specified network port. The server shuts down. |
| SKY003I | <i>name</i> ready to accept requests Explanation: The server name is ready for normal operation. |
| SKY004E | Error opening server socket - terminating Explanation: The server cannot open a socket connection to the required network port. The server shuts down. |
| SKY005E | Server select failed <i>rc=ret err=msg</i> Explanation: An error occurred while listening for a client connection. |
| SKY006I | TCP/IP connection terminated Explanation: The client connection was terminated. |
| SKY007E | Accept error - shutting down Explanation: There was an error in network connection accept processing. The server shuts down. |
| SKY008E | Error reading request Explanation: A network error occurred while reading a client request. |
| SKY013I | Shutdown command from operator acknowledged Explanation: The server has received a console command to shut down. |

SKY016I name Server *ver* started at *tttt*
 "requests received: *nnn*
 "tasks default: *dd* active: *aa* limit: *ll*

Explanation: Response to an operator display status command and indicates the server name, version, start date and the total number of requests received. It also details the worker task settings, the default number of idle tasks, the maximum limit of dynamically started tasks and the current number of active tasks.

SKY018I Request *n* task completed rc=*ret*

Explanation: The worker task *t* has completed with return code *ret*.

SKY023E Unknown server command: *cmd*

Explanation: The command *cmd* is not a valid console command.

SKY025E Invalid command option: *oooo*

Explanation: The option *oooo* is not a valid option for the operator command.

SKY026I Task: *t* Requests: *n* Client: *xxx.xxx.xxx.xxx* : *pppp*

Explanation: This message is issued in response to a display client console command. Task *t* has serviced *n* requests from the client at IP address *xxx.xxx.xxx.xxx* port *pppp*.

SKY027I No active client connections

Explanation: This message is issued in response to a display client console command, when there are no clients currently connected to the server.

SKY030E Missing to/from translation string

Explanation: The data set file name translation is incorrect.

SKY031I Connections total: *nn* max: *mm*/min

Explanation: This message is issued in response to a display client console command. There have been a total of *nn* connections at a maximum rate of *mm* per minute.

SKY031W Not APF authorized, some facilities not available

Explanation: The HTTP server is not APF authorized.

SKY032I Connection rates: *nn*/min *mm*/hour

Explanation: This message is issued in response to a display client console command. The connection rates are *nn* per minute and *mm* per hour.

SKY040I Option *nnnn* *ssss*

Explanation: The parameter option *nnnn* is set to *ssss*.

SKY043E Terminating execution due to parameter error(s)

Explanation: There was an error in one or more parameters. The server shuts down.

SKY045E SAF authentication requested but not APF authorized

Explanation: SAF authentication requires caller to be APF authorized, but server is not APF authorized. The server shuts down.

SKY046E Supplied *parm* is too long

Explanation: The length of the parameter string *parm* exceeds the allowed length.

SKY047E Unable to open *dsname*

Explanation: The HTTP server was unable to open the data set *dsname* in response to a client request.

SKY048E *abend_message_line*

Explanation: Message number for abend reporting messages.

SKY049E Not APF authorized, cannot continue

Explanation: The server is not APF authorized but APF authorization is required. The server shuts down.

SKY050E Task shutdown time expired, terminating tasks

Explanation: During HTTP server shutdown, some tasks did not stop before the shutdown timeout was exceeded. These tasks are forcibly terminated.

SKY051E Cannot find server module *name*

Explanation: When the HTTP server performed its startup checks, it could not find its module: *name*.

- SKY052E** Cannot find all server modules, shutting down
- Explanation:** The HTTP server could not find all of its modules when it performed its startup checks. The server shuts down.
- SKY053I** Current active worker tasks: *t*
- Explanation:** The current number of worker tasks for servicing requests.
- SKY053E** Fatal error in main task, commencing forced shutdown
- Explanation:** The server suffered a fatal error in its main task and was unable to perform an orderly shutdown.
- SKY054E** Fatal error in main task, attempting orderly shutdown
- Explanation:** The server suffered a fatal error in its main task and is attempting to perform an orderly shutdown.
- SKY055I** Forcibly terminating task *t*
- Explanation:** The task *t* is forcibly terminated.
- SKY056I** Disable abend handling option specified, handling disabled
- Explanation:** The HTTP server abend handlers will not be enabled so any abends can cause dumps and may also shut down the server.
- SKY059E** Error initializing translation tables
- Explanation:** An error occurred while initializing the server file name translation table.
- SKY060E** SERVERBASE not set, shutting down
- Explanation:** The required parameter SERVERBASE was not set in the parameter file. The server shuts down because it cannot locate its data files.
- SKY061I** Authentication request received from client at xxx.xxx.xxx.xxx :
pppp
- Explanation:** A request to authenticate was received from the client at network address xxx.xxx.xxx.xxx and port *pppp*.

- SKY100W** Unable to set socket *option* to *value*
Explanation: The named socket *option* could not be set. Processing continues.
- SKY101W** Unable to set socket option
Explanation: A socket option could not be set.
- SKY102E** Socket *option* error: *explanation*
Explanation: Indicates why a socket option could not be set.
- SKY103E** Cannot open parameter file *dsname*, terminating
Explanation: The HTTP server was unable to open the parameter file *dsname*. The server shuts down.
- SKY104E** Parameter *ppp* invalid
Explanation: The parameter *ppp* is not known.
- SKY105E** Unexpected character *c* encountered, skipping line
Explanation: When parsing the parameter file, an unexpected character was encountered. The parameter is skipped by moving to the next line.
- SKY106E** Expected number but non numeric: *ssss*
Explanation: When parsing the parameter file, a non numeric item was found when a number was expected.
- SKY107I** *parm* set to *vvv*
Explanation: The parameter *parm* is set to value *vvv*.
- SKY108E** Expected string: *ssss*, skipping
Explanation: When parsing the parameter file, the string *ssss* was expected but not found. Parsing skips to the next parameter.
- SKY109I** *pppp* set to *vvv*
Explanation: When reading the parameter file, the parameter *pppp* was set to value *vvv*.

| | |
|----------------|---|
| SKY110E | Unknown token type: <i>tttt</i> Explanation: The parameter token is unknown. |
| SKY112E | Cannot create <i>tbl</i> , terminating Explanation: During initialization, the memory table <i>tbl</i> could not be allocated. The server shuts down. |
| SKY113E | Cannot start task <i>tttt</i> , terminating Explanation: During initialization, the task <i>tttt</i> could not be started. The server shuts down. |
| SKY114I | Task <i>tttt</i> completed, rc= <i>nn</i> Explanation: Task <i>tttt</i> completed with return code <i>nn</i> . |
| SKY115I | Commencing server shutdown Explanation: The server has started to shut down. |
| SKY116E | Task <i>tttt</i> unable to get client id Explanation: An error occurred while passing a socket connection to the work task <i>tttt</i> . |
| SKY118I | Task <i>t</i> waiting for work Explanation: The worker task <i>t</i> is now idle after completing a request. |
| SKY119I | Task <i>t</i> shutting down Explanation: Task <i>t</i> has commenced shutting down. |
| SKY120E | Task <i>t</i> unable to allocate dir list buffer Explanation: The worker task <i>t</i> was unable to allocate a memory buffer needed for a directory listing. |
| SKY121E | Task <i>t</i> unable to open directory readme Explanation: The worker task <i>t</i> encountered an error when attempting to open a directory readme file while listing a directory. |

- SKY122E** Task *tt* connection error with *xxx.xxx.xxx.xxx* errno *error_text*
- Explanation:** The worker task *t* encountered a connection error (error number *errno*, text *error_text*) with the client at IP address *xxx.xxx.xxx.xxx*.
- SKY123E** Task *t*, connection eof from *xxx.xxx.xxx.xxx*
- Explanation:** For worker task *t*, the connection to client at IP address *xxx.xxx.xxx.xxx* ended.
- SKY124I** Task *t* connection terminated by peer *adr*
- Explanation:** The network connection to worker task *t* was terminated by the client with IP address *adr*.
- SKY125E** Task *t cmp*, abend *aaa* caught
- Explanation:** The abend handler for task *t* in component *cmp*, intercepted a type *aaa* abend. Task *t* is shut down and a replacement task is created.
- SKY126E** Task *t cmp*, illegal instruction abend caught. Code *aaa*
- Explanation:** The abend handler for task *t* in component *cmp*, intercepted an illegal instruction abend of type *aaa*. Task *t* will be shut down and a replacement task created.
- SKY127E** Task *t cmp* memory access abend caught. Code *aaa*
- Explanation:** The abend handler for task *t* in component *cmp*, intercepted a memory abend of type *aaa*. Task *t* is shut down and a replacement task is created.
- SKY128E** Task *t* request error *nnn* msg: *description*
- Explanation:** For worker task *t*, an HTTP protocol error was encountered for a client request.
- SKY129E** *ppp* out of valid range min - max
- Explanation:** The numeric parameter *ppp* is outside the allowed range.
- SKY130I** *hhh* handler ready
- Explanation:** The handler *hhh* task has finished initializing and is ready for work.

SKY131I *hhh* handler shutting down

Explanation: The handler *hhh* task has started shutting down.

SKY132E *hhh* handler startup timeout, terminating

Explanation: The startup timeout for the handler task *hhh* has been exceeded. The handler will be terminated.

SKY133E Unable to start *hhh* handler, terminating

Explanation: The HTTP server was unable to start its handler task *hhh*. The server shuts down.

SKY134E Unable to allocate *mmm* memory, terminating

Explanation: During initialization, memory could not be allocated for *mmm* memory. The server shuts down.

SKY135E Unable to open log, reason: *rrr*

Explanation: The log handler task was unable to open the log file for reason *rrr*.

SKY136W Out of memory for stack space, requested *nnnn* bytes

Explanation: An HTTP server task was unable to allocate stack memory.

SKY138W No free worker tasks, at maximum limit

Explanation: A request has been received but there are no idle worker tasks and the number of tasks is at the maximum limit. A server busy request is returned to the client. If this condition occurs frequently consider increasing the maximum limit of worker tasks to a value where this is a rare occurrence.

Appendix A. Intercepted Messages

Fujitsu Operating System Messages

The messages listed in Table 6 are received by the SMC. Fujitsu message manuals describe the exact format (spacing, etc.) and definition for each message. Ellipses are used to indicate that the message contains more text than is shown.

Correct operation of the SMC depends on these messages. Do not suppress or alter them using products designed to handle messages through the subsystem interface (SSI). Many automated operations systems make use of the subsystem interface to intercept and alter or suppress messages.



Note: If the “suppressed by subsystem” and “hardcopy only” bits are turned on in the WQE (the MSP write queue element) before the SMC has received the message, the SMC ignores the WTO, and the message is not displayed at the console.

If you plan to use an automated operations system and are unsure about how it intercepts messages, contact the product vendor.

Although these messages may be suppressed (that is, prevented from displaying in the console) by using AOF functions, the text of these messages should not be changed. The use of other WTO exits to change the display characteristics or the text of these messages is not supported by the SMC.

Volume serial numbers (‘ser’) as specified in messages from the operating system, are defined as follows:

SCRTCH: a public scratch volume is to be mounted (nonspecific request).

PRIVAT: a private scratch volume is to be mounted (nonspecific request).

VVVVVV: volume serial number to be processed (specific request)

Messages that contain VOLSERS with more than six characters or any character except A-Z, 0-9, # (crosshatch), \$, ¥ (yen character), and optional trailing blanks are ignored by the SMC.

Table 6. Intercepted Operating System Messages

| Message ID | Description |
|------------|---|
| JBB068A | U dddd,ser |
| JBB101A | M dddd,ser,... |
| JBB111E | D dddd,ser |
| JBB114E | D dddd... |
| JBB135A | U dddd,ser... |
| JBB400A | M dddd, ser... |
| JBB401A | F dddd,ser... |
| JBB501A | M dddd,ser{,labtyp} |
| JBB501E | M dddd,ser{,labtyp} |
| JBB502E | n,dddd,ser... |
| JBB509A | F dddd,ser... |
| JBB512I | I/O ERR LBL ERR SEC VOL... |
| JBB701D | M dddd, VOLUME TO BE LABELED ser |
| JBB702I | dddd, VOLUME LABELS CANNOT BE VERIFIED |
| JBB703I | dddd, VOLUME IS FILE PROTECTED |
| JDJ233A | M dddd,ser{,labtyp} |
| JDJ233D | M dddd,ser{,labtyp} |
| JDJ234E | {K D R} dddd{,ser...} |
| KHE200I | SWAP dddd to eeee - OPERATOR I/O ERROR |
| KHE202I | PROCEED WITH SWAP OF dddd TO eeee |
| KHE203I | ERROR ON dddd, SELECT NEW DEVICE |
| KHE205I | SWAP ddd - OPERATOR I/O ERROR |
| KHE207A | WRONG VOLUME MOUNTED ON dddd, MOUNT ser,... |
| _TA0233D | Message for ASM2 |

Tape Management System Messages

CA-1 Messages

The following CA-1 (TMS) messages are intercepted by the SMC. Refer to the appropriate Computer Associates publication for the exact format and meaning of each message.

Table 7. Tape Management System Messages - CA-1

| Message ID | Description |
|------------|--------------------------------|
| CTS001 | See CA-1 User Manual, Volume 1 |
| CTS002 | See CA-1 User Manual, Volume 1 |
| CTS004 | See CA-1 User Manual, Volume 1 |
| CTS005 | See CA-1 User Manual, Volume 1 |
| CTS007 | See CA-1 User Manual, Volume 1 |
| CTS008 | See CA-1 User Manual, Volume 1 |
| CTS009 | See CA-1 User Manual, Volume 1 |
| CTS010 | See CA-1 User Manual, Volume 1 |
| CTS011 | See CA-1 User Manual, Volume 1 |
| CTS014 | See CA-1 User Manual, Volume 1 |
| CTS015 | See CA-1 User Manual, Volume 1 |
| CTT100A | See CA-1 User Manual, Volume 1 |
| CTT101A | See CA-1 User Manual, Volume 1 |
| CTT102A | See CA-1 User Manual, Volume 1 |
| CTT103A | See CA-1 User Manual, Volume 1 |
| CTT104A | See CA-1 User Manual, Volume 1 |
| CTT105A | See CA-1 User Manual, Volume 1 |
| TMS001 | See CA-1 User Manual, Volume 1 |
| TMS002 | See CA-1 User Manual, Volume 1 |
| TMS004 | See CA-1 User Manual, Volume 1 |
| TMS005 | See CA-1 User Manual, Volume 1 |
| TMS007 | See CA-1 User Manual, Volume 1 |
| TMS008 | See CA-1 User Manual, Volume 1 |
| TMS009 | See CA-1 User Manual, Volume 1 |
| TMS010 | See CA-1 User Manual, Volume 1 |

Table 7. Tape Management System Messages - CA-1 (Continued)

| Message ID | Description |
|------------|--------------------------------|
| TMS011 | See CA-1 User Manual, Volume 1 |
| TMS014 | See CA-1 User Manual, Volume 1 |
| TMS015 | See CA-1 User Manual, Volume 1 |
| IECTMS7 | See CA-1 User Manual, Volume 1 |
| CA\$F810A | See CA-1 Message Guide |
| CA\$F813A | See CA-1 Message Guide |

CONTROL-M/TAPE (formerly CONTROL-T) Messages

The following CONTROL-M/TAPE messages are intercepted by the SMC. Refer to the appropriate BMC publication for the exact format and meaning of each message.

| Message ID | Description |
|------------|--|
| CTT100A | See BMC's INCONTROL for OS/390 and z/OS Message Manual |
| CTT101A | See BMC's INCONTROL for OS/390 and z/OS Message Manual |
| CTT102A | See BMC's INCONTROL for OS/390 and z/OS Message Manual |
| CTT103A | See BMC's INCONTROL for OS/390 and z/OS Message Manual |
| CTT104A | See BMC's INCONTROL for OS/390 and z/OS Message Manual |
| CTT105A | See BMC's INCONTROL for OS/390 and z/OS Message Manual |

Appendix B. MEDia, RECtech, and MODel Values

This appendix provides values for MEDia, RECtech, and MODel parameters. These parameters are used to specify transport and media characteristics. They are specified in various NCS commands and control statements, including the SMC TAPEREQ control statement.

Media Type (MEDia)

The Media type is used to specify the desired type of media to be used for a data set. It is specified in various NCS commands and control statements, including:

- SMC TAPEREQ control statement
- SMC UNITAttr operator command
- HSC VOLATTR control statement

The following table describes valid MEDia types:



Note:

- The SL8500 library supports the T9840A, T9840B, T9840C, T9840D, T9940B, and T10000 media types and recording techniques.
- The SL3000 library supports the T9840C, T9840D, and T10000 media types and recording techniques.

Table 8. Media Types

| Media Type | Description |
|------------|---|
| LONGitud | Indicates standard or enhanced (ECART) capacity cartridges. |
| Standard | Indicates a standard capacity cartridge. Synonyms include CST, MEDIA1, STD, 1, 3480. A standard capacity cartridge can be used on any longitudinal transport (i.e., 4480, 4490, 9490, or 9490EE). However, if the data is written on the tape in 36-track, the data cannot be read by an 18-track 4480 transport. |
| ECART | Indicates an enhanced capacity cartridge. Synonyms include E, ECCST, ETAPE, Long, MEDIA2, 3490E. An ECART cartridge can be used only on 36-track transports (i.e., 4490, 9490, and 9490EE), and is identified by a two tone colored case. |
| ZCART | Indicates an extended-enhanced capacity cartridge. A ZCART cartridge can be used only on TimberLine 9490EE 36-track transports. ZCART can be abbreviated as Z. |

Table 8. Media Types (Continued)

| Media Type | Description |
|----------------|---|
| Virtual | Indicates a VTV (Virtual Tape Volume) mounted on a VTD (Virtual Tape Drive). |
| HELical | <p>Indicates a helical cartridge. A helical cartridge can be used only on RedWood transports. The following subtypes and abbreviations specify a helical cartridge:</p> <p>DD3 indicates any DD3A, DD3B, or DD3C helical cartridge. DD3A or A indicates a helical cartridge with a 10GB media capacity. DD3B or B indicates a helical cartridge with a 25GB media capacity. DD3C or C indicates a helical cartridge with a 50GB media capacity.</p> <p>The seventh position in the external label is encoded with the cartridge type (i.e., A, B, or C).</p> |
| STK1 | Indicates any T9840 cartridge. |
| STK1R | Indicates a T9840 data cartridge. STK1R can be abbreviated as R. T9840 cartridge media capacities are 20GB (T9840A and T9840B), 40GB (T9840C), or 75GB (T9840D). |
| STK1U | Indicates a T9840A, T9840B, or T9840C cleaning cartridge. STK1U can be abbreviated as U. |
| STK1Y | Indicates a T9840D cleaning cartridge. STK1Y can be abbreviated as Y. |
| STK2 | Indicates any T9940 cartridge. |
| STK2P | Indicates a T9940 data cartridge. STK2P can be abbreviated as P. T9940 cartridge media capacities are 60GB (T9940A) or 200GB (T9940B). |
| STK2W | Indicates a T9940 cleaning cartridge. STK2W can be abbreviated as W. |
| T10000T1 or T1 | Indicates a full-capacity 500GB T10000A or 1TB T10000B cartridge. T10000T1 can be abbreviated as T1. |
| T10000TS or TS | Indicates a smaller-capacity 120GB T10000A or 240GB T10000B cartridge. T10000TS can be abbreviated as TS. |
| T10000CT or CT | Indicates a T10000 cleaning cartridge. T10000CT can be abbreviated as CT. |

When this parameter is not specified, a default is chosen based on the value of the RECtech parameter. The following table shows default values used if MEDia is omitted:

Table 9. Media Type Defaults

| RECtech Entered: | MEDia Default |
|---|----------------------|
| 18track | Standard |
| 36track, 36Atrack, 36Btrack | LONGItud |
| 36Ctrack | ZCART |
| LONGItud | LONGItud |
| DD3, Helical | DD3 |
| STK1R, STK1R34, STK1R35 STK1RA, STK1RA34, STK1RA35 STK1RB, STK1RB34, STK1RB35 STK1RAB, STK1RAB34, STK1RAB35 STK1RC, STK1RC34, STK1RC35, STK1RD, STK1RDE, STK1RDN, STK1RD34, STK1RD35, STK1RDE4, STK1RDE5 | STK1R |
| STK2P, STK2P34, STK2P35 STK2PA, STK2PA34, STK2PA35 STK2PB, STK2PB34, STK2PB35 | STK2P |
| Virtual | Virtual |

Recording Technique (RECtech)

The recording technique, or RECtech, is used to specify the method used to record data tracks on the tape surface for the desired data set. It is used in the following NCS commands and control statements:

- SMC TAPEREQ control statement
- SMC UNITAttr operator command
- HSC VOLATTR control statement



Notes: The following table describes valid recording techniques:

- The SL8500 library supports the T9840A, T9840B, T9840C, T9840D, T9940B, and T10000 media types and recording techniques.
- The SL3000 library supports the T9840C, T9840D, and T10000 media types and recording techniques.
- The T9940B transport supports both 3490 and 3590 image definitions. However:
 - With VSM, T9940B transports may **only** be defined as 3490-image devices.
 - With a native interface, T9940B transports may **only** be defined as 3590-image devices.

Table 10. Recording Techniques

| Recording Technique | Description |
|---------------------|---|
| LONGitud | Indicates any device that records data tracks in a linear format along the length of the tape surface. These devices include 4480, 4490, 9490, and 9490EE transports. |
| 18track | Indicates a 4480 transport. |
| 36track | Indicates a 4490, 9490, or 9490EE transport (any device that records in 36-track mode). |
| 36Atrack | Indicates a 4490 transport. |
| 36Btrack | Indicates a 9490 transport. |
| 36Ctrack | Indicates a 9490EE transport. |
| HELical | Indicates a device using helical recording. |
| DD3 | Indicates a device using helical recording. |
| STK1R | Indicates any T9840 transport. |
| STK1R34 | Indicates a 3490E-image T9840 transport. |
| STK1R35 | Indicates a 3590-image T9840 transport. |
| STK1RA | Indicates a T9840A transport. |
| STK1RA34 | Indicates a 3490E-image T9840A transport. |
| STK1RA35 | Indicates a 3590-image T9840A transport. |

Table 10. Recording Techniques (Continued)

| Recording Technique | Description |
|----------------------------|--|
| STK1RB | Indicates a T9840B transport. |
| STK1RB34 | Indicates a 3490E-image T9840B transport. |
| STK1RB35 | Indicates a 3590-image T9840B transport. |
| STK1RAB | Indicates a T9840A or T9840B transport. |
| STK1RAB4 | Indicates a 3490E-image T9840A or T9840B transport. |
| STK1RAB5 | Indicates a 3590-image T9840A or T9840B transport. |
| STK1RC | Indicates a T9840C transport. |
| STK1RC34 | Indicates a 3490E-image T9840C transport. |
| STK1RC35 | Indicates a 3590-image T9840C transport. |
| STK1RD | Indicates a T9840D transport. |
| STK1RDN | Indicates a non-encryption-enabled T9840D transport. |
| STK1RD34 | Indicates a non-encryption-enabled 3490E-image T9840D transport. |
| STK1RD35 | Indicates a non-encryption-enabled 3590-image T9840D transport. |
| STK1RDE | Indicates an encryption-enabled T9840D transport. |
| STK1RDE4 | Indicates an encryption-enabled 3490E-image T9840D transport. |
| STK1RDE5 | Indicates an encryption-enabled 3590-image T9840D transport. |
| STK2P | Indicates any T9940 transport. |
| STK2P34 | Indicates a 3490E-image T9940 transport. |
| STK2P35 | Indicates a 3590-image T9940 transport. |
| STK2PA | Indicates a T9940A transport. |
| STK2PA34 | Indicates a 3490E-image T9940A transport. |
| STK2PA35 | Indicates a 3590-image T9940A transport. |
| STK2PB | Indicates a T9940B transport. |
| STK2PB34 | Indicates a 3490E-image T9940B transport. |
| STK2PB35 | Indicates a 3590-image T9940B transport. |
| T10K | Indicates all T10000 transports. |
| T10KN | Indicates all non-encrypted T10000 transports. |
| T10KE | Indicates all encrypted T10000 transports. |
| T1A | Indicates any T10000A transport. |

Table 10. Recording Techniques (Continued)

| Recording Technique | Description |
|----------------------------|--|
| T1AN | Indicates a non-encryption-enabled 3490E or 3590-image T10000A transport. |
| T1A34 | Indicates a non-encryption-enabled 3490E T10000A transport. |
| T1A35 | Indicates a non-encryption-enabled 3590 T10000A transport. |
| T1AE | Indicates an encryption-enabled 3490E or 3590-image T10000A transport. |
| T1AE34 | Indicates an encryption-enabled 3490E-image T10000A transport. |
| T1AE35 | Indicates an encryption-enabled 3590-image T10000A transport. |
| T1B | Indicates any T10000B transport. |
| T1BN | Indicates a non-encryption enabled 3490E- or 3590-image T10000B transport. |
| T1B34 | Indicates a non-encryption enabled 3490E-image T10000B transport. |
| T1B35 | Indicates a non-encryption enabled 3590-image T10000B transport. |
| T1BE | Indicates an encryption-enabled 3490E- or 3590-image T10000B transport. |
| T1BE34 | Indicates an encryption-enabled 3490E-image T10000B transport. |
| T1BE35 | Indicates an encryption-enabled 3590-image T10000B transport. |
| Virtual | Indicates a VTV (Virtual Tape Volume) mounted on a VTD (Virtual Tape Drive). |

When this parameter is not specified, a default is chosen based on the value of the **MEDIA** parameter. The following table shows default values used if **RECtech** is omitted.

Table 11. Recording Technique Defaults

| MEDIA Entered: | RECtech Default |
|------------------------------|------------------------|
| LONGitud | LONGitud |
| Standard | LONGitud |
| ECART | 36track |
| ZCART | 36Ctrack |
| DD3A, DD3B, DD3C, DD3D | DD3 |
| STK1R, STK1U, STK1Y | STK1R |
| STK2P, STK2W | STK2P |
| T10000T1, T10000TS, T10000CT | T10K |
| Virtual | Virtual |

MODeI Type (MODeI)

The model type is used to specify the model number of a transport (drive), or drive. MODeI provides the same type of information as RECtech, but a user may find it more convenient to specify a transport model rather than a recording technique. MODeI and RECtech are mutually exclusive.

MODeI is used in the following NCS commands and control statements:

- SMC TAPEREQ control statement
- SMC UNITAttr operator command
- HSC VOLATTR control statement

The following table describes valid MODeI types:



Notes:

- The SL8500 library supports **only** model types associated with T9840 and T9940 series transports.
- You can specify multiple values for this parameter; separate each value with a comma.

Table 12. Model Types

| Model Type | Description |
|------------|--|
| 4480 | Indicates a 4480 (18-track) transport. |
| 4490 | Indicates a 4490 (36-track Silverton) transport. |
| 9490 | Indicates a 9490 (36-track Timberline) transport. |
| 9490EE | Indicates a 9490EE (36-track Timberline EE) transport. |
| SD3 | Indicates an SD-3 (RedWood) transport. |
| 9840 | Indicates a 3490E-image T9840A transport. |
| 984035 | Indicates a 3590-image T9840A transport. |
| T9840B | Indicates a 3490E-image T9840B transport. |
| T9840B35 | Indicates a 3590-image T9840B transport. |
| T9840C | Indicates a 3490E-image T9840C transport. |
| T9840C35 | Indicates a 3590-image T9840C transport. |
| T9840D | Indicates a non-encryption-enabled 3490E-image T9840D transport. |
| T9840D35 | Indicates a non-encryption-enabled 3590-image T9840D transport. |
| T9840DE | Indicates an encryption-enabled 3490E-image T9840D transport. |
| T9840DE5 | Indicates an encryption-enabled 3590-image T9840D transport. |
| T9940A | Indicates a 3490E-image T9940A transport. |

Table 12. Model Types (Continued)

| Model Type | Description |
|-------------------|--|
| T9940A35 | Indicates a 3590-image T9940A transport. |
| T9940B | Indicates a 3490E-image T9940B transport. |
| T9940B35 | Indicates a 3590-image T9940B transport. |
| T1A34 | Indicates a 3490E-image T10000A transport. |
| T1A35 | Indicates a 3590-image T10000A transport. |
| T1AE34 | Indicates an encryption-enabled 3490E-image T10000A transport. |
| T1AE35 | Indicates an encryption-enabled 3590-image T10000A transport. |
| T1B34 | Indicates a 3490E-image T10000B transport. |
| T1B35 | Indicates a 3590-image T10000B transport. |
| T1BE34 | Indicates an encryption-enabled 3490E-image T10000B transport. |
| T1BE35 | Indicates an encryption-enabled 3590-image T10000B transport. |
| Virtual | Indicates a VTV (Virtual Tape Volume) mounted on a VTD (Virtual Tape Drive). |

Appendix C. Differences Between SMC and HSC 6.0 and Below

The SMC product represents a complete re-architecture of the MSP interfaces for Sun Sun StorageTek tape library management systems. Customers converting to SMC from HSC 6.0 or below should be aware that minor differences to allocation and message processing may be found with SMC. In a few cases Sun Microsystems recommends changes to existing HSC policies and parameters to preserve behavior consistent with older releases. Significant differences are noted in this appendix.

Allocation Differences

1. SMC allocation is based on exclusion levels (see Chapter 4, “SMC Allocation in a JES Environment” for a detailed description) and patented allocatability testing algorithms. In all cases, the SMC attempts to ensure that the most important policies and criteria are applied first. For example, the SMC ensures that a specific volume is never allocated to an incompatible drive type. Other policies (those above "minimum level") are considered optional. The SMC will ignore optional policies in order to be able to allocate the job.
2. In JES, SMC allocation uses documented operating system interfaces (IEFSSI, IEFSSSTA, IEFJFRQ) to perform allocation influencing. For the most part, if no parameter overrides such as MIACOMPAT or CA1RTS are specified, the SMC performs its modifications at SSI 78 (MSP tape allocation) rather than updating the Eligible Device List (EDL) at SSI 24. In some cases other vendors' products rely on the Sun StorageTek EDL modifications at SSI 24 to work correctly. You can specify MIACOMPAT(ON) to force the SMC to update the EDL as earlier NCS releases did.
3. SMC policies use logical defaults, including:
 - Always separate affinity chains
 - Always honor user exit and TAPEREQ policies for head-of-chain when an affinity chain is not separated
 - Allow allocation to fail when a volume can not be mounted
 - Do not attempt to influence allocation if the original list of eligible drives does not contain any drive known by Sun StorageTek

For most customers, these changes eliminate the need to specify previously required policies such as UNITAFF(SEP) and UX02/08(HONOR).

4. SMC supports the ability to specify any esoteric for substitution in a user exit or TAPEREQ provided that:

- Devices cannot be added to the original list of eligible drives
- The specified esoteric must be a valid esoteric, and must contain one or more drives in common with the original list of eligible drives.

Customers with TAPEREQs or user exits with specified esoterics that were invalid in previous releases may experience unexpected results when these esoterics are honored by SMC.

5. In SMC virtual tape is treated more like a unique device type and may be used when policies include both real and virtual drives. For example, if a subpool including real and virtual volumes is specified, SMC allocation may select virtual drives.
6. SMC ignores allocations for tape DDs when all devices in the EDL are undefined to any library subsystem. This behavior allows better coexistence between Sun StorageTek software and other vendor products that influence tape allocation. It is recommended that you use SMC UNITATTRs to define Sun StorageTek devices outside the library, and if necessary, include SMC UNITATTRs with MODEL(IGNORE) for nonexistent drives outside the library.
7. The SMC uses SMC UNITATTRs to determine characteristics of drives outside the library.
8. A single version of an allocation user exit is executed, regardless of the number of libraries defined. Therefore, user exit return codes such as “USE LIBRARY DRIVES”, “USE VIRTUAL DRIVES”, etc. are **not** used to determine a request owner, nor does the user exit return code or “USE NONLIBRARY DRIVES” result in the selection of a “different” library.

The preferred way to select a library owner from among multiple libraries is through esoteric substitution on TAPEREQ. Alternatively, user exits can be used to specify a library name or esoteric.

Message Handling Differences

The SMC message handling component does not call user exit 01 for all console messages. The USERMsg operator command allows specification of additional messages to be intercepted and passed to the library subsystem's user exit 01.

For swap processing, only the enhanced swap was implemented in SMC. Customers previously doing custom swap processing by defaulting to HSC nonenhanced swap and intercepting IBM swap messages may need to examine their processing and possibly intercept SMC messages.

Appendix D. SMC Interaction with Other Software

Automated Operations

Customers who use an automated operations product should review the SMC0110 WTOR (issued during SMC swap processing) for possible auto-ops rule changes.

Open Type J

The SMC allocation enhancements may not operate if you use the MSP Open Type J macro. Since that macro allows you to change volume serial numbers or data set names at open time, information available at Job Step Allocation time may be incorrect as interpreted by the SMC.



Note: Some vendor software products use MSP Open Type J. If you are experiencing unexpected allocation results using a vendor software product, check with the vendor to determine if Open Type J is used and follow the recommendations below.

SMC allocation may be influencing MSP allocation erroneously based on information that may have changed at open time. To prevent this problem when using the Open Type J macro, specify the appropriate esoteric in the JCL or specify an appropriate esoteric in an applicable TAPEREQ control statement.

SAMS: DISK (DMS)

Sterling Software's SAMS: DISK (DMS) has two methods of allocating transports:

- allocates transports at session startup, holds onto the transports throughout the session and uses Open Type J (refer to the section about "Open Type J").
- uses dynamic allocation (DYNALLOC) to allocate transports when required.

The SMC allocates correctly when dynamic allocation is used. Therefore, the latter method of allocating transports is recommended.

MSP Security Packages

Ensure that your MSP security package (e.g., RACF, TopSecret) is configured to grant SMC the necessary authority to respond to MSP swap messages.

Appendix E. Message Change Summary

The following messages have been added, changed, or deleted for SMC Release 6.1.

New Messages

SMC Messages

- | | | | |
|-----------|-----------|-----------|-----------|
| • SMC0067 | • SMC0150 | • SMC0160 | • SMC0170 |
| • SMC0103 | • SMC0151 | • SMC0161 | • SMC0171 |
| • SMC0105 | • SMC0152 | • SMC0162 | • SMC0174 |
| • SMC0133 | • SMC0153 | • SMC0163 | • SMC0175 |
| • SMC0138 | • SMC0154 | • SMC0164 | • SMC0192 |
| • SMC0139 | • SMC0155 | • SMC0165 | • SMC0193 |
| • SMC0140 | • SMC0156 | • SMC0166 | • SMC0226 |
| • SMC0141 | • SMC0157 | • SMC0167 | |
| • SMC0147 | • SMC0158 | • SMC0168 | |
| • SMC0149 | • SMC0159 | • SMC0169 | |

Sun StorageTek HTTP Server Messages

None.

Changed Messages

- | | | | |
|-----------|-----------|-----------|-----------|
| • SMC0025 | • SMC0086 | • SMC0123 | • SMC0134 |
| • SMC0056 | • SMC0087 | • SMC0128 | • SMC0146 |
| • SMC0063 | • SMC0094 | • SMC0129 | |
| • SMC0066 | • SMC0113 | • SMC0131 | |
| • SMC0067 | • SMC0122 | • SMC0133 | |

Deleted Messages

- SMC0114
- SMC0115

Glossary

Terms are defined as they are used in the text. If you cannot find a term here, check the index.

A

Abnormal end of task (abend)— A software or hardware problem that terminates a computer processing task.

ACS-id— A method used in the LIBGEN process to identify ACSs by using hexadecimal digits, 00 to nn.

ACS— *See* Automated Cartridge System.

ACS library— A library is composed of one or more Automated Cartridge Systems (ACSs), attached cartridge drives, and cartridges residing in the ACSs.

address— Coded representation of hardware id, or the destination or origination of data.

allocation— The assignment of resources to a specific task.

asynchronous transmission— Character-oriented data transmission (as distinct from IBM's block-mode transmission).

Automated Cartridge System (ACS)— A fully-automated, cartridge storage and retrieval library subsystem consisting of one or more Library Storage Modules (LSMs) connected by pass-thru ports.

Automated Cartridge System Library Software (ACSLs)— The library control software, which runs in the UNIX®-based Library Control System.

automatic mode— A relationship between an LSM and all attached hosts. LSMs operating in automatic mode handle cartridges without operator intervention. This is the normal operating mode of an LSM that has been modified online. The opposite situation is "manual mode." *See* manual mode.

B

bar code— A code consisting of a series of bars of varying widths. This code appears on the external label attached to the spine of a cartridge and is equivalent to the volume serial number (volser). This code is read by the robot's machine vision system.

BISYNC— Binary Synchronous Communications. An early low-level protocol developed by IBM and used to transmit data on a synchronous communications link. It is a form of data transmission in which synchronization of characters is controlled by timing signals generated at the sending and receiving stations.

C

CAPid— A CAPid uniquely defines the location of a CAP by the LSM on which it resides. A CAPid is of the form "AAL" where "AA" is the acs-id and "L" is the LSM number.

cartridge— The plastic housing around the tape. It is approximately 4 inches (100 mm) by 5 inches (125 mm) by 1 inch (25 mm). The tape is threaded automatically when loaded in a transport. A plastic leader block is attached to the tape for automatic threading. The spine of the cartridge contains an OCR/Bar Code label listing the VOLSER (tape volume identifier).

Cartridge Access Port (CAP)— An assembly that allows several cartridges to be inserted into or ejected from an LSM without human entry into the LSM.

cartridge drive (CD)— A hardware device containing two or four cartridge transports and associated power and pneumatic supplies.

cartridge tape I/O driver— Operating system software that issues commands (for example, read, write, and rewind) to cartridge subsystems. It is the software focal point for attaching a particular type of control unit. (An example is the Sun StorageTek CARTLIB product.)

cartridge transport— *See* transport.

cell— A receptacle in the LSM in which a single cartridge is stored.

CGI—Common Gateway Interface

channel— A device that connects the host and main storage with the input and output devices' control units. A full-duplex channel has two paths (that is, 2 wires, or one wire with signals at two frequencies). A half-duplex channel requires that one port receives while the other transmits.

channel-to-channel (CTC)— Refers to the communication (transfer of data) between programs on opposite sides of a channel-to-channel adapter.(I)

client— The ultimate user of the ACS services as provided by the Library Control System.

client computing system (CCS)— A computer and an operating system.

client link— The communications link between the LCS and a client.

client-server— A model of interaction in a distributed system in which a program at one site serves a request to a program at another site and awaits a response. The requesting program is called a client; the program satisfying the request is called a server.

client system— The system to which the LCS provides an interface to a Sun StorageTek Automated Cartridge System.

coaxial cable— A transmission medium used in data transmissions for networks using synchronous communications, as opposed to twisted-pair, the primary medium for asynchronous RS-232 communications.

complex— A system composed of other systems, specifically the ACS server system and the client system.

connected mode— A relationship between a host and an ACS. In this mode, the host and an ACS are capable of communicating (in the sense that at least one station to this ACS is online).

connection number— The unique identifier on the server for a communications path. The number is assigned by TCP/IP to identify the unique connection between the server node and a specific port on the server, and the client node and a specific port on the client. The connection number exists only as long as the connection exists.

console— The primary I/O device to control a session on a system.

control data set (CDS)— The data set used by the host software to control the functions of the automated library. Also called a library database.

Control Path Adaptor (CPA)— A Bus-Tech, Inc. hardware device that allows communications between a host processor's block multiplexer channel and a local area network.

Control Unit (CU)— A microprocessor-based unit situated locally between a channel and an I/O device. It translates channel commands into device commands and sends device status to the channel.

coupling facility— A special logical partition that provides high-speed caching, list processing, and locking functions in a SCMP.(I)

coupling facility channel— A high bandwidth fiber optic channel that provides the high-speed connectivity required for data sharing between a coupling facility and the central processor complexes directly attached to it.(I)

CTC— Channel-to-channel.

D

Data Path Adapter— A hardware device which translates from a client computing system's data protocol to the data protocol of the Sun StorageTek Control Unit or IMU. An example is DEC's TC44-AA/BA STI-to-4400 ACS Interconnect.

data set— A set of records treated as a unit.

data sharing— The ability of concurrent subsystems or application programs to directly access and change the same data while maintaining data integrity.(I)

device number— A four-digit hexadecimal number that uniquely identifies a device attached to a processor.

device preferencing— The process of preferring one 36-track transport type over another 36-track transport type.

device separation— *See* drive exclusion.

direct access storage device (DASD)— IBM's term for a disk drive storage device.

directed allocation— *See* drive prioritization.

disconnected mode— A relationship between a host and an ACS. In this mode, the host and the ACS are not capable of communicating (there are no online stations to this ACS).

DMS/OS— DASD Management System/Operating System.

dotted-decimal notation— The syntactic representation of a 32-bit integer that consists of four 8-bit numbers written in base ten with periods (dots) separating them. In TCP/IP descriptions, dotted-decimal notation is used for Internet addresses.

drive exclusion— (previously referred to as *device separation*) refers to the Storage Management Component (SMC) function of excluding drives for an allocation request based on SMC exclusion criteria. *See the SMC Configuration and Administration Guide* for more information.

drive panel— An LSM wall containing tape transports. The drive panel for a T9840 transport can contain either 10 or 20 transports. The drive panel for a non-T9840 transport can contain a maximum of 4 transports.

drive prioritization— (previously referred to as *directed allocation*) refers to the Storage Management Component (SMC) function of influencing selection of a particular drive based on allocation criteria, including volume location. *See the SMC Configuration and Administration Guide* for more information.

Dual LMU— A hardware/microcode feature that provides a redundant LMU capability.

dump— A printed representation of the contents of main storage at time *t*. This representation is used for debugging purposes.

dynamic server switching— The capability of switching server processors when a system failure occurs on the active server.

E

ECART— Enhanced Capacity Cartridge.

Enhanced Capacity Cartridge— A cartridge that has a length of 1100 feet and can be used only on 36-track transports (i.e., 4490, 9490, and 9490EE).

Enterprise Systems Connection (ESCON)— A set of products and services that provides a dynamically connected environment using optical cables as a transmission medium.(I)

error codes (EC)— Numeric codes displayed by messages indicating the type of problem that caused an error.

error recovery procedures (ERP)— Procedures designed to help isolate and, where possible, to recover from errors in equipment.

ESCON— Enterprise Systems Connection.

esoteric name— The name assigned to transports that have the same device type.

Ethernet— One LAN architecture using a bus topology that allows a variety of computers to be connected to a common shielded coaxial spine. The Ethernet architecture is similar to the IEEE 802.3 standard.

event control block (ECB)— Provides an area for a completion code to be stored when an operation has completed.

F

file— A set of related records treated as a unit.

File Transfer Protocol (FTP)— A TCP/IP command that provides a way to transfer files between machines connected through TCP/IP.

foreign socket— One of two end-points in a TCP/IP connection-oriented protocol. Specifies the address of a foreign host that can connect to the server.

G

GB— 1,073,741,834 bytes of storage

H

handshake— A flow-of-control signal sent by one process to another.

heartbeat interval— Specifies how often CLS checks the communications link to a client to make sure it is still “up.”

helical cartridge— A high capacity, helical scan cartridge that can hold up to 50GB of uncompressed data. This cartridge can be used only on RedWood (SD-3) transports.

heterogeneous systems— Systems of dissimilar processor or system type.

homogeneous— Of the same or a similar kind or nature.

host computer— A computer that controls a network of computers.

Host Software Component (HSC)— Software running on the Library Control System processor that controls the functions of the ACS.

HSC— *See* Host Software Component.

HTTP— Hypertext Transfer Protocol.

I

IEEE 802.3— A standard produced by the IEEE and accepted worldwide for local area networks using CSMA/CD (Carrier Sense Multiple Access with Collision Detection).

ICRC— Improved Cartridge Recording Capacity. A compression and compaction feature that increases the amount of data that can be stored on a 1/2-inch cartridge.

initial program load (IPL)— A process that activates a machine reset.

Intelligent Management Unit (IMU)— Hardware similar to a Control Unit. This term is reserved for future products.

Internet— A collection of networks using TCP/IP that functions as a virtual network.

Internet address— The numbering system used to specify a network or host on that network for TCP/IP communications. Standard Internet address notation is dotted-decimal format.

Internet Protocol (IP)— Formal description of messages and rules two networks use to exchange messages.

J

job control language (JCL)— A problem oriented language designed to describe a job’s processing requirements to an operating system.

JES—Job entry subsystem.(I)

JES—An MSP subsystem that receives jobs into the system, converts them to internal format, selects them for execution, processes their output, and purges them from the system. In an installation with more than one processor, each JES processor independently controls its job input, scheduling, and output processing.

L

LAN— *See* local area network.

LCS— *See* Library Control System.

LCU— *See* Library Control Unit.

LIBGEN— The process of defining the configuration of a library to the HSC.

library— An installation of one or more ACSs, attached cartridge drives (also known as transports), volumes (cartridges) placed into the ACSs, host software that controls and manages the ACSs and associated volumes, and the library control data set that describes the state of the ACSs.

library cartridge transport— *See* transport.

library complex— A library complex consists of one HSC Control Data Set (CDS) and may contain up to 256 Automatic Cartridge Systems (ACSs), each of which may contain up to 24 Library Storage Modules (LSMs).

library control component— Software that controls the mounting and dismounting of cartridges in an ACS.

library control platform— The hardware and software that provides the proper environment for the Library Control System.

library control processor— Properly configured computer hardware that supports the operation of the Library Control System.

Library Control Software— A library control component, the client system interface, and library utilities.

Library Control System (LCS)— The library control platform and the Library Control Software.

Library Control Unit (LCU)— The portion of an LSM that controls the movements of the robot.

library database— A file or data set containing information about the location and status of the removable media volumes, such as cell location, scratch status. Also called a control data set (CDS).

library drive— A cartridge drive in the ACS, as distinct from a stand-alone cartridge drive.

Library Management Unit (LMU)— A hardware and software product that coordinates the activities of one or more LSMs/LCUs.

library mode— The operation of a 4480 Cartridge Subsystem as part of a 4400 Automated Cartridge System, as opposed to manual mode, in which the operator inserts cartridges into the transports. *See* manual mode.

LibraryStation— Software that allows MSP hosts to share ACS facilities with client systems.

Library Storage Module (LSM)— The standard LSM (4410) a twelve-sided structure with storage space for up to around 6000 cartridges. It also contains a free-standing, vision-assisted robot that moves the cartridges between their storage cells and attached transports. *See* also PowderHorn, SL8500, and WolfCreek.

LMU— *See* Library Management Unit.

local area network (LAN)— A network in a small (local) geographic area.

local port— The designation of a given application or process among many that are available for a TCP/IP-capable host processor.

local socket— The address combination of a TCP/IP-capable host's network address and a specific port for an application process.

LP— *See* logical port.

LSM— *See* Library Storage Module.

LSM-id— An LSM-id is composed of the ACS-id joined to (concatenated with) the LSM number.

LSM number— A method used to identify an LSM. An LSM number is the result of defining the SLIACS macro LSM parameter during a LIBGEN. The first LSM listed in this parameter acquires the LSM number of 00 (hexadecimal) the second LSM listed acquires a number of 01, and so forth, until all LSMs are identified (up to a maximum of 24 or hexadecimal 17).

M

manual mode— Operation of a cartridge drive apart from an ACS. *See* library mode.

master LMU— The LMU currently controlling the functional work of the ACS in a dual LMU configuration.

mixed configuration— A configuration that contains different types of cartridge drives in both manual and library modes.

modem— A device that enables digital data to be transmitted over an analog transmission facility.

multi-client— The environment where more than one (homogenous or heterogeneous) client system is connected to one LCS.

N

NCS— Nearline Control Solution, consisting of SMC, HSC, Sun StorageTek HTTP server, and LibraryStation.

O

OCR label— Optical character recognition label. An external label attached to the spine of a cartridge that is both human and machine readable.

operator console— In this document, the operator console refers to the MSP client system console.

operating system (OS)— Software that controls the execution of programs that facilitate overall system operation.

P

Pass-thru Port (PTP)— A mechanism that allows a cartridge to be passed from one LSM to another in a multiple LSM ACS.

physical port— The communications hardware required to support a server/client link.

physical volume— A physically bound unit of data file media. *See* cartridge.

pipe— VM Inter-User Communications Vehicle (IUCV) path.

PowderHorn (9310)— The high-performance version of the standard LSM.

pre-configured package— A storage server package including all hardware, software, and configuration parameter settings delivered by the vendor.

privilege class— Applicable to both the VM and CLS environments, userids are granted access to either system based on assigned rights to execute various commands.

product change request (PCR)— A request for enhancement to a product. Normally, this request comes from a client, but may come from Sun StorageTek.

program temporary fix (PTF)— A software release designed to remedy one or a series of defects.

program update tape (PUT)— One or more tapes containing updates to, or new versions of, the SMC system software.

protocol— A formal description of message formats and the rules two or more machines must follow to exchange these messages.

R

recovery— Automatic or manual procedures to resolve problems in the server system.

reel-id— Identifier of a specific tape volume. Equivalent to volume serial number (VOLSER).

request— Term used to refer to commands issued to the 4400 ACS to perform a tape-related function.

S

SCMP— A set of MSP systems communicating and cooperating with each other through certain multisystem hardware components and software services to process customer workloads.(I)

scratch tape— A tape that is available to any user because it is not owned.

scratch tape subpool— A defined subset of all scratch tapes. Subpools are composed of one or more ranges of volumes with similar physical characteristics (type of volume—reel or cartridge, reel size, length, physical location, and so on). Some installations may also subdivide their scratch pools by other characteristics such as label type.

SD-3— The Sun StorageTek helical cartridge transport. Also known as RedWood.

server— The communications component of the NCS solution, also known as the Sun StorageTek HTTP server.

socket— A unique address on a network plus a node address plus the id of one specific application on a specific network. An abstraction used by TCP/IP.

standard capacity cartridge— A cartridge that can be used on any longitudinal transport (i.e., 4480, 4490, 9490, or 9490EE).

standby— The status of a station that has been varied online but is connected to the standby LMU of a dual LMU ACS.

standby LMU— The redundant LMU in a dual LMU configuration that is ready to take over in case of a Master LMU failure or when the operator issues a SWITCH command.

station— A hardware path between the host computer and an LMU over which the HSC and LMU send control information.

Storage Management Component (SMC)— Software interface between IBM's OS/390 and z/OS operating systems and Sun StorageTek real and virtual tape hardware. SMC performs the allocation processing and message handling for the NCS solution.

storage server— A set of hardware and software products designed to enable heterogeneous computer systems to use automated tape cartridge library services.

switchover— The assumption of master LMU function by the standby LMU.

synchronous— *See* BISYNC.

synchronous LAN— Local area network built on synchronous communications.

Systems Network Architecture (SNA)— A description of the logical structure, formats, protocols, and operational sequences for transmitting information units through and controlling the configuration and operation of networks.

T

tape drive— A tape processing device consisting of up to four transports in a cabinet. A drive can refer to an individual transport.

tape library management system (TLMS)— TLMS, as used in this document, refers to any tape library management system, not to CA-1.

TCP/IP— Transmission Control Protocol/Internet Protocol.

trace event type— Types of event traced through the system when tracing is enabled.

trace file— A file that contains information useful for debugging the system.

transaction— A specific set of input that triggers the execution of a specific process.

Transmission Control Protocol (TCP)— An inter-network standard protocol that provides a full-duplex stream service.

transport— An electro-mechanical device used to thread, position, and read or write from a tape.

U

UCB— Unit Control Block.

userid— The userid is the name that identifies a specific “virtual machine” user or client.

utility— Program that performs a function ancillary to the chief function(s) of a computer system.

V

virtual storage— A feature of the OS where main storage requirements are allocated by segments (or pages) as needed by programs, thus creating the apparent existence of unlimited or virtual storage.

Virtual Storage Manager (VSM)— A storage solution that virtualizes volumes and transports in a VTSS buffer in order to improve media and transport use.

Virtual Tape Control System (VTCS)— The primary host code for the Virtual Storage Manager (VSM) solution. This code operates in a separate address space, but communicates closely with HSC.

Virtual Tape Storage Subsystem (VTSS)— The DASD buffer containing virtual volumes (VTVs) and virtual drives (VTDs). The VTSS is a Sun StorageTek RAID 6 hardware device with microcode that enables transport emulation. The RAID device can read and write “tape” data from/to disk, and can read and write the data from/to a real tape drive (RTD).

Virtual Telecommunications Access Method (VTAM)— IBM host-resident communications software that serves as a common interface for communications.

VM— *See* virtual machine.

volume— A tape cartridge (data carrier) that is mounted or dismounted as a unit.

volume serial number (VOLSER)— An identifier of a physical volume.

W

WolfCreek (9360)— The high-performance LSM with a smaller capacity than the standard LSM.

Z

ZCART— An extended-enhanced cartridge that uses a thinner media to provide twice the capacity of the enhanced capacity (ECART) cartridge. This cartridge has a length of 2200 feet and can be used only on TimberLine 9490EE 36-track transports.

Numerics

802.3— *See* IEEE 802.3.

3270— IBM synchronous, block-mode, half-duplex terminals preferred for use with IBM 370 and related types of machine.

3270 protocol— A telecommunications protocol that supports networks of 327x CRTs on IBM mainframes.

3274— Terminal control unit used on the ACS for processor-to-LMU communications.

3480— IBM’s 18-track half-inch cartridge tape drive model.

3490— IBM’s 36-track half-inch cartridge tape drive model.

3590— IBM’s newest cartridge tape drive model that supports 128-track recording technique.

4400 Automated Cartridge System (ACS)— A fully automated, cartridge-based, 18-track storage and retrieval library. A 4400 ACS consists of 1 to 256 LMUs with each LMU connected to from 1 to 24 LSMs.

4410— The standard Library Storage Module (LSM).

4411— Library Control Unit (LCU).

4480— The Sun StorageTek 18-track 1/2-inch cartridge transport.

4480 Cartridge Subsystem— The Sun StorageTek 4480 Cartridge Subsystem consists of a control unit (CU) plus cartridge drives (CDs).

4490— The Sun StorageTek 36-track long-tape cartridge transport with ESCON support. Also known as Silverton.

4780— Same as a 4480, but is used for attachment to certain non-IBM computers.

8380— Sun StorageTek DASD system.

9310— The PowderHorn, a high-performance version of the standard LSM (4410)

9360— The WolfCreek, a high-performance LSM with a smaller capacity than the standard LSM (4410).

9490— The Sun StorageTek 36-track cartridge transport. Also known as TimberLine.

9490EE— The Sun StorageTek 36-track cartridge transport. Also known as TimberLine EE.

9740— A small, four-sided Sun StorageTek library that supports large-style cartridge transports. This library can be configured to contain either 326 cartridges or 494 cartridges.

SL3000— The Sun StorageTek high performance library scalable from 200 to 3,000 cartridge slots.

SL8500— The Sun StorageTek high performance library scalable from 29 terabytes to 70 petabytes with up to 70,000 tape slots.

T9840A— The StorageTek access-centric cartridge transport capable of reading and writing 9840A cartridges.

T9840B— The StorageTek access-centric cartridge transport capable of reading and writing T9840B cartridges.

T9840C— The StorageTek access-centric cartridge transport capable of reading and writing T9840C cartridges.

T9840D— The StorageTek access-centric cartridge transport capable of reading and writing T9840D cartridges.

T9940A— The StorageTek capacity-centric cartridge transport capable of reading and writing 60GB T9940A cartridges.

T9940B— The StorageTek capacity-centric cartridge transport capable of reading and writing 200GB T9940B cartridges.

T10000— The StorageTek high-capacity cartridge transport capable of reading and writing 120GB or 500GB T10000 cartridges.

T10000B— The StorageTek high-capacity cartridge transport capable of reading and writing 240GB or 1TB T10000 cartridges.

Index

A

affinity separation 44

allocation

- affinity separation 44
- deferring mounts 49
- drive exclusion 29
- drive prioritization 48
- exclusion levels 32, 37
- intentionally failing a job 31
- minimum exclusion level 30
- scratch requests 37
- SMC interaction with other software 219
- specific requests 32

ALLOCDef command 60

ALLOCJob command 67

C

CA-1 (TMS) messages 207

CMDDef command 71

command prefix, SMC 58

commands

- issuing 58
- ALLOCDef 60
- ALLOCJob 67
- CMDDef 71
- DRIVemap 73
- LIBrary 76
- List 79
- LOG 81
- MOUNTDef 84
- MSGDef 87
- MSGJob 90
- READ 93
- RESYNChronize 95
- SERVer 96
- TAPEREQ 101
- TCPip 112
- TRace 114
- TREQDef 119
- UEXit 121
- UNITAttr 124
- USERMsg 126

configuration scenarios

- SMC and a single HSC library configuration with multiple remote server paths 13
- SMC and a single HSC library configuration with one local and one remote path 11
- SMC and a single local HSC library 7
- SMC and a single remote HSC library configuration 9
- SMC with two libraries 15, 17

contacting Sun Microsystems StorageTek Support xxvii

conventions

- control statements xxiv
- product names xviii
- symbols xviii
- syntax flow diagrams xix
- typographic xviii

customer support xxvi

customer-initiated maintenance (CIM) xxvii

D

deferring mounts 49

description

- HTTP Server 6
- SMC 1

device preferencing 109

differences, SMC and NCS 4.1 and below 217

drive exclusion 2, 29

drive prioritization 2, 48

DRIVemap command 73

E

examples

- ALLOCDef command 66
- ALLOCJob command 70
- CMDDef command 72
- DRIVemap command 75
- List command 78, 80
- MSGDef command 89
- MSGJob command 92
- READ command 94
- SMC START Procedure 22

- TRace command 117
- UExit command 123
- USERMsg command 126
- exclusion levels
 - scratch request 37
 - specific request 32
- EXEC Statement, SMC 23

F

- flow diagrams, conventions xix

H

- help, technical support xxvi
- HSC mount-related messages 54
- HTTP Server
 - description 6
 - messages 195

I

- IBM (International Business Machines, Inc.)
 - operating system messages 205
- initialization, SMC 21
- intentionally failing a job 31
- intercepted messages
 - IBM operating system messages 205
 - tape management system messages 207
- introduction, SMC 1

J

- JES allocation
 - affinity separation 44
 - deferring mounts 49
 - drive exclusion 29
 - drive prioritization 48
 - exclusion levels 32, 37
 - intentionally failing a job 31
 - scratch requests 37
 - SMC interaction with other software 219
 - specific requests 32
- job, intentionally failing 31

L

- LIBrary command 76
- library subsystem selection 49
- library, defined 2
- LisT command 79
- LOG command 81

M

- message handling, SMC 51
- messages 54
 - descriptions 140
 - format 139, 195
 - HTTP server 195
 - intercepted 205, 209
 - messages intercepted by HSC 205
 - SMC listing 141
 - SMC system 139
 - StorageTek HTTP Server 196
 - tape management system messages 207
 - utility 193
 - variable definitions 140
- minimum exclusion level 30
- Modify command, MSP 58
- MOUNTDef command 84
- mounts, managing from the SMC client 55
- MSGDef command 87
- MSGJob command 90
- MSP START Command 25

O

- one local and one remote 15
- one local and one remote with multiple paths 17
- operator commands
 - issuing 58
 - ALLOCDf 60
 - ALLOcJob 67
 - CMDDef 71
 - DRIVemap 73
 - LIBrary 76
 - LisT 79
 - LOG 81
 - MOUNTDef 84
 - MSGDef 87
 - MSGJob 90
 - READ 93
 - RESYNChronize 95
 - SERVer 96
 - TAPEREQ 101
 - TCPip 112
 - TRace 114
 - TREQDef 119
 - UExit 121
 - UNITAttr 124
 - USERMsg 126
- organization of this Guide xvii

P

- parameters

- ALLOCDef command 61
- ALLOCJob command 67
- CMDDef command 71
- DRIVemap command 73
- LIBrary command 77
- LlSt command 79
- LOG command 82
- MOUNTDef command 84
- MSGDef command 87
- MSGJob command 90
- MSP START Command 25
- READ command 93
- RESYNChronize command 95
- SERVer command 97
- SMC EXEC Statement 23
- TAPEREQ command 104
- TCPip command 112
- TRace command 115
- TREQDef command 119
- UEXit command 122, 124
- USERMsg command 126

partners web site, SUN xxvi

preferencing, device 109

publications, related xxv

R

READ command 93

recovery procedures 127

related publications xxv

RESYNChronize command 95

S

scratch requests 37

SERVer command 96

SL8500 library 209, 229

SMC

- allocation 27
- configuration scenarios 7
- control statements 57
- differences from NCS 4.1 and below 217
- functions 1
- initializing 21
- interaction with other software 219
- library subsystem selection 19
- message handling 51
- messages 139
- operator commands 57
- policy and drive type information synchronization 19
- recovery procedures 127
- starting 21
- Tape Management Extract utility 129

SMCCMDS data set 59

SMCPARMS data set 59

specific requests 32

SSI23 dynamic allocation 28

SSI24 common allocation 28

START Command, MSP 25

START procedure, creating 22

starting SMC 21

subsystem selection 19

support, technical xxvi

swap processing, SMC 53

syntax

- ALLOCDef command 60
- ALLOCJob command 67
- CMDDef command 71
- conventions xix
- LIBrary command 76
- LlSt command 79
- MSGDef command 87
- MSGJob command 90
- MSP START Command 25
- READ command 93
- RESYNChronize command 95
- SMC EXEC Statement 23
- TRace command 114
- UEXit command 121
- USERMsg command 126

T

Tape Management Extract Utility 130

Tape Management System (TMS)

- messages 207

- supported 53

TAPEREQ command 101

TCPip command 112

technical support xxvi

TRace command 114

TREQDef command 119

troubleshooting xxvi

U

UEXit command 121

UNITAttr command 124

USERMsg command 126

utility, Tape Management Extract 130

V

volume serial numbers, defined 205

W

web site, SUN xxvi

worldwide offices, SUN xxviii

Sun Microsystems, Inc. 4150 Network Circle, Santa Clara, CA 95054 USA Phone 1-650-960-1300 or 1-800-555-9SUN Web sun.com



ARGENTINA: 5411-4317-5636 • AUSTRALIA: 1-800-550-786 • AUSTRIA: 43-1-601-26-0 • BALKANS: 301-6188-111 • BELGIUM: 32-2-704 89 83 • BRAZIL: 55-11-51872100 • BRUNEI: 65-216-8333 • CANADA: 1-800-422-8020 (GENERAL); 416-964-2001 (LEARNING MANAGEMENT SYSTEM SALES, TORONTO) • CHILE: 562-372-4500 • COLOMBIA: 571-629-2323
CZECH REPUBLIC: 420-2-330093111 • DENMARK: 45-4556-5040 • EGYPT: 00 202 570 9442 • FINLAND: 358-9-525-561 • FRANCE: 33-1-41-33-17-17 • GERMANY: 49-89-460-08-2788 • GREECE: 30-01-6188101 • HONG KONG: 852-2877-7077 • HUNGARY: 361-202-4415 • INDIA: 91-80-229-8989 • INDONESIA: 65-216-8333 • IRELAND: 353-1-668-4377
ISRAEL: 972-9-9710500 • ITALY: 39-02-9259511 • JAPAN: 81-3-5779-1820 • KOREA: 82-2-3453-6602 • MALAYSIA: 603-2116-1887 • MIDDLE EAST: 00 9714 3366333 • MEXICO: 525-261-0344 • NETHERLANDS: 31-33-4515200 • NEW ZEALAND: 0800-786-338 • NORTH WEST AFRICA: 00 9714 3366333 • NORWAY: FROM NORWAY: 47-22023950, To NORWAY: 47-23369650 • PAKISTAN: 00-9714-3366333 • PEOPLE'S REPUBLIC OF CHINA: 8610-6803-5588 • PHILIPPINES: 632-885-7867 • POLAND: 48-22-8747848 • PORTUGAL: 351-21-413-4000 • RUSSIA: 7-095-935-8411 • SAUDI ARABIA: 00 9714 3366333 • SINGAPORE: 65-216-8300 • SOUTH AFRICA: 27-11-256-6300 • SPAIN: 34-902-210-412 • SRI LANKA: 65-2168333 • SWEDEN: 46-8-631 22 00 • SWITZERLAND: 41-1-908-90-50 (GERMAN) 41-22-999-0444 (FRENCH) • TAIWAN: 886-2-25185735 • THAILAND: 662-344-6855 • TURKEY: 90 212 335 22 00 • UNITED KINGDOM: 44-1276-416-520 • UNITED STATES: 1-800-422-8020 • VENEZUELA: 582-905-3800 • VIETNAM: 65-216-8333 • WORLDWIDE
HEADQUARTERS: 1-650-960-1300

SUN™ THE NETWORK IS THE COMPUTER ©2006 Sun Microsystems, Inc. All rights reserved. Sun, Sun Microsystems, and the Sun logo are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries.