



LDAP Binding Component Tutorial



Sun Microsystems, Inc.
4150 Network Circle
Santa Clara, CA 95054
U.S.A.

Part No: 820-7854-11
June 2009

Copyright 2009 Sun Microsystems, Inc. 4150 Network Circle, Santa Clara, CA 95054 U.S.A. All rights reserved.

Sun Microsystems, Inc. has intellectual property rights relating to technology embodied in the product that is described in this document. In particular, and without limitation, these intellectual property rights may include one or more U.S. patents or pending patent applications in the U.S. and in other countries.

U.S. Government Rights – Commercial software. Government users are subject to the Sun Microsystems, Inc. standard license agreement and applicable provisions of the FAR and its supplements.

This distribution may include materials developed by third parties.

Parts of the product may be derived from Berkeley BSD systems, licensed from the University of California. UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd.

Sun, Sun Microsystems, the Sun logo, the Solaris logo, the Java Coffee Cup logo, docs.sun.com, Java, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. or its subsidiaries in the U.S. and other countries. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the U.S. and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc.

The OPEN LOOK and SunTM Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

Products covered by and information contained in this publication are controlled by U.S. Export Control laws and may be subject to the export or import laws in other countries. Nuclear, missile, chemical or biological weapons or nuclear maritime end uses or end users, whether direct or indirect, are strictly prohibited. Export or reexport to countries subject to U.S. embargo or to entities identified on U.S. export exclusion lists, including, but not limited to, the denied persons and specially designated nationals lists is strictly prohibited.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Contents

Using the LDAP Binding Component in a Project	5
Tutorial Overview	6
Tutorial Requirement	6
Software Needed for the Tutorial	6
Tutorial Plan	7
LDAP Binding Component Project in a Nutshell	8
Starting the GlassFish Application Server	10
▼ To Start the GlassFish Application Server	11
▼ To Start the JBI Components	12
Creating a BPEL Module Project For the Add Feature	15
▼ To Create a BPEL Module Project	15
Creating a WSDL Document	17
▼ To Create a WSDL Document: Add Operation	17
Create a WSDL Document For Type : SOAP	26
▼ To Create a WSDL Document : SOAP	26
Creating a BPEL Process	31
▼ To Create a BPEL Process	31
▼ To Add a Partner Link	33
▼ To Add a Web Service and Basic Activities	35
▼ To Edit the Web Service : Receive1	37
▼ To Edit the Web Service : Invoke1	40
▼ To Edit the Web Service : Reply1	44
▼ To Edit the Basic Activities : Assign1	46
▼ To Edit the Basic Activities : Assign2	50
Creating a Composite Application Project	53
▼ To Create a Composite Application Project	53
Deploying a Composite Application	58
▼ To Deploy a Composite Application	58

- Testing the Composite Application 59
 - ▼ To Test the Composite Application 59
 - Source View 62
 - Design View: Notification 63
 - Create a WSDL Document : Search 64
 - Create a WSDL Document : Update Feature 66
 - Create a WSDL Document : Delete Feature 68

Using the LDAP Binding Component in a Project

The topics in this document provides information about LDAP Binding Component.

For more information about working with the NetBeans IDE, see the <http://www.netbeans.org> page on the NetBeans web site.

What You Need to Know

These topics provide information about the functional behavior of LDAP Binding Component.

- “Tutorial Overview” on page 6.
- “Tutorial Requirement” on page 6.
- “Tutorial Plan” on page 7.
- “LDAP Binding Component Project in a Nutshell” on page 8.
- “Starting the GlassFish Application Server” on page 10.
- “Creating a BPEL Module Project For the Add Feature” on page 15.
- “Creating a WSDL Document” on page 17.
- “Create a WSDL Document For Type : SOAP” on page 26.
- “Creating a BPEL Process” on page 31.
- “Creating a Composite Application Project” on page 53.
- “Deploying a Composite Application” on page 58.
- “Testing the Composite Application” on page 59.
- “Design View: Notification” on page 63.
- “Create a WSDL Document : Search” on page 64.
- “Create a WSDL Document : Update Feature” on page 66.
- “Create a WSDL Document : Delete Feature” on page 68.

What You Need to Do

These topics provides instructions on the following:

- “To Start the GlassFish Application Server” on page 11.
- “To Start the JBI Components” on page 12.
- “To Create a BPEL Module Project” on page 15.

- “To Create a WSDL Document: Add Operation” on page 17.
- “To Create a WSDL Document : SOAP” on page 26.
- “To Create a BPEL Process” on page 31.
- “To Add a Partner Link” on page 33.
- “To Add a Web Service and Basic Activities” on page 35.
- “To Edit the Web Service : Receive1” on page 37.
- “To Edit the Web Service : Invoke1” on page 40.
- “To Edit the Web Service : Reply1” on page 44.
- “To Edit the Basic Activities : Assign1” on page 46.
- “To Edit the Basic Activities : Assign2” on page 50.
- “To Create a Composite Application Project” on page 53.
- “To Deploy a Composite Application” on page 58.
- “To Test the Composite Application” on page 59.

Tutorial Overview

This tutorial helps you create a new OpenESB component called LDAP Binding Component.

It also shows you how to create a LDAP Binding Component project that accesses a LDAP server. It illustrates how to implement the method for requesting and displaying data from a LDAP server.

This component implements all the required interfaces from the JBI 1.0 specification.

The LDAP browser project is an application that holds an implementation of a data provider (for example, LDAPTableDataProvider). In addition to this, the application demonstrates how to pass a request to the server and how to specify the set of attributes to be received from the server.

Tutorial Requirement

Read the sections thoroughly before trying to execute the Binding Component.

Software Needed for the Tutorial

LDAP Binding Component assumes that the following are configured on the target resource.

- GlassFish ESB or Java CAPS
- A JCA container, tested with GlassFish installer
- LDAP Web Browser (used to view the output)

For example, Softerra LDAP Browser

Tutorial Plan


Follow the outlined procedure to build a BPEL process.

1. Create a BPEL Module project using the New Project wizard.
2. Create the following WSDL Document for the BPEL Module.
 - a. LDAP WSDL
 - b. SOAP WSDL

Note – Test Cases are not required for File Binding Component and JMS.

3. Create a Composite Application project.
4. Add the BPEL Module project (*.jar) as a JBI Module to the Composite Application project.
5. Build the Composite Application project. Ensure that the Application Server is started.
6. Deploy the Composite Application project to the Application Server.
7. Create a Test Case.
8. Run the Test Case.
9. (Optional) Debug the BPEL process.


Debug is invoked when the Test Case fails.

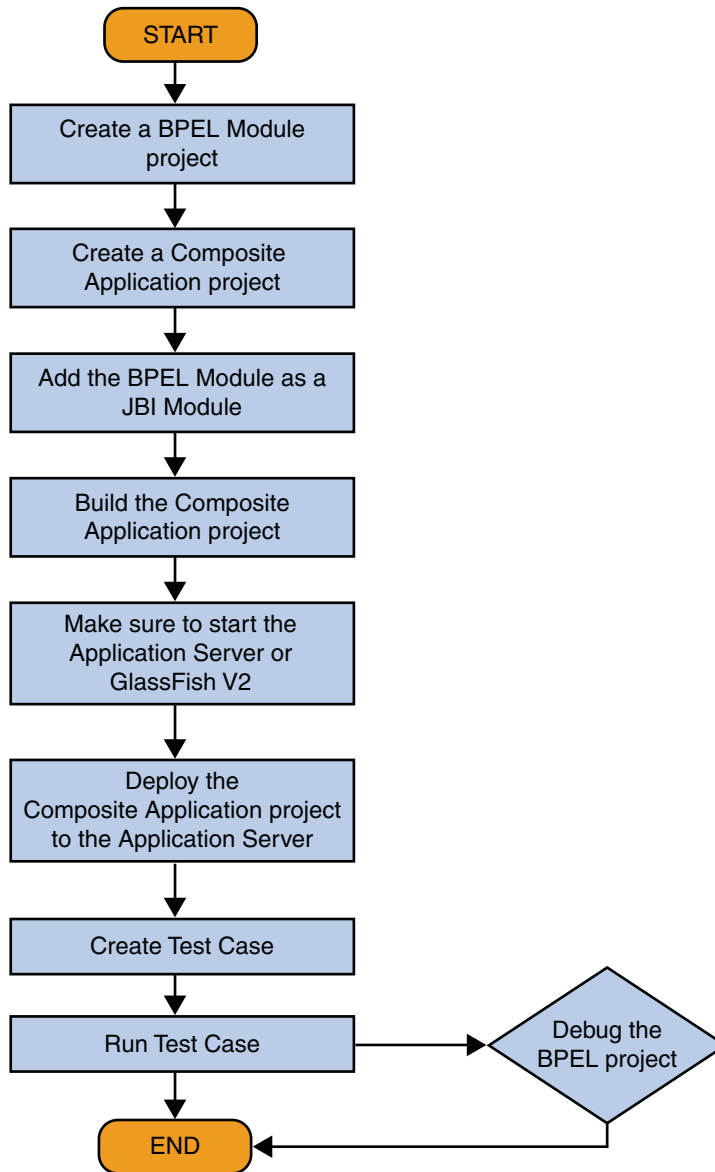


LDAP Binding Component Project in a Nutshell

The following illustration explains the procedure of creating the LDAP BC tutorial project.

Flowchart 1

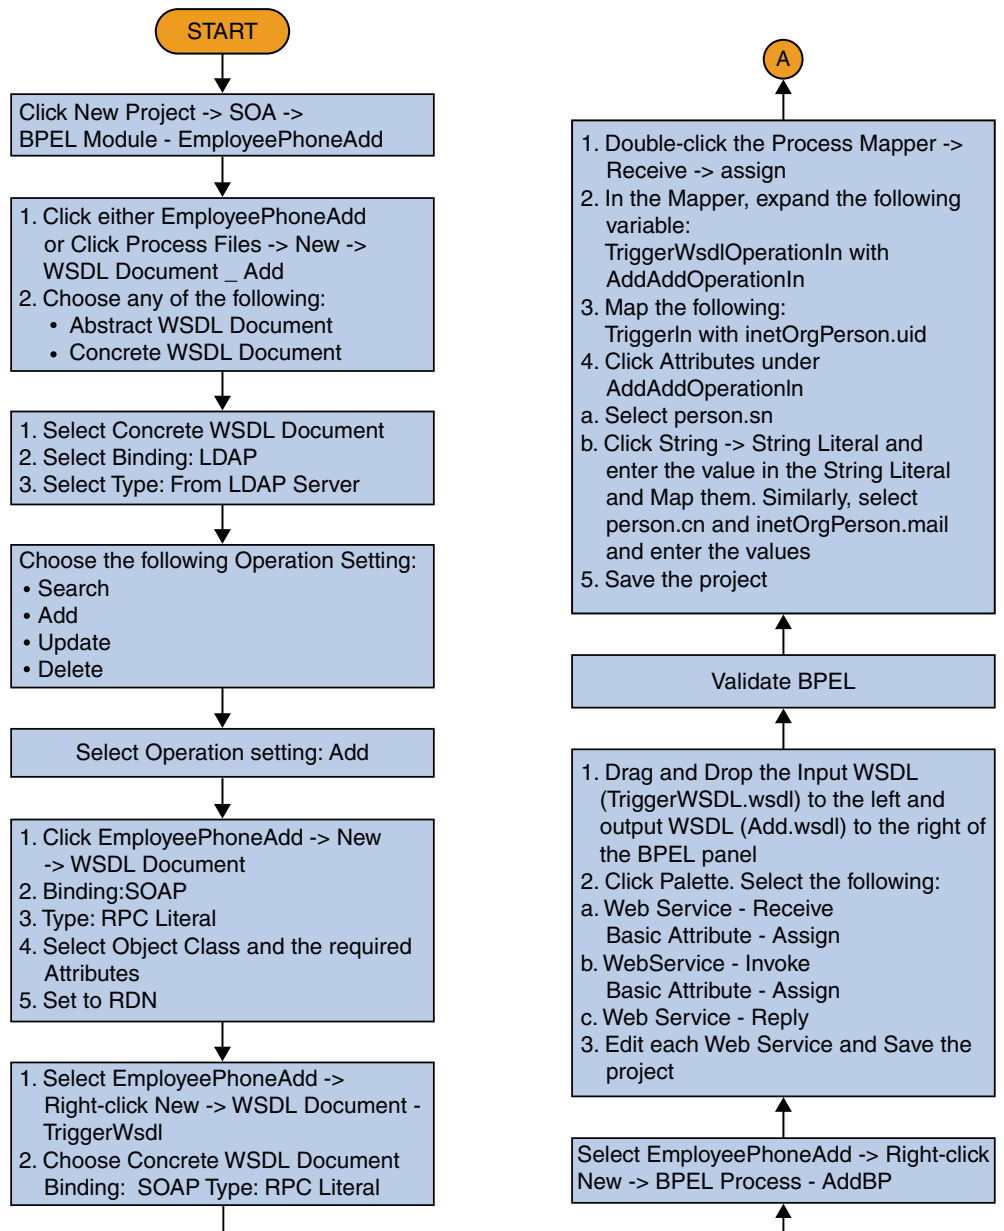

Flowchart 1 (Continued)

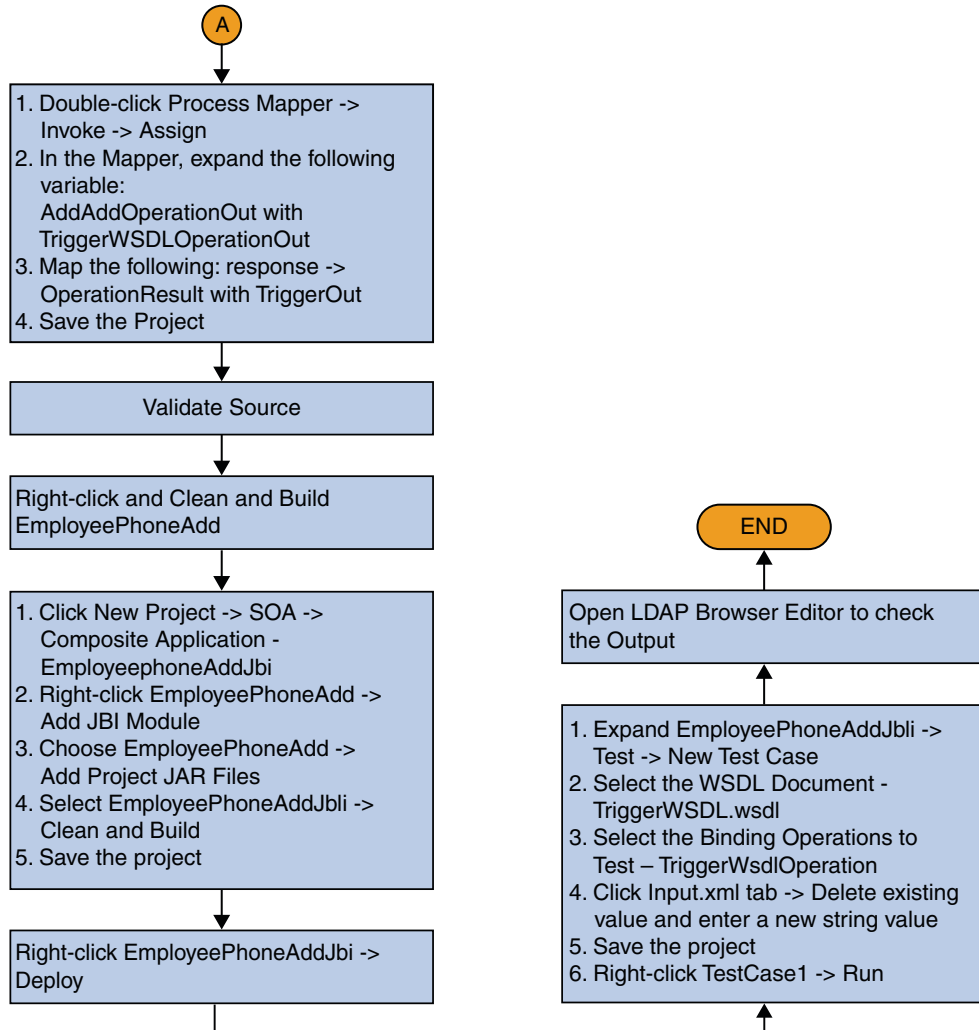


Starting the GlassFish Application Server

The GlassFish Application Server is installed when GlassFish ESB is configured. NetBeans starts the Application Server when needed.

▼ To Start the GlassFish Application Server

Before You Begin Choose Window —> Services, if the Services tab is not visible.

- 1 Click the Services tab and expand the Servers node.
- 2 Right-click the domain (GlassFish V2, by default). Select Start.

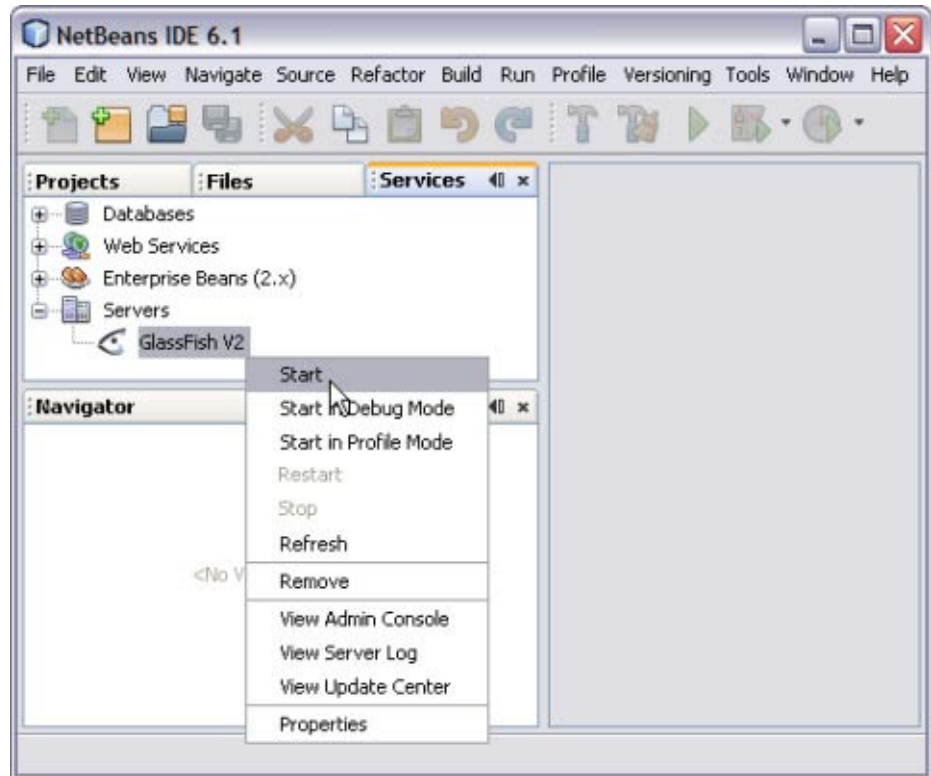


The Output window displays log information generated during the application startup.

Note – Choose Window —> Output —> Output, if the Output window is not visible.

The following message in the Output console window is an indication that the application server is listening.


JBI framework startup complete.

Note – A green arrow badge on the GlassFish Application Server node indicates the server is listening.

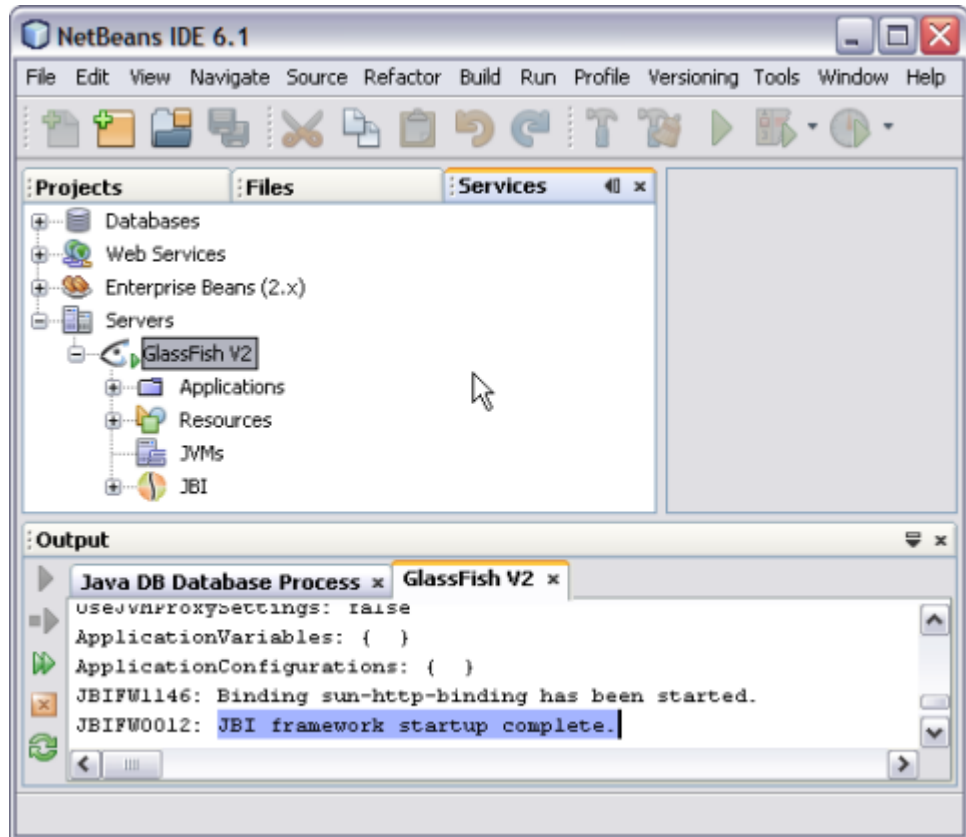

▼ To Start the JBI Components


- 1 Expand GlassFish —> JBI —> Binding Components.
- 2 Right-click on sun-ldap-binding. Click Start.

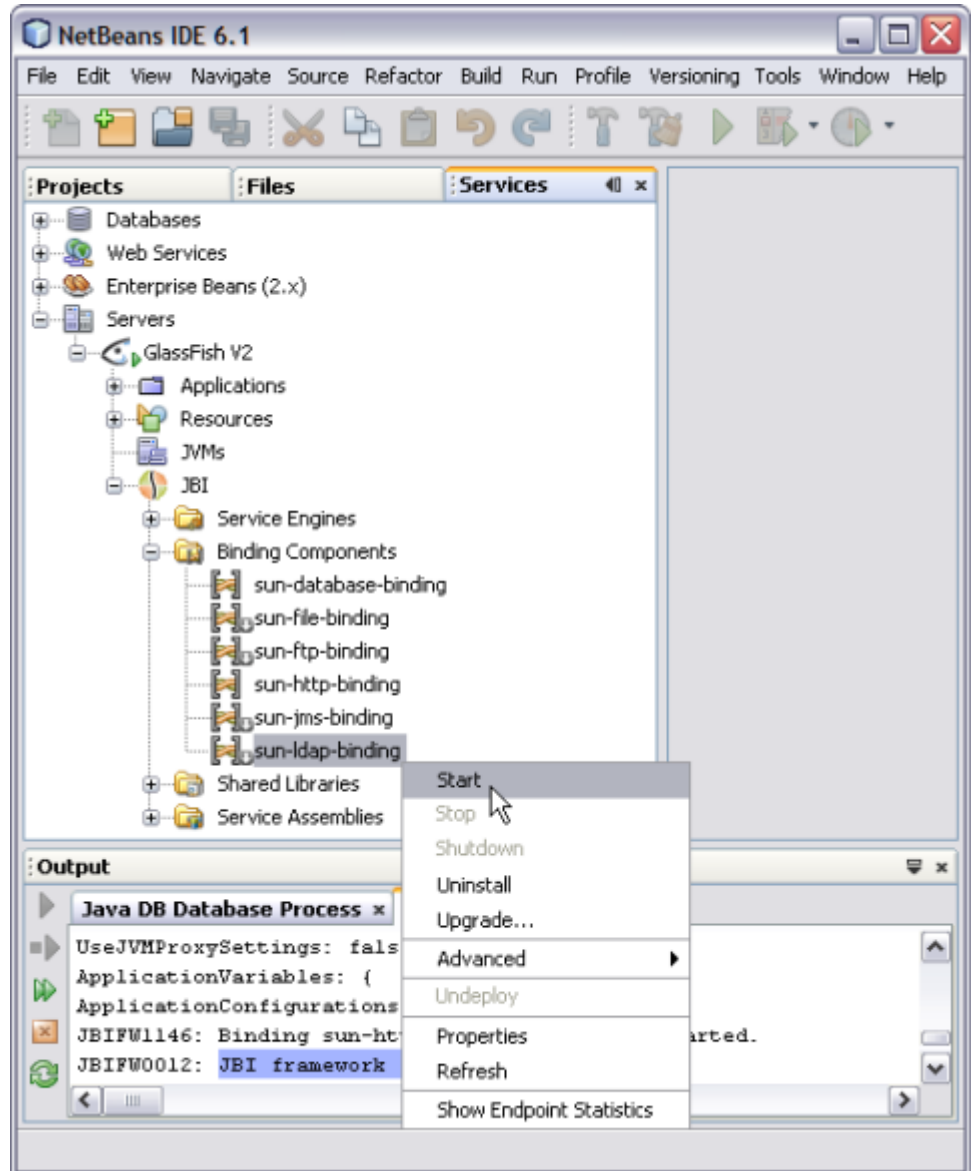

The action enables sun-ldap-binding.

The Output console displays a confirmation message.

Binding sun-ldap-binding has been started.

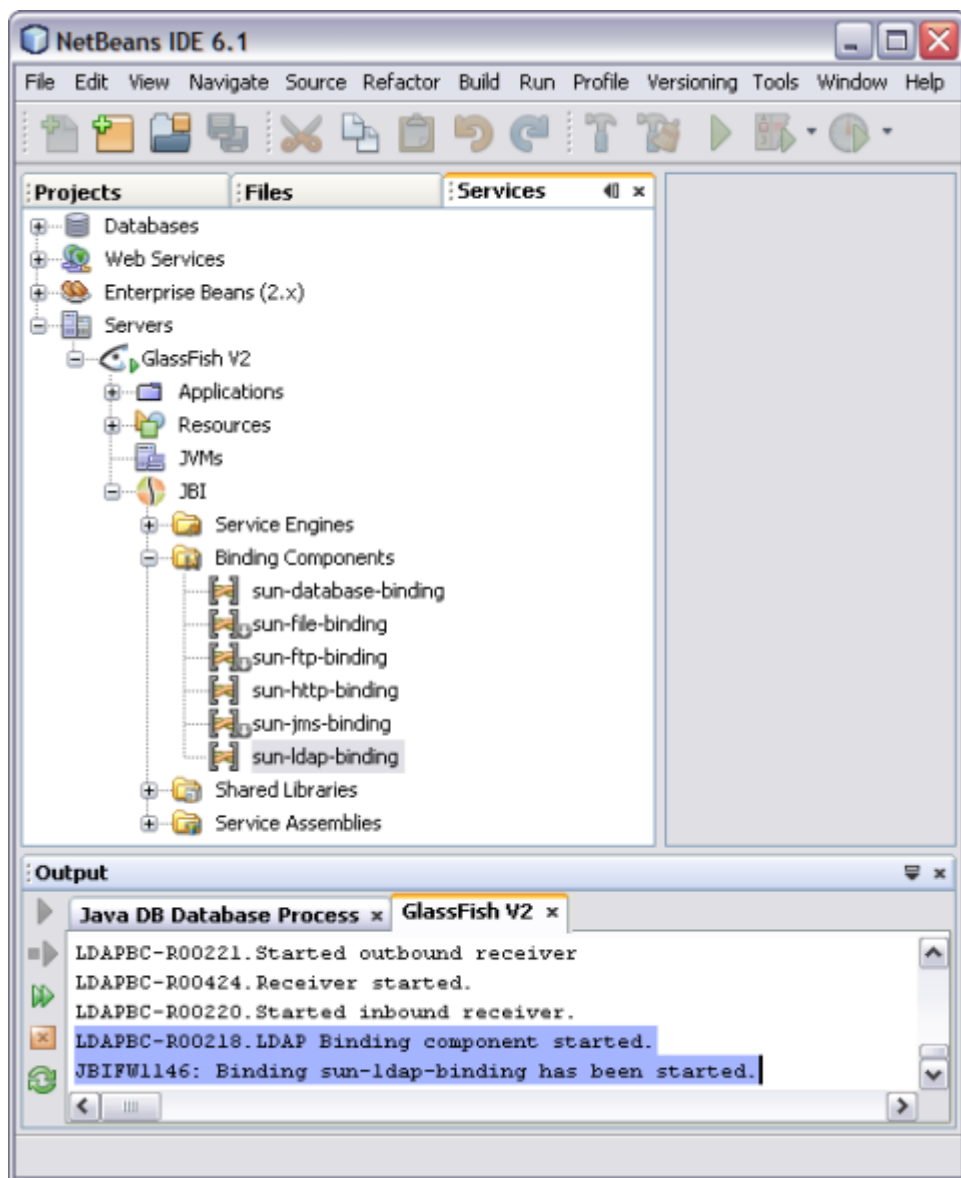


Creating a BPEL Module Project For the Add Feature


In this scenario, an Object Class and an Attribute is added and are identified as Input and Output, respectively.

▼ To Create a BPEL Module Project

- 1 **Choose File —> New Project from the main menu.**
This opens the New Project wizard.
- 2 **Select the SOA node from the Categories list.**
- 3 **Select the BPEL Module node from the Projects list.**

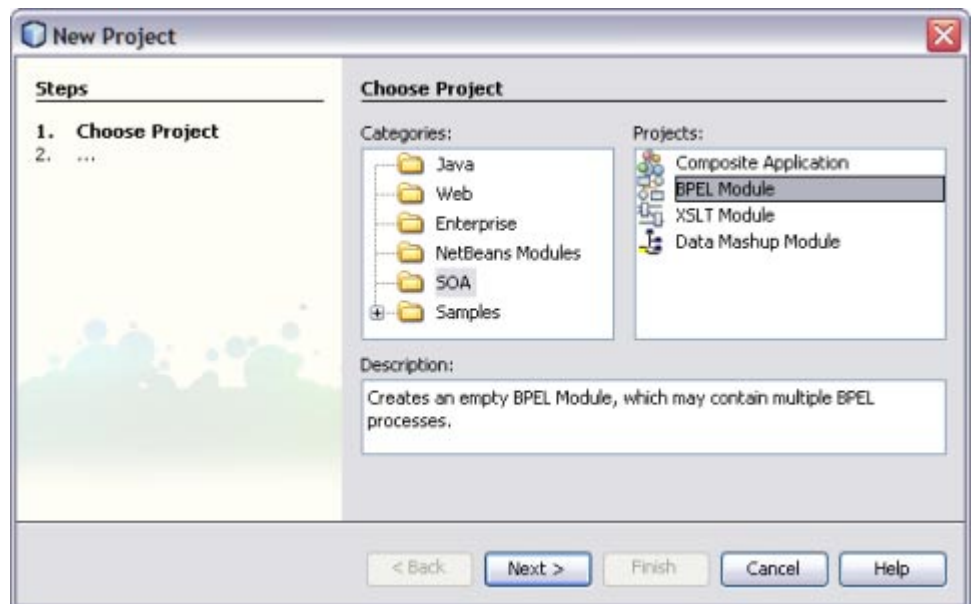


- 4 **Click Next.**
- 5 **Type the Project Name in the Project Name field.**
For example, LDAPBpelModule
- 6 **Click Browse to navigate to the project location field.**
The IDE stores the project files. This step is optional.

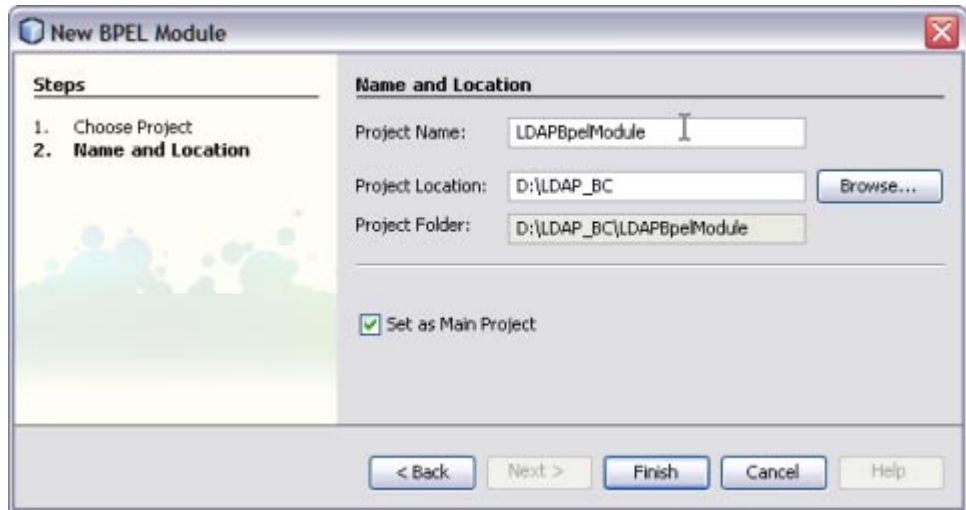

7 Click Finish.

A project node for the BPEL module project named LDAPBpelModule is created in the Projects window.

8 Click Save All.

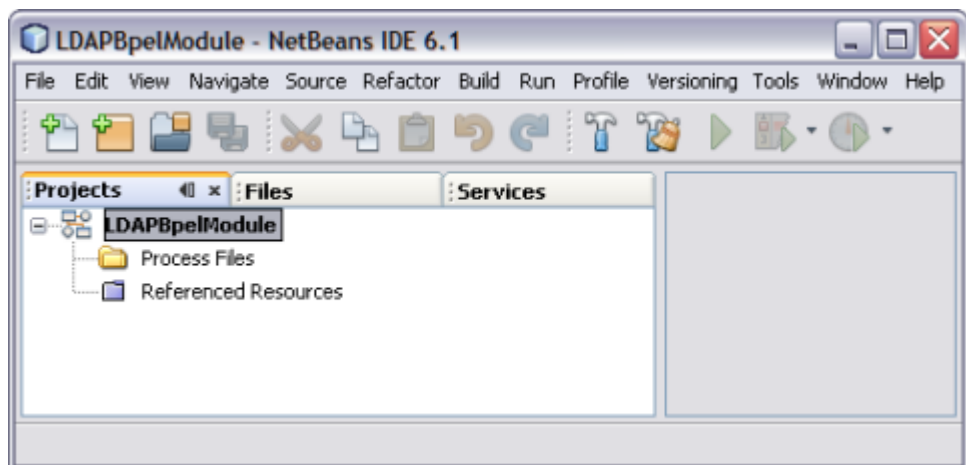


Creating a WSDL Document

In this section, create a WSDL Document in the BPEL Module project using the Add feature. For this example, create `AddWSDL.wsdl` in the BPEL project. Use the Partner view of the WSDL editor to configure the components of the WSDL Document.

▼ To Create a WSDL Document: Add Operation

- 1 Expand the BPEL Module project node in the Projects tab.
- 2 Right-click the project node or Process Files node. Select **New** —> **WSDL Document**.

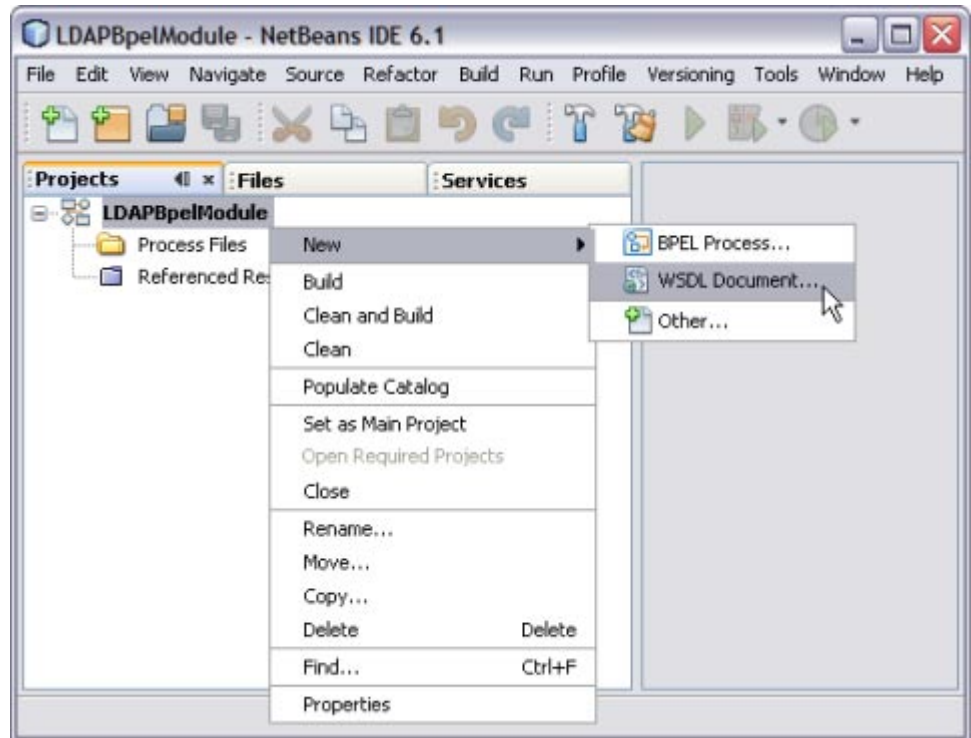


This opens the New WSDL Document wizard.

- 3 **Type the File Name in the File Name field.**

For example, `AddWSDL.wsdl`


- 4 Select Concrete WSDL Document.
- 5 Choose the Binding — LDAP from the drop-down list.
- 6 Choose any one of the following Types from the drop-down list.
 - From LDAP Server
 - From LDIF File

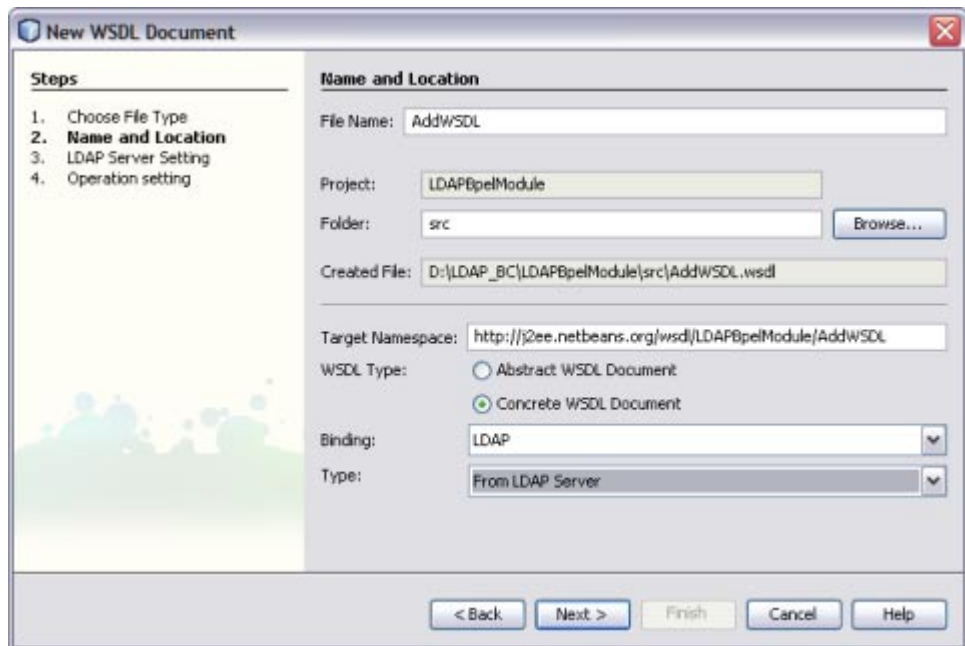



- 7 Click Next.
- 8 Enter the Root DN and LDAP Server URL.
DN is the base object entry search relative to.

In the figure below, the Root DN is **dc=sun,dc=com**. The format for the LDAP Server URL is `ldap://hostname:port`.

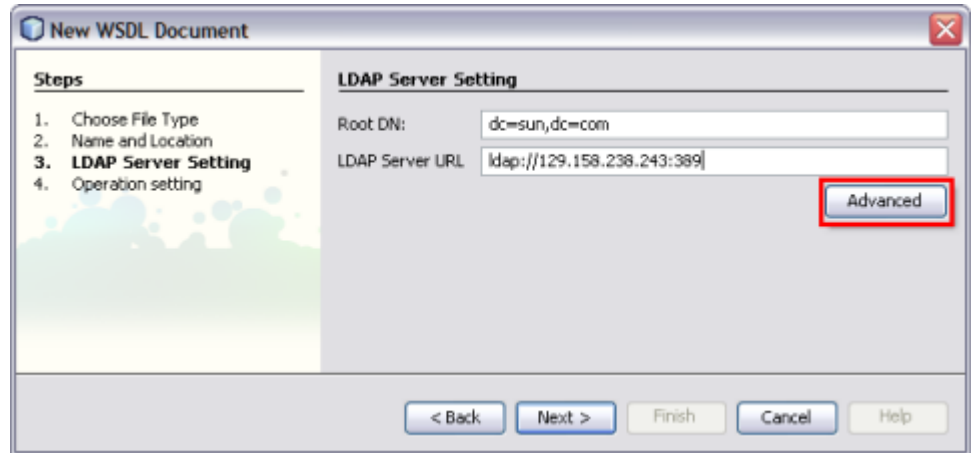- 9 Click Advanced.



The Advanced Login dialog box appears.

 **Advanced Login Dialog** 

Principal

cn=Manager,dc=sun,dc=com

Credential

*****|

SSL Connection Type

Authentication Type

Security Protocol

TrustStore

Browse

TrustStore Type

TrustStore Password

KeyStore

Browse

KeyStoreType

KeyStore Username

Key Store Password

TLS Security

NO

Ok

Cancel

Field	Description	Required Value
Principal	The principal needed when using an authentication mechanism other than the anonymous log-in (authentication = none).	The fully qualified Distinguished Name (DN) of the user. For example: cn=Administrator,cn=Users,dc=stc,dc=com
Credentials	The credentials needed when using an authentication mechanism other than anonymous log-in (authentication = none).	The appropriate credentials, such as valid password.

SSL Connection Type	The SSL connection type.	<p>Select None, Enable SSL, or TLS On Demand. Enter the desired value as follows:</p> <ul style="list-style-type: none"> ■ None: No SSL, simple plain connection. ■ Enable SSL: SSL is enabled. All communication to the LDAP server uses a secure communication channel. <p>Note – If you are using the Enable SSL option, the ProviderURL property must point to a secure LDAP port.</p>
Authentication	<p>The method authentication (none or simple). Select the desired authentication as follows:</p> <ul style="list-style-type: none"> ■ None: No authentication, that is, an anonymous log-on. If you use this setting, ensure that the LDAP server supports anonymous log-ons if you are using this setting. ■ Simple: Authentication is based on a user name and password. Provide the user name and password in the appropriate fields (Use the Principal and Credentials). 	<p>Select None or Simple.</p> <p>The default is None.</p>
TrustStore	<p>The default TrustStore. The TrustStore is used for CA certificate management when establishing SSL connections.</p> <p>Click Browse to select the trust store file.</p>	<p>A valid TrustStore file.</p> <p>There is no default value.</p>
TrustStore Type	The TrustStore type of the TrustStore used for CA certificate management while establishing an SSL connection. If the TrustStore type is not specified, the application uses JKS as the default TrustStore Type.	A valid TrustStore type.
TrustStore Password	The default TrustStore password. The password is meant to access the TrustStore used for CA certificate management while establishing SSL connections.	<p>A valid TrustStore password.</p> <p>There is no default value.</p>

KeyStore	The default KeyStore file. The keystore is used for key/certificate management while establishing SSL connections. Click Browse to select the key store file.	A valid package location. There is no default value.
KeyStore Type	The default KeyStore type. The keystore type is used for key/certificate management when establishing SSL connections. If the KeyStore type is not specified, the default KeyStore type is used.	A valid KeyStore type.
KeyStore Username	The user name for accessing the keystore used for key/certificate management when establishing SSL connections.	A valid KeyStore user name.
KeyStore Password	The default KeyStore password. The password is used to access the KeyStore used for key/certificate management when establishing SSL connections; there is no default.	A valid KeyStore password. There is no default value.
TLS Security	An indicator of whether TLS security is enabled.	The default value is NO

10 Click OK to close the Advanced Login Dialog.


11 Click Next.

The New WSDL Document — Operation Setting dialog box opens.

Note – You can perform any one of following operations.

- Search
 - Add
 - Update
 - Delete
-

12 Click the Add tab.

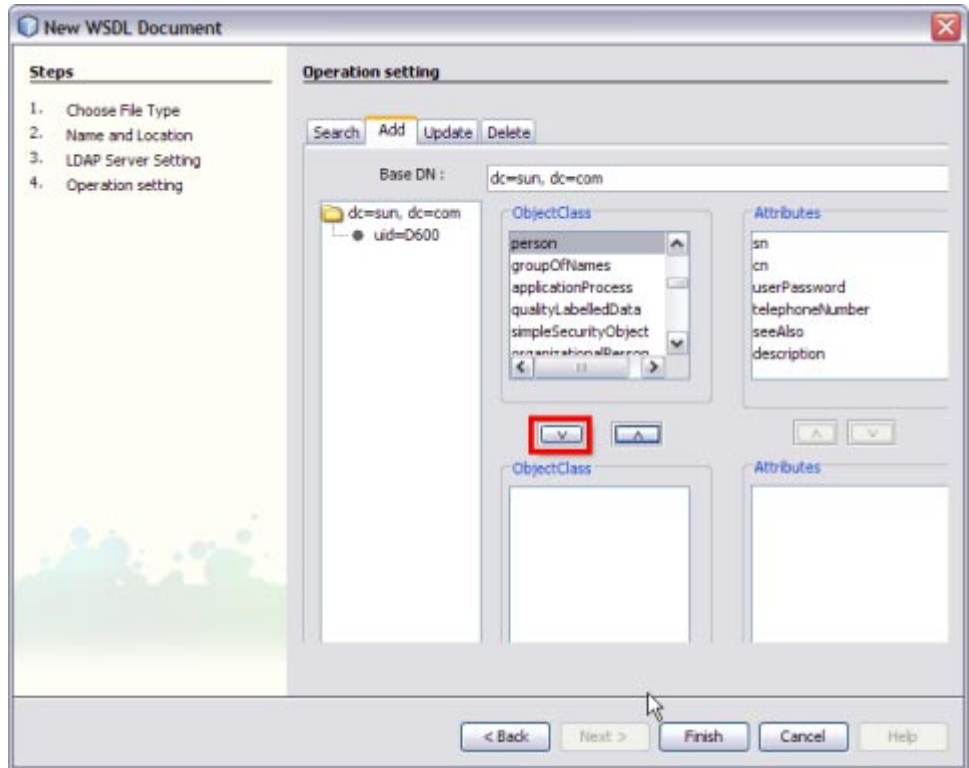

Select the following Object Class:

- a. **person**
- b. **inetOrgPerson**

Click the down arrow to move them from the top-left pane to the bottom-left pane.

Note – The attributes related to the schema are selected.

Each schema is made up of a set of attributes.

For example,


- **person** — person.sn and person.cn
- **inetOrgPerson** — inetOrgPerson.uid and inetOrgPerson.mail

They are represented as follows:

schemaname.Attributename

- a. sn — Surname
- b. cn — Common Name
- c. uid — Unique id
- d. mail — Email


Note – Use the down arrow to move the selected Object Class or Attributes from the top-left pane to the bottom-left pane. Use this to also move from the top-right pane to the bottom-right pane.

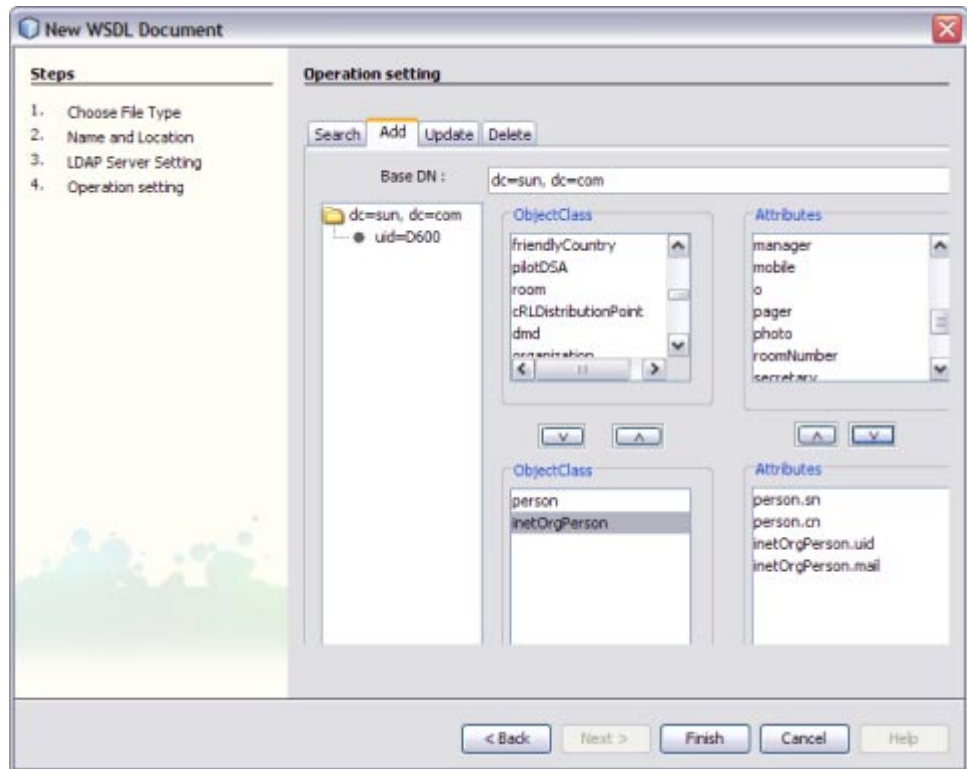

13 Set any one of the Attributes to Relative Distinguished Name (RDN).

A Relative Distinguished Name (RDN) is a component of the distinguished name.


For example, cn=John Doe, ou=People is a RDN relative to the root RDN dc=sun.com.

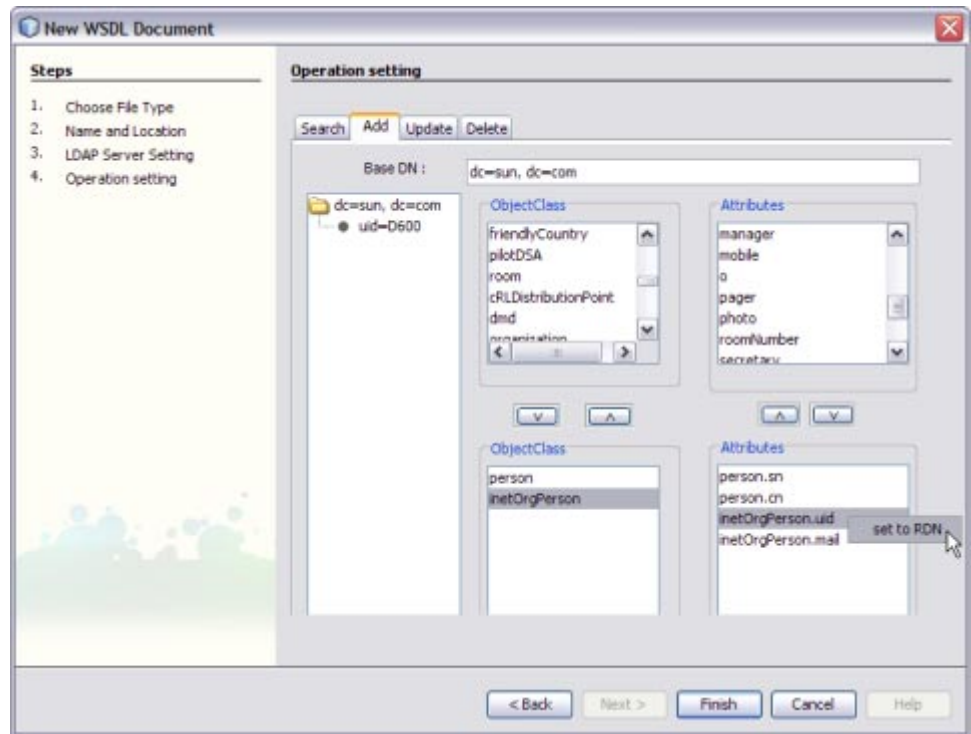

For example, Set inetOrgPerson.uid = RDN

14 Click Finish.

The illustration is as shown.

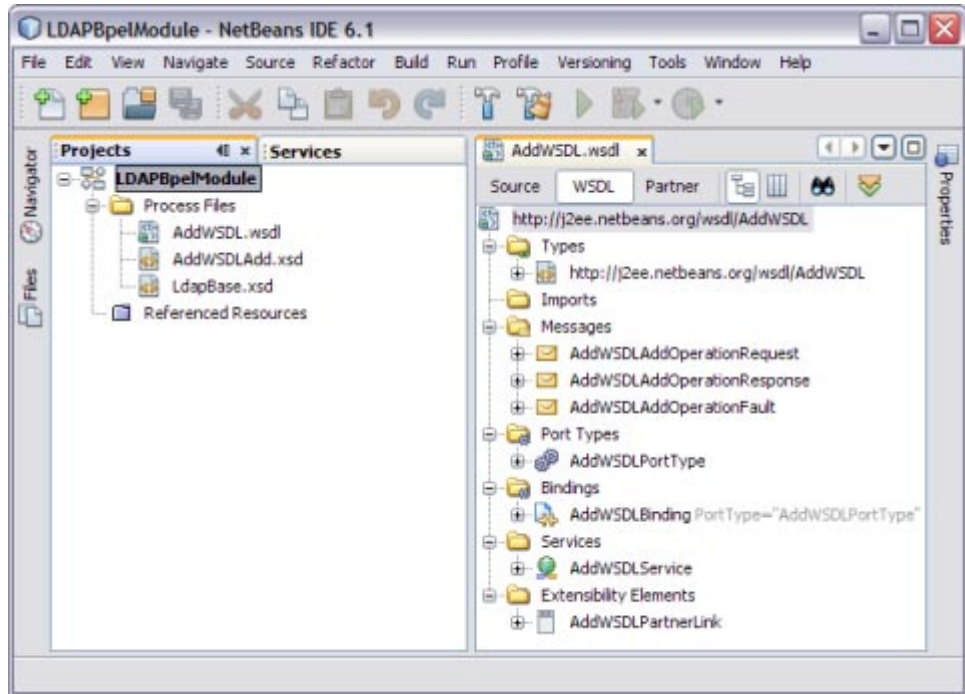

A tree structure is formed as follows:

- a. AddWSDL.wsdl — Target WSDL
- b. AddWSDLAdd.xsd
- c. LdapBase.xsd

Create a WSDL Document For Type : SOAP

In this section, add a WSDL document, for example, TriggerWsdL.wsdl to the BPEL Module project. The Partner view of the WSDL editor to configure the components of the WSDL document.

▼ To Create a WSDL Document : SOAP

- 1 Expand the project node in the Projects window. Right-click the BPEL Module node or Process Files node. Choose New —> WSDL Document...

For example, LDAPBpelModule

This opens the New WSDL Document wizard.

2 Type the File Name in the File Name field.

For example, TriggerWSDL.wsdl

3 Select Concrete WSDL Document.

- **binding**

Defines the message format and protocol details for a port type.

- **service**

Indicates the binding type to be used and the method to access the database resource.


4 Choose the Binding — SOAP from the drop-down list.

5 Select any one of the following Type.

If you select the SOAP binding type, then select any one of the following binding subtypes:

- **RPC Literal:** The operations are RPC oriented (that is, messages contain parameters and return values). Each message part uses an element or type attribute to refer to a concrete schema definition.
- **Document Literal:** The operations are document oriented (that is, messages contain one or more documents). Each message part uses an element or type attribute to refer to a concrete schema definition.
- **RPC Encoded:** The operations are RPC oriented (that is, messages contain parameters and return values). Each message part uses a type attribute to refer to an abstract type.

6 Choose Type — RPC Literal from the drop-down list.

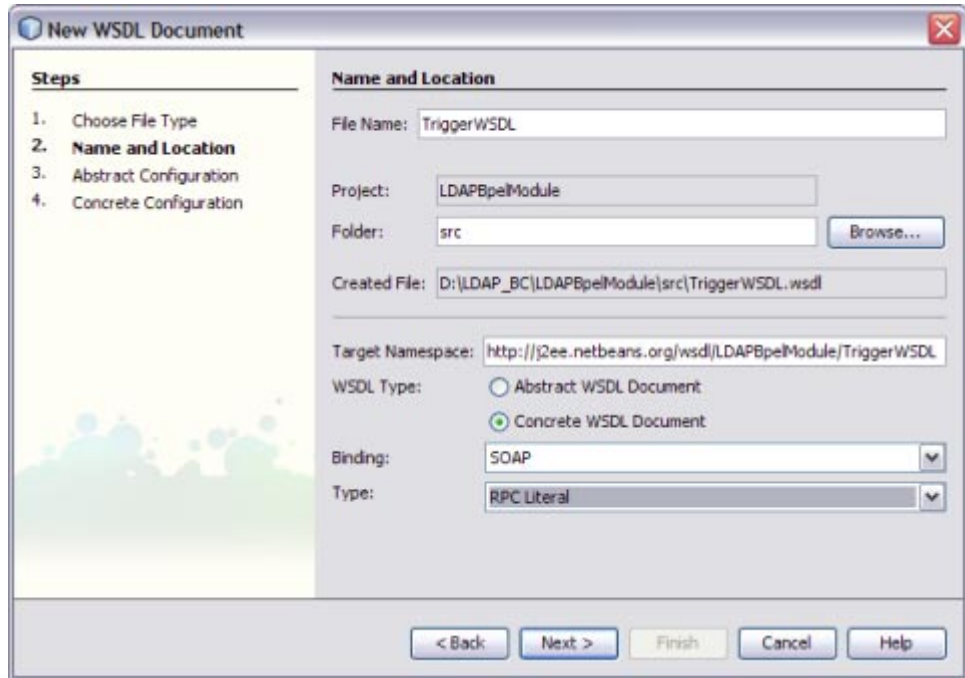

7 Click Next.

This action displays the New WSDL Document dialog box.

8 Choose the Operation Type from the drop-down list.

The WSDL Editor is used to create, edit, and delete port types.

The WSDL Editor supports the following operation types. There are two Operation Types.

- **Request-Response Operation:** The operation receives a message as input, and sends a message as output.
- **One-Way Operation:** The operation receives a message as input.

Each message contains one or more logical parts. Specify the name and the type of content for each part.

If you change the name of a port type or operation, then the WSDL Editor renames all occurrences in the same file. Right-click the component node to rename all occurrences in the associated XSD, WSDL, and BPEL files. Choose Refactor —> Rename.

When Operation Type is One-Way Operation. The following illustration demonstrates when the operation type is chosen as One-Way Operation.

The screenshot shows the 'New WSDL Document' wizard in the 'Abstract Configuration' step. On the left, a 'Steps' pane lists: 1. Choose File Type, 2. Name and Location, 3. **Abstract Configuration**, and 4. Concrete Configuration. The main area contains the following fields and controls:

- Port Type Name:** TriggerWSDLPortType
- Operation Name:** TriggerWSDLOperation
- Operation Type:** One-Way Operation (dropdown menu)
- Input:** A table with two columns: 'Message Part Name' and 'Element Or Type'.

Message Part Name	Element Or Type
part1	xsd:string

 Below the table are 'Add' and 'Remove' buttons.
- ☒ **Generate partnerlinktype automatically.**

At the bottom are navigation buttons: '< Back', 'Next >', 'Finish', 'Cancel', and 'Help'.

Note –


- a. Click the ellipses (...) button to select an Element or Type.
 - b. Enter both the Input and Output Message Part Names for the Request-Response Operation.
The default value of the Input and Output Message Part Names is set as xsd:string.
 - c. Click Add to another Message Part Name as the Input.
This selects the checkbox **Generate partnerlinktype automatically**.
 - d. Click Remove to delete the Message Part Name as the Input.
-

9 Select Operation Type : Request-Response Operation from the drop-down list.

Note – Port Type Name and Operation Name are populated from the previous wizard.

10 Click the ellipses (...) to select the Element or Type.

Enter a Message Part Name for both Input and Output — TriggerIn and TriggerOut, respectively.

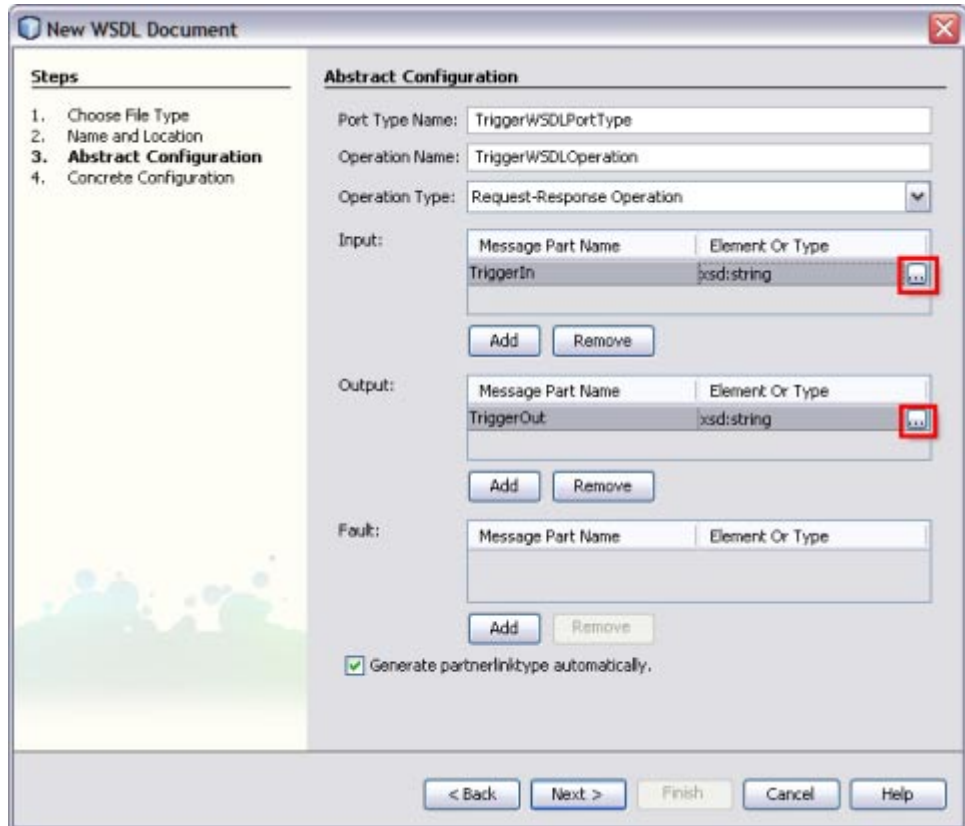

This action displays the Select Element or Type dialog box.


Retain the same values for Element or Type both for Input and Output as xsd:string.

11 Click Next.

The New WSDL Document — Concrete Configuration window is displayed.

Verify the Concrete Configuration.

12 Click Finish.

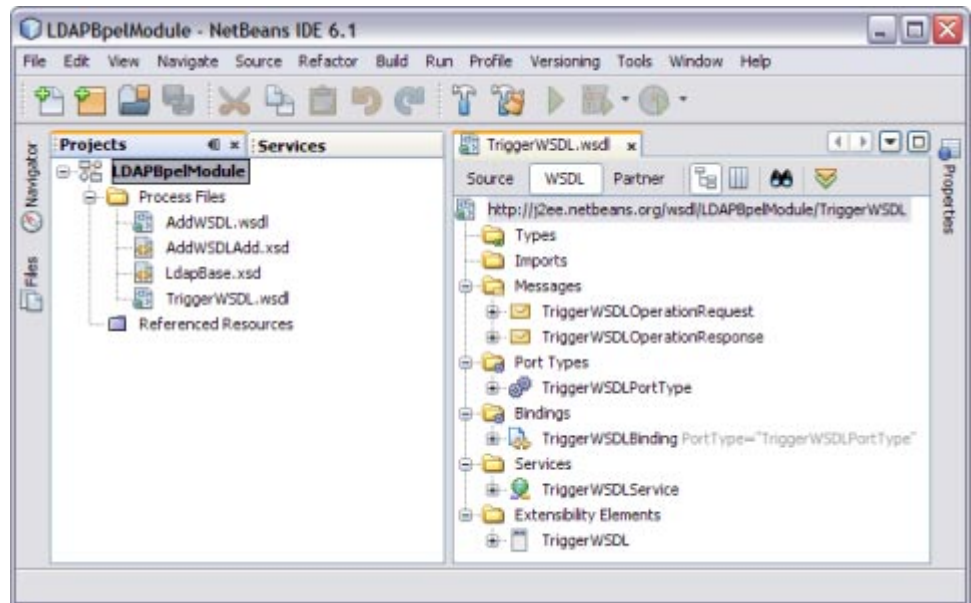

Creating a BPEL Process


In this section, add a BPEL process file. For example, AddBPEL.bpel. You will also learn to add a partner link and associate three activities to the BPEL process file. Create a BPEL Module project to orchestrate.

▼ To Create a BPEL Process

- 1 Expand the project node in the Projects window. Right-click the node or Process Files node. Choose **New —> BPEL Process...**

For example, LDAPBpelModule


This opens the New BPEL Process wizard.

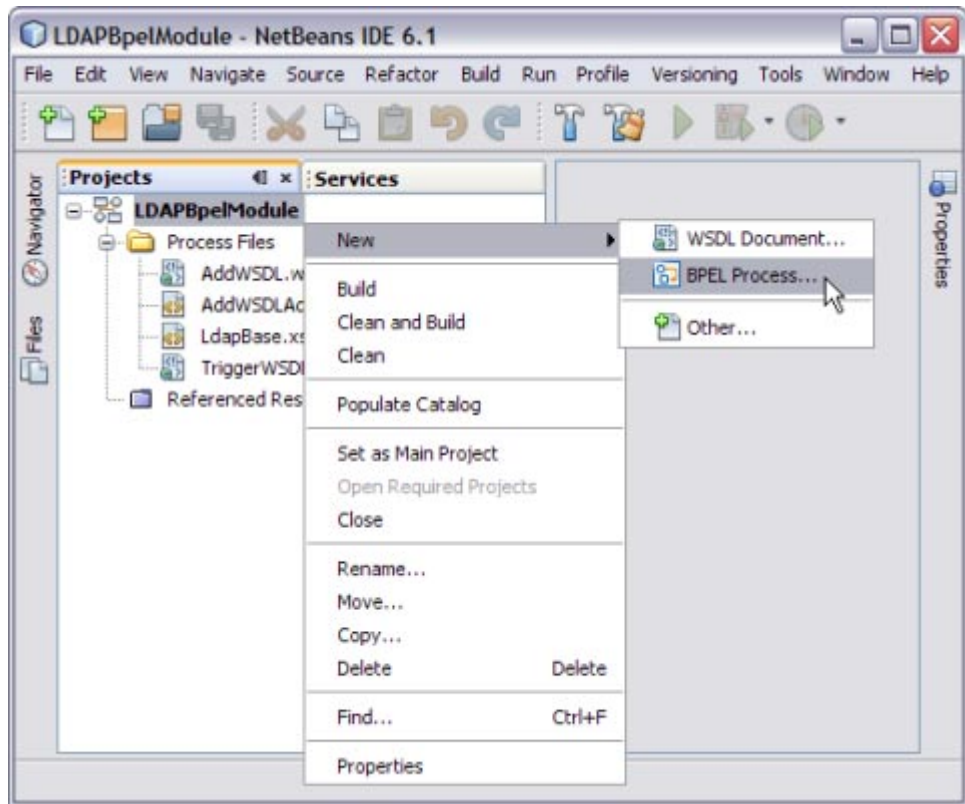

- 2 Type the Filename in the File Name field.

For example, AddBPELProcess

- 3 Click Finish.

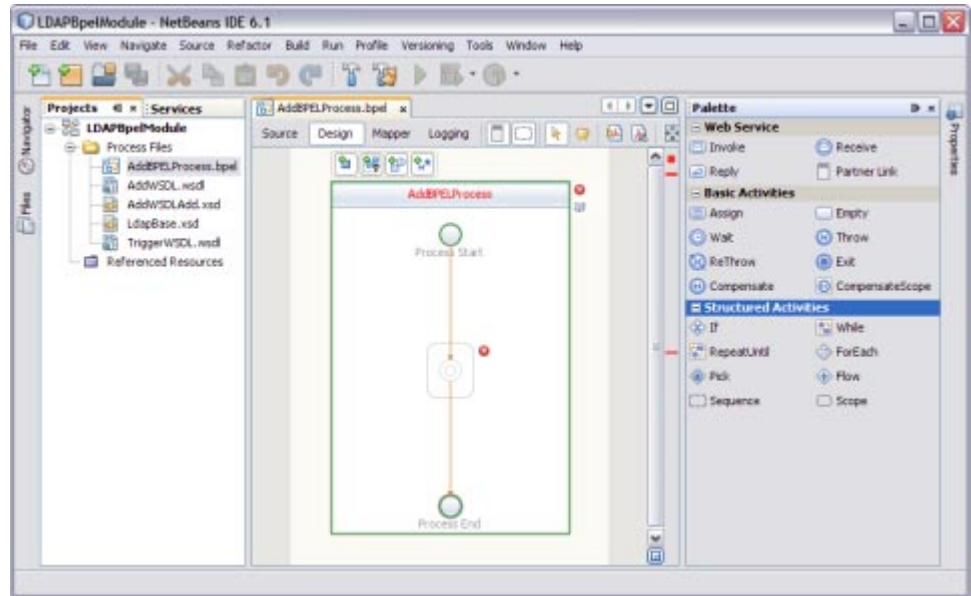

Note –


- In the Projects window, the IDE adds a AddBPELProcess.bpel node under the Process Files node.
- The AddBPELProcess.bpel file is open in the BPEL Designer.
The BPEL Designer has two views: Source and Design.
- The Properties window is open.
- Choose Window —> Properties if the Properties window is not visible.
- The Navigator window shows the BPEL Logical View of the BPEL Process document.

▼ To Add a Partner Link

- 1 Select the Partner Link from the Projects tab. Drag and drop it to the left panel of the design area.


For example, TriggerWSDL.wsdl

This is the Input WSDL.



- For example, AddWSDL.wsdl

This is the Output WSDL.

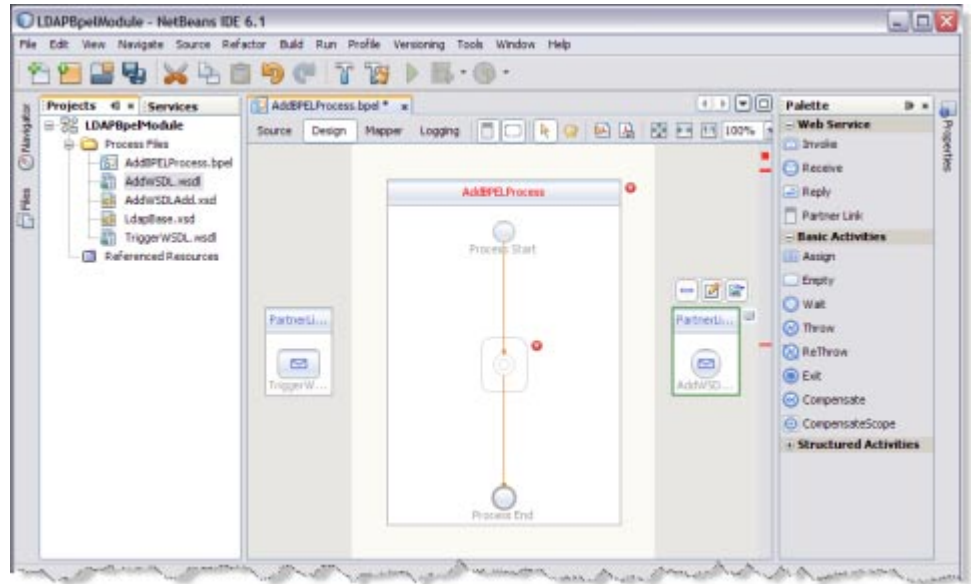

▼ To Add a Web Service and Basic Activities

Drag and Drop the following Web Services:


- Receive
- Invoke
- Reply

Drag and Drop the Basic Activities : Assign.

- 1 Select the Web Service : Receive in the Web Service section of the Palette.
- 2 Drag the selection to the box in the design area between the Process Start and the Process End activities.

For example, BPEL Process box : AddBPELProcess

The IDE provides the visual clues to show an appropriate location to drop the selection.

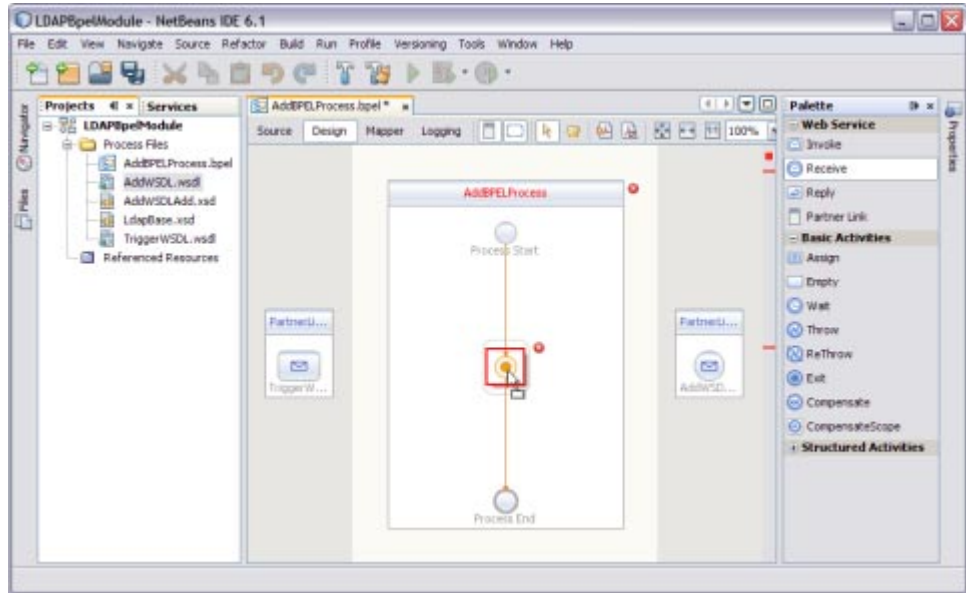

This action places a Web Service Receive called Receive1 in the Design view.

3 Select the Basic Activities. Choose Assign in the Basic Activities section of the Palette.

This action places a Assign activity called Assign1 in the Design view.

4 Drag the selection to the AddBPELProcess box in the design area, between the Process Start and the Process End activities.


Note – Repeat steps 1 through 4 to select Invoke1, Assign2, and Reply1.

Choose the following:

- Select the Web Service : Invoke and Basic Activities : Assign.
- Select the Web Service : Reply.

The icon symbolizes that the Web Services can be edited.

Note – In the diagram, a red cross next to an element means that the element has not passed validation and the output contains errors. Edit each Sequence to pass validation.

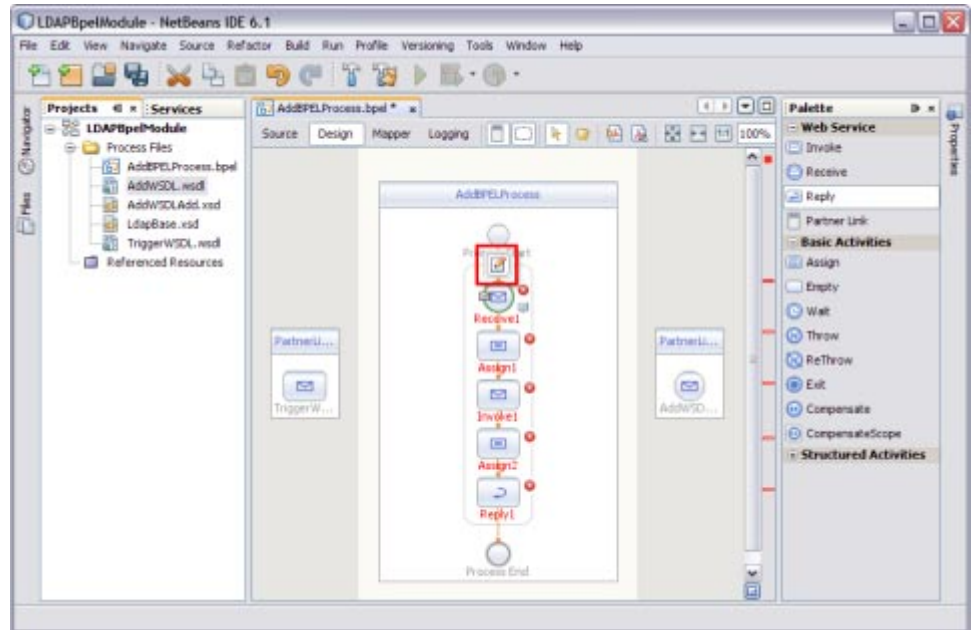


▼ To Edit the Web Service : Receive1

- 1 Click Web Service — Receive1 and click Edit.

This opens the Receive1 [Receive] - Property Editor.

- 2 Select the properties of this service from the Main tab. Select PartnerLink1.


The Operation drop-down list refreshes to display TriggerWSDLOperation.

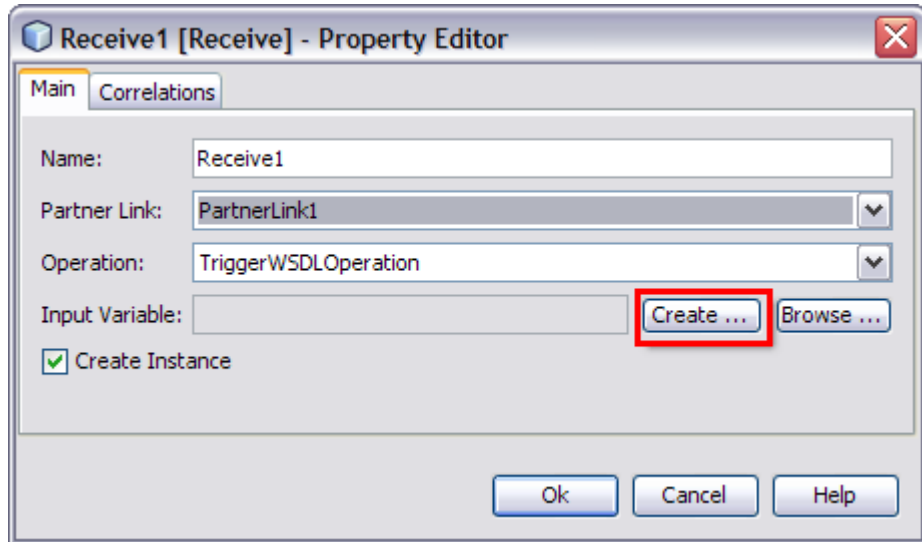

3 Create a new input variable.


Perform the following:

- Click the Create button next to the Input Variable field.
This opens the New Input Variable dialog box.
- The Name, Type, and Scope variable fields are refreshed with their default values.
Change the value in the Name field.
- Click OK.

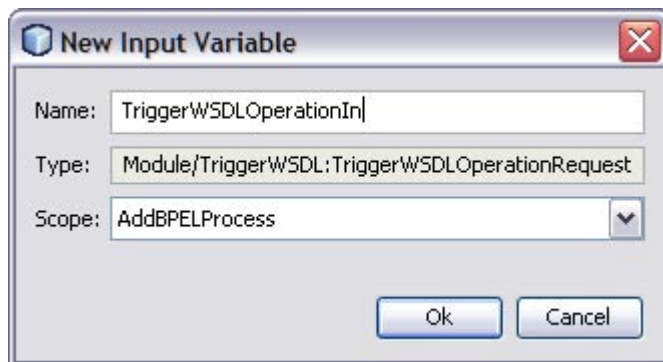


Note –

- All the fields are populated with the assigned values.
The Input Variable is TriggerWSDLOperationIn
- Create Instance check-box is checked, by default.

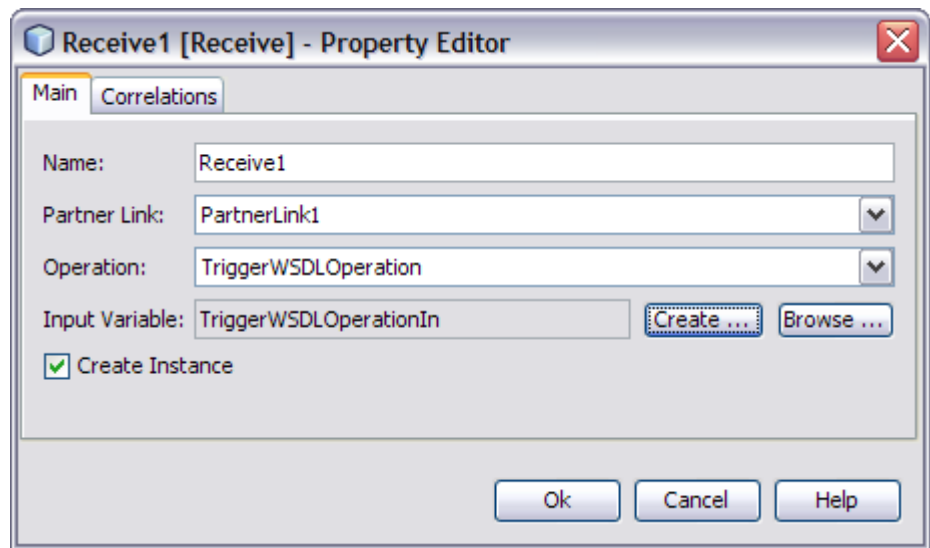


- 4 Click OK to close the Receive1 [Receive] - Property Editor.
- 5 Save the project.

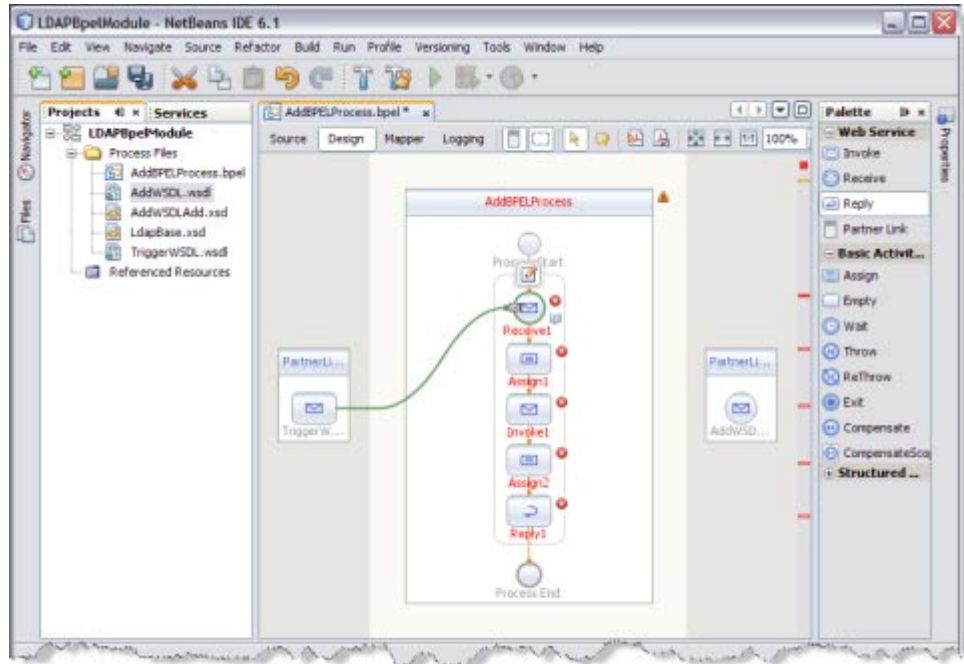

▼ To Edit the Web Service : Invoke1


- 1 Click Web Service — Invoke1 and click Edit.
This opens the Invoke1 [Invoke] - Property Editor.
- 2 Select the properties from the Main tab. Select PartnerLink2 from the drop-down list.
The Operation drop-down list refreshes to display AddWSDLAddOperation.

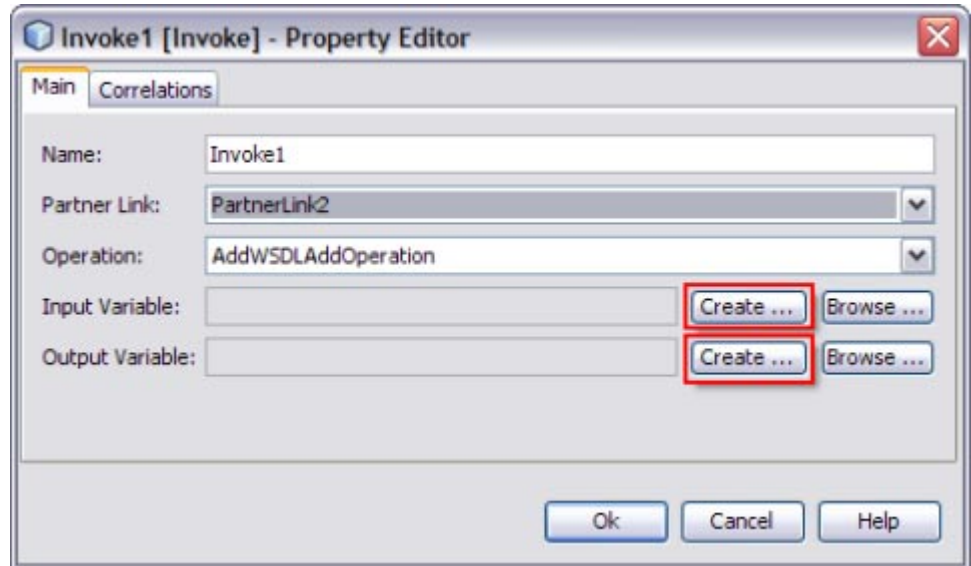

3 Follow these steps to create a new input and an output variable.

a. Click the Create button next to the Input Variable field.

This opens the New Input Variable dialog box.

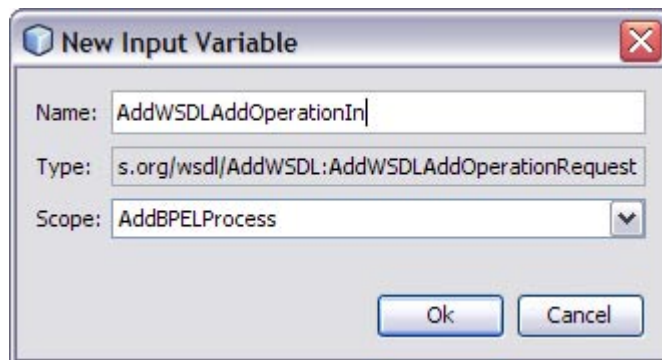


The Name, Type, and Scope variable fields are refreshed with their default values.

You can also change the value in the Name field.

b. Click OK to close the New Input Variable dialog box.

- c. Click the **Create** button next to the **Output Variable** field.

This opens the New Output Variable dialog box.

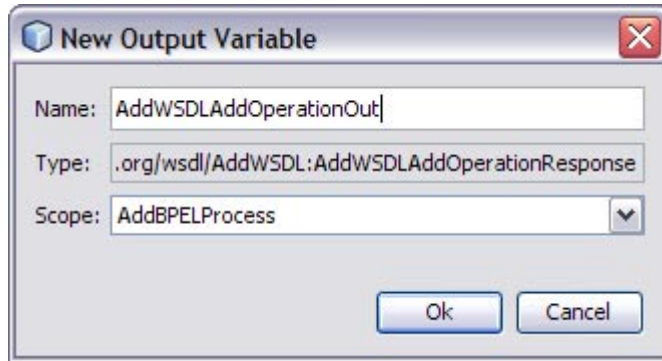

The Name, Type, and Scope variable fields are refreshed with their default values.


You can also change the value in the Name field.

- d. Click **OK** to close the **New Output Variable** dialog box.


Note – All the fields are populated with the assigned values.

Select the following Variables:

- **Input Variable** : AddWSDLAddOperationIn
 - **Output Variable** : AddWSDLAddOperationOut
-

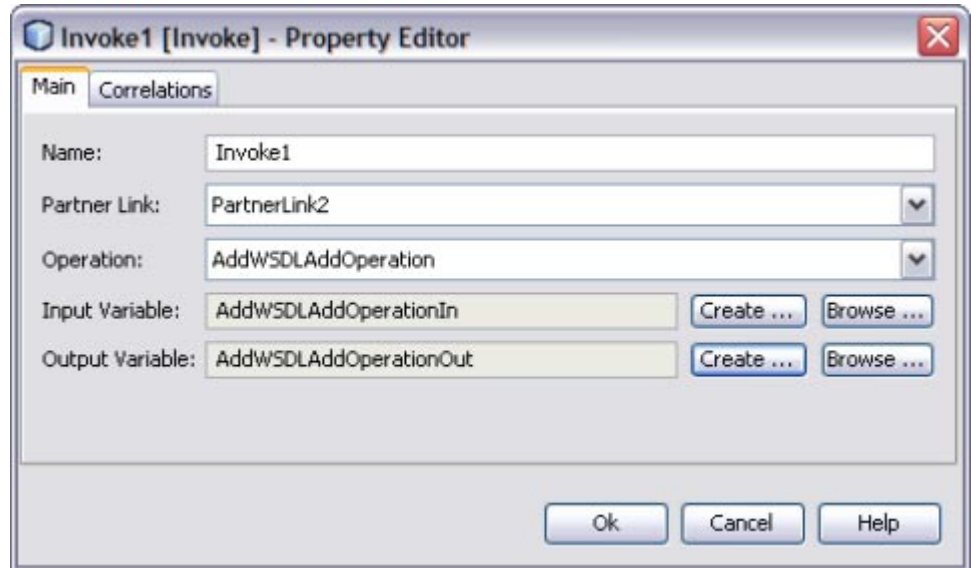

- 4 Click OK to close the Invoke1 [Invoke] - Property Editor.
- 5 Save the project.

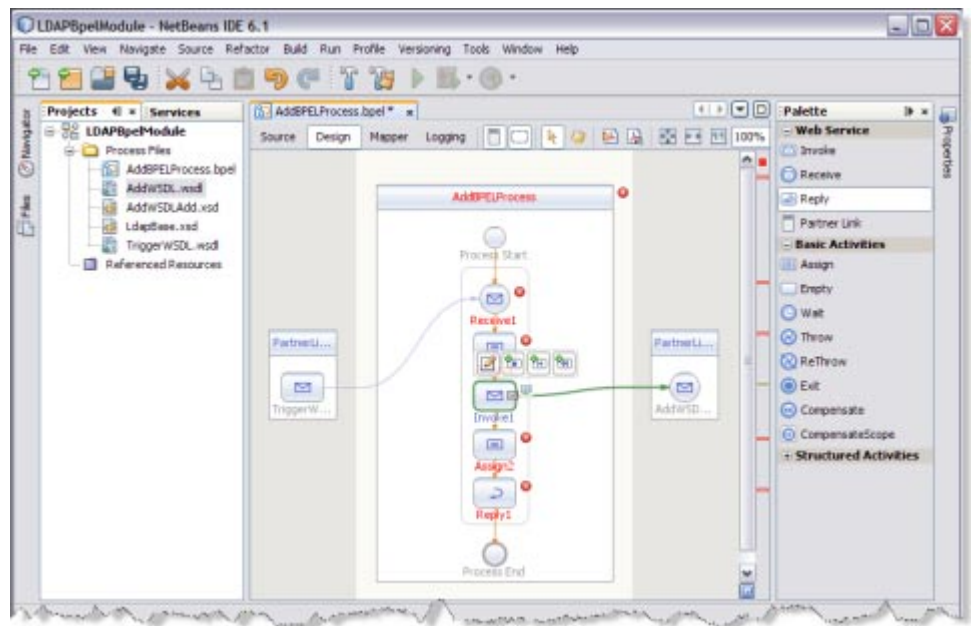

▼ To Edit the Web Service : Reply1

- 1 Click **Web Service : Reply1**. Click **Edit**.

This opens the Reply1 [Reply] - Property Editor.

- 2 Select the properties from the **Main** tab. Select **PartnerLink1** from the drop-down list.


The Operation drop-down list refreshes to display **TriggerWSDLOperation**.

The screenshot shows the 'Reply1 [Reply] - Property Editor' dialog box. It has two tabs: 'Main' and 'Correlations'. The 'Main' tab is active. The 'Name' field contains 'Reply1'. The 'Partner Link' dropdown menu shows 'PartnerLink1'. The 'Operation' dropdown menu shows 'TriggerWSDLOperation'. There are two radio buttons: 'Normal Response' (selected) and 'Fault Response'. Under 'Normal Response', there is an 'Output Variable' field and two buttons: 'Create ...' (highlighted with a red rectangle) and 'Browse ...'. Under 'Fault Response', there are fields for 'Fault Name' and 'Fault Variable', each with a 'Choose ...' or 'Create ...' button. At the bottom are 'Ok', 'Cancel', and 'Help' buttons.


- 3 Follow the steps to create a New Output Variable.

- a. Make sure to select the **Normal Response** radio button.
- b. Click the **Create** button next to the **Output Variable** field.


This opens the New Output Variable dialog box.

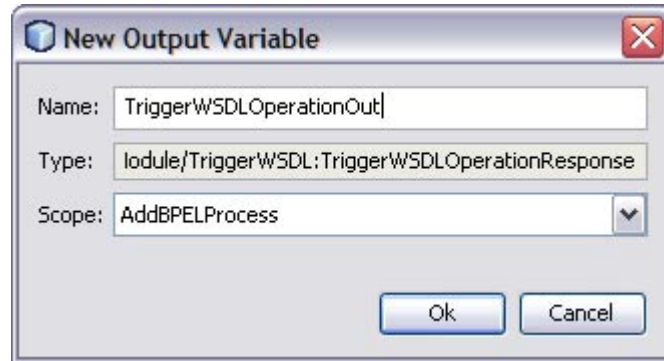

- c. Change the value in the Name field. This is optional.
TriggerWSDLOperationOut is displayed, by default.
- d. Click OK.

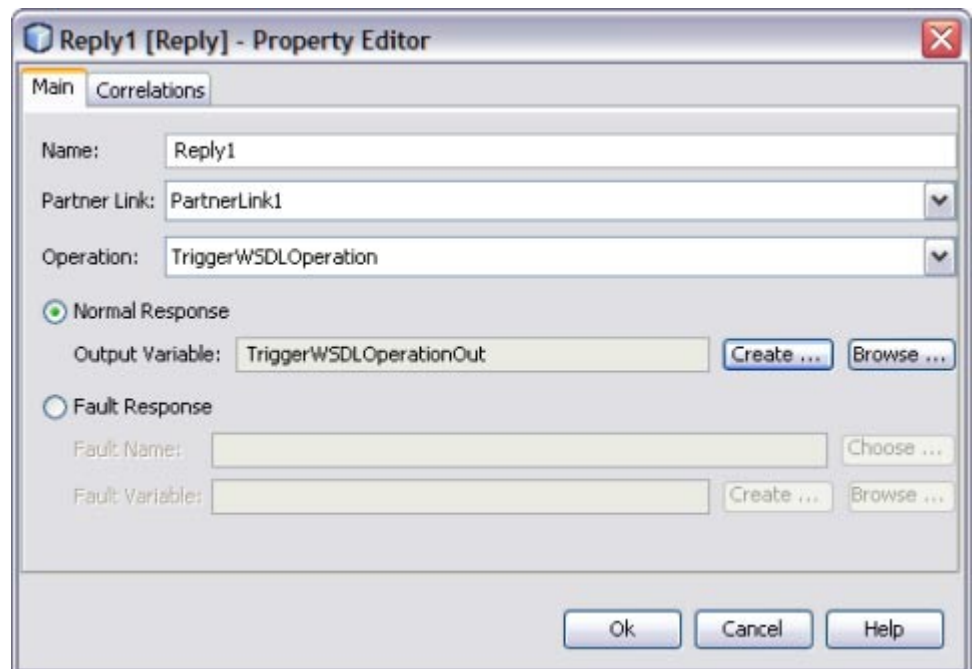

- 4 Click OK to close the Reply1 [Reply] - Property Editor.

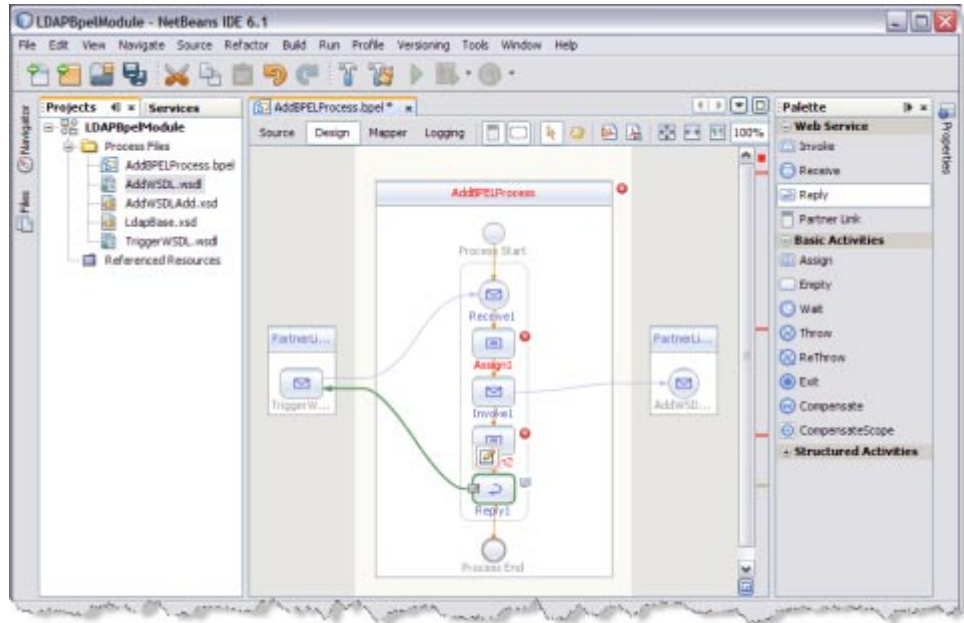

▼ To Edit the Basic Activities : Assign1

- 1 Double-click the Basic Activity : Assign1.

This displays the BPEL Mapper window.

Note – Choose Window → Other → BPEL Mapper from the main menu if the BPEL Mapper window is not visible.

- 2 Expand the node in the Source tree pane (the left pane) of the BPEL Mapper under Output → Variables.

For example, TriggerWSDLOperationIn

A **TriggerIn** node appears under the **TriggerWSDLOperationIn** node.

- 3 Expand the node in the Destination tree pane (the right pane) of the BPEL Mapper under Input → Variables.

For example, AddWSDLAddOperationIn

A **request** node appears under the **AddWSDLAddOperationIn** node.


- 4 Select the node in the Source tree pane. Drag the selection and map it to the node in the Destination tree pane.

For example,

- a. Source tree pane: TriggerWSDLOperationIn — Trigger1n
- b. Destination tree node: AddAddOperationIn — request — attributes — MainAttribute — inetOrgPerson.uid

Map the following:

TriggerIn — inetOrgPerson.uid

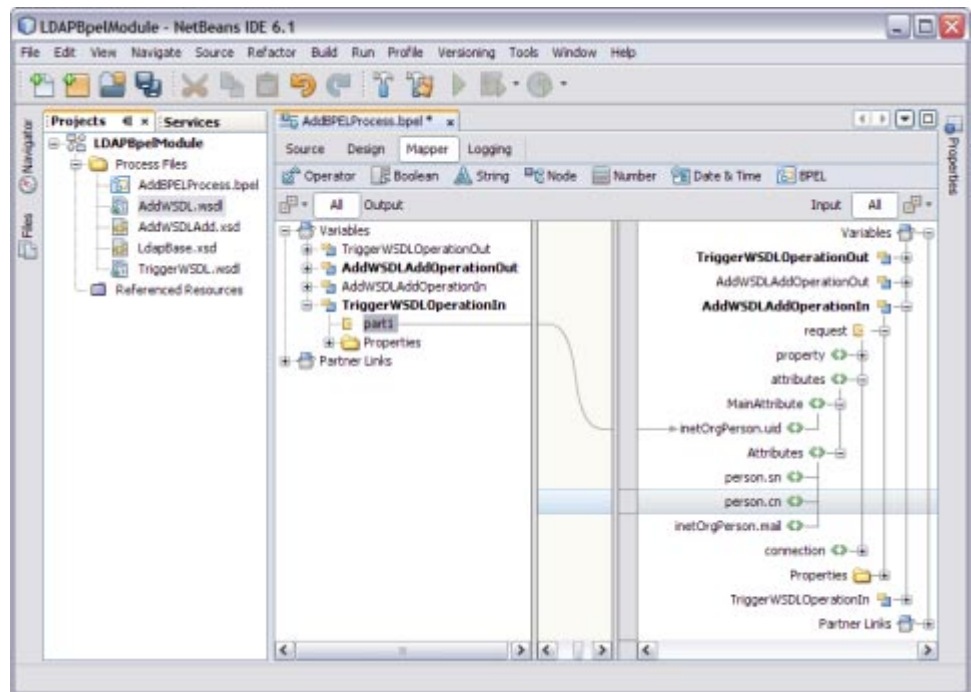


- 5 Click Save All.

- 6 Expand the node in the Destination tree pane (the right pane) of the BPEL Mapper under Input —> Variables.

For example, AddWSDLAddOperationIn


- a. Select request — attributes — Attributes
 - i. Select person.sn.
 - ii. Click String and select String Literal from the drop-down list.

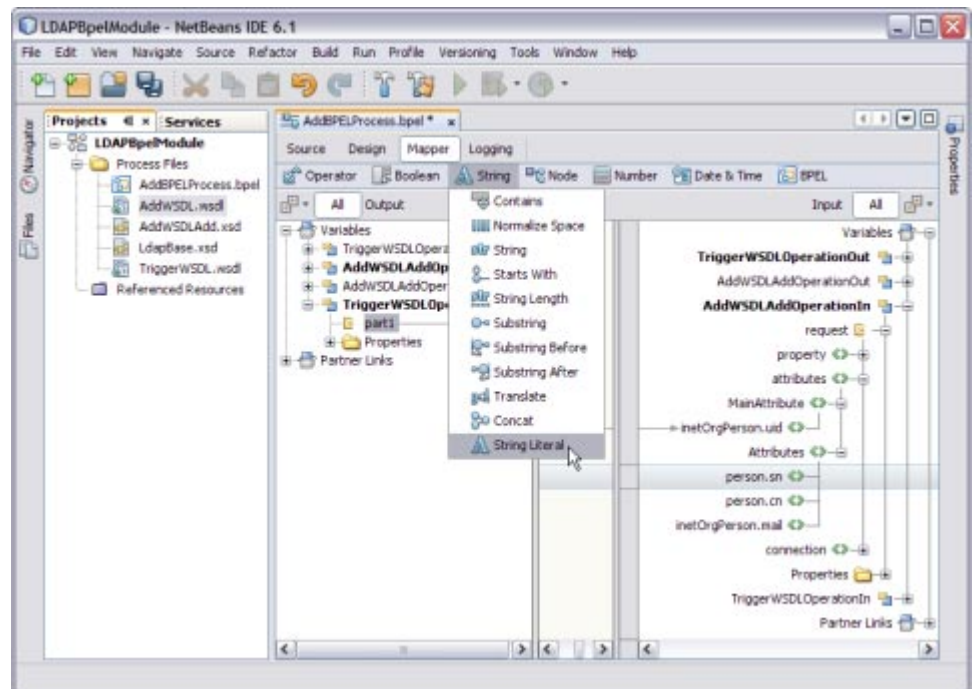

- iii. Enter the values in the String Literal and map the String Literal with person.sn.


For example, person.sn = Joe, where sn = surname and person.cn = Jane where cn = common name

Note – Similarly, select person.cn and follow steps b and c.

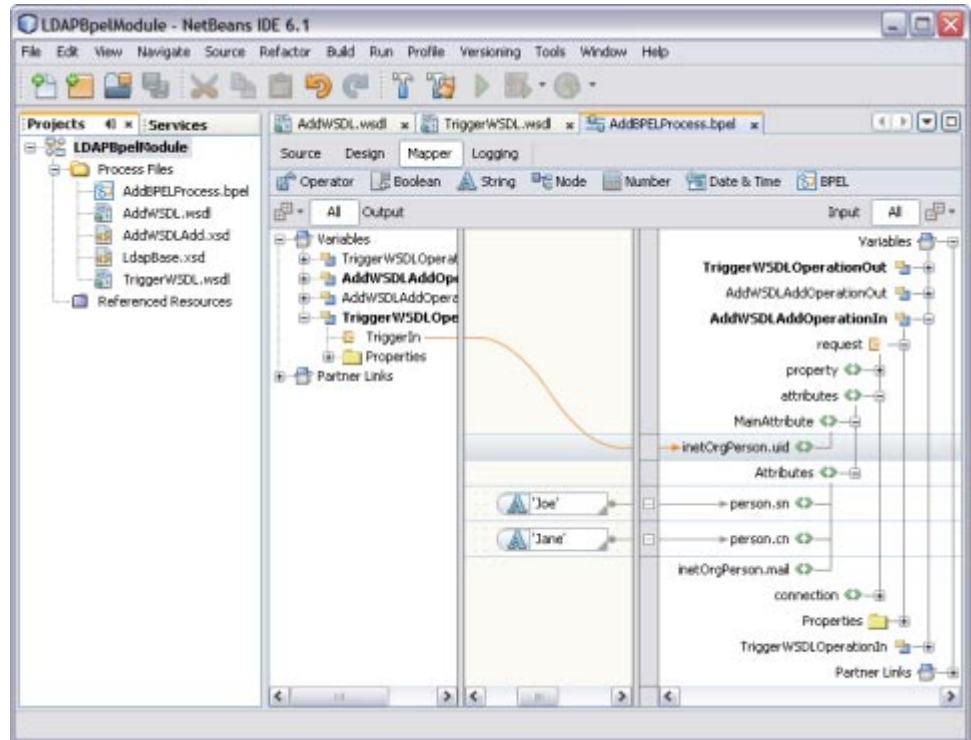

- 7 Click Save All.
- 8 Click the Design tab.

Note – A red icon marked against Basic Activities — Assign1 is not shown.

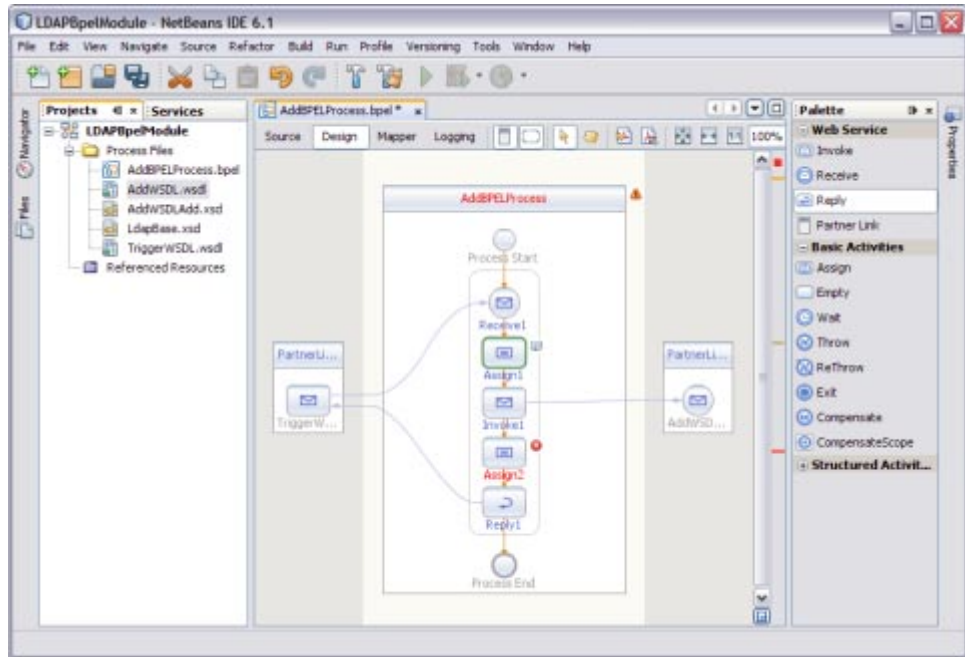

▼ To Edit the Basic Activities : Assign2

- 1 Double-click the Basic Activity : Assign2.

This displays the BPEL Mapper window.

Note – Choose Window —> Other —> BPEL Mapper from the main menu if the BPEL Mapper window is not visible.

- 2 Expand the node in the Source tree pane (the left pane) of the BPEL Mapper under Output — Variables.

For example, AddWSDLAddOperationOut

Expand response — OperationResult.


- 3 Expand the node in the Source tree pane (the right pane) of the BPEL Mapper under Input — Variables.

For example, TriggerWSDLOperationOut

- 4 Map the following variables


For example, OperationResult — TriggerOut

5 Click Save All.

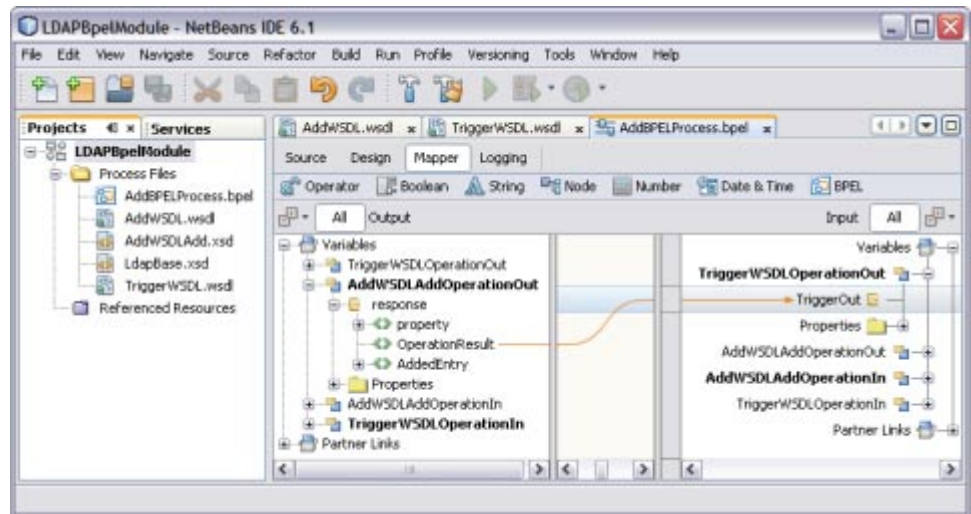

6 Click the Design tab.

The final output is as shown in the illustration.

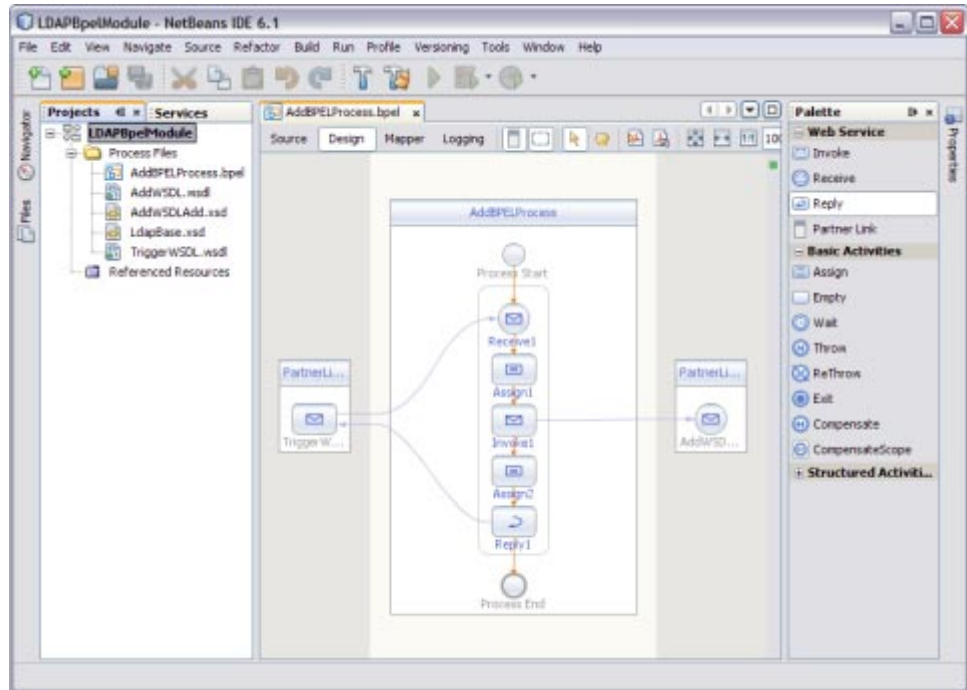


7 Right-click the BPEL Module and select Clean and Build.

For example, LDAPBpelModule

The following message is displayed.

BUILD SUCCESSFUL (total time: 3 seconds).

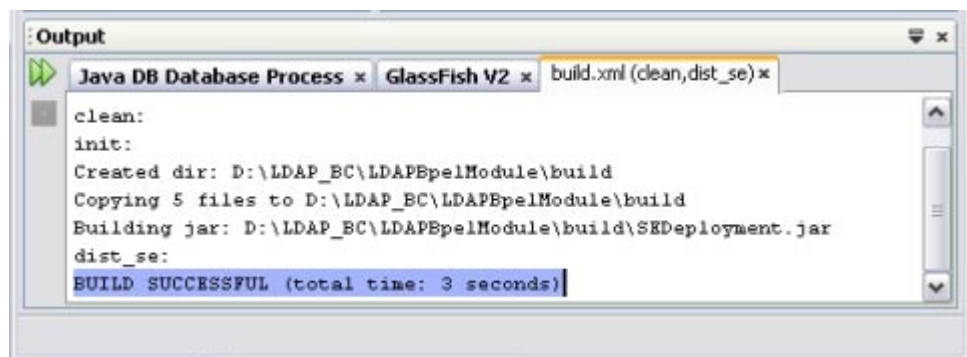


8 Click Save All.

Creating a Composite Application Project

Add the JBI module to the deployment project before deploying the BPEL Module project. Deploying the project makes the service assembly available to the application server. This allows its service units to execute their functionality.

▼ To Create a Composite Application Project


- 1 **Choose File —> New Project.**
This opens the New Project wizard.
- 2 **Select the SOA node from the Categories list.**
- 3 **Select the Composite Application node from the Projects list.**
- 4 **Click Next.**

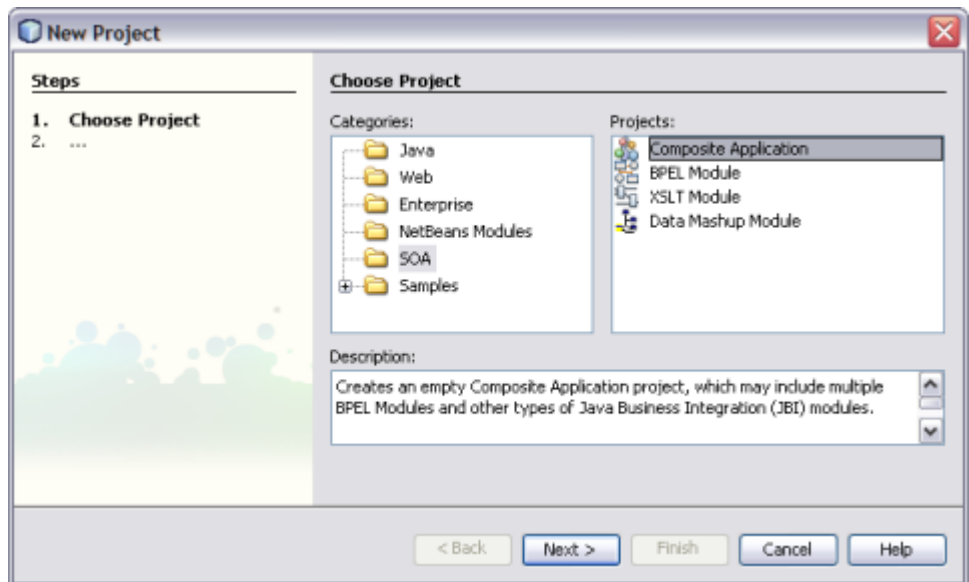

- 5 **Type the Project Name in the Project Name field.**
For example, AddCompApp

6 Click Finish.

The Projects window now contains a project node for a Composite Application project named AddCompApp.

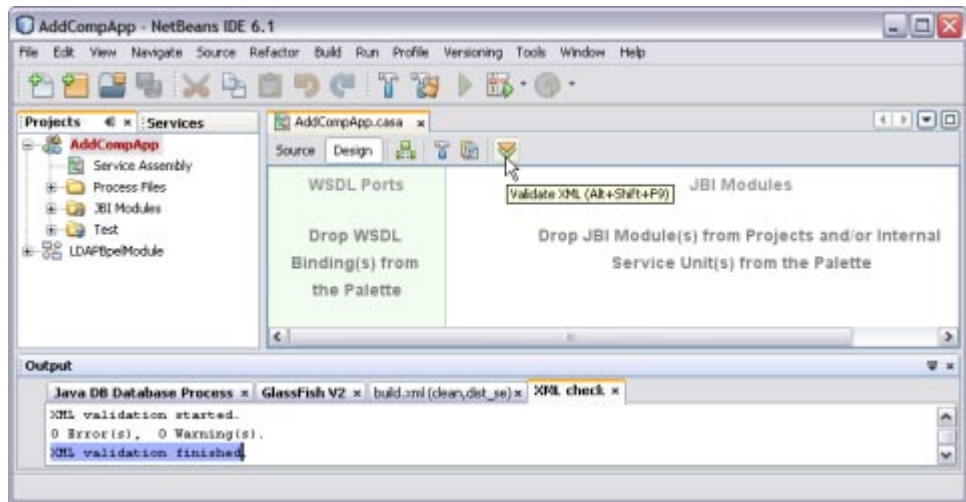**7 Click the Validate XML button.**


This action invokes an XML check and displays the following message in the XML check console.

XML validation finished.

8 Right-click either the Composite Application or the JBI Modules.

For example, AddComositeApp


9 Select Add JBI Module.

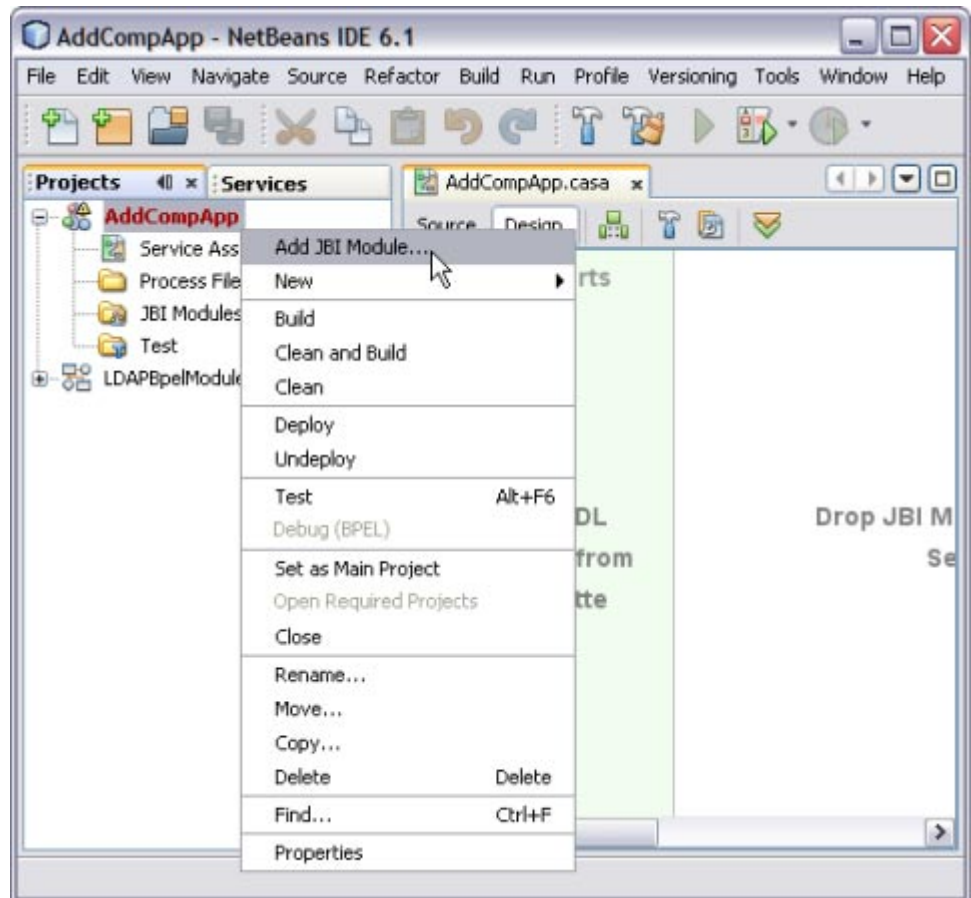


10 Select the BPEL Module Project. Click Add Project JAR Files.

For example, LDAPBpelModule

In the current example, the Project JAR file is build/SEDeployment.jar.

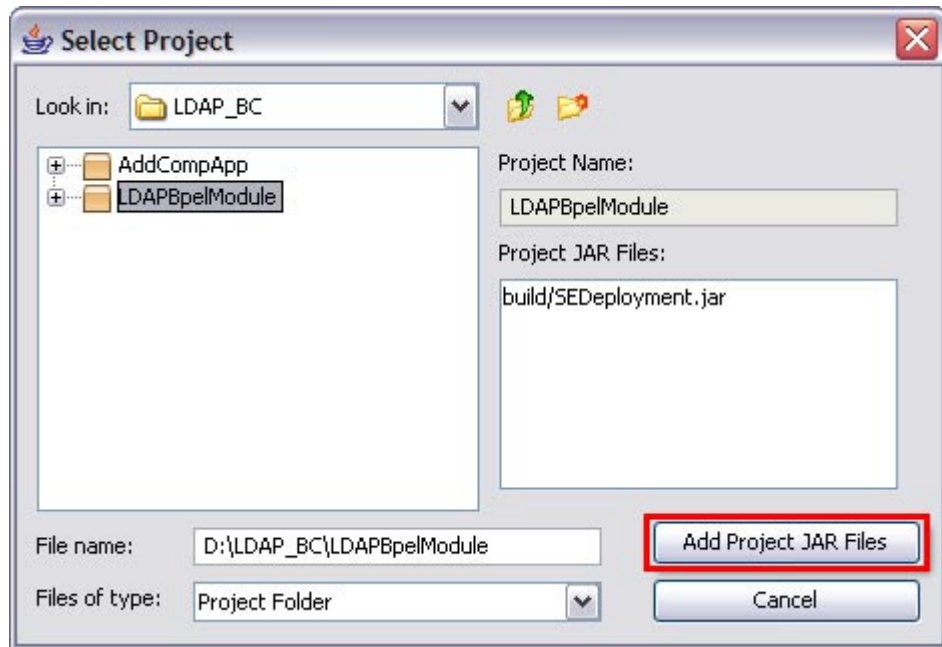

The JAR file is added and is as shown in the illustration.

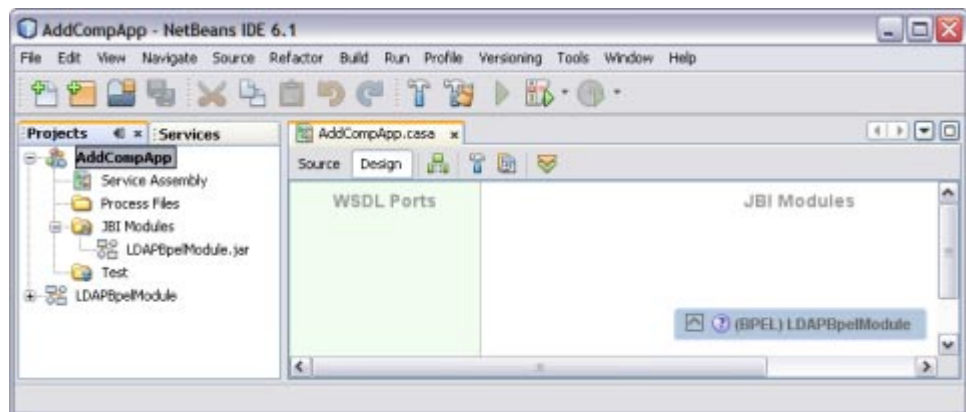

11 Click Save All.


Note – Ensure to following services are started.

- GlassFish Application Server
- JBI Binding Component (sun-ldap-binding)

12 Right-click the Composite Application node. Select Clean and Build.

For example, AddCompApp

The CASA Editor displays the build associated with AddCompApp.

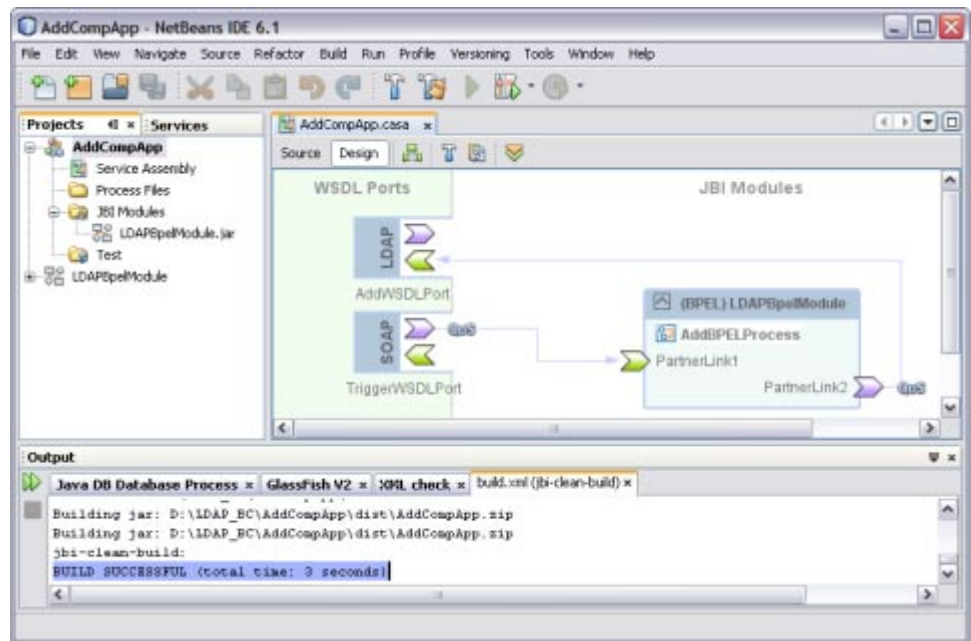

A success message is displayed in the Output window:

BUILD SUCCESSFUL (total time: 3 seconds)

13 Click Save All.


Deploying a Composite Application

This section lists the procedure to deploy the composite application.

Tip – Start the Sun Java System Application Server before deploying the project.

▼ To Deploy a Composite Application

- 1 **Right-click Composite Application project node from the Projects tab.**
For example, AddCompAppl
- 2 **Select Deploy.**

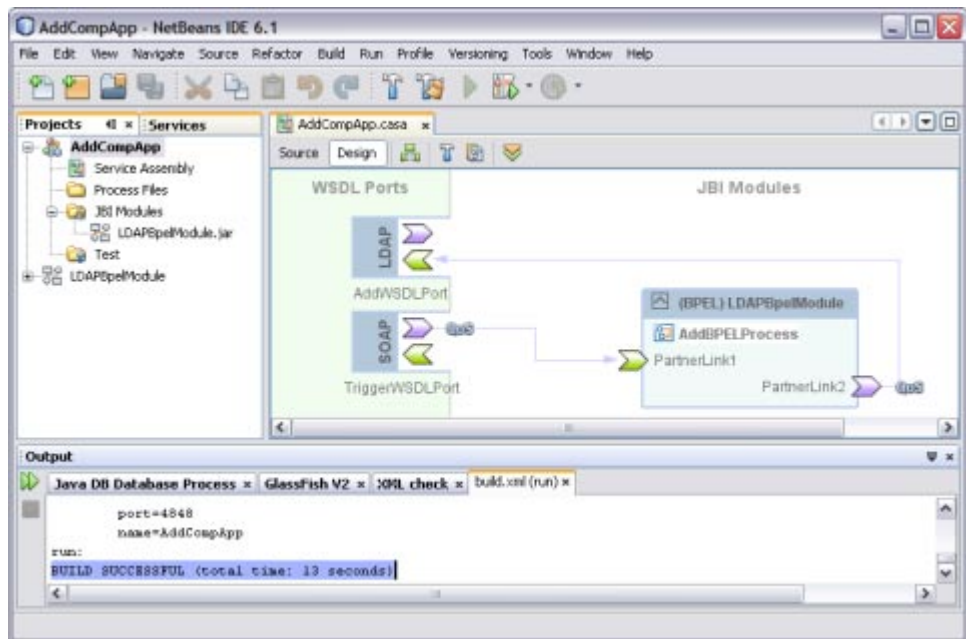

After successful deployment of the project the Output window displays the following message:

BUILD SUCCESSFUL (total time: 13 seconds).

Testing the Composite Application

This section lists the procedure to test the deployed application.

▼ To Test the Composite Application

- 1 **Expand the Composite Application project. Click Test.**

For example, AddCompApp

- 2 **Right-click to select New Test Case.**

- 3 **Enter the Test Case Name.**

For example, AddTest


- 4 **Click Next.**

- 5 **Select the WSDL Document.**

- a. **Select one WSDL Document from the BPEL Module.**

In the current example, the WSDL Document is TriggerWSDL.wsdl and the BPEL Module is LDAPBpelModule — Process Files.

Note – Select one WSDL Document.

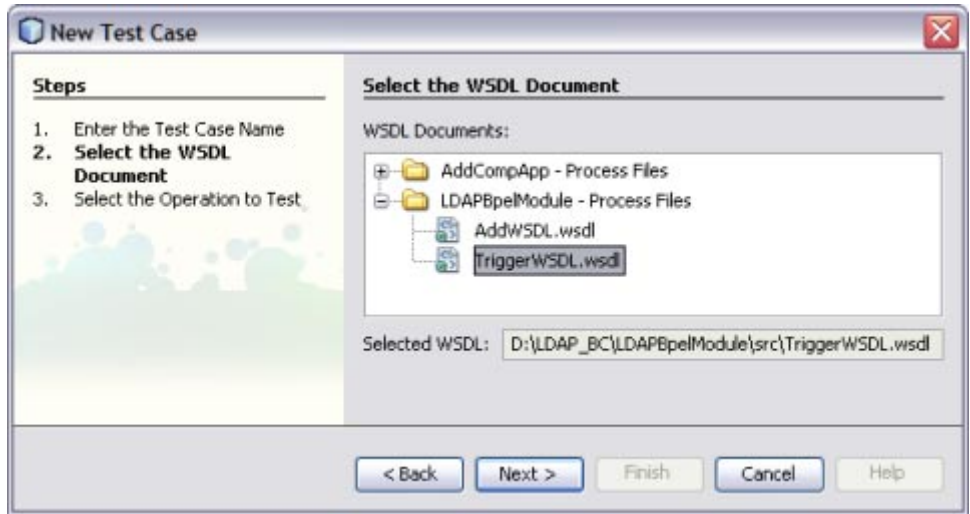


b. Click Next.

c. Select one Operation to text file from the Process Files.


In the current example, the Operation to Text file is TriggerWSDLOperation and the Process File is TriggerWSDLPort (Binding="TriggerWSDLBinding").

Note – Select one Operation to Text file.

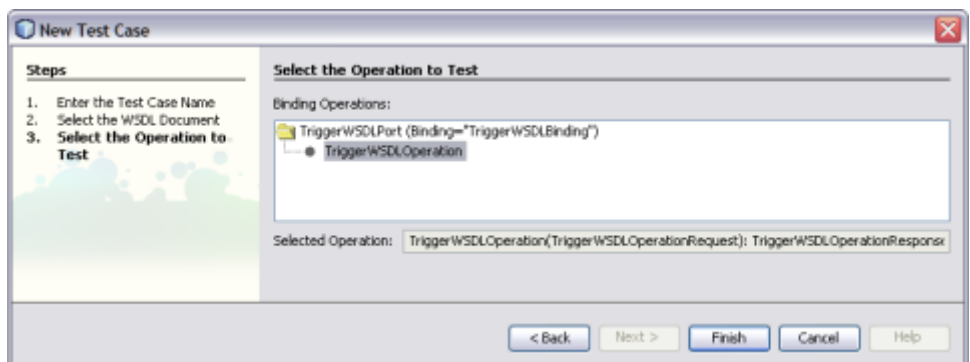


6 Click Finish.

This displays the Source code.

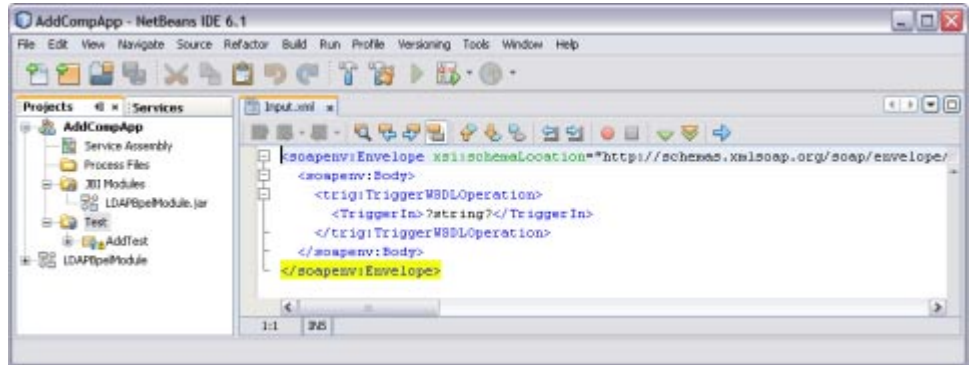

7 Enter the string value.

string = Jane

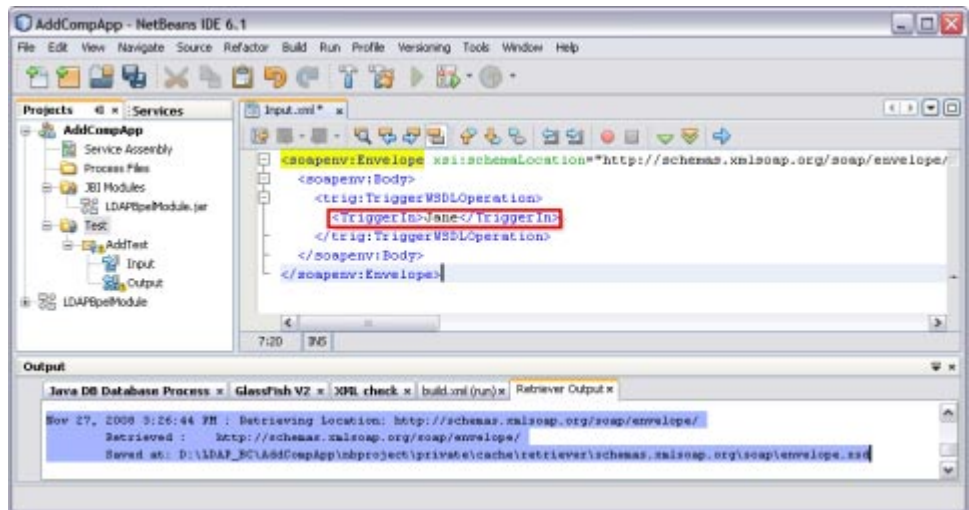

The Output console displays Retrieve.xml when you enter a string value in the input.xml window.


8 Right-click the Test Case and click Run.

For example, AddTest

A confirmation dialog box prompts to overwrite an existing Output.

9 Click Yes.

The Output is as shown in the illustration.

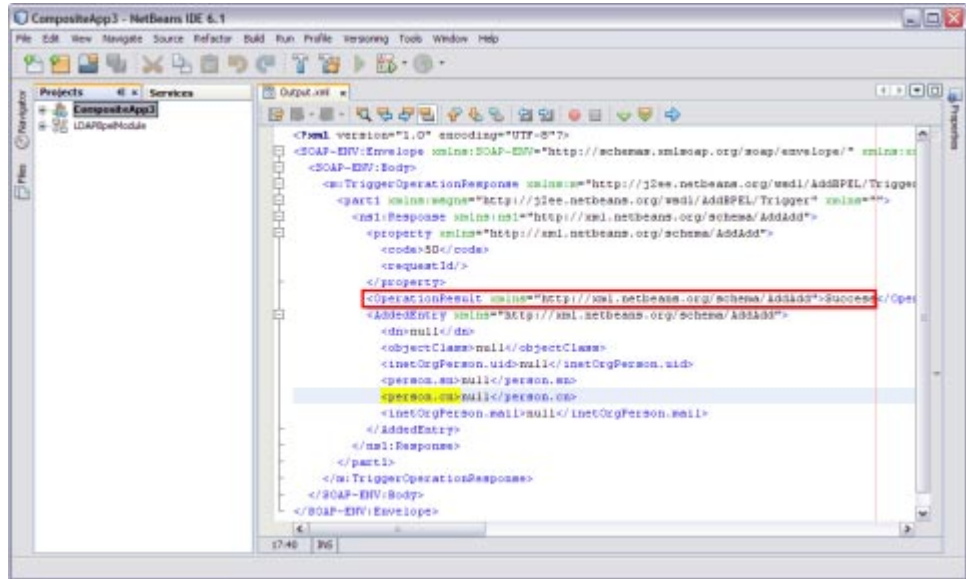

For a demo on the Add feature, visit the following URL:

<http://wiki.open-esb.java.net/Wiki.jsp?page=LDAPAddFeatureScreencast>

Source View

Right-click a node and choose Go To —> Source.

The Source view appears with the cursor positioned at the beginning or end of the component's block.

In the Source view, the underlying XML source code appears. You can directly edit the XML.

1. The top of the Source Editor has a tab for each open document. Each tab shows the name of the document.

Note – If the document has been modified and has not been saved, then an asterisk (*) appears after the name. You can right-click a tab to access various commands.

2. A toolbar is located at the top of the Source Editor window.
3. Source code displayed in the Source Editor is syntactically colored.

4. The Source Editor status line is located beneath the horizontal scroll bar. To toggle between insert mode and overwrite mode, use the Insert key.

Design View: Notification

The Design view displays the results of both real-time and explicit validation in callout windows on the diagram and the error stripe.


In the illustration,

Note – A red cross next to an element on the diagram means that the element has not passed validation and the output contains errors.

A yellow triangle with an exclamation mark means that the element has not passed validation and the output contains warnings.


A red cross in the Design view means there are both errors and warnings.

If you click the cross or the triangle, a callout window lists errors and warnings.

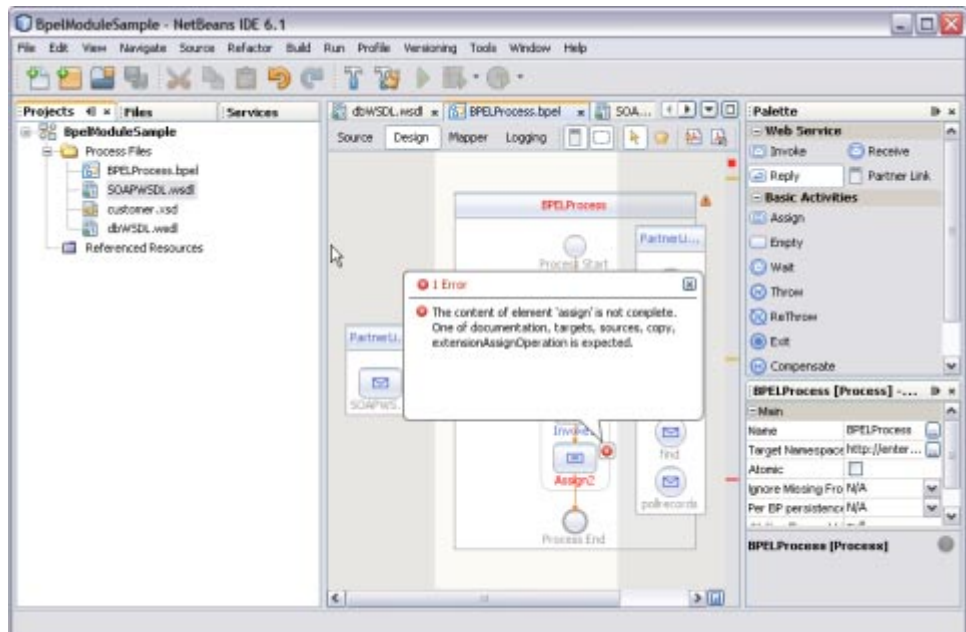

The callout window displays messages related to validation in accordance with the criteria listed above. Messages related to real-time validation are constantly updated.

In the Design view, the error stripe displays the validation results. The error stripe is a strip to the right of the scroll bar that contains red marks if some elements have not passed validation. The error stripe represents the entire diagram, not just the portion that is currently displayed. This stripe helps users to immediately detect any errors in the BPEL process without having to scroll through the entire diagram. Click a red mark to jump to the element that causes problems. If no errors are detected, the small square in the error stripe is green.

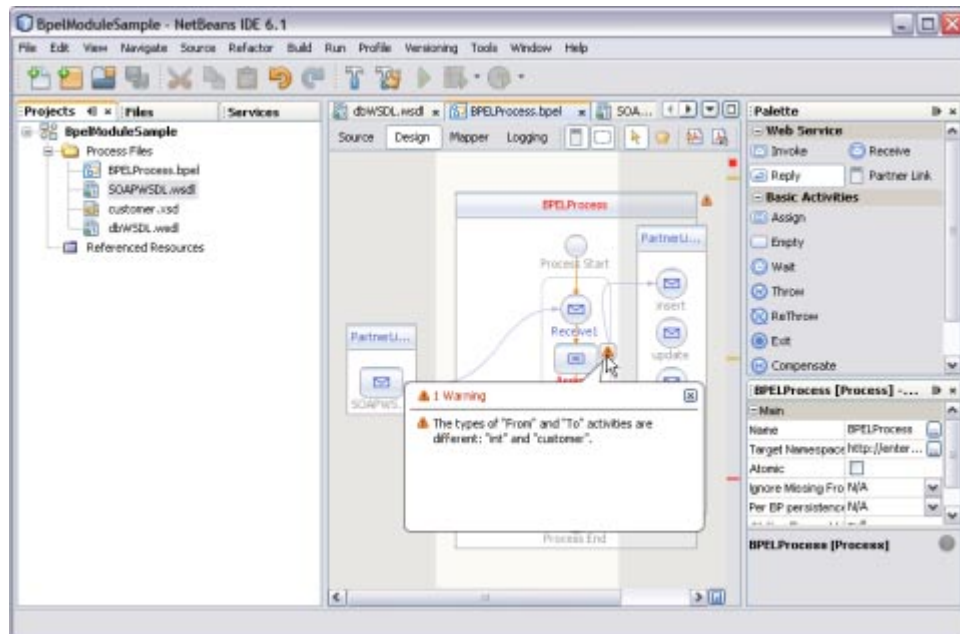


Create a WSDL Document : Search

In this section, the user sets to search using the search filter. The input for the uid is provided from the HTTP/SOAP WSDL and the response is routed to the SOAP reply.

For steps, see the following links:

1. [“Creating a WSDL Document” on page 17.](#)
2. [“Create a WSDL Document For Type : SOAP” on page 26.](#)
 - a. **Click the Search tab.**

In the current example, the selected Object Class is inetOrgPerson.

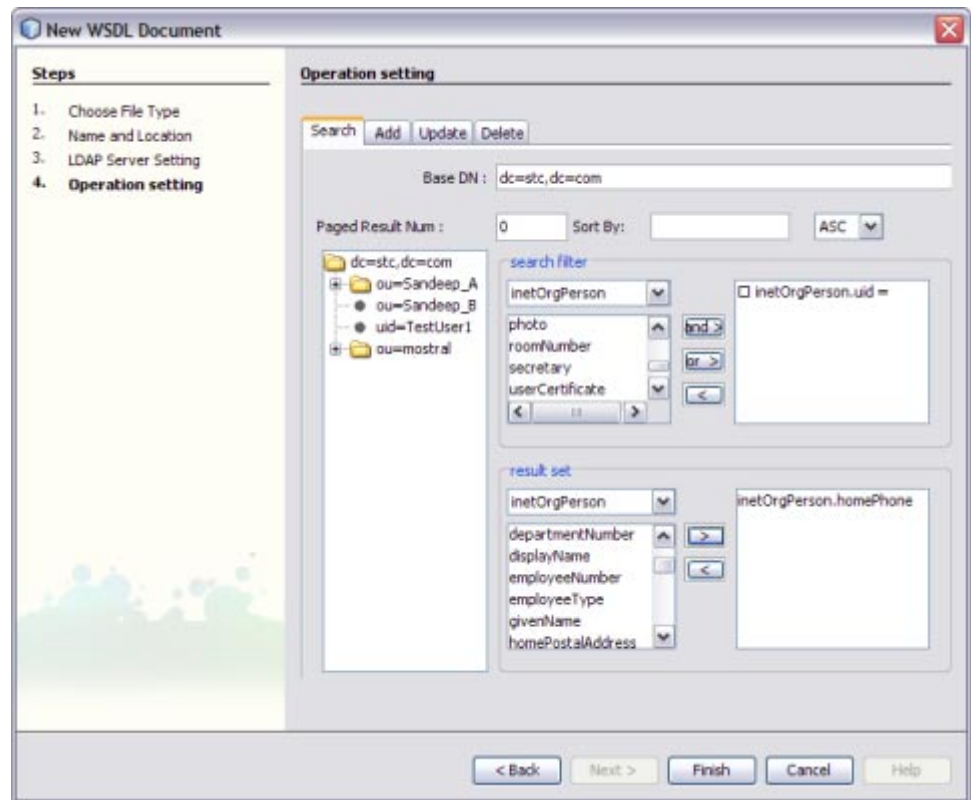

Search Filter

- i. Select Search Filter — `inetOrgPerson` from the drop-down list.
- ii. Select `uid` from the Search Filter list.
- iii. Click the `>` arrow.

`inetOrgPerson.uid =` is moved to the right pane.

Result Set

Tip – Entries with respect to `inetOrgPerson` are populated both in the Search Filter and Result set.

- i. Select Result Set — `homePhone` from the drop-down list.
 - ii. Click `>` arrow to move the selected entry to the right pane.
- b. Click **Finish**.

3. [“Creating a BPEL Process” on page 31.](#)
4. [“Creating a Composite Application Project” on page 53.](#)
5. [“Deploying a Composite Application” on page 58.](#)
6. [“Testing the Composite Application” on page 59.](#)

For a demo on Search, visit the following URL:

<http://wiki.open-esb.java.net/Wiki.jsp?page=LDAPSearchFeatureScreencast>


Create a WSDL Document : Update Feature

In this section, the user sets to use the Update feature.

For steps, see the following links:

1. [“Creating a WSDL Document” on page 17.](#)
2. [“Create a WSDL Document For Type : SOAP” on page 26.](#)
 - a. **Click the Update tab.**

In the current example, the selected Object Class is inetOrgPerson.

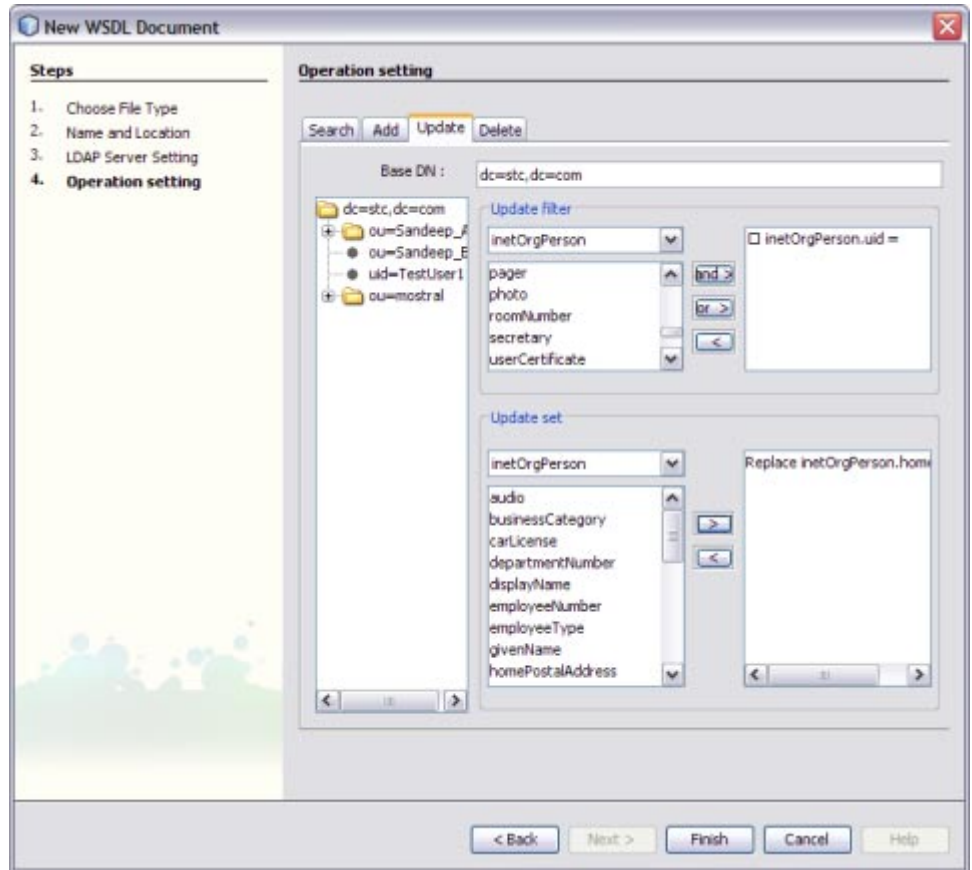

Update Filter

- i. Select Update Filter — `inetOrgPerson` from the drop-down list.
- ii. Select `uid` from the Update Filter list.
- iii. Click the **>** arrow.
`inetOrgPerson.uid =` is moved to the right pane.

Update Set

Tip – Entries with respect to `inetOrgPerson` are populated both in the Update Filter and Update set.

- i. Select Update Set — `homePhone` from the drop-down list.
- ii. Click **>** arrow to move the selected entry to the right pane.

- b. **Click Finish.**
3. “Creating a BPEL Process” on page 31.
4. “Creating a Composite Application Project” on page 53.
5. “Deploying a Composite Application” on page 58.
6. “Testing the Composite Application” on page 59.

For a demo on the Update feature, visit the following URL:

<http://wiki.open-esb.java.net/Wiki.jsp?page=LDAPUpdateFeatureScreencast>


Create a WSDL Document : Delete Feature

In this section, the user sets the Delete feature.

For steps, see the following links:

1. “Creating a WSDL Document” on page 17.
2. “Create a WSDL Document For Type : SOAP” on page 26.
- a. **Click the Delete tab.**

In the current example, the selected Object Class is inetOrgPerson.

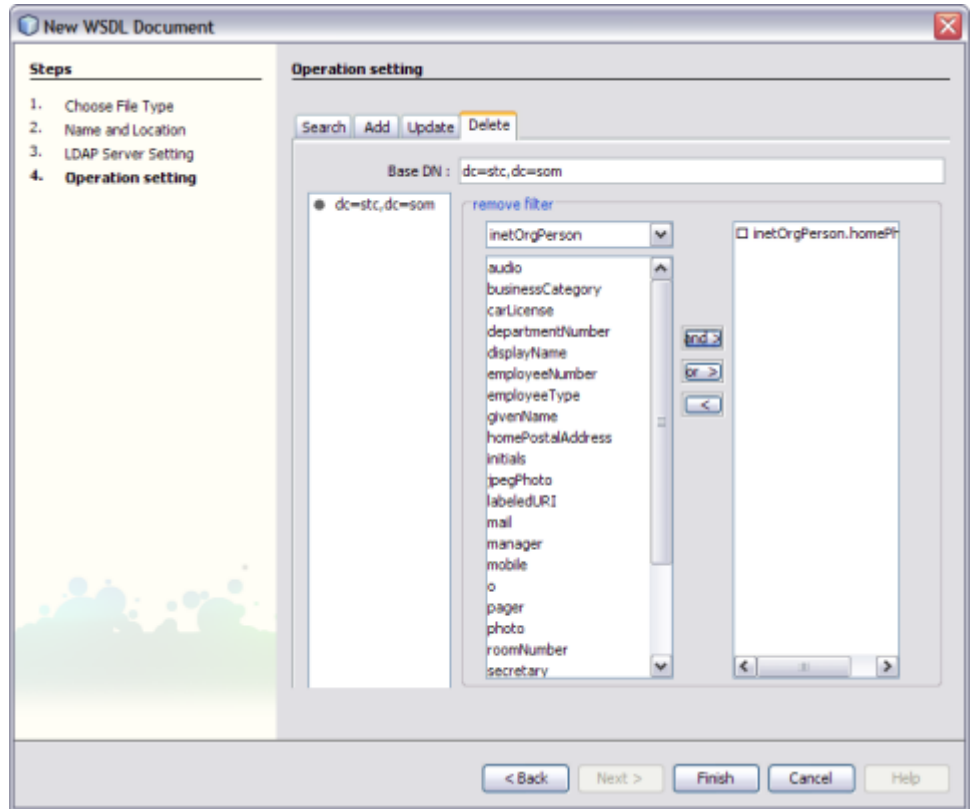

Remove Filter

- i. Select Remove Filter — `inetOrgPerson` from the drop-down list.
- ii. Select the entry from the Remove Filter list.
For example, `uid`
- iii. Click the **> arrow**.
- iv. `inetOrgPerson.uid` is moved to the right pane.
- b. Click **Finish**.
3. “Creating a BPEL Process” on page 31.
4. “Creating a Composite Application Project” on page 53.
5. “Deploying a Composite Application” on page 58.
6. “Testing the Composite Application” on page 59.

