
PeopleSoft Enterprise Financials/Supply Chain Management 8.9 to 9.0 MP5 Upgrade

March 2008

PeopleSoft Enterprise Financials/Supply Chain Management 8.9 to 9.0 MP5
Upgrade
SKU ufscm_mp5_032708_ufscm89to90mp5
Copyright © 2008, Oracle. All rights reserved.

The Programs (which include both the software and documentation) contain proprietary information; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs, except to the extent required to obtain interoperability with other independently created software or as specified by law, is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose.

If the Programs are delivered to the United States Government or anyone licensing or using the Programs on behalf of the United States Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS

Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are “commercial computer software” or “commercial technical data” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the Programs, including documentation and technical data, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement, and, to the extent applicable, the additional rights set forth in FAR 52.227-19, Commercial Computer Software--Restricted Rights (June 1987). Oracle Corporation, 500 Oracle Parkway, Redwood City, CA 94065.

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee’s responsibility to take all appropriate fail-safe, backup, redundancy and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and we disclaim liability for any damages caused by such use of the Programs.

The Programs may provide links to Web sites and access to content, products, and services from third parties. Oracle is not responsible for the availability of, or any content provided on, third-party Web sites. You bear all risks associated with the use of such content. If you choose to purchase any products or services from a third party, the relationship is directly between you and the third party. Oracle is not responsible for: (a) the quality of third-party products or services; or (b) fulfilling any of the terms of the agreement with the third party, including delivery of products or services and warranty obligations related to purchased products or services. Oracle is not responsible for any loss or damage of any sort that you may incur from dealing with any third party.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Open Source Disclosure

Oracle takes no responsibility for its use or distribution of any open source or shareware software or documentation and disclaims any and all liability or damages resulting from use of said software or documentation. The following open source software may be used in Oracle’s PeopleSoft products and the following disclaimers are provided.

Apache Software Foundation

This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>). Copyright © 2000-2003. The Apache Software Foundation. All rights reserved. Licensed under the Apache License, Version 2.0 (the “License”); you may not use this file except in compliance with the License. You may obtain a copy of the License at <http://www.apache.org/licenses/LICENSE-2.0>.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an “AS IS” BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

OpenSSL

Copyright © 1998-2005 The OpenSSL Project. All rights reserved.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>).

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT “AS IS” AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Helma Project

Copyright © 1999-2004 Helma Project. All rights reserved. THIS SOFTWARE IS PROVIDED “AS IS” AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE HELMA PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Helma includes third party software released under different specific license terms. See the licenses directory in the Helma distribution for a list of these license.

Sarissa

Copyright © 2004 Manos Batsis.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA.

ICU

ICU License - ICU 1.8.1 and later COPYRIGHT AND PERMISSION NOTICE Copyright © 1995-2003 International Business Machines Corporation and others. All rights reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, provided that the above copyright notice(s) and this permission notice appear in all copies of the Software and that both the above copyright notice(s) and this permission notice appear in supporting documentation. THE SOFTWARE IS PROVIDED "AS IS," WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE. Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

All trademarks and registered trademarks mentioned herein are the property of their respective owners.

Sun's JAXB Implementation – JSDK 1.5 relaxngDatatype.jar 1.0 License

Copyright © 2001, Thai Open Source Software Center Ltd, Sun Microsystems. All rights reserved.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

W3C IPR SOFTWARE NOTICE

Copyright © 2000 World Wide Web Consortium, (Massachusetts Institute of Technology, Institut National de Recherche en Informatique et en Automatique, Keio University). All Rights Reserved.

Note: The original version of the W3C Software Copyright Notice and License could be found at <http://www.w3.org/Consortium/Legal/copyright-software-19980720>.

THIS SOFTWARE AND DOCUMENTATION IS PROVIDED "AS IS," AND COPYRIGHT HOLDERS MAKE NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE OR DOCUMENTATION WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS. COPYRIGHT HOLDERS WILL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF ANY USE OF THE SOFTWARE OR DOCUMENTATION.

Contents

Preface

About This Documentation.....	xxiii
Understanding This Documentation.....	xxiii
Prerequisites.....	xxiii
Audience.....	xxiii
Organization.....	xxiii
Related Information.....	xxiv

Chapter 1

Prepare Your Database.....	1
Understanding Database Preparation	2
Understanding Your Upgrade.....	2
Understanding PeopleSoft Upgrades.....	2
Verifying the Software Installation	2
Defining Upgrade Databases	3
Reviewing Upgrade Notes and Tips	3
Copying Your Production Database	5
Making a Copy of Production Database	5
Increasing Database Space	5
Applying Upgrade Planning Files	6
Understanding Applying Upgrade Planning Files.....	6
Applying the UPGOPT Project	6
Building the UPGOPT Project	7
Importing Upgrade Setup Data	7
Setting Up Upgrade Planning Security	8
Editing Upgrade Planning DB2 Scripts	9
Updating Statistics.....	9
Running Initial Audit Reports.....	9
Understanding Running Initial Audit Reports.....	10
Run the Initial DDDAUDIT Report.....	10
Run the Initial SYSAUDIT Report.....	10
Create the INITALTAUD Project.....	11
Run the Initial Alter Audit.....	12
Review the Initial Audits.....	12

Performing General Options Setup	13
Reviewing Process Scheduler Processes	14
Reviewing Country Data	15
Reviewing ChartField Configuration	15
Preparing Commitment Control.....	16
Completing Billing Tasks	17
Running Billing PreUpgrade Reports	17
Reviewing the Billing PreUpgrade Reports	17
Setting Up Receivables	18
Posting Receivables Transactions	18
Processing Credit Card Payments	19
Generating Customer Conversation Letters	19
Establishing Customer Conversation Currency	20
Verifying Grant Management Processes	20
Setting Up Projects	21
Processing Third Party Transactions	21
Defining Generic Asset Resource Defaults	22
Managing Expense Approvals	23
Preparing Asset Management	23
Running Asset Management Interface Programs.....	23
Reviewing IT Asset Management Business Rules	25
Reviewing Common Search Configurations	25
Executing Match Rules and Transactions	26
Posting Payables Transactions	26
Running Journal Generator Edit and Post	26
Canceling Rescheduled Payments	27
Flagging Bad Effective Dated Withholding Entities.....	27
Completing Batch Transactions	28
Preparing Inventory	28
Running the Inventory PreUpgrade Report	29
Reviewing PreUpgrade Inventory Report	29
Confirming Shipping and Depleting All Orders	29
Costing and Posting Inventory Transactions	30
Running Inventory Balances Report	30
Preparing Strategic Sourcing	31
Reviewing Event Status	31
Completing Purchasing Tasks	31
Loading Change Requests	31
Setting Up Treasury	32
Understanding the Treasury Setup.....	32

Running Auto Position Process	32
Deleting Duplicate Securities Data	32
Preparing Maintenance Management	33
Running Preventive Management Processes	33
Deleting Projection Staging Data	34
Setting Up Real Estate Management	35
Setting Up Business Unit Default Calendar	35
Setting Up Financial Term Calendar Update	36
Setting Up Lease Region Update	37
Reporting Row Count for Tables.....	38
Preparing Your Database	38
Understanding Database Preparation.....	38
Verify Database Integrity.....	39
Clean the PSOBJCHNG Table.....	39
Drop PeopleTools Tables.....	39
Shrink Images.....	40
Purge Message Queues.....	41
Backing Up Demo Databases	41
Backing Up Copy of Current Demo	42
Backing Up New Release Demo	42
Renaming Records and Fields	42
Understanding Renaming Records and Fields.....	43
Running the RNEPUPS14 Script.....	43
Running the RNEPAUCS01 Script	44
Running the RNEPCAS01 Script.....	44
Running the RNEPEMT01 Script.....	44
Running the RNEPEXS01 Script.....	45
Running the RNEPGMT01 Script.....	45
Running the RNEPLCT01 Script.....	46
Retaining the Target Rename Log Files	46
Running RNEPUPS14 Script on Copy of Current Demo.....	46
Running RNEPAUCS01 Script on Copy of Current Demo	47
Running RNEPCAS01 Script on Copy of Current Demo.....	47
Running RNEPEMT01 Script on Copy of Current Demo.....	48
Running RNEPEXS01 Script on Copy of Current Demo.....	48
Running RNEPGMT01 Script on Copy of Current Demo.....	49
Running RNEPLCT01 Script on Copy of Current Demo.....	49
Comparing Customizations	50
Modifying Compare Report Options	50
Running Compare UPGCUST	51

Running UPGCUST Filter Script	52
Reviewing UPGCUST Compare Log	53
Restoring Copy of Current Demo	53
Identifying Customizations	53
Preparing for the Application Upgrade.....	55
Creating a Copy of RecField Definitions	55
Creating a Copy of DbField Definitions	56
Deleting Old Pagelet Wizard Data	56
Exporting Upgrade Setup Data	57
Dropping Indexes	57
Editing the System Data Swap Script.....	58
Editing the PeopleTools Swap Script.....	58
Backing Up After Prepare Your Database	59

Chapter 2

Apply PeopleTools Changes.....	61
Understanding PeopleTools Changes.....	62
Verifying Upgrade User.....	62
Performing Script Modifications.....	62
Understanding Script Modifications.....	63
Update Configuration Manager Profile.....	63
Run a DBTSFIX Report.....	64
Edit the DBTSFIX Output Scripts.....	65
Edit the GRANT Script.....	66
Edit the PSLANGUAGES Script.....	66
Edit the TLSUPGNONCOMP Script.....	66
Edit the PTxxxTLS Scripts.....	66
Edit the DB2 Scripts.....	67
Edit Move to Production Import Scripts.....	68
Edit Move to Production Password.....	69
Edit the DDLDB2 Script.....	69
Edit the DDLDBX Script.....	69
Edit the DDLORA Script.....	70
Edit the DDLIFX Script.....	70
Edit the MSGTLSUPG Script.....	70
Edit the Integration Broker Script.....	71
Edit Multilingual Step Properties.....	71
Edit Data Type Steps.....	72
Updating PeopleTools System Tables	72

Understanding Updating PeopleTools System Tables.....	73
Clean Up Message Data.....	73
Update System Catalog Views.....	74
Update PeopleTools System Tables.....	74
Grant Privileges to the CONNECT ID.....	74
Update the Product License Code.....	75
Update PeopleTools Patch Information.....	76
Create Temporary Performance Indexes.....	76
Export PeopleTools System Tables.....	77
Import PeopleTools System Tables.....	77
Reset Database Options Flag.....	77
Rerun Update Statistics for DB2 zOS.....	78
Rerun RUNSTATS Report for DB2 UNIX NT.....	78
Rerun Update Statistics for DB2 UNIX NT.....	78
Rerun Update Statistics for Informix.....	78
Rerun Update Statistics for Oracle	79
Turning Off Change Control	79
Loading Model Definition Data.....	79
Understanding Model Definition Data Load Process.....	80
Load Model Definitions for DB2 zOS.....	80
Load Model Definitions for DB2 UNIX NT.....	80
Load Model Definitions for Oracle.....	80
Load Model Definitions for Informix.....	80
Load Model Definitions for Microsoft.....	81
Load Model Definitions for Sybase.....	81
Loading Message Data.....	81
Reviewing PeopleTools Objects	81
Exporting and Copying Projects	83
Understanding Exporting and Copying Projects.....	83
Export and Copy PPLTLS84CUR Project.....	84
Export and Copy PPLTLS84CURML Project.....	84
Export and Copy PPLTLSML Project.....	85
Export and Copy PPLTLS84CURDEL Project.....	86
Export and Copy PATCH84X Project.....	86
Export and Copy PATCH84XML Project.....	87
Populating Tablespace Data.....	87
Create Application Tablespaces.....	88
Populate Tablespace Data.....	88
Update Tablespace Names.....	89
Building Updated PeopleTools Project.....	90

Generate Updated PeopleTools Script.....	90
Edit the Updated PeopleTools Script.....	90
Run the Updated PeopleTools Script.....	91
Migrating Records to New Tablespaces.....	91
Understanding Migration of Records to New Tablespaces.....	91
Export and Copy the PT84TBLSPC Project.....	91
Build the Tablespace Alter Script.....	92
Edit the Tablespace Alter Script.....	92
Run the Tablespace Alter Script.....	92
Loading Base Data.....	93
Loading Language Data.....	93
Populate Languages.....	93
Load Language Data.....	94
Loading PeopleTools Data.....	94
Load NonComparable Objects.....	94
Load English Messages.....	95
Load English String Data.....	95
Load Stored Statements Data.....	95
Loading PeopleTools Definition Group	96
Converting PeopleTools Objects	96
Update REN Server Configuration	96
Populate MCF Data	97
Convert Portal Objects	97
Convert Query Prompt Headings	98
Encrypt Connector Passwords	98
Load Conversion Data	98
Report Conversion Details	99
Run Data Conversion	99
Creating PeopleTools Views.....	99
Create Updated PeopleTools Views.....	99
Converting Integration Broker	100
Understanding Converting Integration Broker.....	100
Updating Integration Broker Defaults	100
Creating Integration Broker Objects	101
Saving Application Messaging Objects	101
Exporting Node Transactions	101
Preparing Integration Broker Deletes	101
Deleting Application Messaging Objects	102
Deleting Node Transactions	102
Setting Object Version Numbers.....	102

Converting Database Data Types	103
Understanding Converting Database Data Types.....	104
Backing Up Before Platform Changes	104
Running Long Data Audit	105
Validating Microsoft Database	105
Reviewing Microsoft Settings	105
Creating Microsoft Conversion Project	106
Generating Microsoft Conversion Script	106
Running Microsoft Conversion Script	106
Granting Permissions to the CONNECT ID	107
Running Microsoft Conversion Report	107
Validating Oracle Database	107
Creating Oracle Audit Tables	108
Auditing Duplicate Length Constraints	108
Auditing Disabled Constraints	108
Reviewing Oracle Settings	108
Generating Oracle Conversion Scripts	109
Running Long to LOB Script 1	111
Running Long to LOB Script 2	111
Running Long to LOB Script 3	111
Running Long to LOB Script 4	111
Running Long to LOB Script 5	112
Running Long to LOB Script 6	112
Running Long to LOB Script 7	112
Running Long to LOB Script 8	112
Auditing Long to LOB Conversion	113
Running Character Length Script 1	113
Running Character Length Script 2	113
Running Character Length Script 3	113
Running Character Length Script 4	114
Running Character Length Script 5	114
Running Character Length Script 6	114
Running Character Length Script 7	114
Running Character Length Script 8	115
Auditing Character Length Semantics	115
Reviewing Conversion Reports	115
Updating Database Options	116
Backing Up After PeopleTools Upgrade.....	116

Chapter 3

Run and Review Compare Reports.....	117
Understanding Compare Reports.....	117
Preparing for Application Changes	117
Exporting Project Definitions	117
Importing Project Definitions	118
Dropping Tables and Views	118
Copying Select Tables	119
Running the DLCGGLU20E Script	119
Running the DLCGGLU20I Script	119
Running New Release Compare Reports	120
Understanding the New Release Compare.....	120
Preserving Local Message Node	120
Modifying New Release Compare Options	121
Running New Release UPGCUST Compare	122
Running New Release UPGCUSTIB Compare	123
Resetting Take Action Flags in UPGCUST	123
Running UPGCUSTIB Filter Script	123
Resetting Flags for ChartField Objects	124
Reviewing New Release Compare Reports	124
Reviewing New Release Changes	124
Reviewing NonComparable Objects	125

Chapter 4

Apply Application Changes.....	127
Understanding Application Changes.....	128
Customizing the New Release	128
Understanding New Release Customizations.....	128
Copying the UPGCUST Project	128
Reviewing Copy Results	128
Running New Release Upgrade Copy	129
Exporting Selected PeopleTools Tables	129
Importing Selected PeopleTools Tables	130
Copying the UPGCUSTIB Project	130
Swapping PeopleTools Tables	130
Creating the UPGIBCOPy Project	131
Copying the UPGIBCOPy Project	132
Updating Target Values	132
Copying the UPGNONCOMP Project	132

Reviewing Project Copy Results	133
Exporting New Release Objects	133
Importing New Release Objects	133
Resetting Object Version Numbers	133
Backing Up New Release Demo Again	134
Updating Database Overrides.....	134
Understanding Database Overrides.....	134
Set Index Parameters After Copy	135
Set Tablespace Names After Copy.....	135
Set Record Parameters After Copy.....	135
Create New Tablespaces.....	136
Backing Up After the Upgrade Copy.....	138
Configuring ChartFields	138
Understanding ChartFields	139
Updating Inactive ChartFields	139
Copying UPG CF CONFIG Project Definition	139
Building the UPG CF CONFIG Script	140
Running the UPG CF CONFIG Script	140
Exporting Configuration Defaults	140
Importing Configuration Defaults	140
Running Configuration by Project Process	141
Updating Asset Management ChartField SQC	141
Exporting ChartField Configuration	141
Importing ChartField Configuration	141
Modifying Trigger Tables	142
Understanding Modifying Trigger Tables.....	142
Building the Trigger Sync Script	142
Running the Trigger Sync Script	142
Modifying the Database Structure.....	143
Understanding Modifying the Database Structure.....	144
Backing Up for DB2.....	144
Building the Upgrade Tables Script.....	144
ReCreating Upgrade Tables.....	144
Creating the ALLTEMPTABS Project.....	145
Building the Create Temp Tables Script.....	145
Creating the ALLTABS Project.....	145
Building the Create and Alter Scripts.....	145
Editing the Create and Alter Scripts.....	146
Creating Temporary Tables.....	147
Creating Tables.....	147

Altering Tables.....	147
Creating Indexes.....	148
ReCreating Triggers.....	148
Reviewing the Create Indexes Log.....	148
Creating Indexes for Data Conversion.....	149
Creating Upgrade Views	150
Setting Index Parameters.....	150
Setting Temp Table Tablespace Names.....	151
Setting Tablespace Names.....	151
Setting Record Parameters.....	151
Generating a DB2 UNIX RUNSTATS Script	152
Updating Statistics for DB2 UNIX.....	152
Updating Statistics for DB2 zOS.....	152
Updating Statistics for Informix.....	152
Updating Statistics for Oracle.....	153
Loading Data for Data Conversion.....	153
Swapping Languages on System Data.....	154
Exporting Application Messages.....	154
Importing Application Messages.....	154
Exporting Record Groups.....	155
Importing Record Groups.....	155
Exporting the System Setup Data	156
Importing the System Setup Data.....	156
Exporting the PW Pagelet Data.....	157
Importing the PW Pagelet Data.....	157
Exporting the Pagelet Wizard Data.....	157
Importing the Pagelet Wizard Data.....	157
Exporting Upgrade Defaults.....	158
Importing Upgrade Defaults.....	158
Exporting Application Data	158
Importing Application Data.....	159
Exporting Data Conversion Driver Data.....	159
Importing Data Conversion Driver Data.....	159
Restoring New Release Demo	160
Applying Updates Before Data Conversion.....	160
Configuring Scheduler and Server	161
Backing Up Before Data Conversion.....	161
Running Data Conversion	162
Reviewing Data Conversion Tips.....	162
Running Data Conversion for Group 1.....	164

Running Data Conversion for Group 2.....	165
Running Data Conversion for Group 4.....	165
Running Data Conversion for Group 11.....	165
Backing Up After Data Conversion.....	165
Finalizing the Database Structure.....	166
Understanding Final Database Structure.....	166
Building the Alter with Deletes Scripts.....	166
Altering Tables with Deletes.....	167
Creating Indexes Again.....	167
Creating Triggers.....	167
Running the AE SYNCIDGEN Process.....	167
Creating All Views.....	168
Running Maintenance Pack Scripts.....	168
Understanding Running Maintenance Pack Scripts.....	168
Running the Accounts Payable Script.....	169
Running the Accounts Receivable Script.....	169
Running the Contract Management Script.....	169
Running the General Ledger Script.....	169
Running the Order Management Script.....	170
Running the Purchasing Script.....	170
Running the Work Order Script.....	170
Running the Strategic Sourcing Script.....	171
Updating the Maintenance Log Table.....	171
Loading Data to Complete System Setup.....	171
Exporting Strings.....	172
Importing Strings.....	172
Exporting EDI Statements.....	173
Importing EDI Statements.....	173
Exporting Mass Change Data.....	173
Importing Mass Change Data.....	174
Exporting XML Service Information.....	174
Importing XML Service Information.....	174
Exporting Related Language System Data.....	174
Importing Related Language System Data.....	175
Exporting Application System Data.....	175
Importing Application System Data.....	175
Exporting Converted Application Base Data.....	176
Importing Converted Application Base Data.....	176
Exporting Notification Template Table.....	176
Importing Notification Template Table.....	177

Exporting Common Portal System Options.....	177
Importing Common Portal System Options.....	177
Exporting Setup Data.....	178
Importing Setup Data.....	178
Loading Stored Statements.....	178
Understanding Loading Stored Statements.....	179
Running the STORECP Script.....	179
Running the STOREFP Script.....	179
Running the STOREGL Script.....	179
Running the STOREIN Script.....	179
Running the STORELC Script.....	180
Running the STOREMG Script.....	180
Running the STOREPO Script.....	180
Updating Language Data.....	180
Understanding Updating Language Data.....	181
Run the TSRECPOP Script.....	181
Completing PeopleTools Conversion	181
Updating Object Version Numbers.....	181
Completing the Service Operation Upgrade.....	182
Running the Final Audit Reports.....	182
Run the Final DDDAUDIT Report.....	182
Run the Final SYSAUDIT Report.....	183
Create the FNLALTAUD Project.....	183
Run the Final Alter Audit.....	183
Review the Final Audits.....	184
Run a Final SETINDEX Report.....	184
Run a Final SETTABLE Report.....	185

Chapter 5

Complete Database Changes.....	187
Understanding Database Changes.....	188
Configuring the Upgrade Environment.....	188
Configure Application Server.....	188
Configure Portal.....	189
Reapplying Customizations.....	189
Understanding the Reapplication.....	189
Performing Customized Object Adjustment.....	190
Registering Portal Navigation Objects.....	190
Setting Up Security.....	191

Understanding Security.....	191
Set Up Security.....	191
Synchronize CREF Permissions.....	191
Grant Access to Personalize Homepage.....	193
Completing Portal Data Conversion.....	194
Reviewing Pagelet and Collection Log.....	194
Enabling Pagelet Publishing.....	195
Backing Up Before Manual Changes	195
Completing ChartField Configuration	195
Running the Configuration Steps Report.....	195
Performing Manual Configuration Steps.....	196
Reviewing PeopleTools Functionality.....	196
Preparing the Content Provider Registry.....	197
Updating the Portal Options Data.....	198
Setting Country Codes	198
Understanding Country Codes.....	199
Adding New Country Codes	199
Modifying Existing Country Codes	200
Completing Credit Card Encryption	201
Understanding Credit Card Encryption.....	201
Reviewing Credit Card Encryption Status.....	201
Running Credit Card Encryption.....	201
Rebuilding Verity Search Indexes	202
Reconciling Notification Templates	203
Reviewing Approval Workflow Framework	203
Completing Promotions	204
Updating Tree Statistics	204
Completing Billing Setup	204
Creating Recommended Manual Indexes	204
Defining Payment Terms for Paid Invoices	205
Configuring Order Management	205
Defining Default Hold Reason Code.....	205
Defining Hold Code Security by Role.....	206
Preparing Treasury Setup	207
Rerunning Auto Position Process	207
Adding CUSIP for Security	207
Completing Setup for Projects	208
Setting Up Analysis Type and Analysis Group	208
Running Summary Refresh	208
Setting Sync IDs	209

Setting Resource Management	211
Loading Holidays	211
Performing Payables Setup	212
Running the Matching Process	212
Verifying Procurement Withholding ChartFields.....	213
Completing Receivables Changes	213
Running Customer Follow Up Query	213
Adding a Cash Control Journal Generator Template.....	214
Updating Existing Conversations	214
Updating eSettlements	215
Validating Buyer Registration	215
Validating Agreement Registration	216
Completing Asset Management Setup	217
Applying Customizations to Business Rules.....	218
Applying Customizations to Common Search Configurations.....	218
Running Compare Asset Repositories Process.....	219
Completing Real Estate Management Setup	220
Setting VAT Processing	221
Updating VAT Defaults	222
Updating VAT Entity Report Options	223
Stamping the Database	224
Reviewing Change Control.....	224
Backing Up Before Testing.....	225
Testing Your Copy of Production.....	226

Chapter 6

Apply Changes to Production Database.....	227
Understanding the Move to Production.....	227
Testing the Move to Production.....	227
Understanding the Move to Production Test.....	227
Understand Move to Production.....	228
Creating a New Change Assistant Job.....	229
Testing Once More.....	230
Performing the Move to Production.....	230
Completing the Upgrade Survey	230

Chapter 7

Appendices.....	233
------------------------	------------

Understanding Appendices.....	233
-------------------------------	-----

Appendix A

Applying Fixes Required for Upgrade.....	235
Preparing to Apply Fixes.....	235
Applying Fixes During Installation.....	236
Applying Fixes After Copying Project.....	236
Applying Fixes After Data Conversion.....	237
Applying Fixes Between Upgrade Passes.....	237
Applying Fixes in Move to Production.....	238

Appendix B

Changing the User Interface.....	239
Change the User Interface.....	239
Change the User Interface for Mobile.....	241

Appendix C

Improving Performance.....	243
Understanding Performance Improvement.....	243
Planning Your Upgrade for Performance.....	243
Performing the Upgrade.....	244
Verifying the Database Structure Task.....	244
Creating and Altering SQL Scripts.....	244
Performing Data Conversion.....	244
Improving Performance for Your Platform.....	244
Using Oracle.....	245
Using DB2.....	245
Consulting the Global Support Center.....	246

Appendix D

Planning for Upgrade Testing.....	247
Understanding Testing Techniques.....	247
Deciding When to Test.....	247
Evaluating Your Testing Requirements.....	248
Defining Your Testing Strategy.....	248
Understanding Your Testing Strategy.....	248

Evaluating Unit Testing	249
Evaluating System Testing.....	249
Evaluating Integration Testing.....	249
Evaluating Parallel Testing.....	250
Evaluating Performance Testing.....	250
Evaluating User Acceptance Testing.....	250
Evaluating Regression Testing.....	251
Determining the Testing Conditions.....	251
Developing Your Test Plan.....	251
Developing Test Scripts.....	252
Reviewing Tips and Techniques.....	253
Reducing the Time of Upgrade Process.....	253
Performing Security Testing.....	254
Performing Testing on Up to Date Data.....	254
Performing Test Move to Production.....	254
Tracking Issues.....	254
Reviewing Testing Tools.....	254
Discussing Change Control.....	255
Discussing Back Up Procedures.....	255
Evaluating Unexpected Results.....	255
Evaluating Reasons for Failure.....	255

Appendix E

Preserving Queries and Tree Objects.....	257
Understanding Preserve Queries and Trees.....	257
Preparing the Database.....	258
Creating a New Project.....	258
Comparing the New Project.....	259
Copying the Project.....	260
Testing the Project.....	260
ReExporting the PeopleTools Tables.....	260

Appendix F

Reviewing Tablespaces.....	263
Understanding Tablespace Review.....	263
Reviewing Table Names.....	263
Reviewing 8.9 Table Names.....	263

Appendix G

Upgrading the Content Provider Registry.....	265
Understanding the Content Provider Registry Upgrade.....	265
Copying Your Enterprise Portal Database.....	267
Upgrading Enterprise Portal PeopleTools.....	267
Updating Registry Permission Lists.....	267
Understanding Registry Permission Lists Updates.....	267
Updating Portal Registry.....	268
Deleting the Database Cache.....	268
Creating the Portal Project.....	268
Understanding Portal Project Creation.....	269
Creating the Target Enterprise Portal Project.....	269
Cleaning the Target Enterprise Portal Project.....	270
Deleting the Target Enterprise Portal Database Cache.....	270
Copying the Target Enterprise Portal Project Definition.....	271
Creating the Copy of Production Portal Project.....	271
Cleaning the Copy of Production Portal Project.....	274
Deleting the Copy of Production Database Cache.....	274
Comparing the Portal Project.....	274
Reviewing the Portal Project.....	275
Copying the Portal Project.....	275
Understanding Portal Project Copying.....	275
Copying the Portal Project.....	276
Deleting the Enterprise Portal Database Cache.....	276
Copying Portal Project to Production.....	276
Understanding Portal Project to Production Copying.....	277
Copying the Portal Project to File.....	277
Copying the Portal Project from File.....	277
Deleting the Enterprise Portal Database Cache Again.....	278
Deleting Obsolete Folders.....	278
Understanding Obsolete Folder Deletion.....	278
Deleting Obsolete Folders on Enterprise Portal 8.4.....	278
Deleting Obsolete Folders on Enterprise Portal 8.8.....	279
Updating Registry Folder Permissions.....	279
Understanding Registry Folder Permissions Updates.....	279
Updating the Enterprise Portal Registry Folder Permissions.....	279
Deleting the Enterprise Portal Cache.....	280

Appendix H

Using Data Conversion Utilities.....	281
Understanding Data Conversion Utilities.....	281
Using the Upgrade Driver Program.....	281
Using the Upgrade Drivers Page.....	281
Understanding Upgrade Drivers Page.....	281
Accessing the Upgrade Drivers Page.....	282
Adding New Upgrade Drivers Section Page.....	282
Inactivating Upgrade Drivers Section.....	283
Reviewing the Data Conversion Report.....	284

Appendix I

Using the Comparison Process	285
Understanding the Comparison Process.....	285
Reviewing Source and Target Columns.....	286
Reviewing the Action Column.....	287
Reviewing the Upgrade Column.....	287
Putting it All Together.....	288
Understanding Upgrade Compare Reports.....	288
Reviewing Report Columns.....	289
Using Reports.....	289

Index	293
--------------------	------------

About This Documentation

Understanding This Documentation

This documentation is designed to direct you through the process of upgrading to your new PeopleSoft release.

This section describes information you should know before you begin working with PeopleSoft products and documentation, including PeopleSoft-specific documentation conventions.

Prerequisites

You must complete the tasks in the document *Getting Started on Your PeopleSoft Upgrade* before beginning this upgrade. If you have not yet completed these tasks, do so now.

See PeopleSoft Customer Connection (Implement Optimize + Upgrade, Upgrade Guide, Upgrade Documentation and Software, Upgrade Documentation and Scripts).

Audience

This documentation assumes you have a basic understanding of the PeopleSoft system. One of the most important components of a successful upgrade of your PeopleSoft installation is your on-site experience.

You should be familiar with your operating hardware environment and have the necessary skills to support that environment. You should also have a working knowledge of:

- SQL and SQL command syntax.
- PeopleSoft system navigation.
- PeopleSoft windows, menus, and pages (and how to modify them).
- The World Wide Web.
- Microsoft Windows or Windows NT graphical user interface.

PeopleSoft recommends that you complete at least one PeopleSoft introductory training course before performing this upgrade.

See PeopleSoft Customer Connection (Oracle University).

Organization

This documentation is divided into chapters, each containing tasks that represent major milestones in the upgrade process:

- Prepare Your Database
- Apply PeopleTools Changes
- Run and Review Compare Reports
- Apply Application Changes
- Complete Database Changes
- Apply Changes to Production Database

This documentation may also contain appendices. When additional information is required to complete an upgrade task, you will be directed to the appropriate appendix.

Related Information

PeopleSoft provides additional information that may help with your upgrade. The following information (as well as updates to our upgrade) is available on PeopleSoft Customer Connection:

- *PeopleSoft Release Notes.* Before you begin your upgrade, read the PeopleTools and PeopleSoft application Release Notes to determine what has changed in the system and to familiarize yourself with the new features in this release. The Release Notes also indicate whether you need to upgrade other portions of your system, such as your RDBMS software or batch files.
- *Upgrades Database.* The Upgrade Documentation database on PeopleSoft Customer Connection contains information posted after shipment of this release that may not be included in these upgrade instructions. This information may include Updates & Fixes required at upgrade. Always check the Upgrade Documentation database for the most current documentation and information.
- *Getting Started on Your PeopleSoft Upgrade.* Before beginning a PeopleSoft upgrade, you must complete the tasks in the document *Getting Started on Your PeopleSoft Upgrade*. This document guides you through planning your upgrade as well as installing the software necessary to upgrade to the next PeopleSoft release. If you did not complete the tasks in this documentation, do so now.

Important! Before upgrading, it is imperative that you check the Upgrade Documentation database on PeopleSoft Customer Connection for updates to the upgrade instructions. We continually post updates as we refine the upgrade process.

See PeopleSoft Customer Connection (Implement Optimize + Upgrade, Upgrade Guide, Upgrade Documentation and Software).

CHAPTER 1

Prepare Your Database

This chapter discusses:

- Understanding Database Preparation
- Understanding Your Upgrade
- Copying Your Production Database
- Applying Upgrade Planning Files
- Editing Upgrade Planning DB2 Scripts
- Updating Statistics
- Running Initial Audit Reports
- Performing General Options Setup
- Reviewing Process Scheduler Processes
- Reviewing Country Data
- Reviewing ChartField Configuration
- Preparing Commitment Control
- Completing Billing Tasks
- Setting Up Receivables
- Verifying Grant Management Processes
- Setting Up Projects
- Managing Expense Approvals
- Preparing Asset Management
- Executing Match Rules and Transactions
- Completing Batch Transactions
- Preparing Inventory
- Preparing Strategic Sourcing
- Completing Purchasing Tasks
- Setting Up Treasury
- Preparing Maintenance Management
- Setting Up Real Estate Management
- Reporting Row Count for Tables

- Preparing Your Database
- Backing Up Demo Databases
- Renaming Records and Fields
- Comparing Customizations
- Identifying Customizations
- Preparing for the Application Upgrade
- Backing Up After Prepare Your Database

Understanding Database Preparation

You must make a copy of your production database before you start preparations for the technical portion of the upgrade. Unless otherwise noted, run these tasks on your Copy of Production database (not the New Release Demo database). These tasks do not use the new PeopleSoft release. You should use your current codeline and current Oracle's PeopleSoft PeopleTools release to perform these tasks unless instructed otherwise.

Important! You must read the documentation *Getting Started on Your PeopleSoft Upgrade* before you continue with your upgrade. This getting started guide explains the upgrade process, terminology, and setup tasks that *must* be performed prior to starting your upgrade.

Task 1-1: Understanding Your Upgrade

This section discusses:

- Understanding PeopleSoft Upgrades
- Verifying the Software Installation
- Defining Upgrade Databases
- Reviewing Upgrade Notes and Tips

Understanding PeopleSoft Upgrades

This task reviews information you need to know before you begin your upgrade. It explains the different types of databases that you will use and provides useful upgrade tips and information that you may need to apply before beginning your upgrade.

Task 1-1-1: Verifying the Software Installation

Before continuing with the upgrade, you must complete all of the tasks in *Getting Started on Your PeopleSoft Upgrade*, "Install the Software Release." Verify that the following tasks are complete:

- Installing the new release.
- Applying PeopleTools patches.

- Applying updates required for upgrade.
- Installing the Change Assistant.
- Creating and configuring an upgrade job.
- Setting Configuration Manager profile.
- Reviewing upgrade step properties.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 1-1-2: Defining Upgrade Databases

The following databases will be used during your upgrade:

- The New Release Demo database always refers to the database delivered with your new PeopleSoft release.
It contains the new and changed database objects that you want to add. The New Release Demo database is also referred to as the Demo database later in the upgrade.
- The Copy of Production database refers to the copy of your production database, into which you will add the new and changed objects for this release from the New Release Demo database.

Note. You will create more than one Copy of Production database. Your second and subsequent copies are referred to as the New Copy of Production.

- The Copy of Current Demo refers to the copy of the demo database for the release that you are currently using.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-1-3: Reviewing Upgrade Notes and Tips

This section contains information that may apply to your upgrade product. Review the information in this section before beginning your upgrade.

- Budget Cycle

Upgrading in the middle of a budget cycle is not recommended, but it can be accomplished. If you want to upgrade in the middle of a budget cycle, you must take the following steps:

Recreate any run control records created prior to the upgrade for the Budgets Cube Import. This is due to the introduction of new ChartFields for ledger tables.

If the Position Budgeting feature is used, the position data will not be upgraded due to the extent of the architectural changes to the position tables. When the upgrade is complete, you will need to subscribe to

the new position data (from HRMS or EPM/WFA) or if you do not have integration points, you will need to key in new position data via the Budgets product.

- Time and Labor to Projects Interface Considerations

This information applies if you are currently using the Time and Labor to Projects interface, and you intend to continue using this interface with the new PeopleSoft release. Because this interface takes records from Time and Labor in the HRMS database and loads them in the Projects tables in the Financial and Supply Chain Management database, you cannot use this interface until both databases are upgraded.

You can upgrade the two databases independently and in no particular order, but you will not be able to run this interface until both upgrades are complete.

- Performance Recommendations

Before beginning your upgrade, you should plan for performance issues.

See Appendix: “Improving Performance.”

- Expenses

PeopleSoft Expenses uses a new Approval and Workflow engine to manage expense transaction approvals. To prepare for upgrade, customers must ensure that all expense transactions are either in Pending status (unsubmitted) or in final approved status prior to the upgrade. Transactions that are in the approval process may not be recoverable for routing to approver queues after the upgrade. Once the upgrade is completed and the system is in production, transactions that are in Pending status may be submitted normally and transactions that are already approved may be staged for further processing as required.

- Mobile Client

No upgrade is provided for Mobile Client. The Client install for users on a prior version of the Mobile Travel & Expenses client would replace the existing database with a new one and will not be upgraded.

Warning! If there are unsubmitted Expense Reports or Time Reports in Mobile Client, they will be lost. It is recommended that all users submit their information to the server before the Expenses and Mobile Upgrade. If you upgrade Expenses before all users have a chance to submit their information, then that information can no longer be submitted.

- Microsoft SQL Server Column Statistics

As of Microsoft SQL Server 2000, user-defined statistics can be created on columns within a table. This feature is not supported by PeopleTools. If you added user-defined statistics to any columns in your PeopleSoft application, it may cause errors to occur during the upgrade steps that alter tables. PeopleSoft recommends that you drop all user-defined statistics on columns of PeopleSoft tables before proceeding with your upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-2: Copying Your Production Database

This section discusses:

- Making a Copy of Production Database
- Increasing Database Space

Task 1-2-1: Making a Copy of Production Database

Make a copy of your production database. You will upgrade this database, rather than performing the upgrade directly on your production database. Performing an upgrade on a copy of your production database enables you to test your upgrade in a controlled environment. Refer to the administration guide for your database platform for information on copying databases.

Note. Move to Production: This is a second Copy of Production sometimes referred to as the New Copy of Production. The first Copy of Production, or “old” Copy of Production, will now be the source database (it was the target database in the initial test pass). The second, or “new” Copy of Production, is now the target database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-2-2: Increasing Database Space

To prepare for the upgrade, you may need to increase the space allocated to your Copy of Production database. Depending on your relational database management system (RDBMS), this may include allocating space to tablespaces or allocating database primary space and log files. Be aware that your new environment needs to accommodate both the existing data in your Copy of Production database as well as the new data, new data structures, and new database objects. Every site and configuration is different, so Oracle cannot offer a guaranteed estimate of your database sizing needs.

As part of the initial upgrade pass, you may need to revisit your initial space allocation settings more than once as you progress through the upgrade. At the end of the initial pass, the final space allocation settings will closely reflect the space you will need to complete any subsequent Move to Production passes. Work with your DBA to ensure that your environment is set up appropriately for both the initial and Move to Production passes.

See the PeopleSoft installation documentation for your product line and release.

Note. Oracle RDBMS customers also need to alter the tablespace for PSIMAGE and increase it to 200 MB; autoextend on next 10 MB; maxsize unlimited.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-3: Applying Upgrade Planning Files

This section discusses:

- Understanding Applying Upgrade Planning Files
- Applying the UPGOPT Project
- Building the UPGOPT Project
- Importing Upgrade Setup Data
- Setting Up Upgrade Planning Security

Understanding Applying Upgrade Planning Files

In this task, you apply the upgrade planning files that you downloaded from the Upgrade database on Customer Connection to your current codeline. These files may include Structured Query Report (SQR) programs and scripts that you will execute in later tasks, and a project that you will apply to your Copy of Production database. This project may include records, fields, pages, menus, queries, and process definitions that allow functional users to define conversion information needed for later upgrade tasks.

Task 1-3-1: Applying the UPGOPT Project

In this step, apply the UPGOPT project to your Copy of Production database using the Copy Project from File process.

To apply the UPGOPT project:

1. Using your current codeline, launch Application Designer and sign in to your Copy of Production database.
2. Select Tools, Copy Project, From File.
3. From the dialog box, select the import directory PS_HOME\PROJECTS\ (current codeline).
4. Click UPGOPT in the Projects box, and then click Select.
5. Click Copy.

This copies the UPGOPT project onto your Copy of Production database.

6. Using your current codeline, launch Data Mover and sign on to your Copy of Production database.
7. Run the following script to load Access Groups and the Upgrade Query Tree:

```
\PS_HOME\SCRIPTS\UPGOPT_EP89.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-3-2: Building the UPGOPT Project

In this step you create and alter tables, and create views.

To build the UPGOPT project:

1. Using your current codeline, launch Application Designer and sign in to your Copy of Production database.
2. Select File, Open...
3. In the Definition drop-down list box, select *Project* and click Open to display the list of projects.
4. Select *UPGOPT* and click Open again.
5. Select Build, Project...
6. Under Build Options, select Create Tables, Create Views.
7. Click Settings...
8. On the Create tab, select Recreate View if it already exists and Recreate Table if it already exists.
9. On the Logging tab, select Fatal errors, warnings, and informational messages.
10. On the Scripts tab, select Output to separate files.
11. In the Script File Names box, give your scripts a unique name that reflects this task number and the object being created.
12. Click OK.
13. Under Build Execute Options, select Build script file.
14. Click Build.
15. Using the appropriate SQL query tool for your platform, run the scripts created in the step above.

Run the scripts in the following order: Create Tables, Create Views, Create Indexes.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-3-3: Importing Upgrade Setup Data

This script imports previously preserved upgrade setup data and mapping values into your New Copy of Production database during the Move to Production upgrade pass. You had set up these values earlier in your Copy of Production database throughout various tasks in the "Prepare your Database" chapter. You then exported this data during your Initial pass or a prior Move to Production pass.

The script name for your upgrade path is:

PUEP89IMP.DMS

Prior to running this script, please ensure that the corresponding DAT file you had exported in the Initial pass or a prior Move to Production pass exists in your current release PS_HOME directory.

The DAT file for your upgrade path is:

PUEP89EXP.DAT

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 1-3-4: Setting Up Upgrade Planning Security

In this step you set up security on your Copy of Production database.

To set up security:

1. Select PeopleTools, Security, Permissions & Roles, Permission Lists.
2. Enter the permission list for the users who will be reviewing and setting up functional requirements for the upgrade, then click Search.
3. Select or insert the menu name UPG_DEFINE_DEFAULTS, and click Edit Components.
4. Select all items in the menu.
5. Click OK.
6. Click Save.
7. Select PeopleTools, Security, Permissions & Roles, Permission Lists.
8. Select the permission list for the users that review and set up functional requirements for the upgrade.
9. Navigate to the Query tab.
10. Select Access Group Permissions.
11. Add one row with the Tree Name UPG_QUERY_TREE_EP and the Access Group UPG_ACCESS_GROUP.
12. Select OK, Save.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-4: Editing Upgrade Planning DB2 Scripts

Perform this step only if your database platform is DB2 z/OS. DB2 z/OS scripts that create tables need a `set current sqlid` statement so that the tables are created with the correct owner ID. Open each script listed below, then uncomment and modify all of the DB2-specific statements to reflect your environment.

For SQL scripts, if the script does not contain DB2-specific statements, add the following line to the top of the script and edit it for your environment, inserting the appropriate owner ID in uppercase characters:

```
set current sqlid = 'OWNER_ID';
```

For Data Mover scripts (DMS), if the script does not contain DB2-specific statements, add the following line to the top of the script and edit it for your environment, inserting the appropriate owner ID in uppercase characters:

```
set execute_sql set current sqlid = 'OWNER_ID';
```

The following is a list of scripts that you need to edit:

```
PUUPX07.DMS
PUEPAU41.DMS
PUEP89IMP.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 1-5: Updating Statistics

Run this task to improve performance of your compare and copy processes. Have your database administrator update statistics on your database before proceeding with your upgrade. Later in the upgrade, you will update your statistics again due to changes in the database structure.

See Appendix: “Improving Performance.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-6: Running Initial Audit Reports

This section discusses:

- Understanding Running Initial Audit Reports

- Run the Initial DDDAUDIT Report
- Run the Initial SYSAUDIT Report
- Create the INITALTAUD Project
- Run the Initial Alter Audit
- Review the Initial Audits

Understanding Running Initial Audit Reports

In this task, you run and review your initial DDDAUDIT, SYSAUDIT, and Alter Audit reports. Running these reports ensures that your database is as clean as possible for the remainder of the upgrade.

Task 1-6-1: Run the Initial DDDAUDIT Report

DDDAUDIT is an SQR script that compares your production SQL data tables with the PeopleSoft PeopleTools record definitions to identify inconsistencies.

In this step, DDDAUDIT is run using SQR from your current (old) PeopleSoft release against the Copy of Production to ensure that you are starting with a clean database.

You will review the output from the report in a later step.

See Review the Initial Audits.

See the Enterprise PeopleTools PeopleBook: System and Server Administration for your current release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-6-2: Run the Initial SYSAUDIT Report

SYSAUDIT is an SQR script used to identify “orphaned” PeopleSoft objects. For example, SYSAUDIT can identify a module of PeopleCode that exists but does not relate to any other objects in the system. SYSAUDIT also identifies other inconsistencies within your database.

In this step, SYSAUDIT is run using SQR from your current (old) release of PeopleSoft against the Copy of Production to ensure that you are starting with a clean database.

You will review the output from the report in a later step.

See Review the Initial Audits.

See the Enterprise PeopleTools PeopleBook: System and Server Administration for your current release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-6-3: Create the INITALTAUD Project

This section discusses:

- Understanding Creating the INITALTAUD Project
- Running the Step Create the INITALTAUD Project Automatically
- Creating the INITALTAUD Project

Understanding Creating the INITALTAUD Project

In this step, you create the INITALTAUD project and use it to run your initial Alter Audit. Creating this new project now ensures that all of the records with type *Table* in your system are audited. This project also includes any custom records that you created in your system.

If your old PeopleSoft PeopleTools release is 8.44 or later, you can run this step automatically in Change Assistant. To run this step automatically, proceed to “Running the Step Create the INITALTAUD Project Automatically.” If your old PeopleSoft PeopleTools release is earlier than 8.44, proceed to “Creating the INITALTAUD Project.”

Running the Step Create the INITALTAUD Project Automatically

To run the step Create the INITALTAUD Project automatically:

1. In Change Assistant, open your upgrade job.
2. In the task Running Initial Audit Reports, right-click the step Create the INITALTAUD Project, and then select Step Properties.
3. In the Step Properties dialog box, change the value in the Type field from *ManualStop* to *CreateProject*.
4. Click OK.
5. Select Edit, Run.

Creating the INITALTAUD Project

To create the INITALTAUD project:

1. Launch PeopleSoft PeopleTools and sign in to the Target database.
2. From Application Designer, select File, New...
3. Select Project, and then click OK.
4. Select Insert, Definitions into Project...
5. Select *Records* from the Object Type drop-down list box.
6. Select *Table* from the Type drop-down list box.
7. Click Insert, and then click Select All.
8. Click Insert, and then click Close.

9. Select File, Save All.
10. Enter the project name *INITALTAUD*.

Warning! You must name the project *INITALTAUD* or the next step will fail.

11. Click OK.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-6-4: Run the Initial Alter Audit

To verify that the PeopleSoft PeopleTools definitions are synchronized with the underlying SQL data tables in your database, run the PeopleSoft PeopleTools alter record process on all records in your system. This process, called an Alter Audit, compares the data structures of your database tables with the PeopleSoft PeopleTools definitions to identify inconsistencies. The Alter Audit then creates SQL scripts with the data definition language (DDL) changes that are required to synchronize your database with the PeopleSoft PeopleTools definitions.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-6-5: Review the Initial Audits

In this step, you review the audits that you performed earlier in this task. Review the audits before proceeding with the upgrade.

Review the output from the SYSAUDIT and DDDAUDIT reports and correct any discrepancies. When application tables are deleted from the Application Designer, they are not automatically deleted from the system tables. Oracle takes this precaution in case you have customized information that you want to preserve. When you review your DDDAUDIT listing, these tables are listed as a discrepancy between the PeopleSoft application and the database.

Now you must decide whether to drop these tables or retain them. In most cases, you will want to drop the tables, using your SQL tool to drop the tables from the system catalogs. If you have customized information or processes that access these tables, you may want to retain them in the system tables even though they will no longer be accessed or updated by the PeopleSoft system. Drop any unnecessary deleted tables now so that your future DDDAUDIT reports will be as clean as possible.

The Alter Audit produces the scripts *INITALTAUD_ALTTLBL.SQL*, *INITALTAUD_CRTIDX.SQL*, and *INITALTAUD_CRTTRG.SQL*. These scripts contain SQL that corrects any discrepancies between your PeopleSoft PeopleTools record definitions and the database system catalog table definitions. Review the Alter Audit output and correct any discrepancies.

Note. Triggers are always dropped and re-created during the alter process and will always show up in the generated Alter Audit script. You can ignore the generated script for triggers.

Note. For Microsoft SQL Server and DB2 UNIX/NT platforms, if your database has tables containing the MSSCONCATCOL or DBXCONCATCOL column, you will see SQL alter the tables and re-create their associated indexes, even though the underlying tables and indexes may not have changed.

Note. You will rerun the DDDAUDIT and SYSAUDIT SQR scripts later in the upgrade. If you want to preserve the log files generated by Change Assistant from this run, you will need to rename the files manually after completing this task.

See the Enterprise PeopleTools PeopleBook: System and Server Administration for your current release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-7: Performing General Options Setup

During this step, you perform a general options setup for all products.

To perform general options setup:

1. Select Set Up Financials/Supply Chain, Upgrade, Define Upgrade Defaults.

The Define Upg Options page appears:

The screenshot shows a web interface titled "Upg Options". It contains a single input field labeled "Upgrade Application Release" with a dropdown arrow, currently displaying the value "8.90". At the bottom of the page, there are two buttons: "Save" and "Notify".

Upg Options page

2. Enter the release number of your target database in the Upgrade Application Release field.
Some of the data conversions only run for specific target releases.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-8: Reviewing Process Scheduler Processes

You should verify that all processes submitted to the process scheduler server have been completed successfully or are cancelled before proceeding with the upgrade.

To view processes from the Process Monitor:

1. Select PeopleTools, Process Scheduler, Process Monitor.
2. Enter an appropriate time limit (such as the last hour, last day, or longer limit) and click Refresh.
3. Review any processes that did not end with a Run Status of *Success* or *Cancelled*.

Any outstanding processes that you want to complete before proceeding with the upgrade should be completed at this time.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-9: Reviewing Country Data

The PeopleSoft system provides the 239 ISO 3166 compatible country codes as part of system data. However, the PeopleSoft system also includes an interface through which you can customize the country codes (either add new ones or modify existing ones). Because the COUNTRY_TBL record is considered system data, it will be repopulated with the current countries as Oracle has defined them. As a result, any additional countries that you may have added and any other customizations that you may have made to this table will be deleted.

You can skip this task if you have never customized country codes. The output of this query will be used to help with the cleanup that you will complete after data conversion.

Note. Move To Production: You can skip this task if you have not customized country codes since your initial upgrade pass.

To run the Country Table query:

1. Select Reporting Tools, Query, Query Viewer.
2. Run the following query report:

```
UPG_ECY01
```

Note. Keep the output of this report; you will need it later in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-10: Reviewing ChartField Configuration

In this task, you must carefully review your ChartField configuration actions in preparation for running the configuration process in chapter 4.

Note. If you have *not* added any new ChartFields, you can skip this task. If you have added new ChartFields, all the new objects, tables, views, pages, and so on that you created when you initially ran the ChartField Configuration process need to be identified and copied over when you review your customizations in chapter 3.

To review the ChartField Configuration actions:

1. Select Set Up Financials/Supply Chain, Common Definitions, Design ChartFields, Reports, Configuration Steps.
2. Enter the Configuration ID *INSTALL_PRODUCT* to generate the Configuration Steps Report.

Note. You should save the Configuration Steps Report so that you can refer to it when you review your customizations.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-11: Preparing Commitment Control

Duplicate commitment control data exists when there are multiple source header entries in the *KK_SOURCE_HDR* table for a document header (for example, Requisition, PO, Voucher, or Journal). Duplication can occur when budget checking is run concurrently for the same source transaction. Such errors are often difficult to diagnose and resolve and can result in data integrity problems.

The Commitment Control Cleanup Utility provides a convenient way to identify duplicate transactions in the commitment control tables and take corrective action. The cleanup utility is not posted as a delivered fix so you must contact the Global Support Center (GSC) to request the utility.

To request the cleanup utility, use the following table to find the appropriate resolution for your PeopleSoft FSCM release:

Release	Resolution
8.4 SP2	721540
8.8 SP1	705732
8.9	683317

The Commitment Control Cleanup Utility identifies and corrects individual source transactions that are duplicated in the Commitment Control (KK) tables. The utility performs the following steps to clean up the duplicate transactions:

1. Identifies duplicate transactions (Identify Process).
2. Reviews and selects duplicate transactions for deletion (Selection).
3. Deletes and unposts duplicate transactions (Delete Process).

The upgrade data conversion does not require all the commitment control duplicate data to be cleaned up. However, Oracle strongly recommends that you clean up the duplicates.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-12: Completing Billing Tasks

This section discusses:

- Running Billing PreUpgrade Reports
- Reviewing the Billing PreUpgrade Reports

Task 1-12-1: Running Billing PreUpgrade Reports

These reports show you data conditions that you should address before the upgrade begins. An explanation of the reports and directions for the output information follow these instructions.

To run the pre-upgrade reports:

1. Select Set Up Financials/Supply Chain, Upgrade, Create Upgrade Reports.
2. Run the following reports:

Bills in Process, PUCGY002.SQR
Billing Interface Process, PUCGY003.SQR

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Billing	All	All

Task 1-12-2: Reviewing the Billing PreUpgrade Reports

This section discusses:

- Reviewing Report PUCGY002
- Reviewing Report PUCGY003

Reviewing Report PUCGY002

This report lists bills in process. If a process aborts in the middle of processing, bills may be stuck in the *in process* state until the process is restarted. You must restart these processes and allow them to complete before proceeding with the upgrade.

To restart aborted bill processes:

1. Select PeopleTools, Process Scheduler, Process Monitor.
2. Enter the process instance from the report in the Instance field.

3. Click the Refresh button.
4. Click the Details link.
5. Select Restart Request.
6. Click OK.

Note. You may want to limit the restart ability to users with expertise to determine that an interface process has in fact terminated abnormally. Do not run the restart process unless you are absolutely sure that the original interface process has terminated.

Reviewing Report PUCGY003

This report displays Billing Interface processes that are considered *in process* and should be restarted. You must restart these processes and allow them to complete before proceeding with the upgrade.

To restart pending bill processes:

1. Select Billing, Interface Transactions, Process Billing Interface.
2. Enter values in the From Interface ID and the To Interface ID fields, based on the report results.
3. Click Run.
4. Select Billing Interface.
5. Click OK to submit the process.
6. Run the Interface & VAT Defaulting job.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Billing	All	All

Task 1-13: Setting Up Receivables

This section discusses:

- Posting Receivables Transactions
- Processing Credit Card Payments
- Generating Customer Conversation Letters
- Establishing Customer Conversation Currency

Task 1-13-1: Posting Receivables Transactions

In this step, you need to successfully post all documents (worksheets, drafts, direct debits, payments, maintenance, transfers, finance charge groups, unpost groups, online pending items groups, direct journals, and so on) by running AR Receivable Update, where applicable.

To post receivables transactions:

1. Run Receivable Update (ARUPDATE) by selecting Accounts Receivable, Receivables Update, Request Receivables Update.
2. Run Entry Event by selecting Accounts Receivable, Receivables Update, Request Entry Event Processor.
3. Run AR Revenue Estimate by selecting Accounts Receivable, Receivables Update, Revenue Estimates, Create Transactions.
4. Run the Commitment Control module by selecting Accounts Receivable, Receivables Update, Revenue Estimates, Budget Check Transactions.
5. Run Journal Generator by selecting General Ledger, Journals, Subsystem Journals, Generate Journals.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Receivables	All	All

Task 1-13-2: Processing Credit Card Payments

In the new PeopleSoft FSCM release, credit card processing in PeopleSoft Receivables carries the deposit ID and payment sequence number on the history record. Therefore, all credit card payments that originate in PeopleSoft Receivables must be processed in PeopleSoft Receivables. Credit card transactions cannot be left in a denied state. All outstanding credit card payments must be resolved by either completing or deleting the payment, before the upgrade begins.

To process credit card payments:

1. Select Accounts Receivable, Payments, Apply Payments, Process Credit Card Payments.
2. Add a run control ID.
3. Add all business units that have items paid by credit card.
4. Ensure the Process Frequency is set to *Always Process* or *Process Once*.
5. Run the process AR_CRCARD.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Receivables	All	All

Task 1-13-3: Generating Customer Conversation Letters

All customer conversation letters that have not been created, must be generated before the upgrade.

Note. After the upgrade, customer conversation letters cannot be created from existing customer conversations.

See “Complete Database Changes,” Completing Receivables Changes.

To run customer follow-up letters:

1. Select Accounts Receivable, Customer Interactions, Customer Follow Up Letter.
2. Select the customer setID.
3. Select the customer ID.
4. Run PSJob FOLLOWUP.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	Receivables	All	All

Task 1-13-4: Establishing Customer Conversation Currency

In the new PeopleSoft FSCM release, each customer conversation allows for a currency code to be established. Because customers are not required to have a default currency code, you can set up a default currency code for all customers that have conversations.

To set the default currency code:

1. Select Set Up Financials/Supply Chain, Upgrade, Define Conversation Currency.
The AR Customer Conversations page appears.
2. Select the currency code from the list of currencies.
3. Click Save.
4. Select the Upgrade Existing Currency Code on Existing Conversations check box to set up a default currency for all customer conversations.

Note. If you do not want to set up a default currency for existing customer conversations, do *not* select this box, and skip the rest of this task.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	Receivables	All	All

Task 1-14: Verifying Grant Management Processes

In this task, you verify the completion of grant management processes.

Before starting the upgrade, make sure that all of Facilities & Administration (FA) process instances have run successfully by verifying that no records are in the GM_PRJ_ERR table.

To verify the completion of grant management processes:

1. Select Grants, Awards, FA Error Interactive Report.

2. Run the Journal Generator process to generate journal entries for all accounting entries from the CA_ACCTG_LN_PC that have not been distributed.
3. Select General Ledger, Journals, Subsystem Journals, Generate Journals.
4. Use the GMDEFN Accounting Definition.
5. Select Reporting Tools, Query, Query Manager.
6. Run the following query:

```
UPG_GF02
```

7. Verify that no rows are returned.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Grant Management	All	All

Task 1-15: Setting Up Projects

This section discusses:

- Processing Third Party Transactions
- Defining Generic Asset Resource Defaults

Task 1-15-1: Processing Third Party Transactions

This section discusses:

- Understanding Third-Party Transactions
- Processing Third-Party Transactions
- Processing Third-Party Projects and Activities

Understanding Third-Party Transactions

Due to changes to the Third-Party Staging Tables in the new PeopleSoft FSCM release, if you use the Third-Party Transaction Loader application engine (PC_INTFEDIT) or the Third-Party Project-Activity Loader application engine (PC_INTF_GEN), you need to process all third-party transactions, projects, and activities that are ready to be loaded before you begin the upgrade process.

Processing Third-Party Transactions

To process third-party transactions:

1. Select Project Costing, Third Party Integration, Load Transactions.
2. Create a new run control.
3. Accept all default values on the run control page.
4. Run the Third-Party Transaction Loader process.

Processing Third-Party Projects and Activities

To load third-party projects and activities:

1. Select Project Costing, Third Party Integration, Load Projects and Activities.
2. Create a new run control.
3. Accept all default values on the run control page.
4. Run the Third-Party Projects and Activities Loader process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Project Costing	All	All

Task 1-15-2: Defining Generic Asset Resource Defaults

In the new PeopleSoft FSCM release, asset type and asset subtype must be defined for all generic asset resources. In order to determine how these values will be populated, select the default asset type and asset subtype for each project business unit. Select one row as the primary default. This primary default setting is used if a generic asset resource is found in a project business unit that is not specified on this page.

Complete this step *only* if you license PeopleSoft Program Management.

1. Select Set Up Financials/Supply Chain, Upgrade, Define Program Mgmt Defaults.

The Generic Asset Defaults page appears:

Generic Asset Defaults

Please identify the default Asset Type and Asset Subtype for each Projects Business Unit. These values will be applied to all existing Generic Asset Resources during the upgrade conversion.

*Business Unit	*Asset Type	*Asset Subtype	Primary
EGV01	Equipment	NETWORK	<input type="checkbox"/>
EGV02	Fleet	TRUCK	<input type="checkbox"/>
US001	IT Hardware	SERVER	<input type="checkbox"/>
US003	IT Hardware	MAC	<input type="checkbox"/>
US004	Fleet	TRUCK	<input checked="" type="checkbox"/>

Generic Asset Defaults page

2. Select default values in the Asset Type and Asset Subtype fields for each project business unit.
3. Select one row as the primary default by selecting the check box in that row.
4. Save your changes.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Program Management	All	All

Task 1-16: Managing Expense Approvals

PeopleSoft Expenses uses an Approval and Workflow engine to manage expense transaction approvals. In preparation for the upgrade, you must ensure all expense transactions are either in Pending status (unsubmitted) or Paid status (for expense reports and cash advances) or final approved status (for travel authorizations and time reports). If you are using post-payment audit functionality, any outstanding transactions for post-pay review must be completed prior to the upgrade. Transactions that are in the approval process may not be recoverable for routing to approver queues after the upgrade. This applies to both pre- and post-payment approvals.

Once the upgrade is completed and the system is in production, transactions that are in Pending status may be submitted normally and transactions that are already approved may be staged for further processing, as required. If you use the post payment audit feature, the Post Payments process will generate worklist entries and notifications for the post-payment auditor. Pending Tools worklist entries that were inserted for the post-pay auditor prior to upgrade will not be removed by the upgrade process, so you must manually mark these entries as “worked.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Expenses	All	All

Task 1-17: Preparing Asset Management

This section discusses:

- Running Asset Management Interface Programs
- Reviewing IT Asset Management Business Rules
- Reviewing Common Search Configurations

Task 1-17-1: Running Asset Management Interface Programs

All pending interface transactions need to be loaded into PeopleSoft Asset Management before upgrading. You must run the following two AM interface programs:

- Retrieve Info from AP/PO
- Load Transactions into AM

To run the AM interface programs:

1. Select Asset Management, Send/Receive Information, Retrieve Info from AP/PO.
2. Add a new run control ID.

The Payables/Purchasing Interface page appears:

Payables/Purchasing Interface

Run Control ID: S2 [Report Manager](#) [Process Monitor](#) [Run](#)

*Request ID: S S

*Process Frequency: Process Once [Interface Asset Information](#)

Process Option: Process All Pending Entries

[Save](#) [Return to Search](#) [Notify](#) [Add](#) [Update/Display](#)

Payables/Purchasing Interface page

3. Enter a request ID.
4. Set the process frequency to *Process Once*.
5. Set the process option to *Process All Pending Entries*.
6. Click the Run button to run the AMPS1000 program.
7. Select Asset Management, Send/Receive Information, Load Transactions, Load Transactions into AM.
8. Add a new Run Control ID.

The Run Transaction Loader page appears:

Run Transaction Loader

Run Control ID: S1 [Report Manager](#) [Process Monitor](#) [Run](#)

Run Control Parameters [Find](#) [View All](#) First 1 of 1 Last

*Request ID: 1 Process Frequency: Once ☐ Process AM Integration

Interface ID: 10000004 To Interface ID: 90000002 System Source:

Find Trans Load ID (optional)

System Source: Load Type:

Load Status: Pending ☒ Financial Record ☐ Physical Records [Search](#)

Interface ID	System Source	Load Type	Load Description	Load Status	Total Items in Query
10000004	BAM	RET	Asset Retirement	NEW	4
10000065	BAM	IUO	Inter-Unit Transfer Out Side	NEW	6
90000001	CNV	CN1	Conversion of First Book	NEW	1
90000002	CNV	CN1	Conversion of First Book	NEW	1

[Save](#) [Return to Search](#) [Previous in List](#) [Next in List](#) [Notify](#) [Add](#) [Update/Display](#)

Run Transaction Loader page

9. Enter a request ID.
10. Set the process frequency to *Once*.
11. Set the Interface ID field to the first interface ID from the search list.
12. Set the To Interface ID field to the last interface ID from the search list.
13. Click the Run button to run the AMIF1000 program.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Asset Management	All	All

Task 1-17-2: Reviewing IT Asset Management Business Rules

Run this step *only* if you license PeopleSoft IT Asset Management. If you do not have PeopleSoft IT Asset Management, you can skip this step.

In the new PeopleSoft FSCM release, the tables related to business rules have been modified. The logic by which “An Exception” is determined has been modified in business rules for Business Unit, Dept ID, and Empl ID values. Therefore, all changes made to PeopleSoft IT Asset Management business rules must be noted before the upgrade, as the upgrade overwrites these changes. After the upgrade, reapply these changes.

If no customizations or changes have been made to the delivered business rules, then you can skip this step.

To review the existing business rules:

1. Select Reporting Tools, Query, Query Manager.
2. Run the following query:

```
UPG_ITS01
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Both	Asset Management	All	All

Task 1-17-3: Reviewing Common Search Configurations

Run this step *only* if you license PeopleSoft IT Asset Management. If you do not have PeopleSoft IT Asset Management you can skip this step.

In this step, review any changes made to Common Search Configuration. In the new PeopleSoft FSCM release, all common search configurations have been modified with the *exception* of IT_ASSET_LOG. This is not needed and has been removed in the new release. Make note of any changes made to the remaining configurations and reapply them after the upgrade.

Note. If no customizations or changes have been made to the delivered Common Search Configurations, then you can skip this step.

To review Common Search Configuration:

1. Select Set Up Financials/Supply Chain, Product Related, IT Asset Management, Common Search Configuration.
2. Select each Common Search Configuration and check for customizations.
Make note of any customizations you find.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Both	Asset Management	All	All

Task 1-18: Executing Match Rules and Transactions

This section discusses:

- Posting Payables Transactions
- Running Journal Generator Edit and Post
- Canceling Rescheduled Payments
- Flagging Bad Effective Dated Withholding Entities

Note. Match Rule Exceptions must be resolved before running data conversions.

Task 1-18-1: Posting Payables Transactions

Before beginning your upgrade, you must post all your voucher, payment, and withhold transactions and generate the corresponding accounting lines.

Run the voucher, payment, and the withholding posting processes before continuing with this upgrade.

To post Payables transactions:

1. To voucher post, select Account Payables, Batch Processes, Vouchers, Voucher Posting.
2. To payment post, select Account Payables, Batch Processes, Payments, Payment Posting.

Note. You must post all vouchers and payments before performing the next step.

3. To withhold post, select Vendors, 1099/Global Withholding, Maintain, Post Withholdings.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Payables eSettlements	All	All

Task 1-18-2: Running Journal Generator Edit and Post

Make sure that the Post Payables Transactions section above is completed before proceeding with this task.

Before starting your upgrade, you must run Journal Generator, Journal Edit, and Journal Posting for all Accounts Payables accounting entries that have been posted but not yet processed by Journal Generator. This is the only way to guarantee that all transactions will be posted to the accounts as you have previously defined them. Run the Journal Generator process for all General Ledger Business Unit/Ledger Group combinations before continuing with this upgrade.

To run journal generator, edit, and post:

1. To run Journal Generator, select General Ledger, Journals, Subsystem Journals, Generate Journals.
2. To run Journal Edit, select General Ledger, Journals, Process Journal, Edit Journals.
3. To run Journal Post, select General Ledger, Journal, Process Journal, Process Posting.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Payables eSettlements	All	All

Task 1-18-3: Canceling Rescheduled Payments

This step cancels rescheduled payments. If you want to cancel any rescheduled payments, you need to complete the cancellations before the upgrade begins.

To cancel any rescheduled payments:

1. Select Accounts Payable, Payments, Pay Cycle Processing, Cancel Rescheduled Payments.
2. Enter a Run Control ID.
3. Select Search to proceed with the cancellation process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Payables eSettlements	All	All

Task 1-18-4: Flagging Bad Effective Dated Withholding Entities

In this step you run a query to identify withholding entities with incorrect effective date information. Because of the new withholding enhancements, the withholding entity and class information on the Procurement Control ChartField page are driven by the information defined on the Withholding Entity Page. The effective date on the old page must be greater than or equal to the effective date on the new page, or the automatic data conversion will not work correctly. Use this report to make any necessary changes to your withholding entities.

To run the Withholding Entities report:

1. Select Reporting Tools, Query, Query Viewer.
2. Run the following query:

UPG_APU30

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Payables eSettlements	All	All

Task 1-19: Completing Batch Transactions

This task is required for any customer that does batch/data collection transaction processing. In this task, you complete or cancel any remaining batch transaction processes. You must confirm that any outstanding batch (BCT) transactions have been completely processed or cancelled before proceeding with the upgrade. The staging tables are not converted and you may lose data that resides in these tables.

To complete or cancel BCT transactions:

1. Select Set Up Financials/Supply Chain, Upgrade, Create Upgrade Reports.
2. Run the report Outstanding Batch Transactions, PUCGY257, to retrieve business units with transactions that have not been closed or cancelled.
3. Select SCM Integrations, Transaction Error Handling, Maintain Transactions.
4. For every business unit listed in the report:
 - a. Click the Search button (flashlight).
 - b. For each entry that does not have the status *Complete*, click the EIP Control ID and either complete or cancel the transaction.
5. If any rows are returned, you must repeat the steps for every applicable business unit.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-20: Preparing Inventory

This section discusses:

- Running the Inventory PreUpgrade Report
- Reviewing PreUpgrade Inventory Report
- Confirming Shipping and Depleting All Orders

- Costing and Posting Inventory Transactions
- Running Inventory Balances Report

Task 1-20-1: Running the Inventory PreUpgrade Report

This report shows you data conditions that you should address before the upgrade begins. An explanation of the report and directions for the output information follows these instructions.

To run the pre-upgrade report:

1. Select Set Up Financials/Supply Chain, Upgrade, Create Upgrade Reports.
2. Run the following reports:

Un-Invoiced Billing Line Count, PUCGS251.SQR

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Inventory	All	All

Task 1-20-2: Reviewing PreUpgrade Inventory Report

The PUCGS251 report identifies any billing lines by Business Unit in the shipping interface table (PS_IN_DEMAND_BI) that have been run through the INS6300/OMBILL process but have not been run through the billing interface process BIIF0001. A total number of rows will be listed on the report. The rows must be processed through Billing so that they appear on an invoice prior to running the upgrade.

Note. If you do not process these outstanding billing lines, you will not be able to invoice these entries after the upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Inventory	All	All

Task 1-20-3: Confirming Shipping and Depleting All Orders

You must confirm, ship, and deplete all orders that have appeared on a pick plan before proceeding with the upgrade.

To confirm, ship, and deplete orders:

1. Make any picking feedback modifications by selecting Inventory, Fulfill Stock Orders, Picking, Material Picking Feedback.
2. When complete, mark all open pick lines as confirmed by selecting the Confirm check box for all lines or by clicking Confirm All.
3. Run picking confirmation for all open pick lines by selecting Inventory, Fulfill Stock Orders, Picking, Picking Confirmation.

4. If Auto-Ship was not selected for all pick lines, ship all lines by selecting Inventory, Fulfill Stock Orders, Shipping, Shipping/Issues.
5. Run depletions for all shipped orders by selecting Inventory, Fulfill Stock Orders, Shipping, Deplete On Hand Quantity.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Inventory	All	All

Task 1-20-4: Costing and Posting Inventory Transactions

In this step, you cost all Inventory transactions and post them to the General Ledger.

Important! Prior to running the data conversion scripts, you must cost all Inventory transactions and post them to General Ledger.

To cost and post Inventory transactions:

1. Run both the transaction costing and accounting line creation processes by selecting Cost Accounting, Inventory and Mfg Accounting, Create Accounting Entries, Cost Accounting Creation.
2. Select the options Cost Inventory Transactions and Creating Accounting Lines for all transaction groups.
3. Select Cost Accounting, Inventory and Mfg Accounting, Create Accounting Entries, Accounting Line Errors.
4. Verify there are no errors for any Inventory Business unit.
5. Run journal generator by selecting General Ledger, Journals, Subsystem Journals, Generate Journals.
6. Select Set Up Financials/Supply Chain, Upgrade, Create Upgrade Reports.

Run the report Verify Costing Transaction, PUCGY303 to ensure that all Inventory and, if applicable, Manufacturing transactions are posted to General Ledger.

This report verifies that all Inventory transactions have been costed and posted to the General Ledger.

7. If any unprocessed transactions exist, you will not be able to reconcile costing after the upgrade. Repeat steps 1 through 5 until there are no unprocessed transactions on the report.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Inventory	All	All

Task 1-20-5: Running Inventory Balances Report

Run the Inventory Balances report to make it easier to reconcile the inventory quantities and values after data conversion.

To run the inventory balances report:

1. Select Inventory, Manage Inventory, Reports, Inventory Balances.
2. If you encounter any discrepancy in the report, please call the Global Support Center for help in resolving the problem before continuing with the upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Inventory	All	All

Task 1-21: Preparing Strategic Sourcing

This section discusses:

- Reviewing Event Status

Task 1-21-1: Reviewing Event Status

In this step, you ensure all events are either closed for bidding or cancelled. You need to either close or cancel events that are open for bidding prior to starting data conversion.

To determine event status:

1. Select Sourcing, Maintain Events, Event Workbench.
2. Use the Event Status field to filter for any events in the posted status.
3. Cancel or award any posted events by either clicking on the Cancel icon or clicking on the Analyze Bid icon.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Strategic Sourcing	All	All

Task 1-22: Completing Purchasing Tasks

This section discusses:

- Loading Change Requests

Task 1-22-1: Loading Change Requests

There have been a number of changes to the way change requests via EDI are now handled. It is highly recommended that you load and process all change requests made from EDI processes prior to the data conversion to guarantee that no information is lost or orphaned.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Purchasing	All	All

Task 1-23: Setting Up Treasury

This section discusses:

- Understanding the Treasury Setup
- Running Auto Position Process
- Deleting Duplicate Securities Data

Understanding the Treasury Setup

In this task, you rerun the Auto Position process for all deals. Run this task only if you licensed Treasury.

Task 1-23-1: Running Auto Position Process

During this step, you will ensure that the Auto Position process is run for all deals. This will process every deal (with its most recent data) to calculate the cash flows, position, and accounting events.

Note. Complete this step only if you license Treasury.

To rerun auto position process:

1. Select Deal Management, Capture Deals, Deal Position Update.
2. Choose the Process All Outstanding Deals switch and run the process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Deal Management Risk Management	All	All

Task 1-23-2: Deleting Duplicate Securities Data

In the new PeopleSoft release, the Key Field business unit has been deleted from the Securities definition. Therefore, if the same security definition has been set up under multiple business units, then the duplicate business units need to be identified and deleted.

To identify duplicate data:

1. Select Reporting Tools, Query, Query Manager.

2. Run the following query:

```
UPG_TRU00
```

The results of this query display securities that have been set up under multiple business units. These Security IDs need to be deleted.

3. Log into the query tool of your choice.
4. Enter every Security ID that shows up in the query display for Bind Variable1.
Bind Variable2 is the Business Unit for the security data you wish to retain.
5. Run the following SQL:

```
DELETE FROM PS_TRX_SEC_HDR WHERE SECURITY_ID =:1 AND BUSINESS_UNIT <>:2;
DELETE FROM PS_TRX_SEC_MKTVAL WHERE SECURITY_ID =:1 AND BUSINESS_UNIT <>:2;
```

6. Rerun the SQL until all the duplicate data has been deleted.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Deal Management	All	All

Task 1-24: Preparing Maintenance Management

This section discusses:

- Running Preventive Management Processes
- Deleting Projection Staging Data

Task 1-24-1: Running Preventive Management Processes

In the new PeopleSoft release, Condition Based Monitoring (CBM) added a source field to the Preventive Management schedule. Therefore, all pending work orders must be created prior to the upgrade so that the CBM flag gets set to 'N'. The information given in this report shows which work orders were created. Be sure to review it to ensure that all work orders were created successfully.

To run Preventive Management for all business units:

1. Select Maintenance Management, Preventive Maintenance, Run Preventive Maintenance.
2. Add a new run control.
3. On the Selection tab, enter the Request ID and Description.
4. Choose *Always Process* for the Process Frequency.
5. Choose *All Business Units* for the Selection Type.
6. Save the page.
7. Click Run.

8. Select *Preventive Maintenance Job*.
9. Click OK.
10. On the Selection tab, click the Process Monitor hyperlink.
Verify the process ended with success.
11. Click the WMPM job hyperlink.
12. Click on the WM_PM process hyperlink.
13. Select the Message Log hyperlink and verify that the PM schedules were selected and work orders were created.
14. Return to the Process Detail page.
15. Click on the WM200001 report hyperlink.
16. Verify the report information.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Maintenance Management	All	All

Task 1-24-2: Deleting Projection Staging Data

All projections must be deleted prior to the upgrade. This ensures that all the Projects staging data is generated with the new fields that were added in the new release of Maintenance Management. After the upgrade is complete, all Projections will show the correct default for Crew ID and the run control options related to the process execution.

To delete Project Staging Data:

1. Select Maintenance Management, Preventive Maintenance, View Projection Summary.
2. Select Process Instance.
3. Click Delete.
4. Verify the Projected Maintenance grid area shows no rows.
5. Save the page.
6. Repeat these steps for all process instances on the search list.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Maintenance Management	All	All

Task 1-25: Setting Up Real Estate Management

This section discusses:

- Setting Up Business Unit Default Calendar
- Setting Up Financial Term Calendar Update
- Setting Up Lease Region Update

Task 1-25-1: Setting Up Business Unit Default Calendar

In the new PeopleSoft release, Lease Administration has introduced a new field, the default Financial Term Calendar, for the Business Unit definition. In the new release all new financial terms created for a lease will inherit the calendar from the business unit to which the lease is assigned. Follow the instructions below to specify the default Financial Term Calendar for each existing business unit defined in the system.

To set up the Financial Term Calendar:

1. Select Set Up Financials/Supply Chain, Upgrade, Define Real Estate Upgrade.
2. Select the BU Default Calendar tab.

Real Estate Business Units	
Business Unit	Calendar
EGV05	Monthly
FRA01	Annual
FRAE1	
IND01	
JPN01	Monthly
US001	Monthly
US002	
US003	

Save Notify Refresh

[BU Default Calendar](#) | [Financial Term Calendar Update](#) | [Lease Region Update](#)

BU Default Calendar page

3. Click on the Calendar prompt for the first Business Unit.
4. Specify the Default Term Calendar for this Business Unit.
5. Repeat for each Business Unit.
6. Save the page.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Real Estate Management	All	All

Task 1-25-2: Setting Up Financial Term Calendar Update

In the new PeopleSoft release, Lease Administration requires that each financial term on a lease have a calendar that specifies the period for the term amount. During data conversion, calendars will be mapped to existing financial terms. The mapping is based on the frequency of the schedule currently used by the financial term. In this step you define each schedule to a calendar for all existing Lease Financial Terms.

To set up the Financial Term Calendar:

1. Select Setup Financials/Supply Chain, Upgrade, Define Real Estate Upgrade.
2. Select the Financial Term Calendar Update tab.

BU Default Calendar | **Financial Term Calendar Update** | Lease Region Update

SetID	Schedule ID	Frequency	Calendar	Periods
SHARE	EOM	Monthly	Monthly	12
SHARE	MONTHLY	Monthly	Monthly	12
SHARE	MONTHLY1	Monthly	Monthly	12

Scan Lease Terms

Save Notify Refresh

[BU Default Calendar](#) | [Financial Term Calendar Update](#) | [Lease Region Update](#)

Financial Term Calendar Update page

3. Click on Scan Lease Terms to bring up all existing schedules from Lease Terms.
4. Select the appropriate Calendar for each Schedule.

Note. If a Calendar Name is left blank for any of the Schedules it will not be assigned a default calendar during the upgrade.

5. Save the page.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Real Estate Management	All	All

Task 1-25-3: Setting Up Lease Region Update

In the new PeopleSoft release, the Region field is a required field for all leases. In this step, set up a region for each lease that does not already have a region assigned to it.

To set up Lease Regions:

1. Select Set Up Financials/Supply Chain, Upgrade, Define Real Estate Upgrade.
2. Select the Lease Region Update tab.

BU Default Calendar | Financial Term Calendar Update | **Lease Region Update**

Set All to **Execute**

Lease Number	Lease Name	Abstract	Region
0000000029	test		Midwest Sales Region
0000000030	test - RL		Western Sales Region

Refresh

Save Notify Refresh

[BU Default Calendar](#) | [Financial Term Calendar Update](#) | [Lease Region Update](#)

Lease Region Update page

3. Enter the Region for each Lease.
You can set all leases to the same region at once by selecting a region in the Set All To field and clicking the Execute button.
 4. Save the page.
-
- Note.** Make sure you save the page before refreshing or else you will lose your changes.
-
5. Refresh the page.

You can refresh the list of leases to show only those leases with blank Region fields by clicking the Refresh button.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Real Estate Management	All	All

Task 1-26: Reporting Row Count for Tables

You may find it helpful to run a report that identifies any table without rows, that is, any table not used in your production database. This information can help you determine whether to accept a change from the New Release Demo database. The UPGCOUNT process reports the row counts of all PeopleSoft tables in your database. You can find the resulting report (UPGCOUNT.LIS) in the TEMP directory specific to your machine.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-27: Preparing Your Database

This section discusses:

- Understanding Database Preparation
- Verify Database Integrity
- Clean the PSOBJCHNG Table
- Drop PeopleTools Tables
- Shrink Images
- Purge Message Queues

Understanding Database Preparation

In this task, you perform a variety of steps in preparation for the PeopleSoft PeopleTools upgrade. These steps prevent errors in tasks later in the upgrade.

Task 1-27-1: Verify Database Integrity

The DBCC CHECKDB command is run to perform a database consistency check on your Copy of Production database. A database consistency check ensures that your database platform environment is clean and minimizes any potential upgrade errors due to possible database corruption.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server Sybase	All

Task 1-27-2: Clean the PSOBJCHNG Table

This step deletes all data stored in the PSOBJCHNG table, which contains all renamed records and fields. The data stored in the PSOBJCHNG table must be deleted before starting your upgrade. The build process looks in this table when running alter renames. Change Assistant will execute the following SQL:

```
DELETE FROM PSOBJCHNG
```

Note. Move to Production: If you rename records or fields later in your upgrade, you should expect to see rows in the PSOBJCHNG table at the end of the upgrade pass. During the Move to Production these rows will be copied from your old Copy of Production to your new Copy of Production. Thus, this step is not necessary during Move to Production.

See “Apply Application Changes,” Modifying the Database Structure.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-27-3: Drop PeopleTools Tables

In this step, you drop PeopleSoft PeopleTools tables to ensure the successful completion of your upgrade. You will drop the following tables, if they exist in your database, using the SQL tool of your choice.

Drop the following tables:

- PS_PSMCFQUEUEESLANG

Note. The table, PS_PSMCFQUEUEESLANG, contains no data and can be safely dropped. Do *not* drop the table PSMCFQUEUEESLANG.

- PSOPTSTATUS

The table, PSOPTSTATUS, will be converted into a view and can be safely dropped. Do not drop the view PSOPTSTATUS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-27-4: Shrink Images

If you have customized images stored in your database, you may need to shrink these images before updating PeopleSoft PeopleTools system tables later in the upgrade. Large image fields could cause that step to fail because it is not possible to bind long raw data that is longer than 32 KB.

To shrink images using a PeopleSoft PeopleTools release later than 8.44.14:

1. Launch Configuration Manager and select the Profile tab.
2. Select the profile for the upgrade database and click Edit.
3. Select the Common tab.
4. Select the option that is labeled either Convert and Shrink Images to Image Size Limit, or Convert DIB and BMP images to JPG.
5. Click OK.

Note. If you re-shrink images, select Don't Convert, but Shrink Images to Image Size Limit. Specify the number of bytes for the image size limit.

6. Launch Application Designer.
7. Select Tools, Upgrade, Convert Images...
8. Select Convert Static Images in Image Catalog.
9. Click Start to convert or shrink images.
10. Select Tools, Upgrade, Convert Images...
11. Select Convert Dynamic Images for fields. Select the box for all of the fields listed.
12. Click Start to convert or shrink images.

If you are using a PeopleSoft PeopleTools release earlier than 8.44.15, you will need to manually save and temporarily remove any custom images greater than 32 KB. Using your SQL query tool, run the following SQL to identify images greater than 32 KB:

```
-- CREATE A TABLE TO HOLD THE CONVERTED IMAGE
CREATE TABLE PS_CONVIMG (CONTNAME VARCHAR2(30), IMAGE SIZE BLOB);
-- LOAD CONVERTED DATA INTO THE TABLE
INSERT INTO PS_CONVIMG SELECT CONTNAME, TO_LOB(CONTDATA) FROM PSCONTDEFN;
-- RETRIEVE IMAGES OVER 32K
SELECT CONTNAME, DBMS_LOB.GETLENGTH(IMAGE SIZE) IMAGE SIZE FROM PS_CONVIMG WHERE⇒
  DBMS_LOB.GETLENGTH(IMAGE SIZE) > 32768;
```

To manually save images greater than 32 KB:

1. In Application Designer, insert your images into a project.
Select Insert, Definitions into Project.

2. Save the project.
3. Copy the images to file.
Select Tools, Upgrade, Copy Project to File.
4. Delete the rows for the images in your project from the PSCONTDEFN table.
5. When you are finished with the upgrade, copy the project from file to restore your custom images.
Select Tools, Upgrade, Copy Project from File.

See “Apply PeopleTools Changes,” Updating PeopleTools System Tables.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 1-27-5: Purge Message Queues

Ensure that all of your message transactions are complete before starting the upgrade. Message functionality and structure changed in the new release, which will prevent old messages from processing successfully.

This step runs the following Data Mover script (DMS), found in the *PS_HOME\SCRIPTS* directory of your old release codeline, on your Copy of Production database to purge your message queues:

```
APPMSGPURGEALL.DMS
```

Warning! A script of the same name is found in the codeline of the release to which you are upgrading. Do not use this script; it will not run successfully.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-28: Backing Up Demo Databases

This section discusses:

- Backing Up Copy of Current Demo
- Backing Up New Release Demo

Task 1-28-1: Backing Up Copy of Current Demo

Back up your Copy of Current Demo database now. This upgrade requires you to run scripts on this database. Before the upgrade starts, you need to take a backup of this environment to preserve your Oracle-delivered demo implementation.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-28-2: Backing Up New Release Demo

Back up your New Release Demo database now. This upgrade requires you to run scripts on this database. Before the upgrade starts, you need to take a backup of this environment to preserve your Oracle-delivered demo implementation.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 1-29: Renaming Records and Fields

This section discusses:

- Understanding Renaming Records and Fields
- Running the RNEPUPS14 Script
- Running the RNEPAUCS01 Script
- Running the RNEPCAS01 Script
- Running the RNEPEMT01 Script
- Running the RNEPEXS01 Script
- Running the RNEPGMT01 Script
- Running the RNEPLCT01 Script
- Retaining the Target Rename Log Files
- Running RNEPUPS14 Script on Copy of Current Demo
- Running RNEPAUCS01 Script on Copy of Current Demo
- Running RNEPCAS01 Script on Copy of Current Demo
- Running RNEPEMT01 Script on Copy of Current Demo

- Running RNEPEXS01 Script on Copy of Current Demo
- Running RNEPGMT01 Script on Copy of Current Demo
- Running RNEPLCT01 Script on Copy of Current Demo

Understanding Renaming Records and Fields

During development of new releases, PeopleSoft sometimes renames records, fields, or specific occurrences of a field on a record (recfield renames). In this task, you will execute scripts to rename those same objects in your Copy of Production and in the Copy of Current Demo.

With these commands, Data Mover renames the objects in the record and field definitions in Application Designer and then logs an entry on the table PSOBJCHNG. It also changes all references to these objects in pages and PeopleCode. This will not rename the objects on the database tables at this time.

Later in the upgrade, you will generate the SQL that will alter the tables on the database. This alter process reads PSOBJCHNG and will rename these tables and fields. The SQL generated to perform that task will be different depending on the build options you select and your database platform, however the result is the same. For record renames, the old table no longer exists and the new table contains the data from the old tables. For field and recfield renames, any affected tables will contain the new column with data from the old column; the old column no longer exists on the tables.

If a field rename does not go through this process, the alter SQL will not recognize it as a rename. After the alter, both old and new columns exist on the table and a data conversion process is required to copy the data from the old column to the new. This is an important distinction to make.

Important! It is very important to resolve any errors with these rename scripts. Do not skip any lines that error. It is not possible to recover from missed renames. The consequences of skipping a rename are evident later in the upgrade when you are in the middle of running data conversion programs.

A few different things could happen: the conversion program could error because the PeopleSoft system is expecting only the new column on the table, but you have both old and new, or you may lose data. Because of the rename, the PeopleSoft system expects the data to be handled in the SQL alter process. If the data doesn't move in the SQL alter process, and you don't write a data conversion program to move the data, the process drops the old column without having copied the data to the new column.

There are several advantages to using this rename process. Any references to the renamed records or fields in your customizations will also be modified. The number of differences on the compare reports is reduced. The SQL alter moves the data from old to new efficiently and no additional data conversion steps are required.

Task 1-29-1: Running the RNEPUPS14 Script

The RNEPUPS14.dms script will rename records, fields, and recfields on the Copy of Production database. These renames should only execute during the initial upgrade pass, not the move to production passes.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-29-2: Running the RNEPAUCS01 Script

The RNEPAUCS01.dms script will rename records, fields, and recfields on the Copy of Production database. Complete this step only if you have not applied Supply Chain Management 8.9 Bundle #8, Bundle Resolution #662535, or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass and not during the move to production passes.

Follow the procedure below to edit your template so that the RNEPAUCS01 script will run automatically.

To run this script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-29-3: Running the RNEPCAS01 Script

The RNEPCAS01.dms script will rename records, fields, and recfields on the Copy of Production database. This script only applies if you have not applied Resolution #672069, FMS ESA 8.9 Bundle #8 (Bundle Resolution #653715) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-29-4: Running the RNEPEMT01 Script

The RNEPEMT01.dms script will rename records, fields, and recfields on the Copy of Production database. This script only applies if you have not applied Resolution #672067, FMS Financials 8.9 Bundle #8 (Bundle Resolution #653714) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-29-5: Running the RNEPEXS01 Script

The RNEPEXS01.dms script will rename records, fields, and recfields on the Copy of Production database. This script only applies if you have not applied Resolution #672068, FMS ESA 8.9 Bundle #8 (Bundle Resolution #653715) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-29-6: Running the RNEPGMT01 Script

The RNEPGMT01.dms script will rename records, fields, and recfields on the Copy of Production database. This script only applies if you have not applied Resolution #672066, FMS ESA 8.9 Bundle #8 (Bundle Resolution #653715) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-29-7: Running the RNEPLCT01 Script

The RNEPLCT01.dms script will rename records, fields, and recfields on the Copy of Production database. This script only applies if you have not applied Resolution #670971, FMS Global Components 8.9 Bundle #5 (Bundle Resolution #653909) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-29-8: Retaining the Target Rename Log Files

In order to retain a copy of the log files for the preceding rename script steps run against the Copy of Production database, you must resave the logs for those steps with new file names. Otherwise, these logs will be overwritten by the following rename script steps run against the Copy of Current Demo database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-29-9: Running RNEPUPS14 Script on Copy of Current Demo

The RNEPUPS14.dms script will rename records, fields, and recfield on the Copy of Current Demo database. These renames should only execute during the initial upgrade pass, not the Move to Production passes. Run this script in Data Mover user mode.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-29-10: Running RNEPAUCS01 Script on Copy of Current Demo

The RNEPAUCS01.dms script will rename records, fields, and recfields on the Copy of Current Demo database. Complete this step only if you have *not* applied Supply Chain Management 8.9 Bundle #8, Bundle Resolution #662535, or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not during the move to production passes.

Follow the procedure below so that you can run the script automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-29-11: Running RNEPCAS01 Script on Copy of Current Demo

The RNEPCAS01.dms script will rename records, fields, and recfields on the Copy of Current Demo database. This script only applies if you have not applied Resolution #672069, FMS ESA 8.9 Bundle #8 (Bundle Resolution #653715) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-29-12: Running RNEPEMT01 Script on Copy of Current Demo

The RNEPEMT01.dms script will rename records, fields, and recfields on the Copy of Current Demo database. This script only applies to customers who have not applied Resolution #672067, FMS Financials 8.9 Bundle #8 (Bundle Resolution #653714) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-29-13: Running RNEPEXS01 Script on Copy of Current Demo

The RNEPEXS01.dms script will rename records, fields, and recfields on the Copy of Current Demo database. This script only applies if you have not applied Resolution #672068, FMS ESA 8.9 Bundle #8 (Bundle Resolution #653715) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-29-14: Running RNEPGMT01 Script on Copy of Current Demo

The RNEPGMT01.dms script will rename records, fields, and recfields on the Copy of Current Demo database. This script only applies if you have not applied Resolution #672066, FMS ESA 8.9 Bundle #8 (Bundle Resolution #653715) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-29-15: Running RNEPLCT01 Script on Copy of Current Demo

The RNEPLCT01.dms script will rename records, fields, and recfields on the Copy of Current Demo database. This script only applies if you have not applied Resolution #670971, FMS Global Components 8.9 Bundle #5 (Bundle Resolution #653909) or FSCM 8.9 Maintenance Pack 4. These renames should only execute during the initial upgrade pass, not the move to production passes.

Follow the procedure below to edit your template so the script can run automatically.

To run the script automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Type from *ManualStop* to *DataMoverUser*, and click OK.
3. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-30: Comparing Customizations

This section discusses:

- Modifying Compare Report Options
- Running Compare UPGCUST
- Running UPGCUST Filter Script
- Reviewing UPGCUST Compare Log
- Restoring Copy of Current Demo

Note. In this task, you identify customizations on the Copy of Production by running a database compare against the Copy of Current Demo database.

Task 1-30-1: Modifying Compare Report Options

PeopleSoft Change Assistant templates are delivered with the default report filters turned on. This limits the size of the reports and keeps them manageable. Before you start the compare, review the compare options in your Change Assistant template step properties and modify them based on your specific requirements.


If you decide not to modify the compare options, the objects are still compared. However, the results are only available online in Application Designer, and are not written into the compare reports. The compare reports are tools to help you review changed objects. However, based on the report filters you select, you may need to review the action flags for other objects in the compare project in Application Designer.

For example, you can modify the compare options so the report contains customized objects that are present in your Copy of Production database but are absent from the Copy of Current Demo database. Alternatively, you can review these objects online, through Application Designer, after the database compare.

To modify the upgrade compare options:

1. Highlight the Run Compare UPGCUST step and right-click.
2. Select Step Properties
The Step Definition dialog box appears.
3. Click Upgrade.
The Compare and Report dialog box appears.
4. Click Options.
5. Select the Report Filter tab.
The default options include your custom changes on the reports.

6. Change the default options as necessary and click OK.

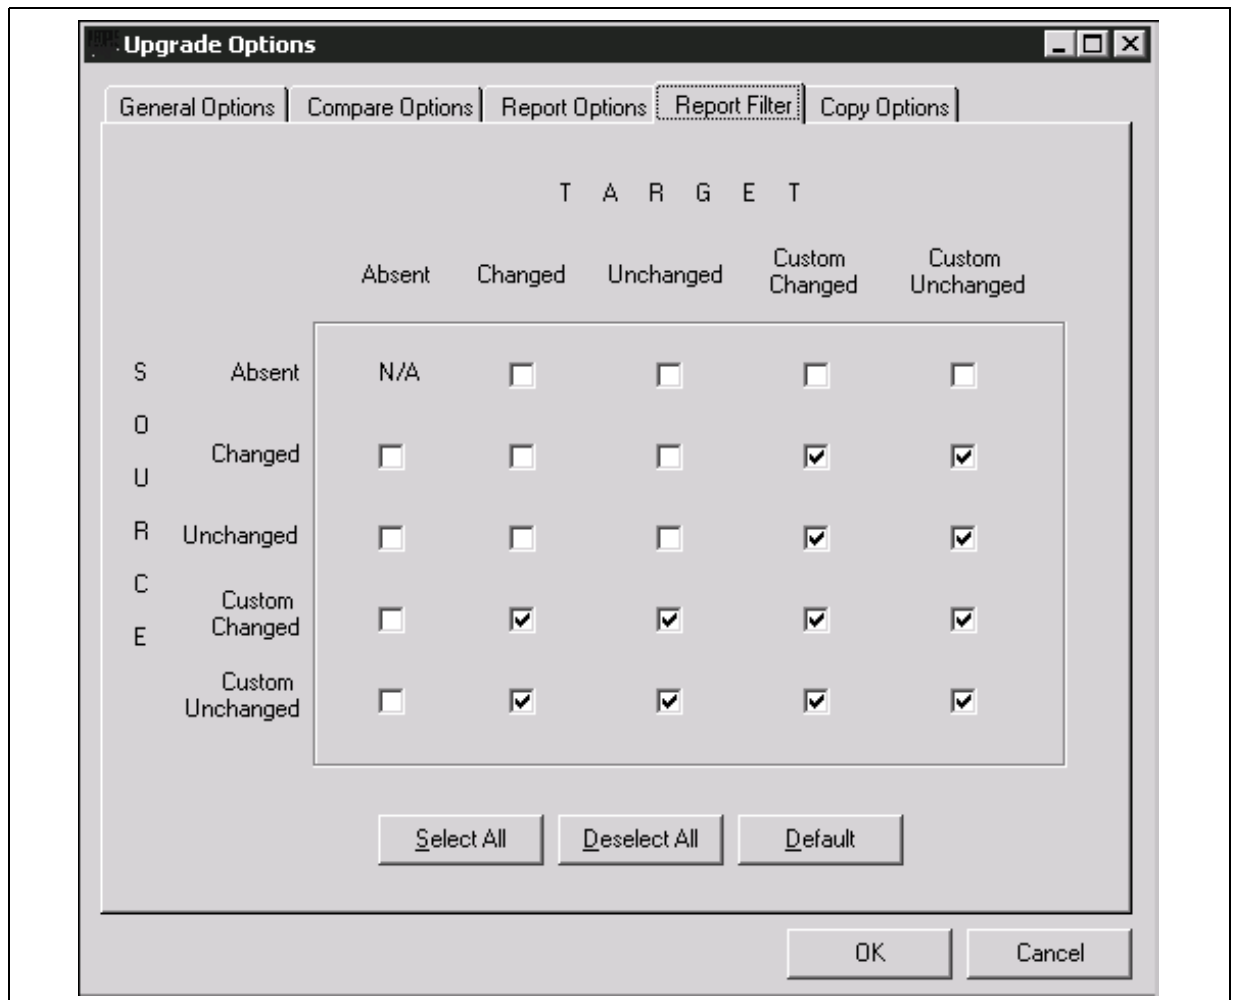

Upgrade Options page, Report Filter tab

7. In the Compare and Report dialog box, click OK.
8. In the Step Definition dialog box, click OK.
9. Select File, Save Job.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-30-2: Running Compare UPGCUST

This step creates a project on your Copy of Production database called UPGCUST and executes a database compare of all comparable object types. This compare is run to identify all customizations on the Copy of Production database. The database compare occurs between your Copy of Production and the Copy of Current Demo database. The following comparable object types are omitted from the comparison:

- Application packages.
- Application package PeopleCode.
- File reference type codes.
- IB queues.
- Java portlet user preferences.
- Messages.
- Message catalog entries.
- Message PeopleCode.
- Portal registry user favorites.
- Portal registry user home pages.
- Services
- Service operations.
- Service operations handlers.
- Service operation versions.
- Service operation routings.

Message catalog entries are exported and imported with Data Mover in a later step. Portal registry user home pages, portal registry user favorites, file reference type codes, and Java portlet user preferences remain in the Copy of Production environment and are not copied from the New Release Demo database. Integration Broker objects will be compared later in the upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-30-3: Running UPGCUST Filter Script

This step removes all objects from the UPGCUST project that are not marked **Changed* or **Unchanged* in your Copy of Production environment. It is used to isolate only custom objects in the UPGCUST project.

The script name for your upgrade is:

PUUPX99.DMS

See Appendix: “Using the Comparison Process.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-30-4: Reviewing UPGCUST Compare Log

In this step, review the log file and compare reports generated by the database compare in the previous step to ensure that it completed successfully. A detailed analysis of these compare reports is not necessary. Later in the upgrade, you will review a new set of compare reports when customizations are compared to the New Release Demo database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-30-5: Restoring Copy of Current Demo

Restore your Copy of Current Demo database from the backup taken earlier in the upgrade. The backup was taken before rename scripts ran against the Copy of Current Demo. This is done to restore the environment to an Oracle-delivered demo implementation.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Copy of Current Demo	Initial	All	All	All

Task 1-31: Identifying Customizations

In this task, identify your modifications to Mass Change, EDI, Message Catalog, SQR Strings, XML Service Information, Verity Based Indexes, Setup Manager data, Pagelet Wizard objects, and related language system data, so that you can reload them later in the upgrade process.

The upgrade tasks will replace all Mass Change processes, Verity Based Indexes, and Setup Manager data. Only modifications to delivered Pagelet Wizard objects will be overwritten because any non-delivered custom Pagelet Wizard objects will be preserved during the upgrade. You cannot print Mass Change code. Be sure that you have extracted your modifications to reapply them later. You must extract your modifications, using cut and paste, to a file for manual reapplication later. EDI tables must be handled in the same way. Reload additional data and review customizations in Oracle-delivered data.

Message sets 0-19,999 will be overlaid during the upgrade, so any customizations you have made in this range will be lost. In addition, all SQR strings will be replaced. To save your customizations, cut and paste your changes to a file and manually reapply them.

Be aware that the data loaded by the PeopleSoft software must not be overwritten.

If you have multiple languages loaded, you should save any custom data you have in related language tables for system data. For these tables, data will be exported from the New Release Demo database when you export related language system data, and imported to your Copy of Production when you import related language system data. The import may delete your custom data, depending on the import option.

The tables that need to be reviewed are listed in the following scripts. These scripts can be found in your new release *PS_HOME\SCRIPTS* directory.

Important! The scripts below are delivered with and run from your new PeopleSoft release. These scripts are *not* run in this task. You will run these scripts later in the upgrade process.

Review the tables that will be overwritten in these scripts:

Tables	Script
Message Catalog	DLUPX01E.DMS
SQR Strings	DLUPX04E.DMS
EDI	DLUPX05E.DMS
Mass Change	DLUPX06E.DMS
XML Service Information	DLUPX13E.DMS
Setup Manager, Verity Based Indexes, and Optimization Models	DLUPX16E.DMS
Pagelet Wizard	DLUPX14E.DMS

If your database contains translations, review the list of related language system data tables that will be exported and imported in these scripts:

DLEPLASYSE.DMS
DLEPLASYSI.DMS

Note. Move to Production: Once you have reapplied these customizations at the end of your initial upgrade pass, you will not need to apply them again. The affected tables are moved from the old Copy of Production to the New Copy of Production by the scripts listed in the following table:

Tables	Scripts
Mass Change	MVAPPEXP.DMS MVAPPIMP.DMS
EDI	MVPRDEXP.DMS MVPRDIMP.DMS
Strings	MVAPPEXP.DMS MVAPPIMP.DMS

Tables	Scripts
Messages	MVAPPEXP.DMS MVAPPIMP.DMS
XML Service Information	MVPRDEXP.DMS MVPRDIMP.DMS
Setup Manager, Verity Based Indexes, and Optimization Models	MVAPPEXP.DMS MVAPPIMP.DMS
Pagelet Wizard	MVUPX16E.DMS

See Also

“Apply Application Changes,” Loading Data for Data Conversion.

“Apply Application Changes,” Loading Data to Complete System Setup.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-32: Preparing for the Application Upgrade

This section discusses:

- Creating a Copy of RecField Definitions
- Creating a Copy of DbField Definitions
- Deleting Old Pagelet Wizard Data
- Exporting Upgrade Setup Data
- Dropping Indexes
- Editing the System Data Swap Script
- Editing the PeopleTools Swap Script

Task 1-32-1: Creating a Copy of RecField Definitions

This step creates a copy of the contents of PSRECFIELD, before the upgrade is begun. It is used by the data conversion code to determine the structure of tables that may have been impacted by fixes you applied.

The script name is:

PUUPX07.DMS

Note. If you previously upgraded your system you may need to drop PSRECFIELD_TMP before running this script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-32-2: Creating a Copy of DbField Definitions

This step runs a script to save a copy of the table PSDBFIELD as PSDBFIELD_TMP. PSDBFIELD_TMP will be used during ChartField configuration to refer to field properties that existed prior to the upgrade. The script name is:

PUEPFAU41.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 1-32-3: Deleting Old Pagelet Wizard Data

This step is only applicable if you have already upgraded your production application to PeopleTools 8.46 or greater.

In this step, you run a script to delete the Common Component Pagelet Wizard (PW) data to ensure that when the UPGPT846PP conversion program is run subsequently, the old existing Common Components Pagelet Wizard data is not re-entered into the PeopleTools Pagelet Wizard tables. If you do not run the script, then items that were removed from the PeopleTools version of Pagelet Wizard, but still exist in the Common Components version of Pagelet Wizard, will be copied back into the PeopleTools version when the UPGPT846PP conversion program is run.

The script also updates the Common Component portal option tables with the existing values in the PeopleTools portal options tables. If you do not run the script, then changes made to the current PeopleTools options tables may be overwritten with values from the Common Components portal options when the UPGPT846PP conversion program is run. The affected values include the default registry prefix, default owner ID, and the default style sheet.

Only run the script if *both* of the following conditions are met.

- Your current production application release database is *already* on PeopleTools 8.46 or greater.
- The table PS_EOPPB_LINKPATHS exists on the Target database.

If both of the above conditions are met, then run the following script:

PTPPB_EOPPB.DMS

To run the step automatically:

1. In Change Assistant, open your upgrade job.
2. In the task Preparing for the Application Upgrade, right-click on the step Deleting Old Pagelet Wizard Data, and select Step Properties.
3. In the Step Properties dialog box, change the Type from *ManualStop* to *DataMoverUser*, and click OK.
4. Select Edit, Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-32-4: Exporting Upgrade Setup Data

This script exports upgrade setup data and mapping values from your Copy of Production database during the Initial or Move to Production upgrade pass, to preserve them for subsequent upgrade passes. You had set up these values earlier in your Copy of Production database throughout various tasks in this chapter. You will load this information into your New Copy of Production in any future Move to Production passes.

The script name for your upgrade path is:

PUEP89EXP.DMS

You will need to preserve the corresponding DAT file in your current PS_HOME directory for use in subsequent Move to Production passes.

The DAT file name for your upgrade path is:

PUEP89EXP.DAT

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-32-5: Dropping Indexes

Drop the following indexes using the SQL tool of your choice. These tables are changing key structure and data conversion cannot update the new columns if these old indexes exist.

- PSMAPRECFIELD.PSAPSMAPRECFIELD
- PSMAPROLEBIND.PSAPSMAPROLEBIND
- PS_GM_PCL_HDR_LNG.PS1GM_PCL_HDR_LNG

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 1-32-6: Editing the System Data Swap Script

This step should only be completed if your Copy of Production has a base language other than English. In a later step you will swap PeopleTools Managed Object tables that have related language on your New Release Demo database so that it is translated correctly when you copy to your Copy of Production. In this step, you edit the swap script located in your new release *PS_HOME* directory to set your New Release Demo database language to the same language as your Copy of Production.

To do this, follow the edit instructions in the script.

The swap system data script for your path is:

```
DLEPLASWAP.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	Non-English Base Language

Task 1-32-7: Editing the PeopleTools Swap Script

This step should only be completed if your Copy of Production has a base language other than English. In a later step you will swap all PeopleTools Managed Object tables that have related languages on your Demo Database so that it is translated correctly when you copy to your Copy of Production. In this step you edit the swap script to set your Demo database language to the same language as your Copy of Production.

To do this, follow the edit instructions in the script.

The swap script for your upgrade path is:

```
PT_RELEASE_SWAP.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	Non-English Base Language

Task 1-33: Backing Up After Prepare Your Database

Back up your Copy of Production database now. This enables you to restart your upgrade from this point, should you experience any database integrity problems during the remaining tasks in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

CHAPTER 2

Apply PeopleTools Changes

This chapter discusses:

- Understanding PeopleTools Changes
- Verifying Upgrade User
- Performing Script Modifications
- Updating PeopleTools System Tables
- Turning Off Change Control
- Loading Model Definition Data
- Loading Message Data
- Reviewing PeopleTools Objects
- Exporting and Copying Projects
- Populating Tablespace Data
- Building Updated PeopleTools Project
- Migrating Records to New Tablespaces
- Loading Base Data
- Loading Language Data
- Loading PeopleTools Data
- Loading PeopleTools Definition Group
- Converting PeopleTools Objects
- Creating PeopleTools Views
- Converting Integration Broker
- Setting Object Version Numbers
- Converting Database Data Types
- Backing Up After PeopleTools Upgrade

Understanding PeopleTools Changes

To implement a successful upgrade, you must apply the necessary PeopleSoft PeopleTools changes. This involves updating the following PeopleSoft PeopleTools features: system tables, copying and building projects, loading seed data, and converting objects. From this point forward, you run all steps using your newly installed version of the software.

Note. Unless otherwise indicated, all scripts can be found in your new release PeopleSoft codeline PS_HOME\SCRIPTS directory. The actual script name is indicated in the description of each step in uppercase letters.

Task 2-1: Verifying Upgrade User

In this task, you verify that the user performing the upgrade steps has proper permissions to complete the upgrade.

Ensure that your upgrade user has PeopleSoft administrator privileges. This allows access to the PeopleSoft portal to make necessary security changes for the upgrade and to run the Portal Application Engine upgrade program. You use this ID to update the security setting for your other users so they can sign on after the upgrade.

Warning! You must perform this step now using your old version of PeopleSoft PeopleTools. If you skip this step, or if your user has insufficient PeopleSoft administrator privileges, you will not be able to complete your upgrade. You cannot complete this step later in the upgrade process. Perform the following steps to grant administrator privileges now.

To grant your upgrade user PeopleSoft administrator privileges:

1. From the browser, select PeopleTools, Security, User Profiles, User Profiles.
2. Select the user ID for your upgrade user.
3. Select the Roles tab.
4. Add the role *PeopleSoft Administrator* if it is not already granted to your upgrade user.
5. Save the user profile.

See the Enterprise PeopleTools PeopleBook: Security Administration for your new release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-2: Performing Script Modifications

This section discusses:

- Understanding Script Modifications

- Update Configuration Manager Profile
- Run a DBTSFIX Report
- Edit the DBTSFIX Output Scripts
- Edit the GRANT Script
- Edit the PSLANGUAGES Script
- Edit the TLSUPGNONCOMP Script
- Edit the PTxxxTLS Scripts
- Edit the DB2 Scripts
- Edit Move to Production Import Scripts
- Edit Move to Production Password
- Edit the DDLDB2 Script
- Edit the DDLDBX Script
- Edit the DDLORA Script
- Edit the DDLIFX Script
- Edit the MSGTLSUPG Script
- Edit the Integration Broker Script
- Edit Multilingual Step Properties
- Edit Data Type Steps

Understanding Script Modifications

In this task, you perform preparation steps and make manual modifications to scripts delivered with your new PeopleSoft release. You must make the following modifications before proceeding with the remainder of your upgrade.


Note. Move to Production: These steps will be repeated in the Move to Production (MTP) pass. The script that you previously edited may be acceptable, or you may need to change it again if your New Copy of Production has a different security or data definition language (DDL) configuration.

Task 2-2-1: Update Configuration Manager Profile

The Configuration Manager default profile needs to be updated to use values for your new release PS_HOME. Change Assistant uses this information to run automated steps for the rest of the upgrade. These are settings on the workstation and you need to do this for each workstation that you may use during the upgrade.

To update the profile:

1. Open Configuration Manager.
2. On the Profile tab, select the Default profile, click Edit, and select the Common tab.

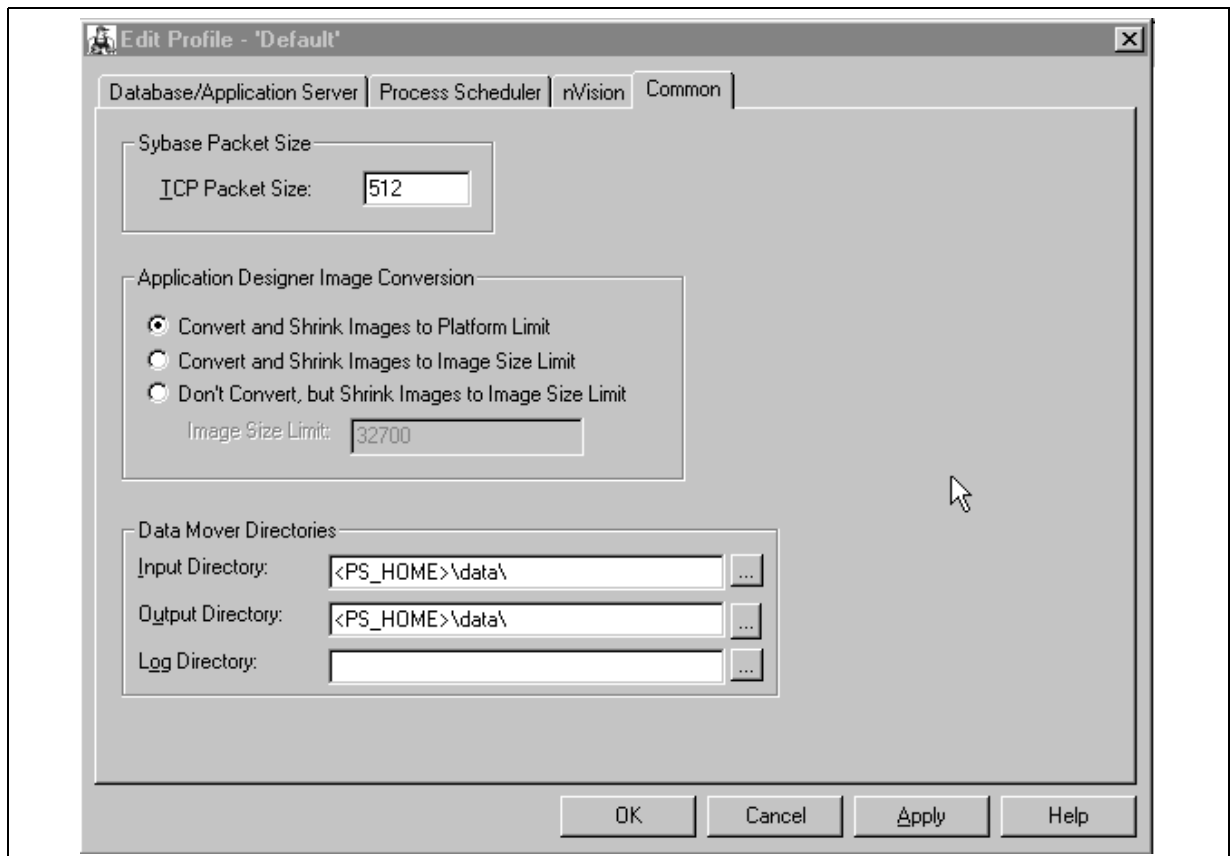

Edit Profile - Default dialog box: Common tab

Note. The Input Directory must be `<PS_HOME>\data\`, substituting `<PS_HOME>` with your directory. The Output Directory must be the same.

3. The Log Directory is set by Change Assistant and should be left as is.
4. Select the Process Scheduler tab and verify your SQR settings. Change Assistant will use these settings to launch SQR.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-2-2: Run a DBTSFIX Report

The DBTSFIX.SQR script aligns the tablespaces in the delivered release scripts with the Target database used during the upgrade. This process generates new release scripts, conforming to the RELxxxDBTSFIX.SQL naming convention that you run in a later task. Run this script to preserve your existing table-to-tablespace mapping in the Target database. The result of this task will be a RELxxxDBTSFIX.SQL script in which xxx represents a release number (for example, 800, 810, 811, 812, and so on) associated with your particular path.

Note. Before running this step, verify that the PS_HOME values are set correctly in the Change Assistant environment for your upgrade job. Change Assistant uses the PS_HOME information to determine which scripts need to be generated.

Important! Do not run the new release script at this point. You will be instructed to run this script later in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle Informix DB2 UNIX/NT DB2 z/OS	All

Task 2-2-3: Edit the DBTSFIX Output Scripts

Edit the generated RELxxxDBTSFIX scripts according to the comments within each script. Verify that the data definition language (DDL) is accurate for your environment for tablespaces, database names, owner IDs, and so forth. The scripts can be found in your Change Assistant output directory for this upgrade path.

Warning! Do not run output scripts at this time. At this point in the upgrade process, you must only review the DBTSFIX output scripts.

Note. For DB2 z/OS customers only: When upgrading from one PeopleSoft release to the next, it is possible to move tables from a tablespace using a 4-KB buffer pool to one using a 32-KB buffer pool. The tablespaces PSIMAGE and PSIMGR use 32-KB buffer pools in Oracle-delivered applications. To maintain the tablespace schema used at your site, the DBTSFIX.SQR script will revise the upgrade scripts with the database and tablespace information from your database (the Target database). Tables assigned to tablespaces PSIMAGE or PSIMGR in the upgrade scripts are the exception to this approach. Note that Oracle has reassigned some tables to PSIMAGE or PSIMGR because they now require a 32-KB buffer pool. You must manually edit the “Create Table” statements in the upgrade scripts to replace the tablespace name PSIMAGE or PSIMGR with an appropriate tablespace name in your implementation that utilizes a 32-KB buffer pool. The database name must also be replaced with the value corresponding to the tablespace you are using.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle Informix DB2 UNIX/NT DB2 z/OS	All

Task 2-2-4: Edit the GRANT Script

Edit `PS_HOME\SCRIPTS\GRANT.SQL` and make the necessary modifications as documented in the script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-2-5: Edit the PSLANGUAGES Script

Edit `PS_HOME\SCRIPTS\PSLANGUAGES.DMS` and make the necessary modifications as documented in the script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 2-2-6: Edit the TLSUPGNONCOMP Script

Edit `PS_HOME\SCRIPTS\TLSUPGNONCOMP.DMS` and make the necessary modifications as documented in the script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 2-2-7: Edit the PTxxxTLS Scripts

This step applies only if you are running on a DB2 z/OS platform.

To edit the PTxxxTLS scripts:

1. Edit all of the scripts in the PS_HOME\SCRIPTS directory on the file server that conform to this file naming convention:

PTxxxTLS.DMS

PTxxxTLSyyy.DMS

The xxx represents a PeopleSoft PeopleTools release greater than your current PeopleSoft PeopleTools release and yyy represents the three-letter language code.

2. Uncomment and modify the set owner ID command within each script, as in the following example:

```
set execute_sql set current sqlid = 'OwnerId In Upper Case';
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 2-2-8: Edit the DB2 Scripts

Perform this step only if your database platform is DB2 z/OS. DB2 z/OS scripts that create tables need the `set current sqlid` statement so that the tables are created with the correct owner ID. Open each script listed below, then uncomment and modify all of the DB2-specific statements to reflect your environment.

For SQL scripts, if the script does not contain DB2-specific statements, add the following line to the top of the script and edit it for your environment:

```
set current sqlid = 'OWNERID (in uppercase)';
```

For Data Mover scripts (DMSs), if the script does not contain DB2-specific statements, add the following line to the top of the script and edit it for your environment:

```
set execute_sql set current sqlid = 'OWNERID (in uppercase)';
```

Following is a list of the scripts that you need to edit:

```
DB2TMPIDXCREATE.SQL
DLUPX02I.DMS
DLUPX13I.DMS
DLUPX14I.DMS
DLUPX96I.DMS
PT_RELEASE_IMPORT.DMS
DLEPSYSI.DMS
DLEPLASYSI.DMS
DLCGGLU20I.DMS
DLCGUPY39I.DMS
DLCGFAS19I.DMS
```

Note. The DLUPX96I.DMS script will run on your Source database. Remember to edit this script for your Source database. All of the other scripts listed will run against the Target database.

In several steps in the upgrade process, project definitions are copied into the database. Any DB2 z/OS scripts that are built from these project definitions will need to be modified before you run them. Set the following steps in your Change Assistant job to a manual stop and edit the scripts for correct database/tablespace information. When you build the SQL scripts after copying the project, the database/tablespace names are the default values. You need to change these to the Target database specific values. To set a step as a manual stop in Change Assistant, highlight the step and select Edit, Stop from the menu bar.

Following is a list of the steps in chapter 4, “Apply Application Changes,” that you will need to set as a manual stop and the names of the scripts you need to edit:

- Run the UPG_CF_CONFIG Script (in the task Configuring ChartFields)
When you get to this step, edit the script UPG_CF_CONFIG.SQL
- Run the Create Upgrade Tables Script (in the task Modifying the Database Structure)
When you get to this step, edit the script UPGCONVERT_CRTTBL.SQL

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 2-2-9: Edit Move to Production Import Scripts

Perform this step only if your database platform is DB2 z/OS.

During the Move to Production, there are several scripts that export data from the previous Copy of Production to the New Copy of Production. These scripts export the tables to a DAT file. When the tables are exported, all the table attributes, including the database-specific information (table owner, database name, and tablespace name), are stored in the DAT file. When you run the import script, it tries to create the tables and indexes using the database-specific information from the DAT file. So even though you ran the import script against your Copy of Production, you would still create tables in the upgraded database (which is the Source database for the Move to Production step). To create the tables in the Target database, open each script listed below, then uncomment and modify all of the DB2-specific statements to reflect your environment.

You will also need to add the following command into MVPRDIMP.DMS, near the end of the script, just after the REPLACE_DATA PSSTATUS command, but before the REPLACE_VIEW PSTEMPTBLCNTVW command, to change *ownerid* to the owner ID of your database.

```
Update PSSTATUS set OWNERID='OWNERID (in uppercase)';
```

Following is a list of the scripts that you need to edit:

```
MVAPPIMP.DMS
MVPRDIMP.DMS
MVCGFAU25I.DMS
MVCGUPY27I.DMS
```

If you prefer, you can copy these overrides from the xxDMODBO.DMS script that was generated from DBSetup while installing your database. Make sure you remove the SET NO RECORD if you copy from the DBSetup generated file.

See the Enterprise PeopleTools PeopleBook: Data Management for your new release.

See “Apply Changes to Production Database,” Performing the Move to Production.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	DB2 z/OS	All

Task 2-2-10: Edit Move to Production Password

If your access ID and access password are different in the Copy of Production database than in the New Copy of Production database, you need to reset the access password in the MVPRDIMP.DMS script.

To modify passwords in your New Copy of Production database, append the following to your MVPRDIMP.DMS script and replace *ownerID*, *accessID*, and *accesspswd* with your values in the New Copy of Production database:

```
UPDATE PSSTATUS set OWNERID = 'ownerID';
UPDATE PSACCESSPRFL SET ACCESSID = 'accessID',
ACCESSPSWD = 'accesspswd', ENCRYPTED = 0;
ENCRYPT_PASSWORD *;
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 2-2-11: Edit the DDLDB2 Script

Edit PS_HOME\SCRIPTS\DDLDB2.DMS. At the bottom of this script, you will see an insert into PSDDLDEFPARMS. This insert contains default information used when creating a table, an index, a unique index, or a tablespace. Verify with your database administrator that the last value for each row is appropriate for your environment by checking the values currently stored in your PSDDLDEFPARMS table. Otherwise, the values will be reset to the default values delivered by Oracle in this script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 2-2-12: Edit the DDLDBX Script

Edit PS_HOME\SCRIPTS\DDLDBX.DMS. At the bottom of this script, you will see an insert into PSDDLDEFPARMS. This insert contains default information used when creating a table, an index, a unique index, or a tablespace. Verify with your database administrator that the last value for each row is appropriate for your environment by checking the values currently stored in your PSDDLDEFPARMS table. Otherwise, the values will be reset to the default values delivered by Oracle in this script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 UNIX/NT	All

Task 2-2-13: Edit the DDLORA Script

Edit `PS_HOME\SCRIPTS\DDLORA.DMS`. At the bottom of this script, you will see an insert into `PSDDLDEFPARMS`. This insert contains default information used when creating a table, an index, a unique index, or a tablespace. Verify with your database administrator that the last value for each row is appropriate for your environment by checking the values currently stored in your `PSDDLDEFPARMS` table. Otherwise, the values will be reset to the default values delivered by Oracle in this script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-2-14: Edit the DDLIFX Script

Edit `PS_HOME\SCRIPTS\DDLIFX.DMS`. At the bottom of this script, you will see an insert into `PSDDLDEFPARMS`. This insert contains default information used when creating a table, an index, a unique index, or a tablespace. Verify with your database administrator that the last value for each row is appropriate for your environment by checking the values currently stored in your `PSDDLDEFPARMS` table. Otherwise, the values will be reset to the default values delivered by Oracle in this script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Informix	All

Task 2-2-15: Edit the MSGTLSUPG Script

Edit `PS_HOME\SCRIPTS\MSGTLSUPG.DMS` and make the necessary modifications as documented in the script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 2-2-16: Edit the Integration Broker Script

Edit `PS_HOME\SCRIPTS\PTIBUPGRADE.DMS` and make the necessary modifications as documented in the script. User level node security and transactional security have been added as of PeopleSoft PeopleTools 8.48. Service namespace information, a low-level user on the node, and a low-level permission list for service operations, need to be specified. Consult with your Integration Broker specialist for assistance.

Note. If you are upgrading from PeopleSoft PeopleTools 8.48 or later, this step and all of the steps in the task “Converting Integration Broker” do not need to be run because the Integration Broker conversion has already been performed. You need to mark all of these steps as complete in your upgrade job. If you don’t mark these steps as complete, the upgrade will try to unnecessarily reconvert your objects.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-2-17: Edit Multilingual Step Properties

In this step, you will edit the Change Assistant step properties for the multilingual PeopleSoft PeopleTools project copy step (or steps). Copy only the translated objects for the languages you license. This prevents the translated objects for unlicensed languages from copying over. You will copy any multilingual projects later in the upgrade process.

Depending on which languages you license, you will need to complete the following instructions once or twice. If you license any of these languages—Arabic, Czech, Danish, Finnish, French, Hebrew, Hungarian, Norwegian, Polish, Russian, or Turkish—perform the following instructions for the step “Export and Copy PPLTLSML Project.” If you license any of these languages—Canadian French, Dutch, German, Greek, Italian, Japanese, Korean, Malay, Portuguese, Simplified Chinese, Spanish, Swedish, Traditional Chinese, or Thai—perform the following instructions for the step “Export and Copy PPLTLS84CURML Project.”

To edit multilingual step properties:

1. In Change Assistant, select the step.
2. Open the Step Properties dialog box.
3. Click the Upgrade button, and then click the Options button.
4. On the Copy Options tab, deselect any languages that you do not license.
Common and English should remain deselected.
5. Click OK three times.
6. Save the template in Change Assistant.

See Export and Copy PPLTLS84CURML Project.

See Export and Copy PPLTLSML Project.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All Non-English

Task 2-2-18: Edit Data Type Steps

For PeopleSoft PeopleTools 8.48 and later, new data types are supported for Microsoft SQL Server 2005 or later and Oracle. These data type changes are only available for use in conjunction with PeopleSoft application release 9.0 or later. If you have already converted data types or are upgrading to a PeopleSoft application release earlier than 9.0, you must mark these steps as complete in the template now. Do *not* run these steps unnecessarily.

To set the Data Conversion steps as complete:

1. In Change Assistant, select all the steps within the task Converting Database Data Types.
2. Press the F7 key.
3. Save the upgrade job in Change Assistant.

See Converting Database Data Types.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server Oracle	All

Task 2-3: Updating PeopleTools System Tables

This section discusses:

- Understanding Updating PeopleTools System Tables
- Clean Up Message Data
- Update System Catalog Views
- Update PeopleTools System Tables
- Grant Privileges to the CONNECT ID
- Update the Product License Code
- Update PeopleTools Patch Information
- Create Temporary Performance Indexes
- Export PeopleTools System Tables
- Import PeopleTools System Tables

- Reset Database Options Flag
- Rerun Update Statistics for DB2 zOS
- Rerun RUNSTATS Report for DB2 UNIX NT
- Rerun Update Statistics for DB2 UNIX NT
- Rerun Update Statistics for Informix
- Rerun Update Statistics for Oracle

Understanding Updating PeopleTools System Tables

In this task, you update your PeopleSoft PeopleTools system tables by running various scripts.

Important! From this point forward, run all steps using the new release of PeopleSoft PeopleTools on your Copy of Production database, unless otherwise indicated.

Task 2-3-1: Clean Up Message Data

If you are upgrading from PeopleSoft PeopleTools 8.48 or later, mark this step as complete in your upgrade job and continue with the rest of the upgrade. Do *not* perform any deletes in this step as you will wipe out current valid data that is needed for your system to function properly.

If you are upgrading from PeopleSoft PeopleTools 8.47 or earlier, perform this step to clean out obsolete message data. Message functionality and structure changed as of PeopleSoft PeopleTools 8.48 and the old data is obsolete. Edit PS_HOME\SCRIPTS\PTUPGIBDEL.SQL to delete data from the tables that only exist in the old PeopleSoft PeopleTools release. Open the script and make the following modifications:

1. Search for the string “--- End of PT8.xx ---” in which *xx* represents the last two digits of the PeopleSoft PeopleTools release you are upgrading from.
2. Delete the entire portion of the script below this string.
3. Save the script as PS_HOME\SCRIPTS\PTUPGIBDEL8xx.SQL in which *xx* represents the last two digits of the PeopleSoft PeopleTools release you are upgrading from, as determined in Step 1.

Important! Save the script using the naming convention shown above. This will preserve the original script for use in updating other databases at different PeopleSoft PeopleTools releases, and assist in running the script automatically.

Follow this procedure to edit your template so that the script can run automatically:

1. Select this step and open the Step Properties dialog box.
2. Change the Script/Procedure value from PTUPGIBDEL8xx to the specific name that you used in Step 3 without the .SQL extension.
3. Change the type from ManualStop to SQLScript, and click OK.
4. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-3-2: Update System Catalog Views

This step runs the UPDOBJ.SQL script, which re-creates system catalog views that both DataMover and PeopleSoft PeopleTools use.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server	All

Task 2-3-3: Update PeopleTools System Tables

Release scripts are SQL scripts that modify the underlying table structure of a database so that it is compatible with a more recent PeopleSoft PeopleTools release. They are located in the PS_HOME\SCRIPTS directory. Release scripts can be identified by their common naming standard, RELxxx.SQL, in which xxx designates a PeopleSoft PeopleTools release number.

These release (REL) scripts alter and update your PeopleSoft PeopleTools tables to the current release. Change Assistant determines which RELxxx scripts to run based on the PeopleSoft PeopleTools release of your Source and Target databases.

If you created RELxxxDBTSFIX (in which xxx is a PeopleSoft PeopleTools release) earlier in your upgrade, the procedure will look at your Output folder and will know to run RELxxxDBTSFIX. If you did not run DBTSFIX, Change Assistant will run RELxxx.

Note. Before running this step, verify that the PS_HOME values are set correctly in the Change Assistant environment for your upgrade job. Your new release PS_HOME/SCRIPTS directory should contain all scripts that will be run during this step. This step runs at least one script. Do not proceed to the next step until these scripts run successfully.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your new release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-3-4: Grant Privileges to the CONNECT ID

This step runs the GRANT.SQL script. This script grants select access to the connect ID for tables necessary for sign on.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-3-5: Update the Product License Code

This section discusses:

- Understanding the Product License Code
- Updating the Product License Code

Understanding the Product License Code

The new PeopleSoft release stores your application product license code on the database. This code is used to unlock the pages and Application Engine programs that you licensed. It also provides necessary product information about your database to be used for identifying software maintenance that may need to be applied.

You need to populate the databases that were upgraded to the new PeopleSoft release so that you have the correct access to pages and Application Engine programs that you licensed.

When your new PeopleSoft databases were installed, the appropriate application license code was added to your database in the PSOPTIONS table. This was done in an update statement that was created when DBSETUP was run to create the Data Mover script for the new PeopleSoft release. The location of this script is:

```
PS_HOME\SCRIPTS\DBnameDBplatform.DMS
```

DBname is the name of the Demo database you installed and *DBplatform* represents the database platform using the following chart:

Database Platform	Code Used
Microsoft SQL Server	MSS
DB2 UDB z/OS	DB2
DB2 UDB UNIX/NT	DBX
Oracle	ORA
Informix	INF
Sybase	SYB

Updating the Product License Code

Follow the steps below to update your product license code.

To update the product license code:

1. From the Data Mover script that was created for your new PeopleSoft database installation, copy out the update to PSOPTIONS.

The statement should look similar to this:

```
update PSOPTIONS set LICENSE_CODE = 'xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx', LICENSE_⇒
GROUP = 'xx';
```

where 'xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx' equals your license code and 'xx' equals your license group.

2. Run the SQL command identified above using your SQL tool.

Your database is now updated with the appropriate license code. You can now access the pages and Application Engine programs that you licensed.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-3-6: Update PeopleTools Patch Information

In this step, you update your database with the version of the PeopleSoft PeopleTools patch being applied.

Note. You only need to run this step if you are applying a PeopleSoft PeopleTools patch as part of the upgrade process.

Log on to Data Mover in user mode and run the %PS_HOME\SCRIPTS\PTPATCH.DMS script.

Review the PeopleSoft PeopleTools patch instructions and perform any additional database upgrade instructions that may be listed prior to the copy of the patch project. The patch project will be copied later during the upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-3-7: Create Temporary Performance Indexes

Perform this step only if you are running on a DB2 z/OS platform. This step runs the DB2TMPIDXCREATE script to create multiple indexes for rename performance. You will drop these indexes later in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	DB2 z/OS	All

Task 2-3-8: Export PeopleTools System Tables

The script for this step exports the content of the PeopleSoft PeopleTools tables from the Copy of Production database during your Move to Production passes. During the initial pass, you run programs to convert some objects, like PeopleCode and fields. You perform analysis to decide which objects, such as records and menus, to bring over to your production database and which customized objects to keep. At the end of the initial pass, you reapply customizations or make other changes, such as modifying your permission lists. You do not need to repeat those tasks in the Move to Production pass because this script exports all of your changes to the PeopleSoft PeopleTools objects.

The script name for your upgrade path is:

MVPRDEXP.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	MTP	All	All	All

Task 2-3-9: Import PeopleTools System Tables

The script for this step imports the content of the PeopleSoft PeopleTools tables into your New Copy of Production database during your Move to Production passes.

These MVPRD* scripts replace tasks and steps performed in the initial pass. These tasks and steps may include:

- Renaming Records and Fields
- Running New Release Compare Reports
- Running New Release Upgrade Copy

If your RDBMS uses tablespaces, edit this script for the proper DDL information.

The script name for your upgrade path is:

MVPRDIMP.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 2-3-10: Reset Database Options Flag

This step runs UPGDBOPTIONS_DISABLE.SQL, which resets the PSSTATUS.UPGDBOPTIONS flag. The flag is reset only for upgrades where you are coming from a PeopleSoft application release prior to 9.0 and going to a PeopleSoft application release of 9.0 or later with PeopleSoft PeopleTools 8.48 or later. The PeopleSoft PeopleTools upgrade must be applied using the old data types as the data type conversion will occur after the PeopleSoft PeopleTools changes have been completed.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	MS SQL Server Oracle	All

Task 2-3-11: Rerun Update Statistics for DB2 z/OS

Earlier in the upgrade process, you updated your statistics for DB2 z/OS. Due to changes in the database structure, you must update statistics again to improve the performance of your compare and copy. Contact your database administrator to have the statistics updated on your database before proceeding with your upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 2-3-12: Rerun RUNSTATS Report for DB2 UNIX NT

This script creates the RUNSTATS.DAT file for the script to update the statistics for DB2 UDB on UNIX, Linux, or Windows.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 UNIX/NT	All

Task 2-3-13: Rerun Update Statistics for DB2 UNIX NT

Earlier in the upgrade process, you updated your statistics for DB2 UDB on UNIX, Linux, or Windows. Due to changes in the database structure, you must update statistics again to improve the performance of your compare and copy. This step runs RUNSTATS . SQL to update statistics on your database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 UNIX/NT	All

Task 2-3-14: Rerun Update Statistics for Informix

Earlier in the upgrade process, you updated your statistics for Informix. Due to changes in the database structure, you must update statistics again to improve the performance of your compare and copy. This step runs UPDATESTATS to update statistics on your database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Informix	All

Task 2-3-15: Rerun Update Statistics for Oracle

Earlier in the upgrade process, you updated your statistics for Oracle. Due to changes in the database structure, you must update statistics again to improve the performance of your compare and copy. Contact your database administrator to have the statistics updated on your database before proceeding with your upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-4: Turning Off Change Control

This task executes a SQL statement that turns off the Change Control feature to improve performance for the upgrade copy. One of the tasks for completing database changes will remind you to turn this feature on again, if you want to use it.

Note. Move to Production: The Change Control feature slows down copy functions. The large copy projects are executed only during the initial pass and the feature is disabled only for the initial pass.

See “Complete Database Changes,” Reviewing Change Control.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-5: Loading Model Definition Data

This section discusses:

- Understanding Model Definition Data Load Process
- Load Model Definitions for DB2 zOS
- Load Model Definitions for DB2 UNIX NT

- Load Model Definitions for Oracle
- Load Model Definitions for Informix
- Load Model Definitions for Microsoft
- Load Model Definitions for Sybase

Understanding Model Definition Data Load Process

In this task, you load model definition scripts for your database platform and populate DDL model definitions. This step runs the DDL model definition script applicable to your database platform. If required by your database platform, you modified this script in the task “Performing Script Modifications,” to use your site-specific information.

See Performing Script Modifications.

Task 2-5-1: Load Model Definitions for DB2 z/OS

This step runs the DDLDB2.DMS script to populate DDL model definitions for the DB2 z/OS platform.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 2-5-2: Load Model Definitions for DB2 UNIX NT

This step runs the DDLDBX.DMS script to populate DDL model definitions for DB2 UDB on UNIX, Linux, or Windows.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 UNIX/NT	All

Task 2-5-3: Load Model Definitions for Oracle

This step runs the DDLORA.DMS script to populate DDL model definitions for the Oracle platform.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-5-4: Load Model Definitions for Informix

This step runs the DDLIFX.DMS script to populate DDL model definitions for the Informix platform.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Informix	All

Task 2-5-5: Load Model Definitions for Microsoft

This step runs the DDLMSS.DMS script to populate DDL model definitions for the Microsoft SQL Server.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server	All

Task 2-5-6: Load Model Definitions for Sybase

This step runs the DDLSYB.DMS script to populate DDL model definitions for the Sybase platform.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Sybase	All

Task 2-6: Loading Message Data

This step loads system messages in the message catalog.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-7: Reviewing PeopleTools Objects

Run this task to identify any PeopleSoft PeopleTools objects that you have customized. This task only identifies the customized PeopleTools objects. You still must overwrite the customized objects with the new PeopleSoft PeopleTools definitions when you copy the project.

During the upgrade process, you copy PeopleSoft PeopleTools objects into your database. PeopleSoft PeopleTools functionality, such as Security, is built using PeopleSoft PeopleTools objects and it is possible that you could have modified the objects that make up a product like Security.

Warning! Do not change the delivered PeopleSoft PeopleTools objects. The delivered objects are integral to the smooth operation of your system, and the modification of these objects could cause system instability.

When you perform the copy of the PeopleSoft PeopleTools projects during the upgrade, you may overwrite modifications that you have made. Excluding any PeopleSoft PeopleTools-delivered objects from the upgrade may result in instability due to dependencies on specific objects.

To review PeopleSoft PeopleTools objects:

1. Open the PPLTLS84CUR project on your Source database.
 - a. Launch Application Designer and sign on to the Demo (Source) database.
 - b. Select File, Open...
 - c. In the Definition field, select Project and click Open to display a list of projects.
 - d. Select the PPLTLS84CUR project and click Open.
2. If the PPLTLS84CUR project does not exist on your Demo (Source) database, then copy the project definition; otherwise continue to the next step.
 - a. Select Tools, Copy Project, From File...
 - b. In the resulting dialog box, change the import directory to *PS_HOME\PROJECTS*, select PPLTLS84CUR from the list of projects and click the Open button.
 - c. The Copy dialog box appears. Click the Deselect All button and then click the Copy button.
When the progress dialog disappears, the project definition has been copied.
3. On your Source database, make a copy of the PPLTLS84CUR project and name it PPLTLS84CURCOMP.
You will use this project for the compare process.
 - a. If the PPLTLS84CUR project is not open, open it now.
 - b. Select File, Save Project As...
 - c. Name the project PPLTLS84CURCOMP.
4. On your Source database, perform a project compare of the PPLTLS84CURCOMP project against your Target database.
 - a. If the PPLTLS84CURCOMP project is not open, open it now.
 - b. Select Tools, Compare and Report...
 - c. Sign on to the Target database.
 - d. Verify that all object types are selected.
 - e. Select Options...
 - f. On the Compare Options tab, select Compare Type of Project.
 - g. Select a value for Target Orientation.
 - h. For Comparison by Release, select the highest release in the list.
 - i. Under Compare Languages, select Common and English.

- j. If you have non-English languages loaded, select the other languages loaded into your database.
- k. Select the Report Filter tab and click Default.
This will cause only customizations to appear on the compare reports.
- l. Click OK.
- m. Click Compare to start the compare process.

Note. To preserve the PPLTLS84CURCOMP compare reports, you must perform one of the following actions: 1) rename the reports, 2) move the reports to a different folder, or 3) reset the Compare Report Output Directory: Within Application Designer, select Tools, Options. On the General tab, change the path specified for the Report Output Directory.

5. Evaluate the compare reports to identify whether the delivered objects conflict with any of your customizations.

You will overwrite the customized objects with the new PeopleSoft PeopleTools definitions when you copy the PeopleSoft PeopleTools projects in a later task. You must not make any modifications that will affect PeopleSoft PeopleTools objects when reimplementing your customizations after the upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-8: Exporting and Copying Projects

This section discusses:

- Understanding Exporting and Copying Projects
- Export and Copy PPLTLS84CUR Project
- Export and Copy PPLTLS84CURML Project
- Export and Copy PPLTLSML Project
- Export and Copy PPLTLS84CURDEL Project
- Export and Copy PATCH84X Project
- Export and Copy PATCH84XML Project

Understanding Exporting and Copying Projects

In this task, you export and copy projects.

Oracle recommends that you verify the results of all copied projects. After a project has been copied, each object is identified with a checkmark in the Done column. You can view these results from the Upgrade tab in Application Designer. It is also recommended that you copy the PeopleSoft PeopleTools projects with the take action flags set as they originally were set when the database was delivered.

Note. If you are running Sybase, check the configuration parameter for “open objects.” If this parameter is set too low, you may encounter the following error: `ct_connect(): network packet layer: internal net library error` during the compare or copy process. If you encounter this error, you will need to increase your parameter accordingly.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Application Designer for your new release.

Task 2-8-1: Export and Copy PPLTLS84CUR Project

This process copies specified objects to the database that are necessary for the proper operation of PeopleSoft PeopleTools. The PPLTLS84CUR project contains all PeopleSoft PeopleTools objects that have been created or updated since PeopleSoft PeopleTools 8.40 was released.

Before the copy of records and fields, the upgrade process detects if the object definition exists or not. The PPLTLS84CUR project is delivered with an action of `CopyProp` to prevent the possible overwrites of custom field labels and recfields. When the upgrade process detects that a given field or record does not exist, it changes that action so that the entire definition can be copied. You can ignore any errors that you may receive at this time similar to the following examples:

```
Changed Action from CopyProp to Copy, definition does not exist on target.
Definition Name: OBJECTNAME not copied, entire definition already copied.
```

These warnings occur because the PeopleSoft PeopleTools project contains fields along with their field label. This is necessary so that the software does not overwrite any customized field labels on PeopleSoft field objects.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-8-2: Export and Copy PPLTLS84CURML Project

This process copies language-specific PeopleSoft PeopleTools objects to the database that are necessary for the proper operation of PeopleSoft PeopleTools.

Before the copy of records and fields, the upgrade process detects if the object definition exists or not. The PPLTLS84CURML project is delivered with an action of `CopyProp` to prevent the possible overwrites of custom field labels. When the upgrade process detects that a given field does not exist, it changes that action so that the entire definition can be copied. You can ignore any errors that you may receive at this time similar to the following example:

```
Changed Action from CopyProp to Copy, definition does not exist on target.
Definition Name: OBJECTNAME not copied, entire definition already copied.
```

This warning occurs because the PeopleSoft PeopleTools project contains fields along with their field label. This is necessary so that the software does not overwrite any customized field labels on PeopleSoft field objects.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	Canadian French Dutch Greek German Italian Japanese Korean Portuguese Simplified Chinese Spanish Swedish Traditional Chinese Thai Malay

Task 2-8-3: Export and Copy PPLTLSML Project

This process copies language-specific PeopleSoft PeopleTools objects to the database that are necessary for the proper operation of PeopleSoft PeopleTools.

Before copying records and fields, the upgrade process detects whether the object definition exists. The PPLTLSML project is delivered with an action of `CopyProp` to prevent the possible overwrites of custom field labels and recfields. When the upgrade process detects that a given field or record does not exist, it changes that action so that the entire definition can be copied. You can ignore any errors that you may receive at this time similar to the following examples:

```
Changed Action from CopyProp to Copy, definition does not exist on target.
Definition Name: OBJECTNAME not copied, entire definition already copied.
```

These warnings occur because the PeopleSoft PeopleTools project contains fields along with their field labels. This is necessary so that the PeopleSoft system does not overwrite any customized field labels on PeopleSoft field objects.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	Arabic Czech Danish Finnish French Hebrew Hungarian Norwegian Polish Russian Turkish

Task 2-8-4: Export and Copy PPLTLS84CURDEL Project

This process deletes specified PeopleSoft PeopleTools objects from your database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-8-5: Export and Copy PATCH84X Project

This process copies specified objects to the database that are necessary for the proper operation of PeopleSoft PeopleTools.

Note. Perform this process only if you are applying a PeopleSoft PeopleTools patch that includes a database project. Check the patch documentation to verify whether a database project was delivered with the patch.

Use Application Designer to perform the following steps.

To export and copy the project:

1. Log on to your Target database as a valid user.
2. Select Tools, Copy Project, From File...
3. In the Import Directory field, enter *PS_HOME\PROJECTS*.
4. Select the PATCH84X project from the list, in which 84X corresponds to the PeopleSoft PeopleTools release of the patch project.

This should correspond with the PeopleSoft PeopleTools release to which you are upgrading.

5. Select Options; select the languages Common and English *only*.
6. Select Copy to begin copying updated PeopleSoft PeopleTools objects to your database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-8-6: Export and Copy PATCH84XML Project

This process copies language-specific PeopleSoft PeopleTools objects to your database that are necessary for the proper operation of PeopleSoft PeopleTools.

Note. Perform this process only if you are applying a PeopleSoft PeopleTools patch that includes a database project. Check the patch documentation to verify whether a multilingual database project was delivered with the patch.

Use Application Designer to perform the following steps.

To export and copy the project:

1. Log on to your Target database as a valid user.
2. Select Tools, Copy Project, From File...
3. In the Import Directory field, enter *PS_HOME\PROJECTS*.
4. Select the PATCH84XML project from the list, where 84X represents the PeopleSoft PeopleTools release of the patch project.
This should correspond to the PeopleSoft PeopleTools release to which you are upgrading.
5. Click Options, and then select the Copy Options tab and verify that only the non-English languages that are installed are selected.

Note. The languages English and Common should not be selected.

6. Click OK.
7. Click Copy.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All Non-English

Task 2-9: Populating Tablespace Data

This section discusses:

- Create Application Tablespaces
- Populate Tablespace Data
- Update Tablespace Names

Task 2-9-1: Create Application Tablespaces

During each Move to Production pass, you must create any new tablespaces. You can reuse the same script created during the initial pass when you created new tablespaces, or you can build a new one if you plan to use different tablespaces on your production system.

See “Apply Application Changes,” Updating Database Overrides, Create New Tablespaces.

The script supplied by Oracle to create tablespaces for your upgrade is:

```
EPDDL.SQL (EPDDL.U.SQL for DB2 z/OS Unicode)
```

Important! For DB2 UNIX/NT sites, the script name is EPDDL.DMS.SQL for ANSI, and EPDDL.DMSU.SQL for Unicode.

Once you have determined which script to run during Move to Production, you can change this step to run automatically.

To run the Create Application Tablespaces step automatically:

1. In Change Assistant, open your upgrade job.
2. In the task Populating Tablespace Data, right-click on the step Create Application Tablespaces, and then select Step Properties.
3. In the Step Properties dialog box, change the value in the Type field from *ManualStop* to *SQLScript*.
4. In the Script/Procedure field, enter the name of the script you want to run and click OK.
5. Select Edit, Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	Oracle Informix DB2 UNIX/NT DB2 z/OS	All

Task 2-9-2: Populate Tablespace Data

This step populates all tablespace information in the PSRECTBLSPC table. This step runs the SETSPACE.SQR script, which ensures that the correct tablespace information is populated for tasks later in the upgrade process.

The values stored in the DDLSPACENAME field are updated with current values found in the system catalog for tables already defined in your database. If you modified tablespace names from the Oracle-delivered names, this step makes those same changes in the PeopleSoft record definition.

If you receive any errors when you run this script, correct them by creating the needed tablespace or changing the tablespace definition on the record object. Then run the script again to validate that you have created all tablespaces.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle Informix DB2 UNIX/NT DB2 z/OS	All

Task 2-9-3: Update Tablespace Names

The SETSPACE SQR script identifies the tables with an invalid database name/tablespace combination. However, the PeopleTools Metadata tables in your Copy of Production (Target) database contain the database/tablespace values from the Demo (Source) database. This also occurs if your Demo and Copy of Production databases are in the same DB2 subsystem after the upgrade/copy is completed. SETSPACE.SQR corrects these values for those tables defined in DB2. For those tables that are defined in the PeopleTools metadata tables, but have not been defined in DB2, you need to review the SETSPACE SQR script for those tables that are reported as not defined in the database, but where the database/tablespace combination is valid. If the report shows an invalid database/tablespace combination, or shows your Demo (Source) database and tablespace names instead of your Copy of Production (Target) database and tablespace names, you can correct the database and tablespace names using one of the following options:

- Generate the alter/create scripts and globally edit the scripts, changing the database/tablespace values to those of your Copy of Production.
- Directly update the PSRECTBLSPC table with your Target database names before generating the alter/create scripts.

This will ensure that the database name/tablespace names in the generated alter/create scripts will be correct. The syntax to update the PSRECTBLSPC table is as follows:

```
UPDATE PSRECTBLSPC SET DBNAME = dbname, DDLSPACENAME = tablespace name WHERE⇒
DDLSPACENAME = tablespace identified in SETSPACE OUTPUT AND DBNAME = database⇒
identified in SETSPACE OUTPUT;
```

If you are using the Oracle-delivered tablespaces, you can omit the references to DDLSPACENAME in the SQL statement above.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 2-10: Building Updated PeopleTools Project

This section discusses:

- Generate Updated PeopleTools Script
- Edit the Updated PeopleTools Script
- Run the Updated PeopleTools Script

Task 2-10-1: Generate Updated PeopleTools Script

This step generates the SQL script to create and alter records of the type Table that are delivered in the PPLTLS84CUR project. The tables are altered to add new columns, rename existing columns, and change columns that have modified properties, such as length, and delete columns. The script will also create new indexes, re-create modified indexes, and create triggers. The script name is:

PPLTLS84CURTABLES.SQL

Note. For DB2 z/OS sites, if this step takes an exceptionally long time, performing a RUNSTATS on the system catalog tablespace SYSDBASE may improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-10-2: Edit the Updated PeopleTools Script

In this step, you edit the PPLTLS84CURTABLES.SQL script that was generated in the previous step for tablespace names and sizing. If you are running on a RDBMS platform that uses tablespaces, and you are *not* using the PeopleSoft tablespace names, have your database administrator review this script and modify the tablespace names appropriately. The script can be found in your Change Assistant output directory for this upgrade path.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS DB2 UNIX/NT Oracle Informix	All

Task 2-10-3: Run the Updated PeopleTools Script

This step runs the script you generated in this task to create all records of the type Table. This creates new table structures, alters existing PeopleSoft table structures, creates new indexes, re-creates modified indexes, and creates triggers.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-11: Migrating Records to New Tablespaces

This section discusses:

- Understanding Migration of Records to New Tablespaces
- Export and Copy the PT84TBLSPC Project
- Build the Tablespace Alter Script
- Edit the Tablespace Alter Script
- Run the Tablespace Alter Script

Understanding Migration of Records to New Tablespaces

In this task you migrate the tables delivered in the PT84TBLSPC project to the correct tablespaces.

Task 2-11-1: Export and Copy the PT84TBLSPC Project

This process copies the records that moved to different tablespaces in the new release of PeopleSoft PeopleTools. The upgrade copy options are set to Copy From Source for record DDL to pick up the new tablespace information.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	DB2 z/OS DB2 UNIX/NT Oracle Informix	All

Task 2-11-2: Build the Tablespace Alter Script

This step generates the SQL script to alter records of the type Table that are delivered in the PT84TBLSPC project. The tables are altered to move them to the correct tablespaces for the new release of PeopleSoft PeopleTools. The script name is:

TABLESPACEALTERTABLES.SQL

Note. For DB2 z/OS sites, if this step takes an exceptionally long time, performing a RUNSTATS on the system catalog tablespace SYSDBASE may improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS DB2 UNIX/NT Oracle Informix	All

Task 2-11-3: Edit the Tablespace Alter Script

In this step, you edit the TABLESPACEALTERTABLES.SQL script for tablespace names and sizing. If you are running on an RDBMS platform that uses tablespaces, and you are *not* using the PeopleSoft tablespace names, you need to review and modify the scripts above. Have your database administrator review these scripts and modify the tablespace names appropriately. The script can be found in your Change Assistant output directory for this upgrade path.

Note. If you are a DB2 z/OS customer, you must edit the scripts for database name regardless of whether you are using the delivered PeopleSoft tablespace names.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS DB2 UNIX/NT Oracle Informix	All

Task 2-11-4: Run the Tablespace Alter Script

This step runs the TABLESPACEALTERTABLES.SQL script to move the tables to the new tablespaces.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS DB2 UNIX/NT Oracle Informix	All

Task 2-12: Loading Base Data

These Data Mover scripts (DMSs) initialize and modify the data in various PeopleSoft PeopleTools tables required for the system to execute properly. This step runs scripts conforming to the PTxxxTLS.DMS and PTxxxTLSyyy.DMS naming conventions, where xxx represents a PeopleSoft PeopleTools release number and yyy represents a three-letter language code, that are greater than your current PeopleSoft PeopleTools release. For some upgrades, no data scripts are required. In this case, Change Assistant continues to the next step without producing a log file.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-13: Loading Language Data

This section discusses:

- Populate Languages
- Load Language Data

Task 2-13-1: Populate Languages

This step runs the PSLANGUAGES.DMS script. This script populates the PSLANGUAGES table with Verity Locale data and other language-specific data.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-13-2: Load Language Data

If your database has languages installed in addition to English, you must populate the PSLANGUAGES table.

To load language data:

1. From the DMS that was created for your PeopleSoft 8.x database installation, find the UPDATE to PSLANGUAGES.

The statement should look similar to the following:

```
UPDATE PSLANGUAGES SET INSTALLED=1 WHERE LANGUAGE_CD = 'xxx';
```

2. Run the SQL command identified above using your SQL tool.

Your database is now updated with the language data.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All Non-English

Task 2-14: Loading PeopleTools Data

This section discusses:

- Load NonComparable Objects
- Load English Messages
- Load English String Data
- Load Stored Statements Data

Task 2-14-1: Load NonComparable Objects

This step runs the TLSUPGNONCOMP.DMS script. This script loads the TLSUPGNONCOMP project and all PeopleSoft PeopleTools-owned object definitions that cannot be delivered using Copy Project to File.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-14-2: Load English Messages

This step runs the MSGTLENG.DMS script, which loads English messages into your database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-14-3: Load English String Data

This step runs the PTSTRENG.DMS script, which loads English string data into the STRINGS_TBL table.

Note. The non-English language data was loaded in the task Loading Base Data.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-14-4: Load Stored Statements Data

Loading the stored statements ensures that the dynamic SQL statements will work correctly with the delivered COBOL programs.

This step runs the STOREPT.DMS script, which loads the dynamic SQL used by the PeopleSoft PeopleTools-delivered COBOL.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-15: Loading PeopleTools Definition Group

This task runs the PTDEFNSEC.DMS script that loads the PeopleTools definition security group. This ensures that the definition security group is updated with the PeopleTools objects introduced in this release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-16: Converting PeopleTools Objects

This section discusses:

- Update REN Server Configuration
- Populate MCF Data
- Convert Portal Objects
- Convert Query Prompt Headings
- Encrypt Connector Passwords
- Load Conversion Data
- Report Conversion Details
- Run Data Conversion

Task 2-16-1: Update REN Server Configuration

This step runs the Application Engine program UPGMCF843, which converts real-time event notification (REN) server configuration information to the new format. REN servers run in the application server domain. They are used for the PeopleSoft PeopleTools MultiChannel Framework (MCF) and Reporting Window output option. The program converts standard REN server configurations to the new format, including MCF cluster information. All REN server configuration information is now stored within the database. You must upgrade old REN server configurations before attempting to boot with the new version of PeopleSoft PeopleTools. If you did not have any REN servers configured prior to starting the upgrade, then the UPGMCF843 program does not make any changes. If one of your configurations cannot be converted, error messages will be written in the Application Engine message log.

After running this step, you should also check the PSRENCONFIG.TXT file located in each application server domain that started an old REN server. (The file will not exist in domains that did not start a REN server.) Each old file should be replaced with the new template file located at PS_HOME/APPSEV/REN/PSRENCONFIG.TXT. Old template files cannot be used with the new version of REN server. If you customized your old configuration files, manually edit the new files and update them with your customizations.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-16-2: Populate MCF Data

This step runs the Application Engine program MCF_UPGR_SND, which populates the PS_MCFEM_MAIL_DSCR table with data. In PeopleSoft PeopleTools 8.44, the REPLY_TO header functionality was added. The field PS_MCFEM_MAIL_DSCR.MCF_REPLY_TO is populated with the values stored in PS_MCFEM_MAIL_MAIN.MCF_EMAIL_SENDER.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-16-3: Convert Portal Objects

This step runs the Application Engine program UPG844PORTAL, which splits PSPRSMDEFN.PORTAL_URLTEXT into segments and stores them in separate columns: PORTAL_URI_SEG1, PORTAL_URI_SEG2, PORTAL_URI_SEG3, and PORTAL_URI_SEG4. This is performed for PeopleSoft Component URLs to extract values for Menu, Component, and Market. Values for Record, Field, Event, and Function Names are extracted from PeopleSoft URLs.

You may see some errors or messages in your log. Following is a list of some of the errors and what to do about them:

- Not authorized CRef: *Portal Object Name* (95,5032).

This means that you do not have proper privileges to run this conversion. You need to grant the user ID that you are using to upgrade Portal Administrator permissions.

- Security synchronization failed for Portal Object: *Portal Object Name* (96,61).

This is not a fatal error. It may be caused by a content reference that contains invalid URL text and indicates that there was an internal error writing to the security table. The invalid URL text may be pointing to a component or script that does not exist in the database. You need to fix the content reference and then rerun the UPG844PORTAL process.

- Cref *Portal Object Name* points to Menu: *Menu Name*, Component *Component Name* which doesn't exist. (96,80).

The content reference is pointing to an invalid Menu/Component combination. You need to fix the content reference so that it points at a valid Menu/Component combination and then rerun the UPG844PORTAL process.

- Duplicate key. Portal: *Portal Name*, Obj Name: *Portal Object Name*, Nodename: *Node*, URL: *URL* (133,4).

This portal object has the same URL as another portal object. Delete or modify this object to remove the conflict and then rerun the UPG844PORTAL process.

See the Enterprise PeopleTools PeopleBook: Internet Technology for your new release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-16-4: Convert Query Prompt Headings

This step runs the Application Engine program UPGQRYDUPHED, which searches for duplicate prompt headings in the table PSQRYBIND and appends numbers onto the text. For example, *Item ID* would become *Item ID 2*. When you run Crystal 9 through the process scheduler, it cannot handle queries with two or more prompts that have the same heading. These duplicates are also not legal in Query. You need to alter any old queries that have duplicate prompt headings so that they work with Crystal 9.

If you find a duplicate heading that exceeds the length of the field HEADING, you need to change the heading manually. In these cases, the following error is written to the log file:

```
The prompt heading HEADING for Query QUERY is duplicated. Please manually correct.⇒
(108, 1108)
```

See the Enterprise PeopleTools PeopleBook: PeopleSoft Query for your new release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-16-5: Encrypt Connector Passwords

This step runs the Application Engine program UPGRDPASSWDS, which encrypts the password property field for the POP3Target, FTPTarget, GetMailTarget, and JMSTarget connectors.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-16-6: Load Conversion Data

This step imports PeopleSoft PeopleTools data conversion Application Engine driver data into your database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-16-7: Report Conversion Details

This step runs the PTUCONV.SQR script. It details which sections will be called by the Upgrade Driver program and what they are doing. Each of the upgrade data conversion sections contains comments that describe the processing done by the section. The information contained in the report is used to evaluate the conversions run in the next step and any actions that are required as a result of the conversion.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-16-8: Run Data Conversion

The Upgrade Driver Application Engine program, PTUPGCONVERT, runs additional PeopleSoft PeopleTools upgrade data conversions. The program then reads the table PS_PTUPGCONVERT, selecting all rows with the group number of 01 and ordering them by the sequence number on the row. A list of Application Engine library sections that must be run for data conversion is returned. The program then calls each section in the order of the sequence number. Review the output file generated in the previous step for more details on the conversions run in this step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-17: Creating PeopleTools Views

This section discusses:

- Create Updated PeopleTools Views

Task 2-17-1: Create Updated PeopleTools Views

This step creates all views defined in the PPLTLS84CUR project. These are PeopleTools views that have changed and are required for tasks later in the upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-18: Converting Integration Broker

This section discusses:

- Understanding Converting Integration Broker
- Updating Integration Broker Defaults
- Creating Integration Broker Objects
- Saving Application Messaging Objects
- Exporting Node Transactions
- Preparing Integration Broker Deletes
- Deleting Application Messaging Objects
- Deleting Node Transactions

Understanding Converting Integration Broker

If you are upgrading from PeopleSoft PeopleTools 8.48 or later, this task does not need to be run because the Integration Broker conversion has already been performed. You need to mark all of the steps in this task as complete in your upgrade job. If you don't mark these steps as complete, the upgrade will try to unnecessarily reconvert your objects.

Task 2-18-1: Updating Integration Broker Defaults

This step runs the PTIBUPGRADE.DMS script. This script populates the default values specified earlier in the upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-18-2: Creating Integration Broker Objects

The PeopleSoft PeopleTools Upgrade Driver Application Engine program, PTUPGCONVERT, runs additional PeopleSoft PeopleTools upgrade data conversions. The program then reads the table PS_PTUPGCONVERT, selecting all rows with a group number of 03 and ordering them by the row sequence number. A list of Application Engine library sections that must be run for data conversion is returned. The program then calls each section in the sequence number order. Review the report generated by PTUCONV.SQR for details on the conversions run in this step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-18-3: Saving Application Messaging Objects

This step copies the PTUPGIBCLONE project to the *PS_HOME*\projects directory. This project was created by the UPGPT848IBUG Application Engine program and contains objects that were successfully converted. The objects are copied to file as a precautionary measure because they will be deleted from the upgrade database.

After running this step, save the exported project in a permanent location where it can be accessed post-upgrade in case there is a need to review or import the old objects.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-18-4: Exporting Node Transactions

This step runs PTUPG_TRX_EXPORT.DMS to save out the old preconversion node transaction data. The generated .dat file is written to the DataMover output directory defined in Configuration Manager, which should be your *PS_HOME*\data directory.

After running this step, save PTUPG_TRX_EXPORT.DAT in a permanent location where it can be accessed post-upgrade in case there is a need to review or import the old objects.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-18-5: Preparing Integration Broker Deletes

This step copies the PTUPGIBDELETE project to your *PS_HOME*\projects directory in preparation for deleting the obsolete pre-conversion object definitions from the upgrade database. This project was created by the UPGPT848IBUG Application Engine program and contains the same objects as PTUPGIBCLONE.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-18-6: Deleting Application Messaging Objects

This step copies the PTUPGIBDELETE project definition from file. Since the actions in the project are set to Delete, this will delete the obsolete preconversion object definitions from the upgrade database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-18-7: Deleting Node Transactions

This step runs PTUPG_TRX.DMS, which removes obsolete node transaction data associated with the obsolete objects in the PTUPGIBDELETE project. This script was generated by the UPGPT848IBUG Application Engine program.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 2-19: Setting Object Version Numbers

In this task, you run the VERSION Application Engine program. This ensures that all of your version numbers are correct and, if not, resets them to 1.

Note. You will rerun the VERSION application engine program later in the upgrade. If you want to preserve the log files generated by Change Assistant from this run, you will need to rename the files manually after completing this task.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 2-20: Converting Database Data Types

This section discusses:

- Understanding Converting Database Data Types
- Backing Up Before Platform Changes
- Running Long Data Audit
- Validating Microsoft Database
- Reviewing Microsoft Settings
- Creating Microsoft Conversion Project
- Generating Microsoft Conversion Script
- Running Microsoft Conversion Script
- Granting Permissions to the CONNECT ID
- Running Microsoft Conversion Report
- Validating Oracle Database
- Creating Oracle Audit Tables
- Auditing Duplicate Length Constraints
- Auditing Disabled Constraints
- Reviewing Oracle Settings
- Generating Oracle Conversion Scripts
- Running Long to LOB Script 1
- Running Long to LOB Script 2
- Running Long to LOB Script 3
- Running Long to LOB Script 4
- Running Long to LOB Script 5
- Running Long to LOB Script 6
- Running Long to LOB Script 7
- Running Long to LOB Script 8
- Auditing Long to LOB Conversion
- Running Character Length Script 1
- Running Character Length Script 2
- Running Character Length Script 3
- Running Character Length Script 4
- Running Character Length Script 5
- Running Character Length Script 6

- Running Character Length Script 7
- Running Character Length Script 8
- Auditing Character Length Semantics
- Reviewing Conversion Reports
- Updating Database Options

Understanding Converting Database Data Types

As of PeopleTools 8.48, new database data types are supported for Microsoft SQL Server 2005 or later and Oracle 9i or later. These data type changes are mandatory but only available for use in conjunction with application releases 9.0 or later.

For Microsoft SQL Server 2005 and later, the data types VARCHAR, NVARCHAR, VARBINARY(MAX), and VARCHAR(MAX) are now supported. Databases on Microsoft SQL Server 2000 and earlier will not use these new data types. The data types as defined in Application Designer are not changed; only the database-level definition will be different:

- Records with fields defined as PeopleSoft CHAR(N) will now use VARCHAR(N).
- Records with fields defined as PeopleSoft NCHAR(N) will now use NVARCHAR(N).
- Records with fields defined as PeopleSoft Long Character(N) will now use VARCHAR(N) if N is <=4000 and VARCHAR(MAX) if N is > 4000 for non-Unicode.
- Records with fields defined as PeopleSoft Long Character(N) will now use NVARCHAR(N) if N is <=4000 and VARCHAR(MAX) if N is > 4000 for Unicode databases.
- Records with fields defined as PeopleSoft IMAGE will now use VARBINARY(MAX).

For Oracle 9i or later, the data types CLOB and BLOB are now supported. In addition, the Character Length Semantics feature is also supported for Unicode databases when creating PeopleSoft CHAR fields and LONG CHARACTER fields with specified lengths less than 1334:

- Records with fields defined as PeopleSoft IMAGE or PeopleSoft LONG CHARACTER with Raw Binary will now use BLOB.
- Records with fields defined as PeopleSoft LONG CHARACTER with no length specified, length greater than 1333(UNICODE), or length greater than 4000 (ANSI) will now use CLOB.

Task 2-20-1: Backing Up Before Platform Changes

Back up your upgrade database now. This enables you to restart your upgrade from this point, in case you experience any database integrity problems during the remaining tasks in the upgrade process.

Important! For Oracle platforms, contact your database administrator to update the statistics on the database catalog. This will improve performance for subsequent steps in the upgrade. Typically only the users sys and sysdba have the authority to perform this task.

The following command updates the statistics on the database catalog:

```
EXEC DBMS_STATS.GATHER_SCHEMA_STATS ( 'SYS' ) ;
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server Oracle	All

Task 2-20-2: Running Long Data Audit

This step runs LONGS-AUDIT.SQL, which audits for any fields exceeding the actual data length for PeopleSoft long character columns. You will review the output in a later step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server	All

Task 2-20-3: Validating Microsoft Database

This step runs DBSETTINGS.SQL, which checks the Microsoft SQL Server version. The data type conversion is supported only with Microsoft SQL Server 2005 or later. You will review the output in a later step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server	All

Task 2-20-4: Reviewing Microsoft Settings

If you are upgrading to a PeopleSoft 9.0 or later application release, the data type update *and* a minimum of Microsoft SQL Server 2005 are required. You will run a conversion process that will substitute the old data types for new ones. The data type conversion is supported for Microsoft SQL Server 2005 or later with PeopleTools 8.48 or later and an application release 9.0 or later. Examine the log file from the step Validating Microsoft Database to ensure that you are running a supported version of Microsoft SQL Server. Do *not* perform the rest of this task if you do not meet the qualifications.

Examine the log file from the step Running Long Data Audit to determine if there are any fields shorter than length 4000 in the database that exceed the actual data length defined for the PeopleSoft long character fields. Prior to PeopleTools 8.48, all PeopleSoft long character fields were created using the TEXT SQL Server data type, and no matter the length defined by the Application Designer, the data in the field could grow as much as the TEXT limits on SQL Server. After the data type conversion, the length specified in Application Designer will be enforced for all fields shorter than length 4000, except for those with length zero. If your data is larger than the length defined in Application Designer, then you must correct the length using Application Designer or change the data itself using your SQL query tool. You must decide whether you want a change in the field length definition or a change in the data. The log file created by LONGS-AUDIT.SQL will only show all of the fields that contain data exceeding a length between 1 and 4000 and will be empty if this condition does not occur with no other action to take.

Resolve these problems before continuing to the next step, otherwise the conversion process will fail. If necessary, contact your DBA for assistance in modifying the fields. If no fields are listed in the log file, no further action is needed and you may proceed with the upgrade.

Note. During Move to Production passes, copy MSSNEWTYPE_ALTER.SQL from your initial pass upgrade's output directory and place it into the output directory for your Move to Production pass. This script is only generated during the initial pass. Edit the script and correct the database name on the first line of the script to point to the Target database for the pass.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server	All

Task 2-20-5: Creating Microsoft Conversion Project

This step runs MSSNEWTYPE.SQL, which generates and populates the MSSNEWTYPE project. The project contains all of the records that need to be modified to use the newly supported data types.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	MS SQL Server	All

Task 2-20-6: Generating Microsoft Conversion Script

This step generates the SQL script MSSNEWTYPE_ALTER.SQL to alter the records in the MSSNEWTYPE project. The generated script will alter the tables with the new data types.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	MS SQL Server	All

Task 2-20-7: Running Microsoft Conversion Script

This step runs the generated script from the previous step. This will alter the existing tables to use the new data types. All of the tables will be copied into their new representation using the new data types and all of the additional padding blanks derived from the use of the old data types will be truncated.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server	All

Task 2-20-8: Granting Permissions to the CONNECT ID

This step runs the GRANT.SQL script. This script grants select access to the CONNECT ID for tables necessary for sign on.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server	All

Task 2-20-9: Running Microsoft Conversion Report

This step runs CONVERSION-AUDIT.SQL, which audits for all unconverted fields. You will review the output in a later step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server	All

Task 2-20-10: Validating Oracle Database

This step runs the DBSETTINGS.SQL script, which queries the database to determine the value of the NLS_LENGTH_SEMANTICS parameter. You will review the output in a later step.

There are two possible conversions that may occur depending on whether or not the database is Unicode. The Long to LOB conversion will apply to all databases, Unicode or ANSI. CHARACTER LENGTH SEMANTICS (CLS) only applies to Unicode databases. The CLS conversion has a dependency on the init.ora parameter NLS_LENGTH_SEMANTICS. The init.ora parameter NLS_LENGTH_SEMANTICS=CHAR, must be enabled for PeopleSoft Enterprise Unicode databases prior to executing the conversion. If the database being converted is ANSI, then this setting is not necessary.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-11: Creating Oracle Audit Tables

This step runs PRECNVADT1A.SQL, which drops and re-creates some temporary tables required by the pre-conversion audit SQRs.

If the tables being dropped, CHECK_CONSTRAINTS, DUPLICATE_CONSTRAINTS, and DROP_CONSTRAINTS, don't exist, the execution of this script will generate the following error, which can safely be ignored:

```
ORA-00942: table or view does not exist
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-12: Auditing Duplicate Length Constraints

This step runs PRECNVADT1.SQR, which checks for duplicate length constraints. This condition can generally exist if the database was created using the Oracle Import utility and CONSTRAINTS=Y was enabled, which is the default setting. You will review the output in a later step.

Note. If this SQR needs to be rerun for any reason, you *must* run PRECNVADT1A.SQL before rerunning PRECNVADT1.SQR.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-13: Auditing Disabled Constraints

This step runs PRECNVADT2.SQR, which checks for 'not validated' constraints. Although this condition should not exist in a production database, it may have occurred if data was imported with external utilities, such as SQL Loader. You will review the output in a later step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-14: Reviewing Oracle Settings

The data type conversion is only supported for Oracle 9i or later with PeopleTools 8.48 or later *and* an application release 9.0 or later. Do *not* perform the rest of this task if you do not meet the qualifications.

For Unicode databases, examine the log file from the step Auditing Duplicate Length Constraints. If there are any duplicate length constraints, those duplicate constraints must be dropped. Run the utility SQL script, *PS_HOME*\scripts\GENDROPDUPCONSTRAINTS.SQL, to generate the script DROPDUPCONSTRAINTS.SQL, containing an ALTER TABLE *TABLE_NAME* DROP CONSTRAINT for every duplicate constraint found. Run the DROPDUPCONSTRAINTS.SQL to resolve the duplicate length constraints.

For Unicode databases, examine the log file from the step Auditing Disabled Constraints. If there are any disabled or nonvalidated constraints, these constraints should be re-validated. Run the utility SQL script, *PS_HOME*\scripts\GENREVALIDATECONSTRAINTS.SQL to generate the script REVALIDATECONSTRAINTS.SQL, containing an ALTER TABLE *TABLE_NAME* ENABLE VALIDATE CONSTRAINT *CONSTRAINT_NAME* for every invalid constraint found. Run the REVALIDATECONSTRAINTS.SQL to enable the constraints.

For Unicode databases, examine the log file from the step Validating Oracle Database to determine if the values in the init.ora file are set properly. For Unicode databases, the NLS_LENGTH_SEMANTICS parameter needs to have a value of *CHAR*. This indicates that CHARACTER LENGTH SEMANTICS is enabled and the conversion can continue. If you need to enable Character Length Semantics, work with your DBA to modify the init.ora for the Target database's SID and set NLS_LENGTH_SEMANTICS to *CHAR*. Then stop and restart the database SID for the setting to take effect.

Note. The NLS_LENGTH_SEMANTICS parameter should be set to *CHAR only* at this point in the upgrade, and should not be set to *CHAR* earlier in the upgrade. If it is set at the time of database creation, the data type conversion scripts will fail with an ORA-30556 error due to the existence of functional indexes on the table.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-15: Generating Oracle Conversion Scripts

Work with your database administrator to set the following init.ora parameters for the Target database's system identifier (SID). Stop and restart the database SID for the following settings to take effect:

1. Set the following init.ora parameters:

```
db_block_size=8192
db_cache_size=325165824
db_file_multiblock_read_count=8
job_queue_processes=10
shared_pool_size=425829120
pga_aggregate_target=5871947670
parallel_max_servers=8
workarea_size_policy=AUTO
```

Note. If you are using Oracle 10g or higher, you may use the parameters SGA_TARGET=300M and SGA_MAX_SIZE=350M instead of SHARED_POOL_SIZE, DB_CACHE_SIZE, and DB_BLOCK_BUFFERS.

2. Pre-allocate the PSTEMP tablespace to at least 10 GB.

3. Pre-allocate the PSDEFAULT tablespace to at least 2 GB with 10-MB local uniform extents.
4. Ensure that you have at least six redo logs sized at 500 MB each.

The Oracle data types script generation program is a Java program that connects to an Oracle database. The prerequisites are Java and the Oracle JDBC Drivers. The Oracle JDBC drivers will automatically be picked up by the .bat file provided that the %ORACLE_HOME% environment variable is set. Check if the %ORACLE_HOME% environment variable is set, by typing the following at the workstation command prompt:

```
echo %ORACLE_HOME%;
```

This should return a path, for example:

```
c:\oracle\product\10.1.0\client_1;
```

If the %ORACLE_HOME% environment variable is not set, then set it in the command prompt window by typing the following at the workstation command prompt:

```
SET ORACLE_HOME=Oracle_Home_location
```

The Oracle data types script generation program is executed using the *PS_HOME\utility\PSORADDataTypesConversion.BAT* file, which requires five input parameters:

- THREADS: The number of Java threads the conversion script generation spawns to generate the scripts. We recommend 10 threads for running this program on Windows.
- ACCESSID: The access ID for the database to be converted.
- ACCESSIDPW: The access password for the database to be converted.
- DBNAME: The database name.
- OUTPUTDIR: A directory path to redirect the generated conversion scripts to a user specified directory. This must be set to the Change Assistant output directory for your upgrade pass. Change Assistant will run the generated scripts later in the upgrade.

Example:

```
PS_HOME\utility\PSORADDataTypesConversion.bat 10 SYSADM SYSADM MYDB c:\upgrade⇒  
\output\Change_Assistant_job_directory
```

In the example command line above:

THREADS = 10

ACCESSID = SYSADM

ACCESSIDPW = SYSADM

DBNAME = MYDB

OUTPUTDIR = c:\upgrade\output\Change_Assistant_job_directory

Open a command prompt window on the client workstation and execute the Oracle data types script generation program *PS_HOME\utility\PSORADDataTypesConversion.bat*. The program will display and write a log (PsOraCnv.log) to the directory specified by the OUTPUTDIR parameter indicating the status of the conversion program. Review PsOraCnv.log and ensure that the conversion scripts were generated cleanly.

For ANSI databases, only LONGTOLOBALTER conversion scripts are generated. For Unicode databases, two sets of scripts are generated: LONGTOLOBALTER conversion scripts and CHARACTERLENGTHSEMANTICSALTER scripts.

After successfully running the conversion program, verify that the generated SQL scripts are located in the staging Change Assistant output directory for your upgrade pass. Later in the upgrade, Change Assistant will automatically run the SQL scripts later in the upgrade from the Change Assistant output directory for your upgrade pass.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-16: Running Long to LOB Script 1

This step runs LONGTOLOBALTER1.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle long to LOB conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-17: Running Long to LOB Script 2

This step runs LONGTOLOBALTER2.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle long to LOB conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-18: Running Long to LOB Script 3

This step runs LONGTOLOBALTER3.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle long to LOB conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-19: Running Long to LOB Script 4

This step runs LONGTOLOBALTER4.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle long to LOB conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-20: Running Long to LOB Script 5

This step runs LONGTOLOBALTER5.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle long to LOB conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-21: Running Long to LOB Script 6

This step runs LONGTOLOBALTER6.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle long to LOB conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-22: Running Long to LOB Script 7

This step runs LONGTOLOBALTER7.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle long to LOB conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-23: Running Long to LOB Script 8

This step runs LONGTOLOBALTER8.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle long to LOB conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-24: Auditing Long to LOB Conversion

This step runs L2LAUDIT.SQR to report on the output of the long to LOB conversion. You will review the report output in a later step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-25: Running Character Length Script 1

This step runs CHARACTERLENGTHSEMANTICSALTER1.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle character length semantics conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-26: Running Character Length Script 2

This step runs CHARACTERLENGTHSEMANTICSALTER2.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle character length semantics conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-27: Running Character Length Script 3

This step runs CHARACTERLENGTHSEMANTICSALTER3.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle character length semantics conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-28: Running Character Length Script 4

This step runs CHARACTERLENGTHSEMANTICSALTER4.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle character length semantics conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-29: Running Character Length Script 5

This step runs CHARACTERLENGTHSEMANTICSALTER5.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle character length semantics conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-30: Running Character Length Script 6

This step runs CHARACTERLENGTHSEMANTICSALTER6.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle character length semantics conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-31: Running Character Length Script 7

This step runs CHARACTERLENGTHSEMANTICSALTER7.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle character length semantics conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-32: Running Character Length Script 8

This step runs CHARACTERLENGTHSEMANTICSALTER8.SQL, which was generated using PSORADDataTypesConversion.bat. The Oracle character length semantics conversion scripts are designed to run concurrently to improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-33: Auditing Character Length Semantics

This step runs CLSAUDIT.SQR to report on the output of the character length semantics conversion. You will review the report output in a later step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 2-20-34: Reviewing Conversion Reports

To review the conversion report for Microsoft, examine the log file from the step Running Microsoft Conversion Report. It contains a list of unconverted columns on tables along with its old data type. Fields on tables with no Application Designer definition will be included in this log. Any unresolved errors from the step Running Microsoft Conversion will also be included. If you are using these tables, it is possible to update them manually to use the new data types with a SQL query tool or with an ETL tool. Be very cautious when changing a table, as this could result in data loss or affected functionality. Once any underlying problems have been resolved, you may rerun all of the previous steps in this task to reconvert any remaining objects listed by the audit report.

Note. During Move to Production passes for Microsoft, you must manually convert any remaining objects. During Move to Production passes, the record definition differs from the database table structure, so do *not* build the record with Application Designer.

To review the conversion reports for Oracle, examine the log files from running the LONGTOLOBALTER*.SQL scripts. If the database is Unicode, also examine the log files for the CHARACTERLENGTHSEMANTICS*.SQL scripts. Review the output from the step “Auditing Long to LOB Conversion.” L2LAUDIT.SQR reports on any unconverted long raw columns. The table name, column name, and column data type are listed. For Unicode databases, review the output from the step “Auditing Character Length Semantics.” CLSAUDIT.SQR reports on any unconverted character length columns (Unicode only). Correct any errors listed on the log files or conversion reports before proceeding with the upgrade. You can manually convert any tables listed in the audit, or resolve the errors that led to the unconverted columns and rerun the conversion.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server Oracle	All

Task 2-20-35: Updating Database Options

This step runs UPGDBOPTIONS_ENABLE.SQL. This script updates the database to indicate that the new data types are now enabled.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	MS SQL Server Oracle	All

Task 2-21: Backing Up After PeopleTools Upgrade

Back up your Copy of Production database now. This enables you to restart your upgrade from this point, in case you experience any database integrity problems during the remaining tasks in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

CHAPTER 3

Run and Review Compare Reports

This chapter discusses:

- Understanding Compare Reports
- Preparing for Application Changes
- Copying Select Tables
- Running New Release Compare Reports
- Reviewing New Release Compare Reports

Understanding Compare Reports

Now that your Copy of Production database is at the same PeopleTools release as your new release, you can compare the two databases to see the differences. In this chapter you run and review compare reports to make decisions regarding your upgrade. Be sure you have plenty of space to run these reports, as some can be rather large.

Task 3-1: Preparing for Application Changes

This section discusses:

- Exporting Project Definitions
- Importing Project Definitions
- Dropping Tables and Views

Task 3-1-1: Exporting Project Definitions

In this step you will export from your Demo database the definition of projects that will be used later in this upgrade. You will import these definitions in the next step.

The script for your upgrade is:

```
DLUPX08E.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Both	All	All	All

Task 3-1-2: Importing Project Definitions

In this step you will import the project definitions into your Copy of Production database. These projects will be used later in this upgrade.

The script for your upgrade is:

```
DLUPX08I.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 3-1-3: Dropping Tables and Views

This step will drop tables, views or both, on the Copy of Production database. Some tables and views need to be dropped from the database prior to compare, copy, or generating DDL scripts. Some common reasons include:

- When a record was a view in a prior release and will be a table in the new release, the view must be dropped before the new tables are created.
- Records used as Application Engine state records for upgrade conversion code must exist on the database as an exact version of the record definition. You do not want these tables to be altered without deleting the obsolete columns. To make that happen, drop the table on the database at this point in the upgrade.
- Some records that have many fields and long row lengths will exceed database limitations if they are altered without deleting obsolete columns. If the table is considered a "temporary" table for batch processing, PeopleSoft assumes it will contain no relevant data at this point in the upgrade process. Dropping the table at this point in the upgrade will eliminate the row length problems that could occur later in the upgrade.

If for some reason any of these tables or views do not exist in your database, and you receive SQL errors, it is OK and you can proceed with your upgrade.

The script name for your upgrade path is:

```
DLEPUPS07.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 3-2: Copying Select Tables

This section discusses:

- Running the DLCGGLU20E Script
- Running the DLCGGLU20I Script

Task 3-2-1: Running the DLCGGLU20E Script

The DLCGGLU20E/I scripts save the contents of PSRECFIELDDB into a temporary table (PS_FS_UPG_RECFLDDB) to be used by data conversion programs. PSRECFIELDDB is a PeopleTools table that contains all Records and the fields on those records. Running the DLCGGLU20E script at this point in the upgrade will preserve the prior release record/field structure in the temporary table.

Note. Move to Production Note: The export can only run during the initial test pass. It is only during the initial pass that you have old release record structures in the new release PSRECFIELDDB table. You will need to preserve the .dat file DLCGGLU20.dat located in your PSHOME\DATA directory. It will need to exist in the PSHOME\DATA directory during your Move to Production Passes.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 3-2-2: Running the DLCGGLU20I Script

The DLCGGLU20I script imports the data into the PS_FS_UPG_RECFLDDB temporary table.

Note. Move to Production Note: The import needs to run in both initial and MTP passes. The export script, DLCGGLU20E script will only run in the initial test pass. This script requires the DLCGGLU20.dat file generated during the initial pass. The .DAT file should be located in your PSHOME\DATA directory.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 3-3: Running New Release Compare Reports

This section discusses:

- Understanding the New Release Compare
- Preserving Local Message Node
- Modifying New Release Compare Options
- Running New Release UPGCUST Compare
- Running New Release UPGCUSTIB Compare
- Resetting Take Action Flags in UPGCUST
- Running UPGCUSTIB Filter Script
- Resetting Flags for ChartField Objects

Understanding the New Release Compare

In this task you will compare your customizations to the new release objects by running a project compare against the Demo database.

Task 3-3-1: Preserving Local Message Node

In this step add your Local Message Node to the UPGCUST project before the project compare between the Copy of Production and Demo database.

To add Local Message Node:

1. Run the following SQL in your Copy of Production database to identify your Local Message Node:

```
SELECT MSGNODENAME FROM PMSGNODEDEFN WHERE LOCALDEFAULTFLG = 'Y'
```

2. Open Application Designer from your Copy of Production database.
3. Open project UPGCUST.
4. Select Insert, Definitions Into Project.
5. Select Definition Type of Message Node.
6. Enter the Message Node name that was returned from the SQL you ran above.
7. Select the displayed Message Node.
8. Click Insert.
9. Save project UPGCUST.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 3-3-2: Modifying New Release Compare Options


For compare steps, PeopleSoft Change Assistant templates are delivered with the default reports filter turned on in the compare options. This limits the size of the reports and keeps them manageable. Before you start the compares, review the Change Assistant template step properties for each compare step in this task and modify the compare options based on your requirements.

If you decide not to modify the compare options, the objects are still compared. However, the results are only available online in Application Designer. They are not written to the compare reports. The compare reports are tools to help you review changed objects. However, based on the report filters you select, you may need to review the action flags for other objects in the compare project in Application Designer.

For example, you can modify the compare options so the report contains customized objects that are present in your Copy of Production database but absent from the Demo database. Alternatively, you can review these objects online, through Application Designer, after the compare.

To modify upgrade compare options:

1. Highlight the compare step you want to review and right-click.
2. Select Step Properties.
The Step Properties dialog box appears.
3. Click Upgrade.
The Compare and Report dialog box appears.
4. Click Options.
5. Select the Report Filter tab.
The default options include your custom changes on the reports.
6. Change the default options as necessary and click OK.

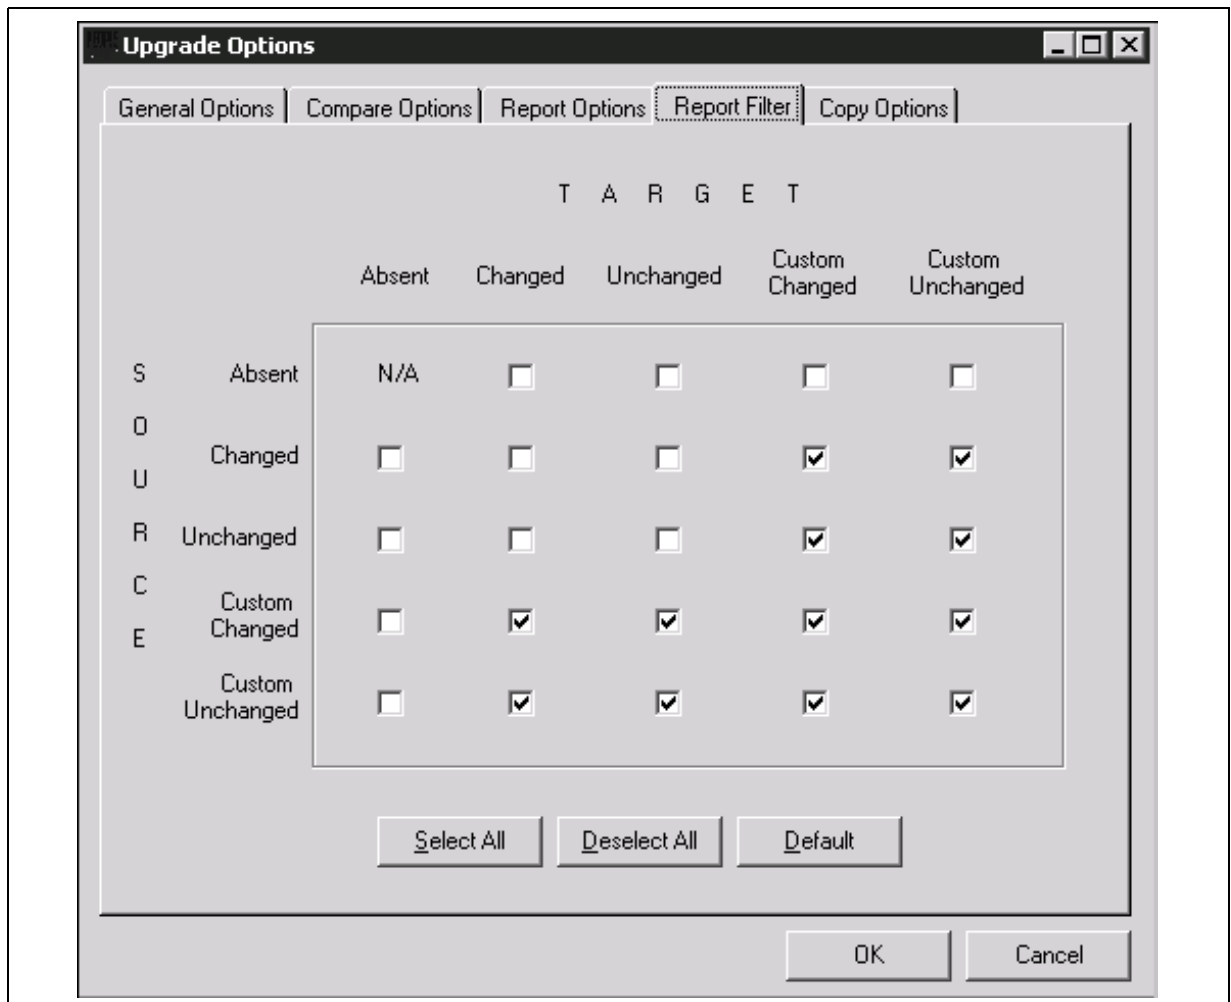

Upgrade Options page, Report Filter tab

7. In the Compare and Report dialog box, click OK.
8. In the Step Definitions dialog box, click OK.
9. Repeat steps 1 through 8 for each compare step in the task you want to review and change.
10. Select File, Save Job.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 3-3-3: Running New Release UPGCUST Compare

This step executes a project compare of all comparable objects in the UPGCUST project.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 3-3-4: Running New Release UPGCUSTIB Compare

This step executes a database compare of all Integration Broker objects and generates the UPGCUSTIB project.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 3-3-5: Resetting Take Action Flags in UPGCUST

This step turns *off* all Take Action flags in the UPGCUST project after the compare. You will analyze the compare results and adjust the upgrade flags in the next step.

The script for your upgrade is:

```
DLUPX98.DMS
```

See Appendix: “Using the Comparison Process.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 3-3-6: Running UPGCUSTIB Filter Script

This step removes all objects from the UPGCUSTIB project that are not marked **Changed* or **Unchanged* in your Copy of Production environment. It is used to isolate only custom objects in the UPGCUSTIB project.

The script name for your upgrade is:

```
DLUPX95.DMS
```

See Appendix: “Using the Comparison Process.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 3-3-7: Resetting Flags for ChartField Objects

This step turns Take Action flags on in the UPGCUST project for objects modified by the ChartField Configuration process. If you have added a new ChartField, you need to review and adjust the flags for all the new objects you have created to support the new ChartField, such as records, views, pages, and components. The script below sets the flag for most of those objects, but you may have used a different name than expected. If you have not added a new ChartField, but have relabeled, resized, renamed, or activated/inactivated a delivered ChartField, the script below will include all those objects and no additional action is required.

The script for your upgrade is:

```
DLEPFAU01.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 3-4: Reviewing New Release Compare Reports

This section discusses:

- Reviewing New Release Changes
- Reviewing NonComparable Objects

Task 3-4-1: Reviewing New Release Changes

In this step, review the UPGCUST and UPGCUSTIB projects to evaluate how changes in the new release affect your customizations.

The UPGCUST and UPGCUSTIB projects exist in your Copy of Production database and contain all the objects you customized in the old release. These projects may include object definitions that are on your Copy of Production database but are not on the Copy of Current Demo database. If these are custom objects that you intend to keep in your upgraded system, you will want to ensure they are set to copy in the UPGCUST or UPGCUSTIB project. Compare reports are viewable when you open the projects in Application Designer. You can use these reports to determine your copy action for each object in the projects. Currently all Upgrade Flags are deselected, meaning no action will take place. Analyze the UPGCUST and UPGCUSTIB projects and select the Upgrade Flags for the customizations you wish to retain.

If the Target column has the value *Absent* it can indicate one of two possible conditions. If Oracle originally delivered the object definition, then it can be considered obsolete in the new release. This value can also indicate that you originally created the object definition for some custom functionality. To ensure the integrity and functionality of the system, delete obsolete Oracle-delivered objects. If you have made a customization to an obsolete object, refer to the product's Release Notes to assess the functionality of the customization and determine where to reapply it in the new release.

See Appendix: "Using the Comparison Process."

Warning! Pay close attention to the compare results for URLs, permission lists, and message nodes. It is highly likely that you will want to keep any customizations that you have made to these objects. You will want to migrate your customized local message node. Please be sure to select the Upgrade Flags from within Application Designer to retain these customizations.

Note. Steps in the database or third-party software installation documentation can result in Oracle-delivered objects being identified in the compare reports as **Changed* in the Source column. You should investigate all instances where objects are identified as **Changed* in the Source column to determine their origin and determine a plan of action based on the findings for each object.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 3-4-2: Reviewing NonComparable Objects

The UPGNONCOMP project is delivered in your Demo database. It contains object definitions that cannot be compared using Application Designer. The UPGNONCOMP project for your upgrade may contain some or all objects of the following object types: trees, access groups, roles, dimensions, cube definitions, and cube instance definitions. These object definitions are required for your upgraded database to function correctly. You need to review this project to see whether you customized any of the objects. You then need to reapply those customizations later in the upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

CHAPTER 4

Apply Application Changes

This chapter discusses:

- Understanding Application Changes
- Customizing the New Release
- Running New Release Upgrade Copy
- Updating Database Overrides
- Backing Up After the Upgrade Copy
- Configuring ChartFields
- Modifying Trigger Tables
- Modifying the Database Structure
- Loading Data for Data Conversion
- Restoring New Release Demo
- Applying Updates Before Data Conversion
- Configuring Scheduler and Server
- Backing Up Before Data Conversion
- Running Data Conversion
- Backing Up After Data Conversion
- Finalizing the Database Structure
- Running Maintenance Pack Scripts
- Loading Data to Complete System Setup
- Loading Stored Statements
- Updating Language Data
- Completing PeopleTools Conversion
- Updating Object Version Numbers
- Completing the Service Operation Upgrade
- Running the Final Audit Reports

Understanding Application Changes

Earlier in the upgrade, you made various application changes. Now it is time to apply these application changes to your Copy of Production database.

Task 4-1: Customizing the New Release

This section discusses:

- Understanding New Release Customizations
- Copying the UPGCUST Project
- Reviewing Copy Results

Understanding New Release Customizations

In this task, the UPGCUST project is copied from the Copy of Production database to the Demo database.

Note. If you are running Sybase, check the configuration parameter for open objects. If this parameter is set too low, you may encounter the following error: `ct_connect(): network packet layer: internal net library error during the compare or copy process`. If you encounter this error, you need to increase the value of this parameter accordingly.

Task 4-1-1: Copying the UPGCUST Project

This step copies your customized PeopleTools and application objects from the Copy of Production database to your Demo database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-1-2: Reviewing Copy Results

Review the results of the project copies that were performed in this task. For each of the projects copied, review the copy logs for any errors. Also, verify in Application Designer that each of the projects copied shows the Done options are checked for those objects you expected to be copied.

There are many different errors you can find in the copy logs, depending on which objects you chose to copy or not copy. For example, if you chose not to copy a record definition, but neglected to clear the PeopleCode Upgrade check box for that record, you will receive errors when trying to copy the PeopleCode. Application Designer maintains PeopleTools integrity during the copy and will not copy PeopleCode for records that do not exist.

Review any errors you receive during the copy process and determine whether they are acceptable cases or unacceptable errors that need correction. In the example above, either the PeopleCode error is acceptable because you do not intend to copy the record definition, or the error is unacceptable and you should copy the record and then copy the PeopleCode for that record again.

You may get messages similar to “Warning: FIELDNAME is a key field and has been appended to the end of the RECORDNAME record.” This is an acceptable message and you can ignore it.

The following error occurs when copying a Portal Registry Structure that has a different PORTAL_OBJNAME but the same PORTAL_URLTEXT as an existing registry object.

```
Duplicate Key. Portal: portalname, Obj name: objectname, CP: nodename, URL (1st 50⇒
char): URL
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-2: Running New Release Upgrade Copy

This section discusses:

- Exporting Selected PeopleTools Tables
- Importing Selected PeopleTools Tables
- Copying the UPGCUSTIB Project
- Swapping PeopleTools Tables
- Creating the UPGIBCOPY Project
- Copying the UPGIBCOPY Project
- Updating Target Values
- Copying the UPGNONCOMP Project
- Reviewing Project Copy Results
- Exporting New Release Objects
- Importing New Release Objects
- Resetting Object Version Numbers
- Backing Up New Release Demo Again

Task 4-2-1: Exporting Selected PeopleTools Tables

Depending on your upgrade path you will need to export one or more PeopleTools tables to preserve values on your Copy of Production database. This step exports PeopleTools tables in the Copy of Production before the upgrade copy has occurred.

The script for your upgrade path is:

```
DLUPX96E.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-2-2: Importing Selected PeopleTools Tables

Depending on your upgrade path you will need to import one or more PeopleTools tables to preserve values on your Copy of Production database. This step imports PeopleTools tables into the Demo database before the upgrade copy occurs.

The script for your upgrade path is:

```
DLUPX96I.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-2-3: Copying the UPGCUSTIB Project

This step copies your customized Integration Broker objects from the Copy of Production database to your Demo database.

See Customizing the New Release, Reviewing Copy Results.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-2-4: Swapping PeopleTools Tables

This step swaps the base language for tables that contain PeopleTools Managed Object data and related language data on your Demo database. This is in preparation for the step, “Exporting New Release Objects.” This script should only be run if your Copy of Production has a base language other than English. The script name for your upgrade path is:

```
PT_RELEASE_SWAP.DMS
```

If you would like to automate this step, follow the procedure below.

To make this step automated:

1. Select the step Swapping PeopleTools Tables in Change Assistant.
2. Open the Step Properties dialog box.
3. Change the Type from *ManualStop* to *DataMoverUser*.
4. Click OK.
5. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	Non-English Base Language

Task 4-2-5: Creating the UPGIBCOPY Project

In this step, you create the UPGIBCOPY project and use it to upgrade your Integration Broker objects to the new release.

To create the UPGIBCOPY project:

1. Launch PeopleTools and sign on to the New Release Demo database.
2. From Application Designer, select File, New...
3. Select Project, and then click OK.
4. Select Insert, Definitions into Project...
5. Select *Messages* from the Object Type drop-down list box.
6. Click Insert, and then click Select All.
7. Click Insert.
8. Repeat steps 5, 6, and 7 for the following object types:
 - Services
 - Service Operations
 - Service Operation Handlers
 - Service Operating Versions
 - Service Operation Routings
 - IB Queues
9. Click Insert, and then click Close.
10. Select File, Save All.
11. Enter the project name UPGIBCOPY.

Warning! You must name the project UPGIBCOPY or the next step will fail.

12. Click OK.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-2-6: Copying the UPGIBCOPY Project

In this step, copy all objects in the project, UPGIBCOPY. This project consists of Oracle-delivered Integration Broker objects as well as any customizations you may have selected to copy to the New Release Demo in a previous step.

See Copying the UPGCUSTIB Project.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-2-7: Updating Target Values

This step updates the Message Node table on the Demo database to keep the assignment of the Local Node defined in the Copy of Production. The update uses the copy of the Message Node table taken earlier in the upgrade.

The script for your upgrade path is:

```
DLUPX97.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-2-8: Copying the UPGNONCOMP Project

In this step, copy the non-compare project, UPGNONCOMP. This project consists of object types you cannot compare and object types not included in your compare project. In a previous step, you reviewed this Oracle-delivered project and modified the Upgrade check box for any objects you did not want to copy.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-2-9: Reviewing Project Copy Results

Review the results of the UPGCUSTIB, UPGIBCOPY, and UPGNONCOMP project copy steps that were performed earlier in this task. Review each copy log for any errors and verify in Application Designer that the Done options are checked for the objects in each of the projects. To verify Done options for UPGIBCOPY and UPGNONCOMP, you would log in to the Demo database, whereas to verify Done options for UPGCUSTIB, you would log in to your Copy of Production database.

There are many different errors you can find in the copy logs, depending on which objects you chose to copy or not copy. Review any errors you received during the copy process to determine whether they are acceptable cases or unacceptable errors that need corrective action.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-2-10: Exporting New Release Objects

This step exports the new release objects and your customizations that you copied to the Demo database in an earlier step, to a file.

The script name for your upgrade path is:

```
PT_RELEASE_EXPORT.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-2-11: Importing New Release Objects

This step imports the new release objects and your customizations into your Copy of Production database.

The script name for your upgrade path is:

```
PT_RELEASE_IMPORT.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-2-12: Resetting Object Version Numbers

In this step, you run the VERSION Application Engine program. This ensures that all of your version numbers are correct and, if not, resets them to 1.

Note. You will rerun the VERSION Application Engine program later in the upgrade. If you want to preserve the log files generated by Change Assistant from this run, you will need to manually rename the files after completing this step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-2-13: Backing Up New Release Demo Again

Back up your New Release Demo database now. This enables you to restart your upgrade from this point, should you experience any database integrity problems during the remainder of the tasks in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-3: Updating Database Overrides

This section discusses:

- Understanding Database Overrides
- Set Index Parameters After Copy
- Set Tablespace Names After Copy
- Set Record Parameters After Copy
- Create New Tablespaces

Understanding Database Overrides

In this task, you update PeopleSoft PeopleTools tables with DDL information from your physical database DDL. You may have overwritten information about where tables exist in your database during the copy project steps of this upgrade. The following steps synchronize your PeopleSoft PeopleTools table definitions with your database again.

In the new release, certain tables have moved from 4K to 32K page size tablespaces. Make sure these tables are created or altered in the 32K tablespaces. See the reference below for a complete list of tables.

See Appendix, “Reviewing Tablespaces.”

Task 4-3-1: Set Index Parameters After Copy

This step updates index overrides stored in the PSIDXDDLPRM table. The values stored in the PARMVALUE field are updated with current values found in the system catalog. The name of the process is:

SETINDEX.SQR

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	Oracle DB2 z/OS	All

Task 4-3-2: Set Tablespace Names After Copy

This step updates tablespace names stored in the PSRECTBLSPC table. In addition, the values stored in the DDLSPACENAME field are updated with current values found in the system catalog. If you modified tablespace names from the Oracle-delivered names, this process makes those same changes in the PeopleSoft system record definition. It also corrects any tablespace names that were reset with values from the Demo database during the copy project step. The process then lists any tablespaces defined in the PeopleSoft PeopleTools tables that are not currently on your database. Use this report to create new tablespaces later in this task. The name of the process is:

SETSPACE.SQR

Note. This step updates both the database and tablespace names in the PSRECTBLSPC table for DB2 z/OS sites. The report produced by this process lists database/tablespace combinations that were not defined in the DB2 system catalog. The report may show your Demo database and tablespace names instead of your Copy of Production database and tablespace names. You will correct this situation when you create new tablespaces.

See Create New Tablespaces.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	Oracle Informix DB2 UNIX/NT DB2 z/OS	All

Task 4-3-3: Set Record Parameters After Copy

This step updates table overrides stored in the PSRECDDLPRM table. The values stored in the PARMVALUE field are updated with the current values found in the system catalog. The name of the process is:

SETTABLE.SQR

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	Oracle	All

Task 4-3-4: Create New Tablespaces

This section discusses:

- Prerequisites
- Creating Oracle Delivered Tablespaces
- Creating Custom Tablespaces

Prerequisites

Before you perform this step, you must make sure your database administrator has created all new tablespaces that will be used in new tables.

Note. DB2 z/OS sites need to create databases as well as tablespaces at this time.

Creating Oracle Delivered Tablespaces

If you use Oracle-delivered tablespace names, be aware that there may be new ones in this release. The report that you produced when you set tablespace names after copying provides a list of tablespaces that are missing from your database.

See Set Tablespace Names After Copy.

You need to create all the tablespaces on the report listed as missing on the database. Once you create all the tablespaces, you can rerun the SETSPACE.SQR; the report should show that no additional modifications are needed.

Note. For DBX sites, create all the tablespaces on the report listed as missing on the database in addition to the corresponding index (IDX) tablespace.

Oracle delivered a shell SQL script containing the DDL commands to create all the Oracle-delivered tablespaces. Edit the script to create just the new tablespaces and to set up the script for your environment.

Note. Oracle reassigned some tables to larger tablespaces because they now require a 32-KB buffer pool. You must manually edit the Create Table statements in the upgrade scripts to replace the tablespace names with an appropriate tablespace name in your implementation that utilizes a 32-KB buffer pool.

The script name is:

```
EPDDL.SQL (EPDDL.U.SQL for DB2 z/OS Unicode)
```

Important! For DB2 UNIX/NT sites, the script name is EPDDL.DMS.SQL for ANSI, and EPDDL.DMSU.SQL for Unicode.

DB2 z/OS sites must also consider how database names are assigned. After the upgrade/copy is completed, some of the PeopleSoft PeopleTools metadata tables in your Copy of Production database will contain the database values from the Demo database. Review the SETSPACE SQR report for those tables that are reported as not defined in the database. If the report shows your Demo database names instead of your Copy of Production database names you can reset them with the following SQL:

```
UPDATE PSRECTBLSPC SET DBNAME = 'Copy of Production dbname'
WHERE DBNAME = 'Demo dbname'
```

Creating Custom Tablespaces

If you will use custom tablespaces, create those tablespaces now. Choose one of the following two methods to get the information into PeopleSoft PeopleTools:

- Update PeopleSoft PeopleTools for each record you will put into a custom tablespace. You can do this directly through Application Designer, or you can update PSRECTBLSPC directly by using the appropriate SQL for your site, as follows:

DB2 z/OS sites:

```
UPDATE PSRECTBLSPC
SET DBNAME = 'new dbname', DDLSPACENAME = 'new tablespacename'
WHERE DBNAME = 'current dbname'
AND DDLSPACENAME = 'current tablespacename';
```

All other sites:

```
UPDATE PSRECTBLSPC
SET DDLSPACENAME = 'new tablespacename'
WHERE DDLSPACENAME = 'current tablespacename';
```

To update each table individually, add the following clause to the predicate of the above statement, making sure you use the record name in this clause:

```
AND RECNAME = record name
```

The SETSPACE report contains the table name. The record name will not have the “PS_” prefix.

You can double-check that you created all tablespaces by rerunning the SETSPACE.SQR report. If you created all tablespaces for records defined in PeopleSoft PeopleTools, the report will be empty.

- When you edit the Create and Alter scripts, you can change the SQL to create the tables in the correct tablespaces. Later in this task you will set tablespace names, which will update PeopleSoft PeopleTools with the correct tablespaces or database/tablespace in DB2 z/OS. The report should be empty at that time.

Note. For DB2 z/OS sites, the SETSPACE report may list some database/tablespace combinations as “Table Undefined - DB/TS OK” when in fact the database name is one that was defined for your Demo database. This occurs if your Demo and Copy of Production databases are in the same DB2 subsystem. The SETSPACE.SQR detected that the database/tablespace combinations do exist in the subsystem and are therefore valid. Make sure that you update these database/tablespace names to match those that exist in your Copy of Production, using the instructions above.

Note. During the Move to Production pass, you will create these tablespaces when you populate tablespace data. You can reuse this script, or you can create a new script for your production environment. To reuse the script you have created for this task, save it and copy it into the PS_HOME\SCRIPTS directory that you use during the Move to Production pass.

See the Enterprise PeopleTools installation guide for DB2 UDB for z/OS for your new release, “Creating a Database,” Correcting Invalid Database/Tablespace Combinations.

See Modifying the Database Structure, Editing the Create and Alter Scripts.

See Modifying the Database Structure, Setting Tablespace Names.

See “Apply PeopleTools Changes,” Populating Tablespace Data.

See “Apply Changes to Production Database,” Performing the Move to Production.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	Oracle Informix DB2 z/OS DB2 UNIX/NT	All

Task 4-4: Backing Up After the Upgrade Copy

Back up your database now. This enables you to restart your upgrade from this point, should you experience any database integrity problems during the remaining tasks in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-5: Configuring ChartFields

This section discusses:

- Understanding ChartFields
- Updating Inactive ChartFields
- Copying UPG CF CONFIG Project Definition
- Building the UPG CF CONFIG Script
- Running the UPG CF CONFIG Script
- Exporting Configuration Defaults
- Importing Configuration Defaults

- Running Configuration by Project Process
- Updating Asset Management ChartField SQC
- Exporting ChartField Configuration
- Importing ChartField Configuration

Understanding ChartFields

In this task you will apply your existing ChartField configuration to the new PeopleSoft objects that have been copied into your database. You will accomplish this by running the Configuration by Project process. The process will dynamically create the project UPG_CFDBCOMP containing the new objects, and use this project in running ChartField Configuration by Project.

Since this task simply applies your existing configuration actions with a Complete status to the new objects, you will also need to run the Full Configuration process after completing the upgrade in the following cases:

- You need to make changes to your current PeopleSoft ChartField configuration that did not exist in the previous release (for example, activate an additional ChartField, relabel a ChartField and so forth).
- You have licensed new products and you have not yet run the Full Configuration process to configure those products.

See *PeopleSoft Enterprise Application Fundamentals 9.0 PeopleBook* “Configuring ChartFields.”

Task 4-5-1: Updating Inactive ChartFields

This step updates the PSDBFIELD table to reflect which ChartFields were previously active or inactive in your Copy of Production database before the upgrade.

The script name for your upgrade is:

DLEPFAU40.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-5-2: Copying UPG CF CONFIG Project Definition

This step copies the project definition from the Demo database to the Copy of Production database. This will only copy the project definition, not the objects in the project.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-5-3: Building the UPG CF CONFIG Script

This step generates the UPG_CF_CONFIG.SQL script that contains SQL to alter existing tables. This SQL will create and alter tables, and create views.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-5-4: Running the UPG CF CONFIG Script

In this step, you run the SQL script generated in the previous step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-5-5: Exporting Configuration Defaults

This script exports ChartField configuration data from the Demo database. This data is considered system data needed for the ChartField configuration steps that follow. The script name for your upgrade path is:

DLCGFAS19E.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-5-6: Importing Configuration Defaults

This script imports the ChartField configuration data into the Copy of Production database. The script name for your upgrade path is:

DLCGFAS19I.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-5-7: Running Configuration by Project Process

This step runs the AE process UPG_CFCONFIG. This process applies all existing ChartField configuration actions on table FS_CF_ACT_LOG with a CF_STATUS of C (Complete) to the objects in project UPG_CFDBCOMP. Project UPG_CFDBCOMP is created by the process and contains records from the upgrade compare project UPGDBCOMP1 and pages from the upgrade compare project UPGDBCOMP2.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-5-8: Updating Asset Management ChartField SQC

This step runs the SQR AMCFBULD, which updates the file AMCHARTS.SQC. Once the process completes successfully, you will find a new AMCHARTS.SQC in your TEMP directory. Move AMCHARTS.SQC into your production SQR directory.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	Asset Management	All	All

Task 4-5-9: Exporting ChartField Configuration

To avoid running the ChartField Configuration process again in the Move to Production passes, this step exports the data updated by this process from your first Copy of Production database. The script name for your path is:

MVCGFAU25E.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	MTP	All	All	All

Task 4-5-10: Importing ChartField Configuration

This script imports the data into the new Copy of Production Database. The script name for your path is:

MVCGFAU25I.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 4-6: Modifying Trigger Tables

This section discusses:

- Understanding Modifying Trigger Tables
- Building the Trigger Sync Script
- Running the Trigger Sync Script

Understanding Modifying Trigger Tables

In this task, you alter without delete some tables on which the triggers on another set of tables depend. This particular task must occur outside of the standard Modifying Database Structure tasks due to restrictions that the table naming conventions impose on the build order of these tables.

Task 4-6-1: Building the Trigger Sync Script

This step generates the SQL script to alter without delete a set of tables on which the triggers on another set of tables depend. The script name for your upgrade path is:

UPG_SPL_DELSYNCH.SQL

Note. If you are upgrading from PeopleSoft 8.80, this step may produce warnings, since the records being altered would be new for your install.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-6-2: Running the Trigger Sync Script

In this step, you run the SQL script generated in the previous step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7: Modifying the Database Structure

This section discusses:

- Understanding Modifying the Database Structure
- Backing Up for DB2
- Building the Upgrade Tables Script
- ReCreating Upgrade Tables
- Creating the ALLTEMPTABS Project
- Building the Create Temp Tables Script
- Creating the ALLTABS Project
- Building the Create and Alter Scripts
- Editing the Create and Alter Scripts
- Creating Temporary Tables
- Creating Tables
- Altering Tables
- Creating Indexes
- ReCreating Triggers
- Reviewing the Create Indexes Log
- Creating Indexes for Data Conversion
- Creating Upgrade Views
- Setting Index Parameters
- Setting Temp Table Tablespace Names
- Setting Tablespace Names
- Setting Record Parameters
- Generating a DB2 UNIX RUNSTATS Script
- Updating Statistics for DB2 UNIX
- Updating Statistics for DB2 zOS
- Updating Statistics for Informix

- Updating Statistics for Oracle

Understanding Modifying the Database Structure

In this task you create and run various scripts and processes that will modify your database structure, including creating new tables and indexes, altering tables that have changed, and re-creating modified indexes.

Note. In the Change Assistant job, some of the steps may complete without error, but display a Warning icon indicating that warning messages exist in the log file.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your new release, “Error Handling.”

Task 4-7-1: Backing Up for DB2

If you are using the DB2 z/OS platform, back up your database now. This enables you to restart your upgrade from this point if you should experience any database integrity problems during the remaining tasks in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	DB2 z/OS	All

Task 4-7-2: Building the Upgrade Tables Script

This step generates the SQL script to drop and re-create all the tables in the project named UPGCONVERT. These tables will be used during data conversion by Application Engine programs. They can be safely dropped at this time because they do not contain application data required by your PeopleSoft system.

The script name for your upgrade path is:

```
UPGCONVERT_CRTTBL.SQL
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-3: ReCreating Upgrade Tables

This step runs the SQL script you generated to re-create all the tables in the project named UPGCONVERT.

The script name for your upgrade path is:

```
UPGCONVERT_CRTTBL.SQL
```


Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-4: Creating the ALLTEMPTABS Project

This step creates a project named ALLTEMPTABS and inserts all records of the type *Temporary Table*.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-5: Building the Create Temp Tables Script

This step generates the SQL script to drop and re-create all the records of type Temporary Table in the database. Processes use the Temporary Tables dynamically in your system. They can be safely dropped at this time because they do not contain transaction data required by your PeopleSoft system.

The script name for your upgrade path is:

ALLTEMPTABS_CRTTBL.SQL

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-6: Creating the ALLTABS Project

This step creates a project named ALLTABS and inserts all records of the type *Table*.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-7: Building the Create and Alter Scripts

This step generates the SQL script to create all new records of the type *Table*. The script name is:

ALLTABS_CRTTBL.SQL

This step generates the SQL script to alter all existing records of the type *Table*. This script is referred to as Alter Without Deletes. The tables are altered to add new columns, rename existing columns and change columns that have modified properties, such as length. Columns that will eventually be deleted will still exist on the tables after this script is executed. The script name is:

ALLTABS_ALTTBL.SQL

This step also generates the SQL script to create new indexes and to re-create modified indexes as needed for the tables in the first two scripts. The script name is:

ALLTABS_CRTIDX.SQL

Note. This step also creates the script ALLTABS_CRTTRG.SQL, which re-creates all database triggers. You do not need to run this script, because all database triggers will be created in the “Finalizing the Database Structure” task.

Note. For DB2 z/OS sites, if this step takes an exceptionally long time, performing a RUNSTATS on the system catalog tablespace SYSDBASE may improve performance.

See Finalizing the Database Structure.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-8: Editing the Create and Alter Scripts

In this step, you will edit the SQL create and alter scripts for tablespace names and sizing. The script names for your upgrade path are:

ALLTEMPTABS_CRTTBL.SQL
 ALLTABS_CRTTBL.SQL
 ALLTABS_ALTTBL.SQL
 ALLTABS_CRTIDX.SQL

If you are not using the PeopleSoft tablespace names, you will need to review and modify the scripts above. When the new record was copied to the Copy of Production database, the PeopleSoft default tablespace name was copied as well. When you performed the step, “Create New Tablespaces,” you were given the option to correct the tablespace names online or to wait and edit the scripts. After you have completed running these scripts you will run the programs that synchronize the PeopleTools definitions with the database catalog again. Therefore, any changes you make to the scripts now will be reflected in the PeopleTools definition. Have your database administrator review these scripts and modify the tablespace names appropriately.

Many of the new tables and indexes will be populated during the upgrade. If they are not sized appropriately for your database, the conversion programs will stop with errors. After the upgrade is complete, you may want your database administrator to review and make adjustments to the amount of free space left in some of the tables or tablespaces.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS DB2 UNIX/NT Oracle Informix	All

Task 4-7-9: Creating Temporary Tables

This step runs the SQL script you generated to create all the records of the type *Temporary Table*. The script name for your upgrade path is:

```
ALLTEMPTABS_CRTTBL.SQL
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-10: Creating Tables

This step runs the SQL script you generated to create all the records of the type *Table*. This step creates new table structures in your database. The script name for your upgrade path is:

```
ALLTABS_CRTTBL.SQL
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-11: Altering Tables

This step runs the SQL script you generated to alter the existing records of type *Table*. This step alters existing PeopleSoft table structures to comply with your new PeopleSoft release.

The script name for your upgrade path is:

```
ALLTABS_ALTTBL.SQL
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-12: Creating Indexes

This step runs the SQL script you generated to create indexes on records of the type *Table*. This step creates or modifies indexes as required.

The script name for your upgrade path is:

ALLTABS_CRTIDX.SQL

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-13: ReCreating Triggers

This step executes the script CREATETRGR.DMS, which will re-create all PeopleSoft triggers in the database. The triggers on PeopleSoft tables were invalidated when the tables were altered and need to be re-created.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 4-7-14: Reviewing the Create Indexes Log

When Change Assistant runs the create indexes script to create indexes, it will not stop when it encounters errors. When you view the log file, you will see that some indexes cannot be created due to unique index constraints. The data causing those indexes to fail will be updated during the task, “Running Data Conversion.” The indexes will then create successfully during the task, “Finalizing the Database Structure.”

Review the errors in the log file. Unique constraint errors are acceptable. If you see any other types of index creation errors, such as space problems, you must correct them before you continue with the upgrade. If you do not correct the errors, it may degrade your performance during data conversion.

The log file name for your upgrade path is:

ALLTABS_CRTIDX.LOG

See Running Data Conversion.

See Finalizing the Database Structure.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-15: Creating Indexes for Data Conversion

During this step, you will create indexes to improve performance during data conversion. These indexes are only used for the purposes of data conversion. They are not required for regular operation of the products, therefore they were not created in previous steps nor are they delivered with the record definitions on the Demo database. In this step you are asked to manually create those indexes that apply to you (not using Application Designer).

It is important to follow the following naming convention so the Alter with Deletes script you run in the task “Finalizing Database Structure” will drop these indexes automatically. Use PS[X]Record Name where X is any letter A-Z. For example, if you have to create an index for table PS_COUNTRY_TBL a proper index name would be PSUCOUNTRY_TBL. If an additional index is required for that same table, you can then name it (for example) PSYCOUNTRY_TBL. However, it is important to ensure that the new name of the index you are creating is not defined in the database already.

Not all listed indexes are required for all customers. Reading the comments with each listed index will help you determine if the index is applicable to your specific upgrade. Work with your database administrator to create a script that will build the indexes in your Copy of Production. You can then modify the Change Assistant Template to automate this step (for the initial pass and all future passes too). To do that, go to the Upgrade Template view, then right-click on the step and edit the step properties. Add your script name, without the file extension, in the Script/Procedure field and change the Type to SQL Script.

After reading the comments to determine whether the index is applicable to your situation, create or modify the following indexes in your Copy of Production database:

Table	With Columns	Comments
PS_CUST_CONVER_DTL	CONVR_QUALIFIER_CD BUSINESS_UNIT CUST_ID CONVR_QUAL_FIELD ITEM_LINE	This index should be non-unique. ARM05 will use this table to update all ITEM records where a CUST_CONVER_DTL exists. (CONVR_QUAL_FIELD is ITEM when CONVR_QUALIFIER_CD = 'I').
PS_ITEM	VAT_ENTITY	This index should be non-unique. It is only used when processing VAT in Receivables. It will improve performance for several steps in section ARM05.
PS_ITEM_ACTIVITY	ITEM ITEM_LINE GROUP_BU GROUP_ID	This index should be non-unique. It will significantly improve performance for step ARY01.Step06 in populated fields TRAN_FROM_BU and TRAN_FROM_CUSTID.

Table	With Columns	Comments
PS_PENDING_ITEM	ITEM ITEM_LINE GROUP_BU GROUP_ID	This index should be non-unique. It will significantly improve performance for step ARY01.Step06 in populated fields TRAN_FROM_BU and TRAN_FROM_CUSTID.
PS_PENDING_ITEM	VAT_ENTITY	This index should be non-unique. It is only used when processing VAT in Receivables. It will improve performance for several steps in section ARM01.
PS_PYMNT_ADVICE	BANK_SETID BANK_CD BANK_ACCT_KEY PYMNT_ID	This index should be non-unique. It will significantly improve performance for step APK01-A.Step02.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-16: Creating Upgrade Views

This step will create the views included in the project definition UPGVIEWS. These views are only needed for the manual setup tasks between here and running data conversion as well as data conversion itself.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-7-17: Setting Index Parameters

This step updates index overrides stored in the PSIDXDDLARM table. The values stored in the PARMVALUE field are updated with current values found in the system catalog. The name of the process is:

```
SETINDEX.SQR
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle DB2 z/OS	All

Task 4-7-18: Setting Temp Table Tablespace Names

This step populates the PeopleTools table PSRECTBLSPC with the table name, database name, and tablespace name information for the temporary table instances created on the database in a previous step. This information will be required by processes that perform in-stream RUNSTATS (%UpdateStats) on the temporary table instances. The name of the process is:

SETTMPIN.SQR

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 4-7-19: Setting Tablespace Names

This step populates all tablespace information in the PSRECTBLSPC table. The values stored in the DDLSPACENAM field are updated with current values found in the system catalog. If you modified tablespace names when you edited the SQL script that created your new tables from the Oracle-delivered names, this will make those same changes in the PeopleSoft record definition. The name of the process is:

SETSPACE.SQR

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle Informix DB2 UNIX/NT DB2 z/OS	All

Task 4-7-20: Setting Record Parameters

This step updates table overrides stored in the PSRECDDLPRM table. The values stored in the PARMVALUE field are updated with the current values found in the system catalog. The name of the process is:

SETTABLE.SQR

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 4-7-21: Generating a DB2 UNIX RUNSTATS Script

This step executes the RUNSTATS.SQR that creates the RUNSTATS.SQL to update the statistics on DB2 UNIX/NT.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 UNIX/NT	All

Task 4-7-22: Updating Statistics for DB2 UNIX

Earlier in the upgrade process, you updated your statistics. Now that you have copied your new objects and created new indexes, update your statistics again. Run the RUNSTATS.SQL script created in the previous step to improve performance of your data conversions and generation of the Alter with Delete script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 UNIX/NT	All

Task 4-7-23: Updating Statistics for DB2 zOS

Earlier in the upgrade process, you updated your statistics. Now that you have copied your new objects and created new indexes, update your statistics again to improve performance of your data conversions and generation of the Alter with Delete script. Contact your database administrator to have the statistics updated on your database before proceeding with your upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS	All

Task 4-7-24: Updating Statistics for Informix

Earlier in the upgrade process, you updated your statistics. Now that you have copied your new objects and created new indexes, update your statistics again to improve performance of your data conversions and generation of the Alter with Delete script.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Informix	All

Task 4-7-25: Updating Statistics for Oracle

Earlier in the upgrade process, you updated your statistics. Now that you have copied your new objects and created new indexes, update your statistics again to improve performance of your data conversions and generation of the Alter with Delete script. Contact your database administrator to have the statistics updated on your database before proceeding with your upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

Task 4-8: Loading Data for Data Conversion

This section discusses:

- Swapping Languages on System Data
- Exporting Application Messages
- Importing Application Messages
- Exporting Record Groups
- Importing Record Groups
- Exporting the System Setup Data
- Importing the System Setup Data
- Exporting the PW Pagelet Data
- Importing the PW Pagelet Data
- Exporting the Pagelet Wizard Data
- Importing the Pagelet Wizard Data
- Exporting Upgrade Defaults
- Importing Upgrade Defaults
- Exporting Application Data
- Importing Application Data
- Exporting Data Conversion Driver Data

- Importing Data Conversion Driver Data

Task 4-8-1: Swapping Languages on System Data

This script swaps the base language for tables that contain system data on your Demo database and have related language data, in preparation for the system data exports in the next step. This script should be run only if your Copy of Production has a base language other than English. The script name for your upgrade path is:

DLEPLASWAP.DMS

If you want to make this step automated, follow the steps below.

To make this step automated:

1. Select the step Swapping Languages on System Data in Change Assistant.
2. Open the Step Properties dialog box.
3. Change the Type from *ManualStop* to *DataMoverUser*.
4. Click OK.
5. In your upgrade job, mark the step as Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	Non-English Base Language

Task 4-8-2: Exporting Application Messages

This step exports Application Messages data from the Demo database. The script name for your upgrade path is:

DLUPX01E.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-8-3: Importing Application Messages

This step imports Application Message data into your Copy of Production database. Message Sets 0-999 are overlaid during the PeopleTools Upgrade. Application Message Sets 1000-19,999 are overlaid with this task. If you have added custom messages in this set range, you must add those messages again at the end of the upgrade. To prevent this from happening again in future maintenance or upgrades, add your custom messages in a set range of 20,000 or greater.

Note. If the script fails, verify that your Configuration Manager Profile output and input directories are set to the same location. If not, this could be the cause of the problem.

The script name for your upgrade path is:

DLUPX01I.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-8-4: Exporting Record Groups

This step exports Record Group data from the Demo database. The script name for your upgrade path is:

DLUPX02E.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-8-5: Importing Record Groups

This step imports Record Group data and populates Set Control data in your Copy of Production database. The following records are related to Record Groups and Set Control data:

- REC_GROUP_REC
- REC_GROUP_TBL
- SET_CNTRL_TBL
- SET_CNTRL_GROUP
- SET_CNTRL_REC
- SETID_TBL

The import script deletes from, and then reloads, the Record Group tables, REC_GROUP_REC and REC_GROUP_TBL. These are the tables that are modified when you use PeopleTools, Utilities, Administration, Record Group. The script then rebuilds the related setID tables, PS_SET_CNTRL_GROUP and PS_SET_CNTRL_REC. The PS_SET_CNTRL_TBL and PS_SETID_TBL tables contain the setIDs you use in your system; this script does not update PS_SET_CNTRL_TBL. However, it does check for orphan setID references in PS_SET_CNTRL_REC and adds the missing setIDs to PS_SETID_TBL.

If you have moved an Oracle-delivered record into a custom added record group, and deleted the record from the Oracle-delivered record group, this script will put the record back into the Oracle-delivered record group and remove it from the custom added record group.

If you have created a new record group, it will be deleted in this step if all of its records are assigned to Oracle-delivered record groups in the new release. To continue using your custom record group, you will need to re-create it in the Reapply Customizations task.

This script creates an output file and uses it to create a temporary table. To run successfully, the Configuration Manager input and output Data Mover directories should be the same.

Note. If the script fails, verify that your Configuration Manager Profile output and input directories are set to the same location. If not, this could be the cause of the problem.

The script name for your upgrade path is:

DLUPX02I.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-8-6: Exporting the System Setup Data

This script exports the contents of the Message, Strings, Stored Statements, Record Group, data conversion driver, EDI, and Mass Change tables from the Copy of Production database during your Move to Production passes. During the initial pass, you ran other scripts to load this data and in some cases had to reapply customizations. This script exports the entire contents of these tables, including customizations, so that you will not need to reapply them after the Move to Production. The script name for your upgrade path is:

MVAPPEXP.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	MTP	All	All	All

Task 4-8-7: Importing the System Setup Data

This script imports the data exported in the previous step into your New Copy of Production database during your Move to Production passes. This script replaces many scripts that you ran in the initial pass. It will move all data in these tables so that any customizations you have added to these tables during your initial pass will be moved to your New Copy of Production database. Also, it will rebuild the Set Control tables using the Record Groups from the Copy of Production database and your current Set Control values on the New Copy of Production database. The script name for your upgrade path is:

MVAPPIMP.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 4-8-8: Exporting the PW Pagelet Data

This script exports the application-specific Pagelet Wizard pagelet definition, header, footer, and category tables from the Demo database in the initial pass. The script name is:

DLUPX14E.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-8-9: Importing the PW Pagelet Data

This script imports the application-specific data for the Pagelet Wizard pagelet definition, header, footer, and category tables into your Copy of Production database during the initial pass. This data is needed for the data conversion. The script name is:

DLUPX14I.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-8-10: Exporting the Pagelet Wizard Data

This script exports the contents of the Pagelet Wizard tables from the Copy of Production database during your Move to Production passes. During the initial pass, you ran programs and scripts to load this data and in some cases had to make changes. This script exports the entire contents of these tables, including changes, so that you will not need to reapply them after the Move to Production. This data is needed for the data conversion. The script name is:

MVUPX16E.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	MTP	All	All	All

Task 4-8-11: Importing the Pagelet Wizard Data

This script imports the Pagelet Wizard tables from the Copy of Production database into the New Copy of Production during your Move to Production passes. This script replaces processes that you ran in the initial pass. It will move all data in the affected tables so that any changes you have made during your initial pass will be moved to your New Copy of Production database. This data is needed for the data conversion. The script name is:

MVUPX16I.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 4-8-12: Exporting Upgrade Defaults

This script exports the upgrade default data values and mapping during your Move to Production passes. This is the data that you set up during the chapter “Prepare Your Database” of your initial upgrade pass. You will load this information into your New Copy of Production later in the Move to Production upgrade pass. The script name for your upgrade path is:

MVEP89EXP.DMS

See “Prepare Your Database.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	MTP	All	All	All

Task 4-8-13: Importing Upgrade Defaults

This script imports the upgrade default data values and mapping that you set up during the chapter “Prepare Your Database,” of your initial upgrade pass. The script name for your upgrade path is:

MVEP89IMP.DMS

See “Prepare Your Database.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 4-8-14: Exporting Application Data

This script exports data from the Demo database for various application system data tables. The script name for your upgrade path is:

DLEPUPM33E.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Both	All	All	All

Task 4-8-15: Importing Application Data

This script imports data into your Copy of Production database. These tables are various application system data tables that contain data required for some data conversion programs. The remaining application system data will be loaded after tables are altered to delete obsolete columns. The script name for your upgrade path is:

DLEPUPM33I.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-8-16: Exporting Data Conversion Driver Data

This step exports data conversion Application Engine driver data from the Demo database. The script name for your upgrade path is:

DLUPX03E.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-8-17: Importing Data Conversion Driver Data

This step imports data conversion Application Engine driver data into your Copy of Production database.

The script name for your upgrade path is:

DLUPX03I.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-9: Restoring New Release Demo

Restore your New Release Demo database from the backup you took in Chapter 1 earlier in the upgrade. The backup was taken before projects were copied and scripts were run against the Demo database. This is done to restore the environment to the original Demo database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-10: Applying Updates Before Data Conversion

You should have downloaded and applied Required For Upgrade updates just after you installed your Demo database. Now is a great time to check PeopleSoft Customer Connection again for any new postings, and apply them now. Before data conversion, you should also verify that you have the most current UPGCONVERT.EXE.

This is just one place that you can apply updates. There are other places in the upgrade process where applying updates may be applicable as well. How you apply the update varies depending on where you are in the upgrade.

See Appendix: “Applying Fixes Required for Upgrade.”

Important! Apply all fixes listed under the product line/release, even if you have not licensed the product the fix is listed under. There are many interdependencies between products and database objects. If you do not apply the fix, you may be introducing another error in a different area of the conversion code.

To apply PeopleSoft project fixes before data conversion:

1. Download Required for Upgrade Change Packages using the “Download Change Package” functionality in Change Assistant.
2. Use Change Assistant to install and apply the updates into your Demo database for this upgrade pass. Review the documentation included with each update prior to applying the update.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your current release.

3. The project is now loaded on your Demo database. You should run a project compare to make sure the objects in the fix will not overwrite any of your customizations. If you find customizations, you must decide how to deal with them before you copy the fix to your Copy of Production.
4. If you are performing a Move to Production upgrade pass, first migrate the Change Packages into the Source database for this upgrade pass. If needed, first set up Change Assistant with the environment information for your Source database. If you customized any of the objects delivered in the Change Package, you should repackage the fix to include your customizations. If you did not customize any objects delivered in the fix you may directly apply it to the Source database.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your new release, “Applying Updates.”

5. Migrate the Change Packages into the Target database for this upgrade pass. If needed, first set up Change Assistant with the environment information for your Target database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-11: Configuring Scheduler and Server

You can manually run data conversion jobs on the server. Refer to the appendix “Improving Performance” for instructions. If you choose to run data conversion manually, configure and start your process scheduler and application servers now.

Tips for configuring and starting the application server:

- Make sure the application server domain being configured points to the Target database for this pass of the upgrade.
- Set a different JSL port for each database instance.

See the Enterprise PeopleTools installation guide for your database platform for the new release.

See Appendix: “Improving Performance.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-12: Backing Up Before Data Conversion

Back up your database now. This enables you to restart your upgrade from this point, should you experience any database integrity problems during the remainder of the tasks in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-13: Running Data Conversion

This section discusses:

- Reviewing Data Conversion Tips
- Running Data Conversion for Group 1
- Running Data Conversion for Group 2
- Running Data Conversion for Group 4
- Running Data Conversion for Group 11

Note. In this task you will populate new tables and columns. Earlier, you altered tables and added all new and modified columns. You did not, however, remove obsolete columns. The following steps will move data from the obsolete columns to the new columns and tables. Later in this chapter, in the task “Finalizing the Database Structure,” you will generate and run SQL to delete those obsolete columns. The Upgrade Driver Application Engine program, UPG_DATACONV, will run all upgrade data conversions.

Task 4-13-1: Reviewing Data Conversion Tips

This section discusses:

- Upgrade Driver Program – UPG_DATACONV
- Data Conversion Documentation
- Running Data Conversion Concurrently
- Writing Data Conversion for Your Non-Oracle Records
- Data Conversion Errors Expected During the Initial Upgrade Pass
- Restarting Data Conversion

Upgrade Driver Program – UPG_DATACONV

UPG_DATACONV is an Application Engine program designed to run all upgrade data conversions. Each time the program is run during an upgrade pass, Change Assistant passes a group number parameter to the program. The program then reads the table PS_UPG_DATACONV, selecting all rows with that group number and ordering them by the sequence number on the row. A list of Application Engine library sections that must be run for data conversion is returned. The program then calls each section in the order of the sequence number. You can review the sections that are called by the Upgrade Driver program by accessing the Define Upgrade Drivers page on the Demo database.

Data Conversion Documentation

Each section called by the Upgrade Driver program contains comments describing the underlying conversion. By running the UDATACNV.SQR report you can find which sections are called by the Upgrade Driver program and what they are doing.

See Appendix: “Using Data Conversion Utilities.”

Running Data Conversion Concurrently

Each data conversion step in this task corresponds to a group number as defined in the Define Upgrade Drivers page. Each group is independent of the others unless otherwise documented, allowing the groups to be run concurrently. Oracle recommends that you run data conversion in the order it appears in your template during the initial upgrade pass to determine processing times. This is why the Change Assistant templates are delivered with the data conversion steps' "Run Concurrently" property set to *No*. To reduce overall processing time during your Move to Production passes, you may decide to run some or all conversion steps concurrently. To run steps concurrently, reset the "Run Concurrently" property to *Yes* in your Change Assistant template.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your new release.

Writing Data Conversion for Your Non-Oracle Records

The data conversion code delivered for this upgrade was written to handle only Oracle-delivered records. You may have added your own records to the system. To convert data in the underlying tables, you may need to create your own Application Engine library. The Upgrade Driver program can call an Application Engine library section that you create. To have the Upgrade Driver program call your custom section during this task, you will need to add the section on the Define Upgrade Drivers page.

See Appendix: "Using Data Conversion Utilities."

Data Conversion Errors Expected During the Initial Upgrade Pass

During your initial upgrade pass you can expect to have data conversion programs fail. This is because your PeopleSoft software installation is unique, which makes it difficult to write data conversions that will work for everyone all of the time. Your database may be larger than most, you may have customized Oracle-defined records, or you may not have copied all object deletions onto your Copy of Production. These differences will cause data conversion to fail. You must fix each problem on your initial Copy of Production and restart the Application Engine program. Your fixes will be automatically copied to your New Copy of Production during the Move to Production passes and data conversion will run smoothly.

If you have customized records that are delivered from Oracle, you may need to make changes to the Application Engine programs to handle these customizations. For example, here are two situations in which you may need to customize data conversion code:

- If you added fields to a Oracle-delivered record, you may need to add your additional fields to the conversion code for those records.
- If a Oracle-delivered record you customized will be deleted, you may need to add your own conversions to move the data to a new location.

Use the Find In feature of Application Designer to determine which Application Engine programs affect your customized records.

To use the Find In feature:

1. Create a project and add all Application Engine programs and related objects that have a name starting with *UPG* and save the project.
2. Select Edit, Find In.
3. Enter each customized record name in the Find What field and your project name in the Project field.
4. Click Find.

The results will appear in the output window.

Document any changes you make to data conversion programs. This way, if a new version of the program is delivered through Customer Connection, you will know exactly what changes you have made. You can then reapply the changes to the new version of the program.

If your database is large, you may have data conversion programs that fail due to running out of space as you move data from one table to another. This problem can happen on all RDBMS platforms, but is more of a problem on those platforms using tablespaces. If your data conversion terminates abnormally with a space error, examine the Application Engine SQL statements that caused the problem. Determine where the data is coming from and how much will be moved. Have your database administrator adjust the allocated space accordingly. The data conversion can then be restarted.

If you get a data conversion error because a field does not exist on a table, and the field is not one you have customized, check your field renames. If a field that appears on a record that is deleted in the new PeopleSoft release but was not deleted in your compare and copy, your table will be out of sync with what is expected by data conversion. If you had deleted the record, the rename would not happen on the physical table and the field would have the old name. This is what the data conversion program expects. If you did not delete the record, the field was renamed during the altering of tables and the data conversion program will terminate abnormally. Edit the Application Engine SQL to use the name, which is now on your table, and then restart the data conversion.

See Appendix: “Using the Comparison Process.”

Restarting Data Conversion

Before restarting a data conversion step, rename the log file. Change Assistant uses the same log file name each time you start or restart an Application Engine program. This means that the restarted Application Engine program will replace the original log file if it is not renamed.

If your data conversion program fails, fix the problem on your Copy of Production and restart the program. When you set the data conversion step to Restart in your Change Assistant job, it will rerun the program using the PROCESS_INSTANCE and RUN_CNTL_ID from the initial run and the conversion will restart right after the last committed SQL command. Application Engine keeps track of data committed to the database in the table PS_AERUNCONTROL, keyed by PROCESS_INSTANCE and RUN_CNTL_ID.

See Finalizing the Database Structure.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-13-2: Running Data Conversion for Group 1

This step runs the UPG_DATACONV Application Engine program for Group 1. For additional documentation for Group 1, run the UDATACNV report.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-13-3: Running Data Conversion for Group 2

This step runs the UPG_DATACONV Application Engine program for Group 2. If you want to see additional documentation for Group 2, then run the UDATACNV report.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-13-4: Running Data Conversion for Group 4

This step runs the UPG_DATACONV Application Engine program for Group 4. If you want to see additional documentation for Group 4, then run the UDATACNV report.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-13-5: Running Data Conversion for Group 11

This step runs the UPG_DATACONV Application Engine program for Group 11. If you want to see additional documentation for Group 11, then run the UDATACNV report.

Group 11 must execute after all other groups complete successfully. If you decide to run groups concurrently, Group 11 must run after all other groups have completed.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-14: Backing Up After Data Conversion

Back up your database now. This enables you to restart your upgrade from this point, should you experience any database integrity problems during the remaining tasks in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-15: Finalizing the Database Structure

This section discusses:

- Understanding Final Database Structure
- Building the Alter with Deletes Scripts
- Altering Tables with Deletes
- Creating Indexes Again
- Creating Triggers
- Running the AE SYNCIDGEN Process
- Creating All Views

Understanding Final Database Structure

Now that Data Conversion is completed, this task will alter the tables to remove obsolete columns, and create final indexes and views.

Task 4-15-1: Building the Alter with Deletes Scripts

This step uses the previously created project ALLTABS and generates three SQL scripts: one that will alter tables to drop obsolete columns, one that will also create any remaining indexes that could not be created with the first alter, and one that will create triggers. The script names are:

```
ALLTABS_DEL_ALTTBL.SQL
ALLTABS_DEL_CRTIDX.SQL
ALLTABS_DEL_CRTRTG.SQL
```

Important! All indexes should create when the ALLTABS_DEL_CRTIDX.SQL script is run. When a unique index fails to create, it is probably due to a data conversion issue. If a unique index fails to create, you must resolve the issue and not simply remove the index. To prevent this issue, you can back up tables in the ALLTABS_DEL_ALTTBL.SQL script that will be dropping recfields that have data. This way, if you have an issue you may have the old fields and data you need to correct it.

Note. For DB2 z/OS sites, if this step takes an exceptionally long time, performing a RUNSTATS on the system catalog tablespace SYSDBASE may improve performance.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-15-2: Altering Tables with Deletes

This step executes the script ALLTABS_DEL_ALTTBL.SQL, which was generated in the previous step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-15-3: Creating Indexes Again

This step executes the script ALLTABS_DEL_CRTIDX.SQL, which was generated in the previous step. All indexes should create at this time.

Important! Review the log to find any unique indexes that might have failed to create. All indexes should create at this time, so those errors are not acceptable and should be corrected. When a unique index fails to create, it is probably due to a data conversion issue.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-15-4: Creating Triggers

This step executes the script ALLTABS_DEL_CRTTRG.SQL, which was generated in a previous step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-15-5: Running the AE SYNCIDGEN Process

This step executes the AE_SYNCIDGEN Application Engine program. Mobile applications use Sync IDs to give each row a unique identifier. For any tables with the Sync ID column set to the default value of zero, the AE_SYNCIDGEN program will populate the column with the next valid Sync ID value.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-15-6: Creating All Views

This step runs CREATEVW.DMS to re-create all views in the Copy of Production database. The script will try to create every view in Application Designer. If there is an error on one view, it will keep going until it gets to the end of the list.

Important! Review the log to find any views that failed to create. All views should create at this time, so those errors are not acceptable and should be corrected.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-16: Running Maintenance Pack Scripts

This section discusses:

- Understanding Running Maintenance Pack Scripts
- Running the Accounts Payable Script
- Running the Accounts Receivable Script
- Running the Contract Management Script
- Running the General Ledger Script
- Running the Order Management Script
- Running the Purchasing Script
- Running the Work Order Script
- Running the Strategic Sourcing Script
- Updating the Maintenance Log Table

Understanding Running Maintenance Pack Scripts

This task runs the scripts required for maintenance pack updates.

Task 4-16-1: Running the Accounts Payable Script

This step runs the DataMover commands delivered with PeopleSoft FSCM 9.0 Maintenance Pack 5 for accounts payable tables.

The script for your upgrade is:

MPAPX01.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-16-2: Running the Accounts Receivable Script

This step runs the DataMover commands delivered with PeopleSoft FSCM 9.0 Maintenance Pack 5 for accounts receivable tables.

The script for your upgrade is:

MPARX01.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-16-3: Running the Contract Management Script

This step runs the DataMover commands delivered with PeopleSoft FSCM 9.0 Maintenance Pack 5 for contract management tables.

The script for your upgrade is:

MPSCMTX01.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-16-4: Running the General Ledger Script

This step runs the DataMover commands delivered with PeopleSoft FSCM 9.0 Maintenance Pack 5 for PeopleSoft Enterprise General Ledger tables.

The script for your upgrade is:

MPGLX01.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-16-5: Running the Order Management Script

This step runs the DataMover commands delivered with PeopleSoft FSCM 9.0 Maintenance Pack 5 for PeopleSoft Order Management tables.

The script for your upgrade is:

MPOMX01.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-16-6: Running the Purchasing Script

This step runs the DataMover commands delivered with PeopleSoft FSCM 9.0 Maintenance Pack 5 for PeopleSoft Purchasing tables.

The script for your upgrade is:

MPPOX01.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-16-7: Running the Work Order Script

This step runs the DataMover commands delivered with PeopleSoft FSCM 9.0 Maintenance Pack 5 for work order tables.

The script for your upgrade is:

MPWOX01.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-16-8: Running the Strategic Sourcing Script

This step runs the DataMover commands delivered with PeopleSoft FSCM 9.0 Maintenance Pack 5 for PeopleSoft Strategic Sourcing tables.

The script for your upgrade is:

```
MPAUCX01.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-16-9: Updating the Maintenance Log Table

This step runs the DataMover script to update the Maintenance Log table with updates included with PeopleSoft FSCM 9.0 Maintenance Pack 5.

The script for your upgrade is:

```
MPFSCM9_MAINT_LOG5.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-17: Loading Data to Complete System Setup

This section discusses:

- Exporting Strings
- Importing Strings
- Exporting EDI Statements
- Importing EDI Statements
- Exporting Mass Change Data

- Importing Mass Change Data
- Exporting XML Service Information
- Importing XML Service Information
- Exporting Related Language System Data
- Importing Related Language System Data
- Exporting Application System Data
- Importing Application System Data
- Exporting Converted Application Base Data
- Importing Converted Application Base Data
- Exporting Notification Template Table
- Importing Notification Template Table
- Exporting Common Portal System Options
- Importing Common Portal System Options
- Exporting Setup Data
- Importing Setup Data

Task 4-17-1: Exporting Strings

This script exports Strings data from the Demo database. The script name for your upgrade path is:

`DLUPX04E.DMS`

This data will be exported during Move to Production by the script MVAPPEXP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-17-2: Importing Strings

This script imports Strings data into the Copy of Production database. The script name for your upgrade path is:

`DLUPX04I.DMS`

This data will be imported during Move to Production by the script MVAPPIMP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-17-3: Exporting EDI Statements

This script exports EDI Statements from the Demo database. The script name for your upgrade path is:

`DLUPX05E.DMS`

This data will be exported during Move to Production by the script MVPRDEXP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-17-4: Importing EDI Statements

This script imports the EDI Statements into the Copy of Production database. The script name for your upgrade path is:

`DLUPX05I.DMS`

This data will be imported during Move to Production by the script MVPRDIMP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-17-5: Exporting Mass Change Data

This script exports Mass Change tables from the Demo database. The script name for your upgrade path is:

`DLUPX06E.DMS`

This data will be exported during Move to Production by the script MVAPPEXP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-17-6: Importing Mass Change Data

This script imports Mass Change tables into the Copy of Production database. The script name for your upgrade path is:

`DLUPX06I.DMS`

This data will be imported during Move to Production by the script MVAPPIMP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-17-7: Exporting XML Service Information

This script exports XML service data from the Demo database. The script name for your upgrade path is:

`DLUPX13E.DMS`

This data will be exported during Move to Production by the script MVPRDEXP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-17-8: Importing XML Service Information

This script imports XML service data into the Copy of Production database. The script name for your upgrade path is:

`DLUPX13I.DMS`

This data will be imported during Move to Production by the script MVPRDIMP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-17-9: Exporting Related Language System Data

This script exports system data from various application-related language tables in your Demo database into a Data Mover *.DAT file. In a later step, this data will be loaded into your Copy of Production. The script name for your upgrade path is:

`DLEPLASYSE.DMS`

Note. During Move to Production passes you can reuse the data files that are created by this export script. Preserve this DAT file, and set the Type of Upgrade property in the Change Assistant template to Initial Upgrade for this step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Both	All	All	All Non-English

Task 4-17-10: Importing Related Language System Data

This script will delete old related language system data from related language tables. The script then imports the data exported by the scripts above. The script name for your upgrade path is:

DLEPLASYSI.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All Non-English

Task 4-17-11: Exporting Application System Data

This script exports system data from various application tables from the Demo database into a Data Mover *.DAT file. In a later step, this data will be loaded into the Copy of Production database. The script name for your upgrade path is:

DLEPSYSE.DMS

Note. During Move to Production passes, you can reuse the data files that are created by this export script. To do this, change the Type of Upgrade from Both to Initial Upgrade in the step properties and save the job.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Both	All	All	All

Task 4-17-12: Importing Application System Data

This script imports the application system data, exported in the previous step, into the Copy of Production database. The script name for your upgrade path is:

DLEPSYSI.DMS

Note. Some of the data will be imported using the *ignore dups* option. These data loads will give the message “Error: duplicate SQL rows” and then give a “Successful completion” message. These error messages can be ignored because duplicate data is expected.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-17-13: Exporting Converted Application Base Data

To avoid running the ChartField Configuration process again in the Move to Production passes, this setup will export selected data updated by this process from your first Copy of Production Database. The tables exported in this script have been updated by some data conversions. The script name for your path is:

MVCGUPY27E.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	MTP	All	All	All

Task 4-17-14: Importing Converted Application Base Data

This script imports your ChartField Configuration data into the new Copy of Production database. The script name for your path is:

MVCGUPY27I.DMS

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 4-17-15: Exporting Notification Template Table

This script exports the notification template information from the Demo database into a Data Mover *.DAT file. In a later step, this data will be loaded into the Copy of Production database. The script name for your upgrade path is:

DLGUPY39E.DMS

Note. During Move to Production passes, you can reuse the data files that are created by this export script. To do this, preserve this DAT file, and set the properties in the template for Initial Upgrade.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Both	All	All	All

Task 4-17-16: Importing Notification Template Table

This script imports the system data, exported in the above step, into the Copy of Production database. The script name for your upgrade path is:

```
DLCGUPY39I.DMS
```

Note. Run this script using bootstrap mode.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-17-17: Exporting Common Portal System Options

This script exports the contents of the Common Portal System Options table from the Demo database. The script name for your upgrade path is:

```
DLEOX01E.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Both	All	All	All

Task 4-17-18: Importing Common Portal System Options

This script imports the Common Portal System Options data into your Copy of Production database. The script name for your upgrade path is:

```
DLEOX01I.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-17-19: Exporting Setup Data

This script exports setup data from the Demo database. The script name for your upgrade path is:

`DLUPX16E.DMS`

This data will be exported during Move to Production by the script MVAPPEXP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Source	Initial	All	All	All

Task 4-17-20: Importing Setup Data

This script imports setup data into the Copy of Production database. The script name for your upgrade path is:

`DLUPX16I.DMS`

This data will be imported during Move to Production by the script MVAPPIMP.DMS.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-18: Loading Stored Statements

This section discusses:

- Understanding Loading Stored Statements
- Running the STORECP Script
- Running the STOREFP Script
- Running the STOREGL Script
- Running the STOREIN Script
- Running the STORELC Script
- Running the STOREMG Script
- Running the STOREPO Script

Understanding Loading Stored Statements

This task loads all the new COBOL stored statements in your database. The STORE*.DMS scripts are located in the PS_HOME\SRC\CBL\BASE directory. These scripts are only delivered if you have licensed the product and should only appear in the Change Assistant job based on the product configuration in the environment definition.

The stored statements scripts are executed only in the initial pass. In the move to production passes, a different script will export the stored statement table, PS_SQLSTMT_TBL, from the first copy of production and import it into the second copy of production.

Task 4-18-1: Running the STORECP Script

STORECP.DMS loads stored statements for COBOL programs owned by the Product Configurator product.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	Product Configurator	All	All

Task 4-18-2: Running the STOREFP Script

STOREFP.DMS loads stored statements for COBOL programs owned by the Flow Production product.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	Flow Production	All	All

Task 4-18-3: Running the STOREGL Script

STOREGL.DMS loads stored statements for COBOL programs owned by the General Ledger product.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	General Ledger	All	All

Task 4-18-4: Running the STOREIN Script

STOREIN.DMS loads stored statements for COBOL programs owned by the Inventory product.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	Inventory	All	All

Task 4-18-5: Running the STORELC Script

STORELC.DMS loads stored statements for COBOL programs for Global products and is loaded for several products that support VAT processing.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	Billing General Ledger Payables eSettlements	All	All

Task 4-18-6: Running the STOREMG Script

STOREMG.DMS loads stored statements for COBOL programs owned by the Manufacturing product.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	Manufacturing	All	All

Task 4-18-7: Running the STOREPO Script

STOREPO.DMS loads stored statements for COBOL programs run by the Purchasing product.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	Purchasing	All	All

Task 4-19: Updating Language Data

This section discusses:

- Understanding Updating Language Data
- Run the TSRECPOP Script

Understanding Updating Language Data

In this task, you run scripts to modify data in PeopleSoft PeopleTools-related language tables.

Note. For DB2 z/OS customers, Oracle recommends that you run RUNSTATS against the system catalog tables at this time.

Task 4-19-1: Run the TSRECPOP Script

In this step, the TSRECPOP script initializes and modifies the data in PeopleSoft PeopleTools-related language architecture tables.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 4-20: Completing PeopleTools Conversion

The PeopleTools Upgrade Driver Application Engine program, PTUPGCONVERT, runs additional PeopleTools upgrade data conversions. The program then reads the table PS_PTUPGCONVERT, selecting all rows with a group number of 02 and ordering them by the sequence number on the row. A list of Application Engine library sections that must be run for data conversion is returned. The program then calls each section in the order of the sequence number. Review the report generated by PTUCONV.SQR for details on the conversions run in this step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-21: Updating Object Version Numbers

In this task, you run the VERSION Application Engine program. This ensures that all of your version numbers are correct and, if not, resets them to 1.

Note. Do not update statistics after you complete this task.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-22: Completing the Service Operation Upgrade

This step runs a DataMover script to delete duplicate service operation handlers and routings.

The script name is:

```
mpcox01.dms
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-23: Running the Final Audit Reports

This section discusses:

- Run the Final DDDAUDIT Report
- Run the Final SYSAUDIT Report
- Create the FNLALTAUD Project
- Run the Final Alter Audit
- Review the Final Audits
- Run a Final SETINDEX Report
- Run a Final SETTABLE Report

Task 4-23-1: Run the Final DDDAUDIT Report

DDDAUDIT is an SQR that compares your production SQL data tables with the PeopleSoft PeopleTools record definitions to uncover inconsistencies. You can expect some errors from this report. You will review the output from the report in another step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-23-2: Run the Final SYSAUDIT Report

SYSAUDIT is an SQR that identifies *orphaned* PeopleSoft objects. For example, SYSAUDIT will identify a module of PeopleCode that exists but does not relate to any other objects in the system. SYSAUDIT also identifies other inconsistencies within your database.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-23-3: Create the FNLALTAUD Project

In this step, you create the FNLALTAUD project and use it to run your final Alter Audit. Creating this new project now ensures that all the records in your system are audited, including SQL tables. This project also includes any custom records that you have created in your system.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-23-4: Run the Final Alter Audit

Run the PeopleSoft PeopleTools alter record process on all tables in your system to check whether the PeopleSoft PeopleTools definitions are synchronized with the underlying SQL data tables in your database. This process is called an Alter Audit. An Alter Audit compares the data structures of your database tables with the PeopleSoft PeopleTools definitions to uncover inconsistencies. The Alter Audit then creates an SQL script with the DDL changes needed to synchronize your database with the PeopleSoft PeopleTools definitions.

The Alter Audit script is built using the FNLALTAUD project created in the previous step.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-23-5: Review the Final Audits

The Alter Audit process creates SQL scripts that correct any discrepancies between your PeopleSoft PeopleTools record definitions and the database system catalog table definitions. Review the Alter Audit output and correct any discrepancies noted by running the generated scripts with your platform-specific SQL tool. The script names are:

```
FNLALTAUD_ALTTBL.SQL
FNLALTAUD_CRTIDX.SQL
```

Note. The Alter Audit process also creates the script FNLALTAUD_CRTTRG.SQL, which re-creates all database triggers. You do not need to run this script, since all database triggers were created in a previous task.

See Finalizing the Database Structure.

Note. For Informix sites, if your database has Application Functions, you use SQL to drop and re-create these functions and their associated indexes, even though the underlying tables and indexes have not changed.

Note. For Microsoft SQL Server and DB2 UNIX platforms, if your database has tables containing the MSSCONCATCOL or DBXCONCATCOL column, you will see SQL alter the tables and re-create their associated indexes, even though the underlying tables and indexes may not have changed.

Review the output from the SYSAUDIT and DDDAUDIT reports and correct any discrepancies.

Your DDDAUDIT listing shows some expected discrepancies. Tables and views deleted from the Application Designer are not automatically deleted from the system tables. Oracle takes this precaution in case you have customized information that you want to preserve. Therefore, the report lists any tables and views that the new release does not have. Review these tables to verify that you do not wish to preserve any custom data, and then drop the tables and views.

Your SYSAUDIT report may have some errors due to references to obsolete PeopleSoft-owned objects. For instance, if a PeopleSoft Permission List is deleted, and you have a Role that still refers to that Permission, then it will appear on the SYSAUDIT report.

See the Enterprise PeopleTools PeopleBook: Data Management for your new release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 4-23-6: Run a Final SETINDEX Report

The SETINDEX SQR updates index overrides stored in the PSIDXDDLPRM table. The SQR updates the values stored in the PARMVALUE field with current values found in the system catalog. Running SETINDEX cleans up fragmentation issues that may have occurred during data conversion.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	DB2 z/OS Oracle	All

Task 4-23-7: Run a Final SETTABLE Report

The SETTABLE SQR updates table overrides stored in the PSRECDDLPARM table. The SQR updates the values stored in the PARMVALUE field with the current values found in the system catalog. Running SETTABLE will clean up fragmentation issues that may have occurred during data conversion.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	Oracle	All

CHAPTER 5

Complete Database Changes

This chapter discusses:

- Understanding Database Changes
- Configuring the Upgrade Environment
- Reapplying Customizations
- Setting Up Security
- Completing Portal Data Conversion
- Backing Up Before Manual Changes
- Completing ChartField Configuration
- Reviewing PeopleTools Functionality
- Preparing the Content Provider Registry
- Updating the Portal Options Data
- Setting Country Codes
- Completing Credit Card Encryption
- Rebuilding Verity Search Indexes
- Reconciling Notification Templates
- Reviewing Approval Workflow Framework
- Completing Promotions
- Completing Billing Setup
- Configuring Order Management
- Preparing Treasury Setup
- Completing Setup for Projects
- Setting Sync IDs
- Setting Resource Management
- Performing Payables Setup
- Completing Receivables Changes
- Updating eSettlements
- Completing Asset Management Setup
- Completing Real Estate Management Setup

- Setting VAT Processing
- Stamping the Database
- Reviewing Change Control
- Backing Up Before Testing
- Testing Your Copy of Production

Understanding Database Changes

Many changes were made in the previous chapters of this documentation. In this chapter, you complete these changes so that you can begin testing your Copy of Production. By testing your Copy of Production, you ensure that you can still operate day-to-day processes on your new PeopleSoft release.

Task 5-1: Configuring the Upgrade Environment

This section discusses:

- Configure Application Server
- Configure Portal

Task 5-1-1: Configure Application Server

Running Portal requires a fully functional application server domain. In this step, you configure your application server.

Note. If you configured your application server earlier in the upgrade, you can skip this step.

Tips for configuring and starting the application server:

- Make sure that the Application Server domain you configure points to the Target database for this pass of the upgrade.
- Set a different JSL port for each database instance.

See the Enterprise PeopleTools installation guide for your database platform.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-1-2: Configure Portal

PeopleSoft applications are accessed through the Portal. You need to grant users access to complete the upgrade process. You must install and configure the Portal to complete the upgrade.

Note. If you configured your Portal earlier in the upgrade, you can skip this step.

You also must define a password on the Node Definitions page for Single Signon to work properly. If you do not define a password, the signon page appears when trying to access a report directly, instead of the report itself. To avoid this issue, follow the procedure below to assign a password.

To assign a password:

1. Select PeopleTools, Integration Broker, Integration Setup, Nodes.
2. Click Search.
3. Select the database's default local node.
The default local node shows a *Y* in the Default Local Node column.
4. On the Node Definitions page, select *Password* in the Authentication Option field.
5. Enter a password in the Password field.
6. Enter the password again in the Confirm Password field.
7. Enter the default user in the Default User ID field.
8. Save the node definition.
9. Reboot the application server and web server.

See the Enterprise PeopleTools installation guide for your database platform.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-2: Reapplying Customizations

This section discusses:

- Understanding the Reapplication
- Performing Customized Object Adjustment
- Registering Portal Navigation Objects

Understanding the Reapplication

In this task, you work with your customized objects to ensure that they are properly integrated into your upgraded database.

Task 5-2-1: Performing Customized Object Adjustment

When you reviewed your upgrade compare reports, you decided whether to take the Source or Target version of the objects. If you took the Oracle-delivered version of an object instead of your own customized version, you may need to customize the new objects to get the blend of new standard features and your custom features. In complex cases, this may take several iterations. You need to make manual adjustments to the objects to apply these customizations.

Once you reapply all of your customizations, you should run the DDDAUDIT and SYSAUDIT reports to make sure that you did not introduce any problems into your system.

Reapply any Mass Change or EDI customizations.

See “Prepare Your Database,” Identifying Customizations.

Be aware that you must not overwrite Oracle-loaded data. The customizations, extracted during an earlier step, must be manually applied now.

In another step, you applied the Oracle-delivered record group assignments.

See “Apply Application Changes,” Loading Data for Data Conversion, Importing Record Groups.

If you maintain any custom record group assignments, reapply them to your Copy of Production database now.

During Move to Production passes, you will not need to reapply these customizations. The changes you make now will be copied to any subsequent Copy of Production database using Data Mover scripts.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 5-2-2: Registering Portal Navigation Objects

You must register your customized objects, such as menus and components, in order to access them in Portal. You can use the Registration Wizard or the Menu Import process to grant access to the appropriate components. Make sure that you register your components for all of your portals (for example, Customer, Supplier, Employee, and so forth). Also, make sure that you select the node name that matches the database. Do not use the Local node.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Application Designer for your new release, “Using the Registration Wizard.”

See the Enterprise PeopleTools PeopleBook: Internet Technology for your new release, “Administering Portals.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 5-3: Setting Up Security

This section discusses:

- Understanding Security
- Set Up Security
- Synchronize CREF Permissions
- Grant Access to Personalize Homepage

Understanding Security

In this task you perform steps to set up security, grant access to the user ID, set up permissions lists, and grant access to navigation and homepages.

Task 5-3-1: Set Up Security

This section discusses:

- Understanding Security Setup

Understanding Security Setup

Select the PeopleTools, Security folder now to add the new PeopleSoft PeopleTools and application menus, delete old menus, and set up appropriate operator security for your system.

Many menu additions and deletions have occurred. Examine the menu compare report and the PeopleSoft Demo database for details of the required security changes, then decide which of your roles and permission lists should have access to each of the new menus.

Many tasks in this chapter instruct you to select a specific menu within the new PeopleSoft release. To perform these tasks, set up appropriate security for each of the menus referenced in each of the tasks.

See the PeopleSoft Enterprise Portal Solutions PeopleBook: Enterprise Portal Application Technology for your new release, information on Oracle-delivered security.

Note. Move to Production: If you changed the user profiles in your production system after you froze your PeopleSoft PeopleTools, you must manually apply the changes to your Copy of Production database before the end of the final Move to Production.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 5-3-2: Synchronize CREF Permissions

This section discusses:

- Understanding Content Reference Permissions
- Running the Portal Security Synchronization Process

Understanding Content Reference Permissions

As part of the PeopleSoft PeopleTools 8.4x Portal architecture, Portal Registry Structures reference permission lists. At this point, however, the Portal Registry Structures copied from the Demo database do not reference any permission lists on the Copy of Production database. This synchronization program will match the existing permission lists to the appropriate Registry Structures and update it.

Note. The user ID that invokes this process must have the security role Portal Administrator. Otherwise, the process may terminate abnormally.

Note. Your Process Scheduler must be running to perform this task.

Running the Portal Security Synchronization Process

Follow the steps below to run the Portal security synchronization process.

To run the security synchronization process:

1. From your browser, sign in to your Target database.
2. Select PeopleTools, Portal, Portal Security Sync.
3. Click Add a New Value.
4. Enter the run control ID *UPG_PORTAL_SYNC_BOTH*.
5. Click Add.
6. Keep the default value for the default portal registry name in the Portal Name field (for example: *EMPLOYEE*, *CUSTOMER*, or *SUPPLIER*.)
7. Click Save.
8. Click Run.
9. In the Process Scheduler page, check that you set your parameters correctly.
10. Click OK.
11. Click the Process Monitor link to monitor the program's process.
12. Repeat steps 6 through 11 for each Portal name used in the database for your specific applications.
With each repetition, in step 6 change the Portal Name field to one of the following: *EMPLOYEE*, *CUSTOMER*, *SUPPLIER*, *MOBILE*, and so on.
13. Review any messages received during the running of this process with your Portal Administrator.

See the Enterprise PeopleTools PeopleBook: Internet Technology for your new release.

Note. If the permission lists for your upgrade user do not allow you access to a component, you will encounter this error when running the security synchronization process for that page: *Security synchronization failed for Portal Object*. This error may indicate other problems with the component or folder, but you should check your security first.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 5-3-3: Grant Access to Personalize Homepage

This section discusses:

- Understanding Access to Portal Homepage
- Updating Homepage Personalization Permission List
- Adding the Portal User Role

Understanding Access to Portal Homepage

You must complete this step if you use any of the Portal Pack products or pagelets. To add, remove, or change the layout of the homepage, you must grant homepage personalization security access to all non-guest users.

Updating Homepage Personalization Permission List

To update the homepage personalization permission list:

1. Using PeopleSoft Data Mover, sign in to the Target database.
2. Open the Data Mover script *PS_HOME\SCRIPTS\PORTAL_HP_PERS.DMS*.
3. Run this script against the Target database.
4. Close Data Mover.

Adding the Portal User Role

To add the Portal User Role to the user IDs:

1. Using PeopleSoft Data Mover, sign in to the Target database.
2. Open the Data Mover script *PS_HOME\SCRIPTS\PORTAL_ADD_ROLE.DMS*.
3. Run this script against the Target database.
4. Close Data Mover.

Note. You should grant the PAPP_USER role to all new user IDs for access to the homepage personalization. After running this script, manually remove the role PAPP_USER from any GUEST user ID, because a GUEST user should not be personalizing the common homepage.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 5-4: Completing Portal Data Conversion

This section discusses:

- Reviewing Pagelet and Collection Log
- Enabling Pagelet Publishing

Task 5-4-1: Reviewing Pagelet and Collection Log

This section discusses:

- Correct Logged Issues
- Run UPGPT846PP Again

This step explains how to correct logged issues for Navigation Collections, Portal Registry objects, and Pagelet Wizard objects.

Note. Perform this step only if there are logged issues that need to be resolved for Navigation Collections, Portal Registry Objects, or Pagelet Wizard objects reported from the UPGPT846PP process.

Correct Logged Issues

Review the log from running the data conversion UPGPT846PP Application Engine program in the task titled, "Completing PeopleTools Conversion." Correct the issues from the log using the instructions in the MAIN section comments of the UPGPT846PP program. These instructions were reported in the chapter 2 task "Converting PeopleTools Objects" in the "Report Conversion Details" step.

See "Apply Application Changes," Completing PeopleTools Conversion.

See "Apply PeopleTools Changes," Converting PeopleTools Objects, Report Conversion Details.

Run UPGPT846PP Again

In this step, you run the UPGPT846PP process again.

Note. The Application Engine process UPGPT846PP can be run repeatedly, if necessary, as you resolve data issues.

To run UPGPT846PP again:

1. Run the Application Engine conversion process UPGPT846PP with the upgrade user ID.

The program can be run from the command line with the following:

```
$PS_HOME\bin\client\winx86\psae -CD dbname -CT dbtype -CS dbservername -CO =>  
oprid -CP oprpswd -R 1 -AI UPGPT846PP
```

2. Review the log file according to the instructions in the previous step.
3. If there are any remaining issues, correct them and rerun UPGPT846PP.
4. Repeat steps 2 and 3, if necessary, until there are no remaining issues for Navigation Collections, Portal Registry objects, or Pagelet Wizard objects.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-4-2: Enabling Pagelet Publishing

This step enables the creation of homepage pagelets for Navigation Collections and Pagelet Wizard. The script name for your upgrade path is:

```
PTPP_PORTAL_PACK.DMS
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-5: Backing Up Before Manual Changes

Back up your Copy of Production database now. This enables you to restart your upgrade from this point should you experience any database integrity problems during the remaining tasks in the upgrade process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-6: Completing ChartField Configuration

This section discusses:

- Running the Configuration Steps Report
- Performing Manual Configuration Steps

Task 5-6-1: Running the Configuration Steps Report

Follow the procedure below to run the Configuration Steps Crystal report.

To run the Configuration Steps Crystal report:

1. Select Set Up Financials/Supply Chain, Common Definitions, Design ChartFields, Reports, Configuration Steps.
2. Run the Configuration Steps Crystal report for CF Configuration ID: INSTALL_PRODUCT.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 5-6-2: Performing Manual Configuration Steps

These steps are outlined on the Configuration Steps report run in the previous step. These steps must be completed before using the system.

See *PeopleSoft Enterprise 9.0 Application Fundamentals PeopleBook* “Configuring ChartFields.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 5-7: Reviewing PeopleTools Functionality

The PeopleSoft Enterprise PeopleBooks detail the current PeopleSoft PeopleTools functionality. There are many new features delivered in the new release that you may want to use. You should now review the PeopleSoft Enterprise PeopleBooks and PeopleTools Installation Guide to configure your environment properly. This may include, but is not limited to, configuring and starting a process scheduler, report server, and reviewing portal settings.

See the Enterprise PeopleTools installation guide for your database platform on your new release.

See Oracle’s PeopleSoft Customer Connection (Implement Optimize + Upgrade, Upgrade Guide, Upgrade Documentation and Software, Release Notes).

You should review the following considerations:

- If you applied a PeopleSoft PeopleTools patch earlier in the upgrade, review the patch documentation and run any steps that you have not already performed during the upgrade.

Check your Change Assistant output directory if you do not know whether a script was already run during the upgrade process.

- You must reimplement any workflow that you want to use in the new release.
- Oracle has updated the styles that define the look of the user interface.

The classic (old) style sheet, as well as two new styles, are delivered with this release of PeopleSoft PeopleTools. The PeopleSoft PeopleTools system databases and PeopleSoft 8.4 applications use the classic style, whereas all other applications use the new dark blue style. After the PeopleSoft

PeopleTools portion of the upgrade, Oracle sets the classic style as the default, but you can update to one of the new user interface styles.

See Appendix: “Changing the User Interface.”

Note. The new user interface styles are supported by Internet Explorer release 5 and above and Netscape Navigator release 6 and above. If you are using any other browser or release, the system uses the classic style as the default.

- PeopleSoft PeopleTools uses Verity release 5.0 to implement free text search.

Verity 5.0 is not compatible with the version of Verity that was used in previous PeopleSoft PeopleTools releases. Check the necessary application patches that may be required to use the new version of Verity.

See PeopleSoft Customer Connection (Updates + Fixes, Required for Install or Upgrade).

- As a result, performing PS/nVision drill-down operations on reports that were created prior to upgrade would fail. This is mainly because drill-down hyperlinks are by design hard coded into PS/nVision reports. A simple search and replace utility has been provided that can be used to replace old hyperlinks with new ones. This Microsoft Excel macro is located at %PS_HOME%\EXCEL\UpdateNvsDrill.xls.
- Integration Broker was rewritten in PeopleSoft PeopleTools 8.48.

If you use Integration Broker, you will need to perform setup configuration and review the explanation of metadata mapping.

See Enterprise PeopleTools PeopleBook: Integration Broker, Appendix: “Understanding Migrated Integration Metadata,” for your new release.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 5-8: Preparing the Content Provider Registry

You should perform this task if you use Enterprise Portal 8.4 or higher running on PeopleTools 8.4x with full or partial navigation load access method. This means you do not use a single link to access your content provider databases, but instead you load some or all of the portal registry structures from the content provider database into your Enterprise Portal database. PeopleSoft refers to Content Provider databases as the application databases that contain the transaction content. Your Copy of Production database is your Content Provider database for this task.

When you upgrade a content provider database, the registry structures are updated, old registry structures are removed, and new registry structures are added. These changes need to be copied to the Enterprise Portal database by updating the portal registry structures in your Enterprise Portal database to match what is in the Content Provider database. Follow the detailed instructions in the appendix referenced below.

See Appendix: “Upgrading the Content Provider Registry.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-9: Updating the Portal Options Data

In this step you update the PeopleTools Portal Options data.

Note. Only perform this step if your upgraded database is on PeopleTools 8.46 or greater.

This step sets the portal options prefix and Owner ID. These values are used when creating Pagelet Wizard definitions and Navigation Collection objects.

To set the Portal Options Prefix and Owner ID:

1. From your browser, sign on to your New Copy of Production database.
2. Select PeopleTools, Portal, Portal Utilities, System Options.
3. Update the value for the Registry Object Prefix with a 1- to 4-character prefix that is unique to your organization.

Note. Do *not* use PAPP, PAPX, PAPQ, PAPI, PRTL, EO, or PT. Do *not* use any product line specific prefix (such as CR, HC, EP, or CI). Do *not* use a blank value.

4. Enter the Owner ID value with your organization's specific owner ID.

Note. The Owner ID is a translate value on the PeopleTools field OBJECTOWNERID. Do *not* use any delivered product Owner ID. If you do not have an Owner ID, then either create one, or leave the Owner ID value as a blank space.

5. Click Save.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 5-10: Setting Country Codes

This section discusses:

- Understanding Country Codes

- Adding New Country Codes
- Modifying Existing Country Codes

Understanding Country Codes

The PeopleSoft system provides the 239 ISO 3166 compatible country codes as part of system data. However, the PeopleSoft system also provides an interface through which you can customize the country codes, either to add new ones or modify existing ones. Since the COUNTRY_TBL record is considered system data, it was repopulated with the current countries as defined by the PeopleSoft system. As a result, any additional countries you may have added and any other customizations you may have made to this table were deleted.

If you have customized country code entries, perform the following steps using the results from the SQL query in the task titled Reviewing Country Data.

See “Prepare Your Database,” Reviewing Country Data.

Task 5-10-1: Adding New Country Codes

Follow the steps below to add new country codes.

To add new country codes:

1. Select Set Up Financials/Supply Chain, Common Definitions, Location, Country.
2. Select the Add a New Value tab.
3. Enter the new country code and click Add.
4. Using the query results from the task titled Reviewing Country Data, enter the values for Description, Short Description, and 2-Character Country Code.

If the country is a European Union member, select the EU Member State check box.

See “Prepare Your Database,” Reviewing Country Data.

5. Select the Address Format tab.
6. Indicate the labels that you would want to appear to the users affiliated with this country.

The following example shows the labels for USA.

Note. The Available check box indicates whether the label is available for display to the user.

Home | Worklist | MultiChannel Console | Add to Favorites | Sign out

New Window | Help | Customize Page | Copy URL

Country Description | **Address Format**

Country: USA United States

Available	Label	Available	Label
<input checked="" type="checkbox"/> Address 1	Address 1: <input type="text"/>	<input type="checkbox"/> Number 1	<input type="text"/>
<input checked="" type="checkbox"/> Address 2	Address 2: <input type="text"/>	<input type="checkbox"/> Number 2	<input type="text"/>
<input checked="" type="checkbox"/> Address 3	Address 3: <input type="text"/>	<input type="checkbox"/> House Type	<input type="text"/>
<input type="checkbox"/> Address 4	<input type="text"/>	<input type="checkbox"/> Field 1 Label	<input type="text"/>
<input checked="" type="checkbox"/> City	City: <input type="text"/>	<input type="checkbox"/> Field 2 Label	<input type="text"/>
<input checked="" type="checkbox"/> County	County: <input type="text"/>	<input type="checkbox"/> Field 3 Label	<input type="text"/>
<input checked="" type="checkbox"/> State	State: <input type="text"/>	<input type="checkbox"/> Postal Search	
<input checked="" type="checkbox"/> Postal	Postal: <input type="text"/>		

Save Return to Search Notify Add Update/Display

[Country Description](#) | [Address Format](#)

Address Format page

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-10-2: Modifying Existing Country Codes

In this step, you will modify your existing country codes.

To modify existing country codes:

1. Select Set Up Financials/Supply Chain, Common Definitions, Location, Country.
2. Enter the country code you want to modify and click Search.
3. Update the necessary fields based on the query results from the task titled Reviewing Country Data.
See “Prepare Your Database,” Reviewing Country Data.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-11: Completing Credit Card Encryption

This section discusses:

- Understanding Credit Card Encryption
- Reviewing Credit Card Encryption Status
- Running Credit Card Encryption

Understanding Credit Card Encryption

In this task you will upgrade your existing credit card data. First, you must ensure that your credit card data has already been encrypted.

Task 5-11-1: Reviewing Credit Card Encryption Status

Before running credit card encryption, you must check to see if the credit card data has already been encrypted as part of a release bundle applied to an earlier release.

To credit card encryption status:

1. Select Set Up Financials/Supply Chain, Upgrade, Upgrade Credit Card Numbers.
2. Add a Run Control ID.
3. If the Generate Random Key button is disabled, some of the data has already been converted.

This conversion could result by implementing a bundle containing the new encryption functionality or by previously performing a partial upgrade conversion. In this case, the encryption key is already set and the existing data is encrypted with it, so you can not generate a new key.

4. If the key is disabled, skip the following step titled Running Credit Card Encryption.
5. If the key is active, complete the remaining steps in this task.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-11-2: Running Credit Card Encryption

The latest release of this product provides more secure credit card encryption. Therefore, all stored credit card numbers within the system must be upgraded to use the triple-DES algorithms and 168-bit encryption keys.

To run credit card encryption:

1. Select Set Up Financials/Supply Chain, Upgrade, Upgrade Credit Card Numbers.
2. Click the Generate Random Key button.

Note. If this button is disabled, some of the data is already converted, as a result of implementing a bundle containing the new encryption functionality or of previously performing a partial upgrade conversion. In this case, the encryption key is set and the existing data is encrypted with it, so you can not generate a new key.

3. Click the Run button.

This action will either encrypt or re-encrypt each field in the grid depending on the state of the current value.

4. Once all values are set to *No Action* the upgrade has completed.

Note. If the process fails for any reason or if you see value other than *No Action* after it completes, you can restart the process using the Process Scheduler Restart functionality and it will continue from where it stopped. If you cannot restart the process this way, then start the process from the beginning by clicking Run on this page. The process will bypass any values that are already processed.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-12: Rebuilding Verity Search Indexes

In this task, you will rebuild your Verity search indexes.

Note. In this PeopleSoft release, the indexes CS_DOCUMENTS_ADH and CS_DOCUMENTS_PO have been combined into one index, CS_DOCUMENTS. You may need to update your application server and process scheduler configurations to reflect this change.

To rebuild Verity search indexes:

1. Select Set Up Financials/Supply Chain, Common Definitions, Search Indexes, Build Search Index.
2. If a run control does not exist, add a run control/index combination for every index you want to rebuild, if a run control does not exist.
3. Submit the process with the build option *Create New/Rebuild* selected.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-13: Reconciling Notification Templates

In this task, you will reconcile updates to component and generic notification templates with changes that you made to customize these templates. You should review the notification text and variables.

To access component notification template information, select PeopleTools, Workflow, Notifications, Notification Templates.

To access component notification template variables, select PeopleTools, Workflow, Notifications, Template Variables.

To access generic template information, navigate to PeopleTools, Workflow, Notifications, Generic Templates.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-14: Reviewing Approval Workflow Framework

The approval workflow framework is enhanced in the new PeopleSoft release to offer more scalability. As a result, changes to how approval processes are defined and the to performance of the approval workflow engine have been made. If your product uses the approval workflow framework, review the following reference and, if applicable, any product-specific PeopleBook documentation about your use of the framework.

See PeopleSoft Enterprise Supply Chain Management 9.0 Common Information PeopleBook, “Using Workflow and Managing Approvals.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-15: Completing Promotions

This section discusses:

- Updating Tree Statistics

Task 5-15-1: Updating Tree Statistics

Follow the steps below to optimize the performance of your Product Tree structures.

To update tree statistics:

1. Select Set Up Financials/Supply Chain, Product Related, Promotions Management, Update Tree Statistics.
2. Create a run control ID if needed.
3. Add a row for every setID/Customer Tree and setID/Product Tree combination in your system.
4. Click Run to submit the update process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Promotions Management	All	All

Task 5-16: Completing Billing Setup

This section discusses:

- Creating Recommended Manual Indexes
- Defining Payment Terms for Paid Invoices

Task 5-16-1: Creating Recommended Manual Indexes

Billing has published recommended index modifications that may apply to your installation. These index options are dependent on your installation and therefore cannot be included in the delivered application. For the latest information access Customer Connection and find report ID 1556219000.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Billing	All	All

Task 5-16-2: Defining Payment Terms for Paid Invoices

A new option defined at the Billing business unit level allows you to define a payment term for invoices that are fully paid and that do not have a discount for early payment. This new option ensures that the discount for early payment is not applied during the Accounts Receivable payment application process. If you do not define a payment term, outstanding credits could occur in Accounts Receivable.

To define payment terms for paid invoices:

1. Select Set Up Financials/Supply Chain, Business Unit Related, Billing, Billing Options.
2. Enter a setID value.
3. Select a value from the prompt dialog box and enter it in the field Pay Terms for Fully Paid Bill.
4. Repeat steps 2 and 3 for every valid setID.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Billing	All	All

Task 5-17: Configuring Order Management

This section discusses:

- Defining Default Hold Reason Code
- Defining Hold Code Security by Role

Task 5-17-1: Defining Default Hold Reason Code

This section discusses:

- Defining a Hold Reason Code
- Setting the Hold Reason Code as Default

Defining a Hold Reason Code

A default hold reason code value must be set for automation hold processing for each Order Management business unit. This user-defined default value is used whenever a system generated hold code is applied. Before the default value can be set, the reason code value must be added to the list of valid reason codes.

See PeopleSoft Enterprise Order Management 9.0 PeopleBook, Setting Up PeopleSoft Order Management Business Units, Setting Up Order Management Business Units, Establishing Hold Processing.

To add a new reason code value:

1. Select Set Up Financials/Supply Chain, Common Definitions, Codes and Auto Numbering, Reason Codes.
2. Select the Add a New Value tab.
3. Enter a setID value.

4. Select Reason Type Order/Quote Hold.
5. Enter a value in the Reason Code field.
6. Click Add.
7. Enter an effective date and description.
8. Click Save.
9. Repeat steps 4 through 8 for every valid setID.

Setting the Hold Reason Code as Default

After you have entered at least one Order/Quote Hold reason code, you can set the default value on the Order Management business units.

To set the default hold reason code:

1. Select Set Up Financials/Supply Chain, Business Unit Related, Order Management, Order Management Definition.
2. Enter an Order Management business unit.
3. Click Search.
4. Click the Hold Processing link at the bottom of the page.
5. In the Automatic Hold group box, select a value for the Hold Reason Code field.
6. Click Save.
7. Repeat steps 2 through 6 for every valid business unit.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Order Management	All	All

Task 5-17-2: Defining Hold Code Security by Role

In previous releases, no security was available for the application or removal of holds associated with quotes and orders. Now, you must assign hold codes to user roles to control the holds that a role can manage.

See PeopleSoft Enterprise Order Management 9.0 PeopleBook, Implementing PeopleSoft Order Management, Implementing Order Management Options, Defining Hold Code Security by Role.

To define hold code security by role:

1. Select Set Up Financials/Supply Chain, Security, Hold Security by Role.
2. Click the Add a New Value tab.
3. Enter a setID.
4. Enter a role name.
5. Click Add.
6. Add a row for each hold code value that the role can manage.
 - a. Select the Add Authority check box if the role has the authority to add quote and order holds.

- b. Select the Release Authority check box if the role has the authority to release quote and order holds.
- c. Select the Delete OM Hold check box if the role has the authority to delete quote and order holds.
7. Click Save.
8. Repeat steps 3 through 7 for each valid setID.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Order Management	All	All

Task 5-18: Preparing Treasury Setup

This section discusses:

- Rerunning Auto Position Process
- Adding CUSIP for Security

Task 5-18-1: Rerunning Auto Position Process

In this step, you will rerun the Auto Position processes for all deals. This action will process every deal to calculate the cash flows, position, and accounting events, which will reflect changes to the deals during the upgrade.

To re-run the Auto Position processes:

1. Select Deal Management, Capture Deals, Deal Position Update.
2. Select the Process All Outstanding Deals option and run the process.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Deal Management Risk Management	All	All

Task 5-18-2: Adding CUSIP for Security

CUSIP IDfield is a new, required field in the new release. It must be populated for all securities.

Note. Complete this step only if you license PeopleSoft Deal Management.

To update the CUSIP IDfield:

1. Select Deal Management, Administer Deals, Securities.

2. Open the appropriate security and add the CUSIP.
3. Click Save.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Deal Management	All	All

Task 5-19: Completing Setup for Projects

This section discusses:

- Setting Up Analysis Type and Analysis Group
- Running Summary Refresh

Task 5-19-1: Setting Up Analysis Type and Analysis Group

Many analysis types and analysis groups are integral to project processes. The upgrade delivers any additions or changes to the required analysis types and analysis groups under the projects-owned setIDs of SHARE, MODEL and MFG. However, other setIDs were not updated because of the risk of overwriting any changes you may have made to these user-configurable variables. You will need to analyze the system-defined analysis types and analysis groups found under the SHARE setID and determine which additions or changes to migrate to any other setID that you use for Projects processing.

Access these tables, using the navigation show, to perform further analysis:

- Projects Analysis Groups – PS_PROJ_AN_GRP_TBL: Set Up Financials/Supply Chain, Product Related, Project Costing, Transaction Options, Analysis Groups.
- Projects Analysis Types – PS_PROJ_ANTYPE_TBL: Set Up Financials/Supply Chain, Product Related, Project Costing, Transaction Options, Analysis Types.
- Projects Analysis Group Mapping – PS_PROJ_AN_GRP_MAP: Set Up Financials/Supply Chain, Product Related, Project Costing, Transaction Options, Analysis Groups.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Project Costing	All	All


Task 5-19-2: Running Summary Refresh

To clear out any anomalous data that may be present in your system and to make sure the flexible analysis works correctly, you must run a full refresh on the summary tables.

To run summary refresh:

1. Select Project Costing, Utilities, Refresh Summary Tables.
2. Add a new run control ID, or use an existing one.

This example shows the Refresh Summary Tables page:

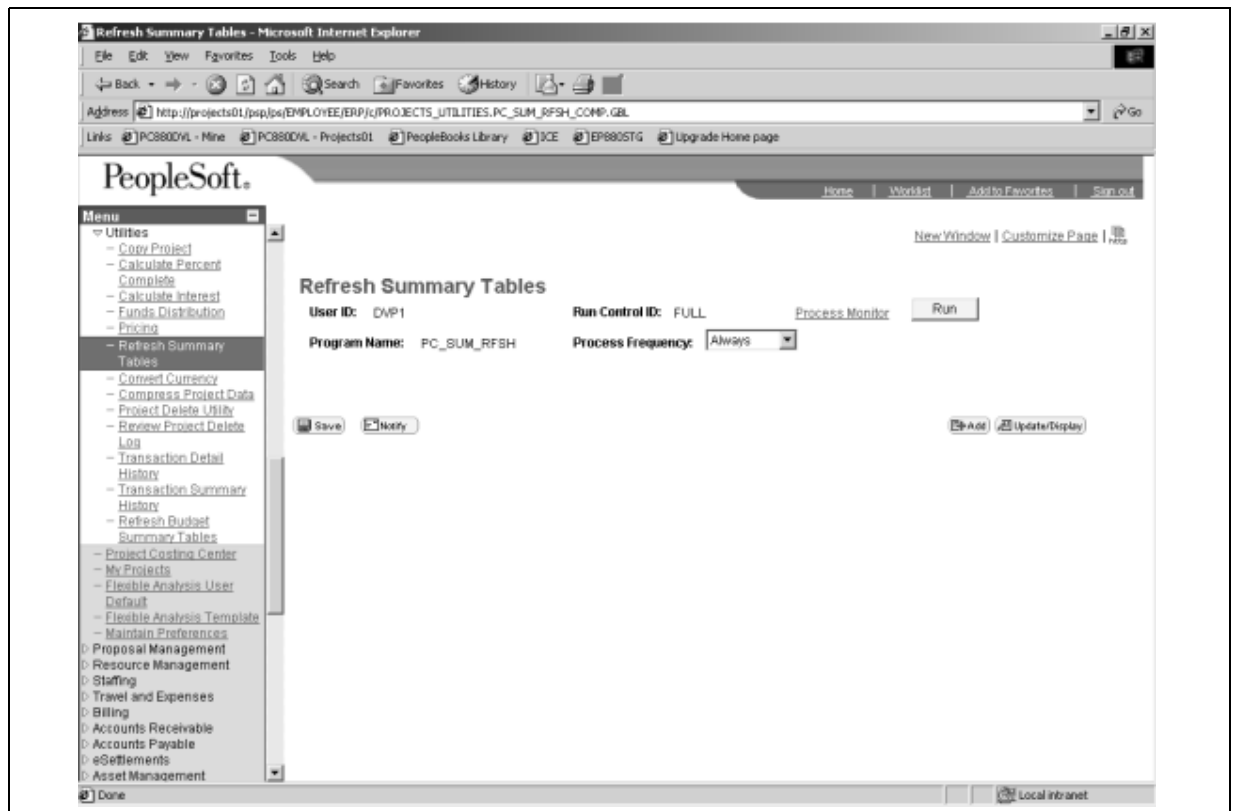

Refresh Summary Tables page

3. Click Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Project Costing	All	All

Task 5-20: Setting Sync IDs

Sync IDs for PeopleSoft Mobile Time and Expense provide a unique key to a record that can be used by the sync server to identify data rows online and on a mobile device. Before Mobile Time and Expense can be functional, you must run the Sync ID utility to populate all records in the database with the Sync ID field.

Note. To complete this task, you need to use PeopleSoft Internet Architecture. If you do not have your PeopleSoft Internet Architecture environment established for this upgrade pass, the task can be postponed until you have established your PeopleSoft Internet Architecture environment. You will need to complete this task for your functional testing, as well as the Move to Production pass.

To run the Sync ID utility:

1. In the appropriate SQL Tool for your platform, run the following statement:

```
UPDATE PSXLATITEM SET SYNCID = 0
```

This will clear out the duplicate SYNCIDs from this Translate table.

2. Open Application Designer.
3. Select File, Open.
4. Select *Project* from the dropdown list.
5. In the Name field, verify whether MTE_RELATED_CONTENT exists.
6. If MTE_RELATED_CONTENT exists, open the project and verify that all of the following objects exist:

```
TE_ADD_NEW_EXPENSE
TE_ALERT_AREA_MSG
TE_EXP_RPT_SIG
TE_GEN_INFO_HTML
TE_GROSS_UP_EST
TE_RS_RETURN
TE_START_EXP
TE_START_RS
TE_TIME_RPT_SIGNATURE
TE_TITLE_BAR
```

Note. If all of these objects exist, skip to step 17.

7. If MTE_RELATED_CONTENT does not exist, select File, Save Project As....
8. Enter *MTE_RELATED_CONTENT*.
9. Click OK.
10. Navigate to the Insert menu.
11. Select Definitions into Project.
12. Select *HTML* in the Definitions Type drop-down list box.
13. Insert the following HTML objects into the project:

```
TE_ADD_NEW_EXPENSE
TE_ALERT_AREA_MSG
TE_EXP_RPT_SIG
TE_GEN_INFO_HTML
TE_GROSS_UP_EST
TE_RS_RETURN
TE_START_EXP
TE_START_RS
TE_TIME_RPT_SIGNATURE
TE_TITLE_BAR
```

14. Select *Style Sheets* in the Definitions Type drop-down list box.
15. Insert the following Style Sheet objects into the project: *PSSTYLEDEF*.

16. Save the project and confirm that all objects listed previously are in the Project MTE_RELATED_CONTENT.
17. Run the Sync ID utility by selecting PeopleTools, Utilities, Administration, Set SyncIDs.
18. Select Set Sync IDs.

This process will take a while to complete.

Note. Once the Sync IDs are set, the application servers must be recycled by a System Administrator. Please have the System Administrator shut down all application servers, delete all cache, and restart all application servers.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Mobile Time and Expense	All	All

Task 5-21: Setting Resource Management

This section discusses:

- Loading Holidays

Note. If you do not license Resource Management, you can skip this task.

Note. To complete this task, you need to use PeopleSoft Internet Architecture. If you do not have your PeopleSoft Internet Architecture environment established for this upgrade pass, the task can be postponed until you have established your PeopleSoft Internet Architecture environment. You will need to complete this task for your functional testing as well as the Move to Production pass.

Task 5-21-1: Loading Holidays

In earlier releases of PeopleSoft Resource Management, when the holidays process ran it created holiday entries in the resource calendar with a TASK_TYPE of *HOLIDAY*. In the new release a new TASK_TYPE of *SCHEDULED_HOLIDAY* has been introduced. You must run the Load Holidays process at the end of the upgrade to properly assign holidays to the correct task category.

This step deletes all calendar entries where the task type is set to *HOLIDAY* for the future date and creates new entries in the calendar with new task type as *SCHEDULED_HOLIDAY*.

To run the Load Holiday process:

1. Select Set Up Financials/Supply Chain, Common Definitions, Resource Data, Load Holidays.
2. Add a new Run Control ID.
3. Click Save.
4. Click the Run button to access the Process Scheduler Request page.

5. Select the appropriate Server Name and click OK to run the process.
6. Check the Process Monitor to verify that the process ran to completion.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Resource Management	All	All

Task 5-22: Performing Payables Setup

This section discusses:

- Running the Matching Process
- Verifying Procurement Withholding ChartFields

Task 5-22-1: Running the Matching Process

To view the existing vouchers that are currently in *Exception* or *Overridden* status on the Matching Workbench, you need to run the matching process against those vouchers. After you set up the match rules and document association rules, you should run the matching process to pick up all the vouchers that are currently in *Ready*, *Exception*, or *Overridden* status. After the matching process runs successfully, you can view vouchers on the Matching Workbench component. You must run the matching process for all the business units.

To run the matching process:

1. Select Accounts Payable, Batch Processes, Vouchers, Matching.
2. Add a new run control.
3. Enter a description.
4. Set the Match action to *Matching*.
5. From the Options drop-down list box, select *All Business Units*.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Payables eSettlements	All	All

Task 5-22-2: Verifying Procurement Withholding ChartFields

During the upgrade new setup tables were populated as a result of enhancements to Withholding/1099. The data that was populated came from the Withhold Entity page. You must check the Withholding ChartFields defined under Procurement Control to ensure that the tableset sharing is the same. If it is not, then you must return to Procurement Control and change the ChartField.

To verify the Withholding ChartFields for a business unit:

1. Select Set Up Financials/Supply Chain, Business Unit Related, Procurement, Procurement Control.
2. Select the business unit.
3. Click Search or Enter.

This brings you to the General Controls tabbed page.

4. Select the Withholding tab.
5. Click the Chartfields link for each entity.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Payables eSettlements	All	All

Task 5-23: Completing Receivables Changes

This section discusses:

- Running Customer Follow Up Query
- Adding a Cash Control Journal Generator Template
- Updating Existing Conversations

Note. If you do not have PeopleSoft Receivables, you can skip this task.

Task 5-23-1: Running Customer Follow Up Query

The new customer conversation functionality requires you to provide a business unit when creating follow up letters. In this step you will run a query to determine which operators need to update their existing run controls for conversation follow-up letters. The query should be used to notify users that they should update the run control with the business units they need to process when creating follow-up letters. As the clean-up effort continues, the query can be run as needed to identify which operators and run controls have not been updated.

To run the UPG_ARU10 query:

1. Select Reporting Tools, Query, Query Viewer.
2. Run the following query:

UPG_ARU10

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	Receivables	All	All

Task 5-23-2: Adding a Cash Control Journal Generator Template

If you are a PeopleSoft Receivables customer running Cash Clearing, a new journal generator template must be created in order to journalize cash clearing entries. For information on how to set up a journal generator template, see the reference below. A cash clearing template for PeopleSoft Receivables is delivered in demo data and can be referred to when setting up the new journal generator template.

See *PeopleSoft Enterprise Receivables 9.0 PeopleBook*.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	Receivables	All	All

Task 5-23-3: Updating Existing Conversations

In the new release, customer conversations have been enhanced to group conversations by business unit. This allows AR Receivable specialists to create follow-up letters by business unit. Earlier in the upgrade, all existing conversations with follow-up letters were created. If there is a need to create a follow-up letter from an existing conversation, a business unit value *must* be populated on the conversation before creating the letter. Online functionality populates the business unit field when it's saved based on the user's default business unit on the User Preferences page. If the user's default business unit is different than the business unit of the customer conversation, you can update the user preferences page with the correct business unit.

To update the default business unit for an operator:

1. Select Financials/Supply Chain, Common Definitions, User, Preferences, Define User Preferences.
2. Select the user that will access the conversation.
3. Select the Overall Preferences link.
4. Select the business unit to be populated on the conversation.
5. Save the page.

To update an existing conversation:

1. Select Customers, Conversations, Update Conversations.
2. Select a customer conversation.
3. Change the status to Open.
4. Save the page.

Note. In the new PeopleSoft release, all conversations require a contact ID. Conversations that are updated will require you to select a contact ID for the conversation. Click the Edit Entry button on the Conversation Entries scroll to select a valid contact ID.

5. After the conversation has been updated with the correct business unit, the default business unit on the User Preferences page can be changed back to its original value.
6. If this procedure cannot be implemented, you can update the conversation records with a SQL script. For a reference the following records should be updated with the desired business unit value:

```
CUST_CONVER.BUSINESS_UNIT
CUST_CONVER_LNG.BUSINESS_UNIT
CUST_CONVER_ATT.BUSINESS_UNIT
CUST_CONVER_DTL.BUSINESS_UNIT
CUST_CONVER_HDR.BUSINESS_UNIT
CUS_CNV_HDR_LNG.BUSINESS_UNIT
```

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	Receivables	All	All

Task 5-24: Updating eSettlements

This section discusses:

- Validating Buyer Registration
- Validating Agreement Registration

Task 5-24-1: Validating Buyer Registration

Follow the steps in the procedure below to validate the buyer registration payment method assignment.

To validate the buyer registration payment method assignment:

1. Select eSettlements, Buyer Information, Review Buyer Details.
2. Select the buyer that you want to review.
3. Review the bank data on the Bank Information page and ensure that the payment method is correct.
4. If the payment method of the Bank Information page needs to be corrected, then in the BSP model, select the correct payment method on the Buyer Information – Bank Information page. In the BD model, navigate to the Payables Business Unit Options, for the buyer, and select the correct payment method on the Payment Options page.
5. If the value you want does not appear in the drop-down list box, then the payment method is not valid for this particular bank account. To address this problem, follow these steps:
 - a. Go to the Bank setup pages and add the desired payment method to the bank account.

- b. Return to this page to assign the new payment method to the buyer.

Buyer Registration Information page

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	eSettlements	All	All

Task 5-24-2: Validating Agreement Registration

In this step, you review and validate the buyer Agreement Registration payment method assignment.

To validate the Agreement Registration payment method assignment:

1. Select eSettlements, Buyer Information, Review Agreement Details.
2. Choose the agreement that you want to review.

Note. The user profile of your current user ID must have the Buyer Administration Role type assigned to one of its roles and the proper security for all buyers to access agreements.

3. Review the bank data on the Buyer page and ensure that the payment method is correct.
4. If the payment method is not correct, correct the payment method now.
5. If the value you want does not show up in the drop-down list box, then the payment method is not valid for this particular bank account. To address this problem, follow these steps:
 - a. Go to the bank setup pages and add the desired payment method to the bank account.
 - b. Return to this page to assign the new payment method to the buyer.

The screenshot displays the 'Agreement Registration Buyer Information' page. On the left is a 'Menu' pane with a search bar and a tree view containing 'eSettlements', 'Buyer Information' (with sub-items 'Review Buyer Details', 'Review Agreement Details', 'Review User Profiles'), 'Invoices', 'eSettlements Center', 'Application Diagnostics', and 'Data Expansion Tool'. The main content area has three tabs: 'Buyer' (selected), 'Buyer Notifications', and 'Supplier'. Below the tabs are several sections: 'Agreement Reference' showing 'Buyer: BUY01 Buyer One', 'Supplier: BOOKS4U Books for You', and 'Location: 1'; 'Buyer Processing Options' with a checked 'Standard Vouchers Allowed' and a 'Supplier Ref ID' field; a 'Comments' section with a text area; 'Bank Information' with fields for '*Bank Code: USA BANK', '*Bank Account: EFT Account', and '*Payment Method: Electronic Funds Transfer'; and 'Self-Service Invoice Options' with '*Invoice Verification Option: No Invoices'. At the bottom are 'Save' and 'Cancel Agreement' buttons. Links for 'New Window' and 'Help' are in the top right.

Agreement Registration Buyer Information page

See Also*PeopleSoft Enterprise eSettlements 9.0 PeopleBook***Properties**

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	eSettlements	All	All

Task 5-25: Completing Asset Management Setup

This section discusses:

- Applying Customizations to Business Rules
- Applying Customizations to Common Search Configurations
- Running Compare Asset Repositories Process

Note. Complete this task *only* if you license IT Asset Management. If you do not have IT Asset Management you can skip this task.

Task 5-25-1: Applying Customizations to Business Rules

In the new PeopleSoft release, Business Rules and associated attributes are modified. Before using the system after the upgrade, it is important that you verify the Business Rules upgraded correctly and reapply any customizations that were present before the upgrade.

To review IT Asset Management Business Rules:

1. Select Set Up Financials/Supply Chain, Product Related, IT Asset Management, Business Rules.
2. Select Search.

Define Business Rules page

3. Select the Business Rule that needs to be reviewed.
4. It is important to verify all the Apply To field in the Define Rule Action area.
Make all modifications needed based on the Business Rule logic.
5. Save the Business Rules.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Asset Management	All	All

Task 5-25-2: Applying Customizations to Common Search Configurations

It is important to verify the Common Search Configurations after the upgrade, and reapply any customizations you may have had prior to the upgrade.

To review IT Asset Management Common Search Configuration:

1. Select Set Up Financials/Supply Chain, Product Related, IT Asset Management, Common Search Configuration.
2. Select Search.
3. Select any configuration that needs to be reviewed.

Menu

- Set Up Financials/Supply Chain
 - Install
 - Security
 - Upgrade
 - Business Unit Related
 - Common Definitions
- Product Related
 - Asset Management
 - Budgeting
 - Billing
 - Contracts
 - Cost Accounting
 - Engineering
 - Expenses
 - Grants
 - Inventory
- IT Asset Management
 - User-Defined Fields
 - IT Subtypes
 - Rule Attributes
 - Business Rules
 - Inventory Age
 - Code Mappings
 - IP Addresses
 - IP Locations
 - Contract Types
 - Employee Network IDs
 - Employee Groups
 - IT Role Access
 - Common Search Configuration
 - Related Links

Common Search Configuration

Search Name: IT_EXCPT_SEL
Description: Manage Exceptions

Field List

Field Number	Record (Table) Name	Record Alias	Field Name	Field Label ID	Edit Type	Prompt Table	Active Status
1	1 IT_RECON_DSPLY	A	SERIAL_ID	SERIAL_ID	Prompt	IT_RECON_HDR	Active
2	2 IT_RECON_DSPLY	A	ASSET_ID	ASSET_ID	Prompt	ASSET_NS_WW	Active
3	3 IT_RECON_DSPLY	A	BUSINESS_UNIT_HR	EXCPT	Prompt	SP_BU_AM_NONWW	Active
4	4 IT_RECON_DSPLY	A	BUSINESS_UNIT_AM	EXCPT	Prompt	SP_BU_AM_NONWW	Active
5	5 IT_RECON_DSPLY	A	DISCO_MFG_ID	EXCPT	Prompt	MANUF_NS2_WW	Active

From Clause Records

Field Number	Record (Table) Name	Record Alias
1	1 IT_RECON_DSPLY	A

Buttons: Save, Return to Search, Previous in List, Next in List, Add

Common Search Configuration page

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Asset Management	All	All

Task 5-25-3: Running Compare Asset Repositories Process

You must run the Compare Asset Repositories process at this time. This populates IT Asset Management Exception tables.

To run Compare Asset Repositories Process:

1. Select IT Asset Management, Asset Discovery and Validation, Compare Asset Repositories, Create a New Run Control ID.

Compare Asset Repositories

2. Set Process Frequency to Once.
3. Set Reconcile Delta Only to No.
4. Leave the rest of the parameters blank.
5. Click Run.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Asset Management	All	All

Task 5-26: Completing Real Estate Management Setup

After the upgrade, you must run a report for Real Estate Management to verify the Proration Calendars converted correctly. This interactive report shows any Lease Financial Terms whose assigned Calendar does not match its Schedule.

This report only applies to leases using the 365–Day Proration whose calendar has periods that begin on a different day than that of its schedule. For example this report shows a lease whose financial term was scheduled for the 15th of each month (prior to the upgrade) but during the upgrade it was changed to a monthly calendar whose periods begin on the 1st of the month. After the upgrade, the payment period has been effectively changed. The payment period is now from the 1st of the month to the last day of the month with the payment due on the 15th of the month.

If this is not corrected the next payment made will be incorrect. In order to correct this, the Lease Administrator must create an amendment for this lease and change the calendar, regenerating the Financial Term Schedule and updating the general transaction the next time the Transaction Generator is executed.

To run the Financial Term Exception Report:

1. Select Setup Financials/Supply Chain, Upgrade, Financial Term Exceptions.

Financial Terms

The Lease and financial terms appearing below contain calendar assignments that do not match the Term Schedule. Change the Calendar assignment or schedule via an amendment and regenerate the lease transactions.

[Refresh](#)

Financial Term Exception Report					
Lease Number	Lease Name	Transaction Group	From Date	To Date	Calendar
TL100	Test Lease - 100	Base Rent	01/01/2005	12/15/2005	Monthly
RL100	Test Lease - 100	Base Rent	01/01/2005	12/15/2005	Monthly
0000000041	shashi LO test	Base Rent	01/01/2005	01/01/2008	Monthly

[Notify](#) [Refresh](#)

Financial Terms page

2. If there are any Exceptions listed in the report, click on the Lease Number hyperlink.
3. Verify the cause of the exception.
4. If required raise an Amendment and change the Term Calendar.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	Real Estate Management	All	All

Task 5-27: Setting VAT Processing

This section discusses:

- Updating VAT Defaults
- Updating VAT Entity Report Options

Task 5-27-1: Updating VAT Defaults

In the new PeopleSoft release, a new declaration point, Declaration at Accounting Date, has been added. You may specify this new declaration point as the default for both goods and services throughout the VAT defaulting hierarchy. You may also specify that VAT be recorded on advance payments when the declaration point for the advanced payment is accounting date.

To update VAT defaults:

1. Select Set Up Financials/Supply Chain, Common Definitions, VAT and Intrastat, Value Added Tax, VAT Defaults.
2. Select the VAT Driver value *VAT Entity Registration*.
3. For each VAT Entity, for each country, complete the following steps:
 - a. Select the *VAT on Adv Pay — Acctg in AP* check box if you want VAT to be recorded on advance payments in Accounts Payable when the declaration point for the advance payments is set to At Accounting Date.
 - b. Clear the *VAT on Adv Pay — Acctg in AP* check box if you do NOT want VAT to be recorded on advance payments in Accounts Payable when the declaration point for the advance payments is set to At Accounting Date.
 - c. Select the *VAT on Adv Pay — Acctg in AR* check box if you want VAT to be recorded on advance payments in Accounts Receivable when the declaration point for the advance payments is set to At Accounting Date.
 - d. Clear the *VAT on Adv Pay — Acctg in AR* check box if you want VAT to be recorded on advance payments in Accounts Receivable when the declaration point for the advance payment is set to At Accounting Date.
4. Return to the search page for VAT defaults.
5. For each of the following VAT drivers, for each country, set the default VAT Declaration Point for Goods to *At Accounting Date* (optional):
 - VAT Entity Registration
 - Order Management Business Unit
 - Billing Business Unit
 - Receivables Options
 - Asset Management Business Unit
 - Purchasing Options
 - Payables Options
 - Customer
 - Customer Location
 - Vendor
 - Vendor Location
 - Bill Source
 - Bill Type
 - Voucher Origin
 - Control Group

6. For each of the following VAT drivers, for each country, set the default VAT Declaration Point for Services to *At Accounting Date* (optional):
 - VAT Entity Registration
 - Order Management Business Unit
 - Receivables Options
 - Purchasing Options
 - Payables Options
 - Customer
 - Customer Location
 - Vendor
 - Vendor Location
 - Bill Source
 - Bill Type
 - Voucher Origin
 - Control Group

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-27-2: Updating VAT Entity Report Options

In the new PeopleSoft release, a new VAT Transaction report has been added which assists in reconciling and auditing your VAT return. This report is based on the existing VAT report definitions and is run from the existing VAT Return and Report run control component. However, before you can run this report for any given VAT Entity, you must link the report to the VAT Entity.

To link the VAT report to the VAT entity:

1. Select Set Up Financials/Supply Chain, Common Definitions, VAT and Intrastat, Value Added Tax, VAT Entity.
2. For each VAT Entity, for each registration country, complete the following:
 - a. Select the VAT Report Details link.
 - b. Within the VAT Reports scroll area, click on the plus button to add a new row.
 - c. For the new row, select *Application Engine* for Process Type.
 - d. Select *LC_RPT_VAT* for the process name.
 - e. Click OK to return to the main VAT Entity page.
3. Click Save.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-28: Stamping the Database

In this step, you set the database to the release level of the Demo database. The values that you enter here appear whenever you view the Help, About PeopleTools dialog.

To stamp the database:

1. Launch Application Designer on your Copy of Production database using the new PeopleSoft release.
2. Select Tools, Upgrade, Stamp Database.
3. Fill in all three of the PeopleSoft Release fields with the appropriate value for your product line and release number:

Financials/SCM, 9.00

4. In the Service Pack field, enter 0.
5. Click Stamp.
6. Close Application Designer.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All


Task 5-29: Reviewing Change Control

Earlier in the upgrade process, in the beginning of the chapter “Apply PeopleTools Changes,” the Change Control feature was disabled. In this step, you re-enable Change Control, if your site uses this functionality.

To turn on Change Control:

1. Sign on to the Target database using Application Designer.
2. Select Tools, Change Control, Administrator.

The following dialog box appears:

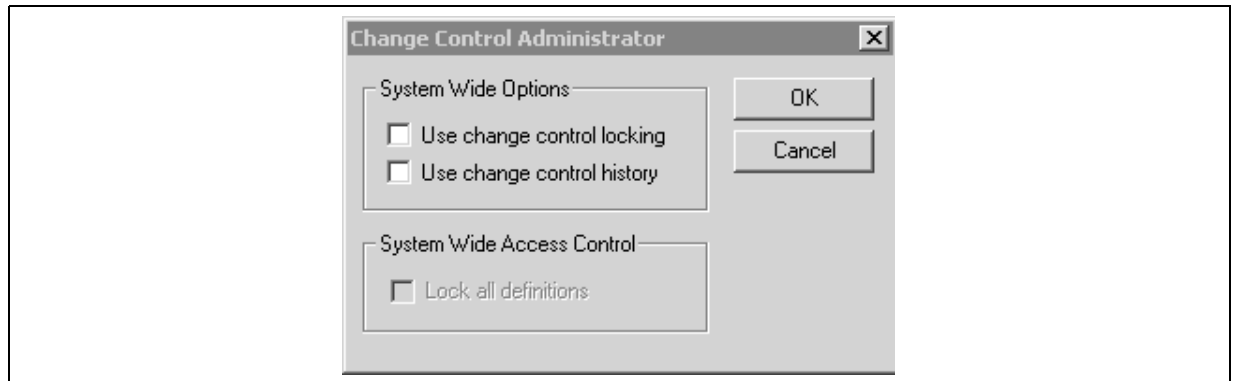

Change Control Administrator dialog box

3. Set Use change control locking and Use change control history according to your site specifications.

Note. Move to Production: The Change Control feature slows down copy functions. The large copy projects are only executed during the initial pass, and the feature is only disabled during the initial pass. If you enable the feature at this point, it will remain enabled during future test Move to Production passes.

See “Apply PeopleTools Changes,” Turning Off Change Control.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Initial	All	All	All

Task 5-30: Backing Up Before Testing

Back up your Copy of Production database now. This enables you to restart your upgrade from this point, should you experience any database integrity problems during the remaining tasks in the upgrade process.

See Appendix: “Planning for Upgrade Testing.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 5-31: Testing Your Copy of Production

In this task, you test your Copy of Production. Testing your Copy of Production will ensure that you can still operate your day-to-day processes on your new release. After you have reviewed your DDDAUDIT and SYSAUDIT, verify that the system is working properly by reviewing the system online. After you are comfortable that the system is working properly, you can perform the Test Move to Production upgrade pass.

See Appendix: “Planning for Upgrade Testing.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

CHAPTER 6

Apply Changes to Production Database

This chapter discusses:

- Understanding the Move to Production
- Testing the Move to Production
- Testing Once More
- Performing the Move to Production
- Completing the Upgrade Survey

Understanding the Move to Production

Once you complete all of the necessary tasks to launch your system into production, you are ready to begin your Test Move to Production passes or to move your system into production.

Task 6-1: Testing the Move to Production

This section discusses:

- Understanding the Move to Production Test
- Understand Move to Production
- Creating a New Change Assistant Job

Understanding the Move to Production Test

Everything you have done to this point is the initial pass of the upgrade process. Now you are ready to start the Test Move to Production pass. The initial pass is very time consuming and requires a lot of analysis at different steps of the process and to troubleshoot issues. The Test Move to Production pass is a different series of steps, which includes a subset of the previous tasks, and takes advantage of the tasks performed during the first upgrade pass.

You should perform as many test moves to production as necessary to work out any issues and to be comfortable with the process. During each Test Move to Production you will be able to refine the process so that you can save time and avoid manual processes. These test passes will also let you know how long the process takes so you can plan your production downtime for your move to production weekend.

Task 6-1-1: Understand Move to Production

The following text is a high level view of what you will be doing in the Move to Production test pass. The remaining steps in this task will prepare your test environment. For example, you may need to move some scripts generated in the initial pass to a new Change Assistant staging directory. Next you will create a new Change Assistant job, setting the Type of Upgrade to Move to Production. That will give you a job with steps filtered with only those steps that apply to the Move to Production (MTP) test pass. From that point forward, you will simply follow the steps as they exist in your new job.

One of those first steps will be to take a Copy of Production. This second Copy of Production is sometimes referred to as the “New Copy of Production.” The first Copy of Production, or “old” Copy of Production, will now be the Source database (it was the Target database in the initial test pass). The New Copy of Production is now the Target database.

The steps executed in the MTP pass vary in several ways. Many of the tasks and steps in the initial test pass will be replaced in the MTP pass with Data Mover export and import scripts. In the initial pass, some steps required you to make functional decisions and take time to manually set up data. That data can be copied from the first database to the next, saving you setup time and eliminating the chance for manual error or typos.

Also, the MTP pass does not repeat the database compare/copy steps. You made the decisions once; there is no need to repeat these steps. Instead, a Data Mover script, MVPRDEXP, will export all the tables that contain the PeopleTools objects like records and PeopleCode from the first database. Another Data Mover script, MVPRDIMP, will import those tables into the second database. Anything you have done to PeopleTools objects while executing or testing the first pass—copied objects from DMO, reapplied customizations, applied updates from the PeopleSoft Customer Connection website—will be moved to the second Copy of Production with these scripts.

Another important difference with the MTP pass is the handling of SQL scripts that create and alter tables. In the initial pass, you generated the SQL scripts, sometimes edited the SQL script, and then executed the SQL scripts. In the MTP pass, you may be able to skip the generation steps and use the SQL you previously generated. This is another way to save time in your critical go-live window and is the ultimate goal, but it is an incremental process to get to that point.

In the first MTP pass, everyone must regenerate the SQL. There are small differences between the initial and MTP passes that require the SQL to be regenerated in at least one MTP pass. The Change Assistant Templates are delivered with the steps set this way.

In subsequent MTP passes, you may choose to “turn off” the generation steps if possible. If you have not changed any records at the end of one MTP pass, then you can reuse the SQL in your next pass. If you have done anything to change records, you should generate SQL again. This can include things like applying PeopleTools upgrades (for example, 8.47 to 8.48), or applying updates from the PeopleSoft Customer Connection website that involve record changes, or making additional customizations to records.

If you choose to skip some of these steps, do one of the following: mark the step complete in your job, or change the step properties in the template, so the step will never show up in your MTP filtered job again. To change the step properties, double-click on the step to open the Step Properties dialog, and change the Type of Upgrade to Initial Upgrade. In addition, copy the SQL scripts from the previous pass output directory to the new pass output directory. Change Assistant will look for the SQL scripts in the output directory set on the job’s Database Configuration, so make sure it will find them when it tries to run them.

The steps that are eligible for this treatment will contain Move To Production documentation notes indicating such.

Note. If you have made any changes to your trees, tree structures, or PS/Query objects since the upgrade began, you may want information on how to preserve those changes.

See Appendix: “Preserving Queries and Tree Objects.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 6-1-2: Creating a New Change Assistant Job

You need to create a new Change Assistant Job for each test Move to Production pass.

To create a new Change Assistant job:

1. Oracle recommends that you use new output and stage directories for each new test pass. Create those directories now.
2. From Change Assistant, select Tools, Options and specify the new output and staging directories on the Change Assistant Options page.
3. Select File, Open Environment and select the environment.
4. Review the configuration on the General Settings window.
The Database Type, Language and SQL Query Executable will be the same as your previous job. Make changes to the PS_HOME settings, if necessary, and select Next.
5. Specify the Source Database setup information and click Next.
This is the Copy of Production database from your previous pass.
6. Specify the Target Database setup information and click Next.
This is the new Copy of Production database.
7. Review the environment configuration on the Confirm Selections window and click Next to save the changes to the environment.
8. Select File, New Job.
9. Select the template on the Use Template window and click OK.
10. On the Type of Upgrade window, select Move to Production.
11. Click OK.
A new upgrade job using the naming convention of *Template_Environment_Move to Production* is created.
12. Highlight the job name and select Edit, Set Documentation Directory, then select the directory where the documentation is located and click OK.
If you have been using documentation printed from the filtered view on the jobs, print the documentation again. The steps for Move to Production are different than in the initial pass.
13. Select View, Documentation.
14. Select View, Expand All to display all the steps in the job that apply to your upgrade.
The job will contain steps that were not in the initial upgrade pass and will exclude some steps that were in the initial upgrade pass based on the step properties.

Now you are ready to run the job.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 6-2: Testing Once More

As in any implementation project, you must consider planning, resources, development, and training. Testing also needs to be an integral part of your implementation project. Testing your database once more, after you have completed the upgrade, ensures that you can still operate your day-to-day processes on your new PeopleSoft release.

The level of testing in this task will focus primarily on the strategies to employ before moving into production.

See Appendix: “Planning for Upgrade Testing.”

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	Both	All	All	All

Task 6-3: Performing the Move to Production

When you are ready, you can move the system into production. Take your system out of production and perform all of the steps involved in testing the Move to Production against your production database.

See Testing the Move to Production.

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

Task 6-4: Completing the Upgrade Survey

We are interested in feedback on your upgrade experience and any thoughts and/or suggestions you have on how we can improve the process in the future. Note that this survey should only be accessed once you have completed your upgrade and are in production on the new release.

See Also

<http://www.peoplesoft.com/go/upgradesurvey>

Properties

Database Orientation	Initial or MTP	Products	Platforms	Languages
Target	MTP	All	All	All

CHAPTER 7

Appendices

Understanding Appendices

The appendices portion of this documentation contains information you may need for your upgrade. The appendices have been referenced throughout the upgrade documentation for further understanding of the upgrade you are performing. PeopleSoft recommends that you read each appendix as it is referenced in the documentation.

APPENDIX A

Applying Fixes Required for Upgrade

This appendix discusses:

- Preparing to Apply Fixes
- Applying Fixes During Installation
- Applying Fixes After Copying Project
- Applying Fixes After Data Conversion
- Applying Fixes Between Upgrade Passes
- Applying Fixes in Move to Production

Task A-1: Preparing to Apply Fixes

This appendix gives general instructions for applying a Required for Upgrade fix for your upgrade. If the directions given in a particular fix are different from those given here, then follow the instructions in the fix.

It is important that you run your upgrade using the latest versions of all upgrade software. In Customer Connection, check the upgrade page and the Updates and Fixes page to ensure that you have all of the latest code.

Ideally, you should follow the steps below to apply the various files and fixes.

To apply files and fixes:

1. Install the new release from the CD.
2. Apply any additional scripts and projects from the Customer Connection upgrade page to your new release codeline (and to the New Release Demo database, if applicable).
3. Apply any other Required for Upgrade fixes from Customer Connection's Updates and Fixes to your new release codeline (and to the New Release Demo database, if applicable).
4. Run your initial pass of the upgrade.
5. Before you begin each subsequent upgrade pass, check the upgrade page for new versions of any files you previously applied.

Then check Updates and Fixes for any new Required for Upgrade fixes.

Your initial upgrade pass will differ from your subsequent Test Move to Production passes. Some of the upgrade tasks and steps are common to both the initial upgrade pass and the Move to Production pass. For this reason, you may find Required for Upgrade fixes that do not apply to the upgrade pass that you are currently performing. The details provided with each fix will help you determine whether to apply the fix and when to apply it. The fix will also tell you what to do if you have already passed the step for which the fix is needed.

How you apply a fix depends on where you are in the upgrade process. This appendix explains how to apply a typical fix, and is organized by the various points within the upgrade where you will apply fixes.

Task A-2: Applying Fixes During Installation

In the chapter, “Install the Software,” of *Getting Started on Your PeopleSoft Upgrade*, you should first download and apply all files and objects from the upgrade page on PeopleSoft Customer Connection. Then you must download all Required for Upgrade fixes from Updates and Fixes on PeopleSoft Customer Connection. You can use the instructions in this section to apply any additional fixes that are posted, until you reach the task, “Running New Release Compare Reports.”

If a fix contains a project that needs to be copied from a file, apply it to your New Release Demo database during installation. If the project contains changes for records or fields, those objects will be updated during the normal compare and copy steps in the upgrade. You will not have to build objects in the project separately or consider whether it will have an impact on customizations. You will do that with the rest of the objects during the upgrade. Apply as many of the fixes as you can at this time.

To apply script fixes during installation:

1. Download Required for Upgrade change packages using the “Download Change Package” functionality in Change Assistant.
2. Use Change Assistant to apply the updates into your New Release Demo database.

Review the documentation included with each update prior to applying each update. There may be manual steps that need to be performed in order to successfully apply the update.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your current release, “Applying Updates.”

Task A-3: Applying Fixes After Copying Project

It is best not to apply fixes during the compare and copy tasks in the “Run and Review Compare Reports” and “Apply Application Changes” chapters of the initial upgrade pass. It can also be cumbersome to apply record and field changes during the creating and altering of tables in the “Complete Database Changes” chapter. It is, therefore, best to wait until just before the “Running Data Conversions” task in the “Apply Application Changes” chapter to apply additional fixes. Most of the fixed objects will be data conversion code, delivered in projects.

To apply PeopleSoft project fixes before data conversion:

1. Download Required for Upgrade change packages using the “Download Change Package” functionality in Change Assistant.
2. Use Change Assistant to apply the updates into your New Release Demo database for this upgrade pass.
Review the documentation included with each update prior to applying each update.
See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your current release, “Applying Updates.”
3. The project is now loaded on your New Release Demo database. You should run a project compare to make sure that the objects in the fix will not overwrite any of your customizations.

If you find customizations, you must decide how to deal with them before you copy the fix to your Copy of Production.

4. If you are performing a Move to Production upgrade pass, first migrate the change packages into the Source database for this upgrade pass.

If needed, first set up Change Assistant with the environment information for your Source database. If you customized any of the objects delivered in the change package, you should repackage the fix to include your customizations. If you did not customize any objects delivered in the fix you may directly apply them to your Source database.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your current release, “Applying Updates.”

5. Migrate the change packages into the Target database for this upgrade pass.

If needed, first set up Change Assistant with the environment information for your Target database.

Task A-4: Applying Fixes After Data Conversion

At this point, you have already converted all of your data for the upgrade pass, and you cannot apply Application Engine program fixes and use them in this upgrade pass. You should refer to the fix instructions to determine what to do in each case. Often, the instructions say that you need to restore your database from a pre-conversion backup and rerun data conversion to get the benefits of the fix. Because this is the only way you can get the fix onto your current Copy of Production, you may decide to allow the error and not apply the fix until you do a Test Move to Production. Then after you have completed that test pass, you can test the affected function. However, you should not do this if your next pass is your final Move to Production, and you are going into production with the resulting database. You should always test your upgraded database between test passes if changes have been made to procedures, scripts, or programs. You do not want any surprises during the final Move to Production.

Task A-5: Applying Fixes Between Upgrade Passes

You can apply fixes just before you start a Test Move to Production pass in the same way you would in the step above, Apply Fixes After Copying Project. In those instructions, you apply the fix to your New Release Demo database and compare it to the Copy of Production. Make sure that you do the database comparison in order to verify that the fix does not wipe out any customizations you made to Application Engine programs during your initial upgrade pass. If you have made customizations, merge your customizations into the new Application Engine code on the New Release Demo database. Then apply the fix to your Copy of Production, which you will use as the Source database in the Test Move to Production. The fix will then get moved to your New Copy of Production when you run the MVPRDEXP.DMS and MVPRDIMP.DMS scripts in the “Apply PeopleTools Changes” chapter.

Task A-6: Applying Fixes in Move to Production

Once you have started a Test Move to Production, do not apply any fixes until just before data conversion. Apply any fixes using the previous step, “Applying Fixes After Copying Project.” In those instructions you apply the fix to your New Release Demo database and compare it to your Copy of Production. Instead of using the original Copy of Production as the Target, you must now use your New Copy of Production, the one defined as the Target in your Move to Production Change Assistant job. Be sure to do the database comparison to verify that the fix does not wipe out any customizations that you made to Application Engine programs during your initial upgrade pass. If you have made customizations, merge your customizations into the new Application Engine code on the New Release Demo database, then copy the project to your New Copy of Production.

APPENDIX B

Changing the User Interface


This appendix discusses:

- Change the User Interface
- Change the User Interface for Mobile

Task B-1: Change the User Interface

Three user interface options were delivered with your current release of PeopleSoft 8.x. The classic style, the style seen in previous releases of your PeopleSoft application, is set as your default style. The following are examples of the three delivered styles: classic, light blue, and dark blue.

The classic style, shown below, is set as your default style delivered with your PeopleSoft release.

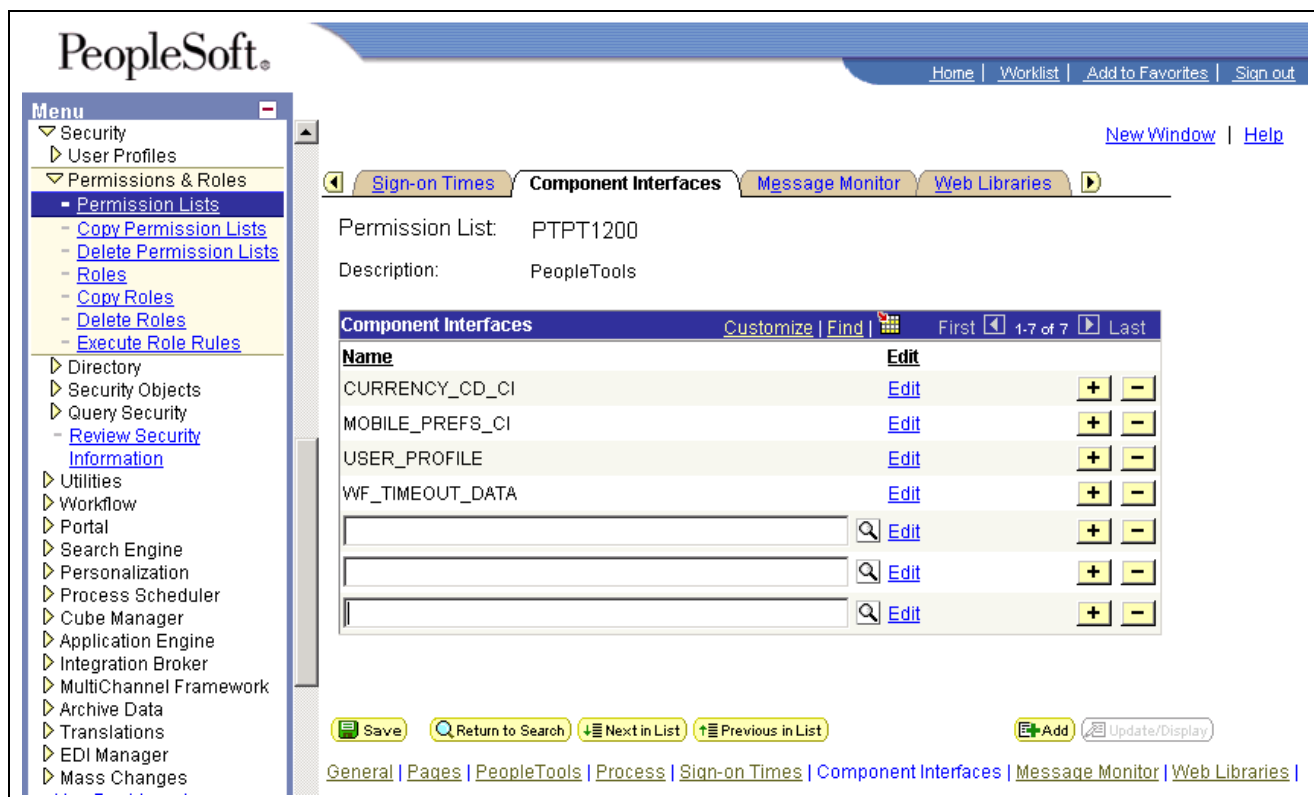

The classic style user interface option

The following example represents the light blue style.

The screenshot shows the PeopleSoft web application interface in a light blue theme. The top navigation bar includes links for Home, Worklist, Add to Favorites, and Sign out. A left-hand menu is expanded to show the 'Permissions & Roles' section, with 'Permission Lists' selected. The main content area displays the 'Component Interfaces' for permission list PTPT1200, which is described as 'PeopleTools'. A table lists several component interfaces with 'Edit' links and add/remove buttons. At the bottom, there are buttons for Save, Return to Search, Next in List, Previous in List, Add, and Update/Display, along with a breadcrumb trail.

PeopleSoft®

Home | Worklist | Add to Favorites | Sign out

New Window | Help

Sign-on Times | **Component Interfaces** | Message Monitor | Web Libraries

Permission List: PTPT1200
Description: PeopleTools

Component Interfaces		Customize	Find	First	1-7 of 7	Last
Name	Edit					
CURRENCY_CD_CI	Edit				+	-
MOBILE_PREFS_CI	Edit				+	-
USER_PROFILE	Edit				+	-
WF_TIMEOUT_DATA	Edit				+	-
	Edit				+	-
	Edit				+	-
	Edit				+	-

Save Return to Search Next in List Previous in List Add Update/Display

General | Pages | PeopleTools | Process | Sign-on Times | **Component Interfaces** | Message Monitor | Web Libraries |

The light blue style user interface option

This example represents the dark blue style.

This screenshot shows the same PeopleSoft web application interface as the first one, but with a dark blue theme. The layout, including the left-hand menu, top navigation bar, and main content area, is identical to the light blue version. The 'Component Interfaces' table and the bottom navigation buttons are also present in the same positions.

PeopleSoft®

Home | Worklist | Add to Favorites | Sign out

New Window | Help

Sign-on Times | **Component Interfaces** | Message Monitor | Web Libraries

Permission List: PTPT1200
Description: PeopleTools

Component Interfaces		Customize	Find	First	1-7 of 7	Last
Name	Edit					
CURRENCY_CD_CI	Edit				+	-
MOBILE_PREFS_CI	Edit				+	-
USER_PROFILE	Edit				+	-
WF_TIMEOUT_DATA	Edit				+	-
	Edit				+	-
	Edit				+	-
	Edit				+	-

Save Return to Search Next in List Previous in List Add Update/Display

General | Pages | PeopleTools | Process | Sign-on Times | **Component Interfaces** | Message Monitor | Web Libraries |

The dark blue style user interface option

See the Enterprise PeopleTools PeopleBook: PeopleSoft Application Designer for your new release.

To change your styles, you must delete the substyle sheets associated with the classic style and replace them with either the light or dark blue substyle sheet.

Note. The new user interface looks are supported by Internet Explorer release 5 and above and Netscape Navigator release 6 and above. If using a browser and release other than these, the system defaults to the classic style.

To enable one of the new user interface looks:


1. In Application Designer, open the stylesheet PSSTYLEDEF.
2. Select the PSALTERNATE Sub Style Sheet, and click Delete.
3. Select Insert, Insert Sub Style Sheet.
4. Select PSALTERNATE_LIGHTBLUE or PSALTERNATE_DARKBLUE.
5. Repeat steps 1 through 4 for the PTSTYLEDEF and PSACE Sub Style Sheets, making sure to use the same extension (_LIGHTBLUE or _DARKBLUE) as you did for PSALTERNATE.
6. Select Save.
7. Open the stylesheet PSQUERYSTYLEDEF.
8. Select the PTQUERYSTYLESUB Sub Style Sheet, and click Delete.
9. Select Insert, Insert Sub Style Sheet.
10. Select PTQUERYSTYLESUB_LIGHTBLUE or PTQUERYSTYLESUB_DARKBLUE.
Use the same extension as you did in Step 4.
11. Click Save.

Task B-2: Change the User Interface for Mobile

You use related content projects to synchronize extraneous PeopleSoft PeopleTools objects to a mobile device. In particular, you can use a related content project to synchronize a new or customized stylesheet to the mobile device. Related content projects are associated with a component interface. Oracle recommends that you associate a given related content project with a synchronizable component interface that is common to your mobile application.

To change the user interface look for mobile applications:

1. Follow the procedure in the previous task, “Change the User Interface,” to add the new or customized stylesheet to a PeopleTools project.
2. In Application Designer, open a synchronizable component interface that is common to your mobile application.
3. Open the Properties dialog box from the pop-up menu.
4. Select the Synchronization tab.

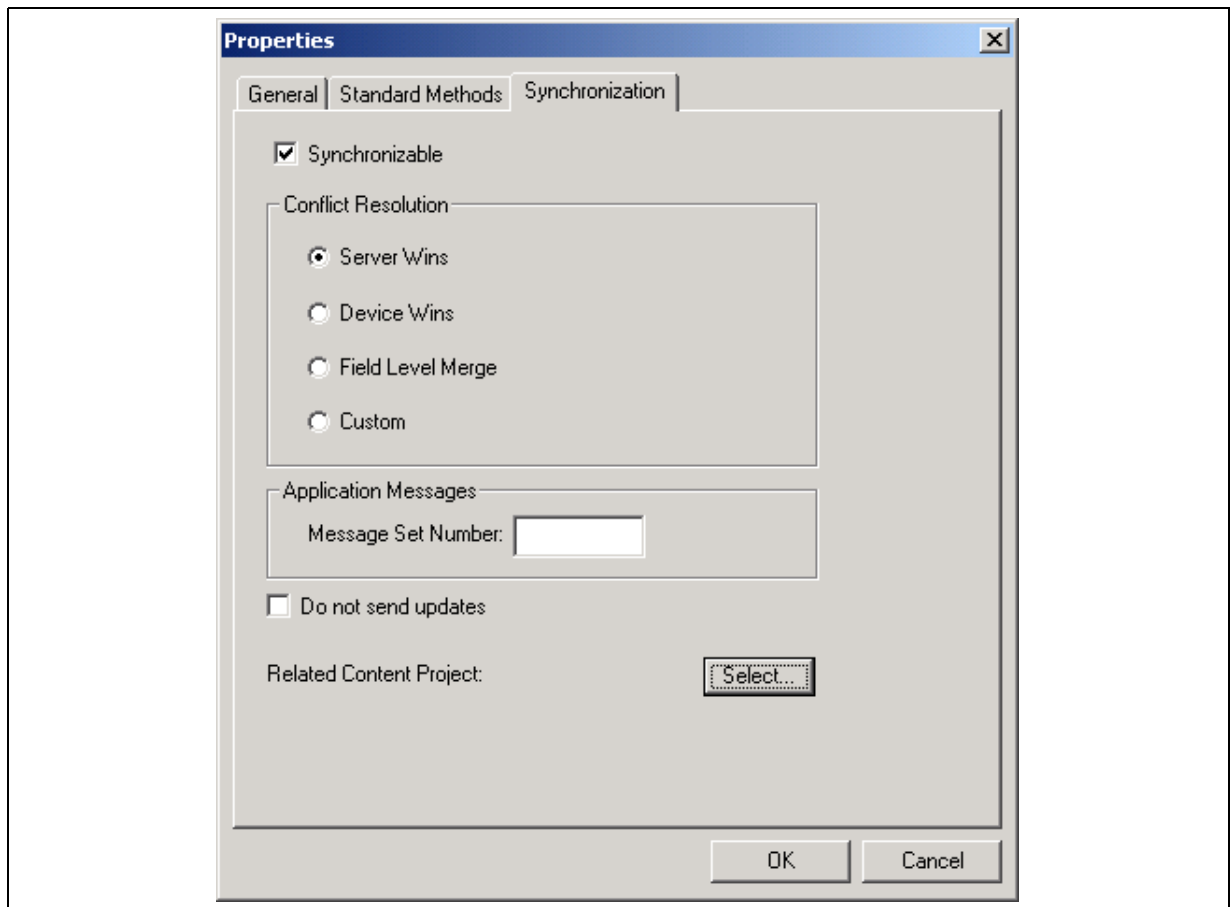

Properties dialog box: Synchronization tab

5. Click Select at the Related Content Project field.
6. Find and highlight the desired project and click Select.
7. Click OK.

The stylesheet will be synchronized to the mobile device during the next bootstrap or update applications synchronization.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Component Interfaces for your new release.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Mobile Agent for your new release.

APPENDIX C

Improving Performance

This appendix discusses:

- Understanding Performance Improvement
- Planning Your Upgrade for Performance
- Performing the Upgrade
- Improving Performance for Your Platform
- Consulting the Global Support Center

Understanding Performance Improvement

Performance is always a challenge when you are upgrading. Much of the data currently in your database will be affected. No other batch processing works quite like it. Upgrade performance is sensitive to your unique environment and data. These performance recommendations are designed to help you improve performance during your upgrade.

Task C-1: Planning Your Upgrade for Performance

Review the following guidelines to help plan for better upgrade performance:

- Provide as much hardware, memory, and disk space as you can.
- Run long processes on a dedicated server, not the client. Configure that server similarly to your production environment.
- Size the Copy of Production database (Target) like your production database — allow for growth.
- Use a dedicated workstation, configured like the production environment.
- Provide an application server and process scheduler for the Target database on the new PeopleSoft release.
- Look for fragmented tables. Resize or reorganize the initial and next extends accordingly.
- Know which tables are your largest. This information will be valuable during the upgrade.

Task C-2: Performing the Upgrade

This section discusses:

- Verifying the Database Structure Task
- Creating and Altering SQL Scripts
- Performing Data Conversion

Task C-2-1: Verifying the Database Structure Task

When performing the “Modifying the Database Structure” task, perform all recommended update statistics, so the optimizer can make a good decision.

Task C-2-2: Creating and Altering SQL Scripts

The following list provides tips to use when performing the “Modifying the Database Structure” task.

- Perform all recommended update statistics, so the optimizer can make a good decision.
- Look for large tables that are being altered. Create separate scripts for each of these tables and run the script concurrently with your other alter scripts. You can run these concurrently even if you are using the Alter by Rename build option because each table creation uses an independent temporary table name in the new PeopleSoft release (PSY*recname*).
- Run your create table script concurrently with the alter tables without deletes script.
- Some indexes will not create during alter without deletes because of a unique key violation. You can expect this because index structures have changed. The data in these indexes will be corrected during data conversion. You can create the index as a non-unique key for data conversion. Create this non-unique index, without the field that caused the error, so that data conversion does not have to update the index as well as the data pages as it corrects the data in this field.

Task C-2-3: Performing Data Conversion

Oracle delivers the Change Assistant templates to run the steps on the client by default. The server can run Application Engine programs. You may want to run these programs on the server to increase performance. Change Assistant uses the PSEMHUB and PSEMAgent to execute jobs to the server. You will need to configure and start your Environment Management Hub and Agent, enter the Environment Management information into the Change Assistant options, set your Change Assistant mode, select the Perform Server Processing check box, and modify the run location of the steps you wish to run on the server. Consider running data conversion application engine programs concurrently as they were designed with no dependencies between programs. Any exceptions to this are noted in the documentation. If you would like to take advantage of concurrent processing, modify the step properties and set the Run Concurrently option to Yes.

See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your new release.

Task C-3: Improving Performance for Your Platform

This section discusses:

- Using Oracle
- Using DB2

Task C-3-1: Using Oracle

You should use the cost-based optimizer during the upgrade. The application engine scripts use MetaSQL to run the update statistics command at various times during data conversion. If you are running the rule-based optimizer, you will not take advantage of these statements.

When running the alter scripts, remember the Oracle hint `/*APPEND*/`. This command will improve the performance of your alter script if you are doing an “Alter by Rename.” This hint performs like an Oracle Direct Load Insert and does not capture redo or recovery information. The syntax is as follows:

```
INSERT /*+ APPEND */ INTO TABLENAME (FIELD1, FIELD2, ...
```

Make sure your database administrator has turned autoextend on. Autoextend allows tablespaces to grow larger than their set maximum size and will be useful during the upgrade process since tablespaces grow several times larger than they would in production.

Alter the tablespace for PSIMAGE and increase it to 200 MB; autoextend on the next 10 MB; set the maxsize to *unlimited*.

Task C-3-2: Using DB2

Perform all recommended update statistics on the system catalog as well as the application tablespaces.

Interspersed throughout the Application Engine data conversion programs are steps that make a dynamic call for RUNSTATS to be performed against selected tables. An example of how this is used follows:

- Step01 - Start with an empty Temp_Table_TAO.
- Step02 - INSERT 60,000 rows into the Temp_Table_TAO.
- Step03 - Application Engine Step calls %UpdateStats(Temp_Table_TAO).
- Step04 - You can now perform SQL against Temp_Table_TAO using new statistics.

This will allow you to use indexes when processing against Temp_Table_TAO. If DB2 z/OS is not configured correctly, Application Engine programs skip these steps and the performance of the SQL steps that follow will suffer.

In order to take advantage of the %UpdateStats feature, at least one of these conditions must be met:

- You implemented the DSNUTILS stored procedure.
- You followed the enhanced installation path.

See the Enterprise PeopleTools Installation for DB2 UDB for z/OS for your new release.

Note. If you disable the %UpdateStats feature of Application Engine, it will adversely affect the performance of your data conversion programs, because statistics will not update when the tables are loaded with large volumes of data.

Task C-4: Consulting the Global Support Center

If you do have a problem with your upgrade, contact the Global Support Center (GSC). Oracle will be able to give you a solution to the problem faster if you supply the following information:

- Include details about the table row counts and indexes available on the tables involved in the processing:
 - Include indexes in your physical database, not those defined in Application Designer.
 - Mention any additional indexes that you custom-added; they could be getting in the way.
- Include RDBMS (Oracle, SQL Server, or DB2, and so on) and RDBMS release (for example, Oracle 7.3 or 8.16).
- If you are running on Oracle, specify whether you are running in cost-based or rule-based mode.
- Include the PeopleSoft upgrade path for both PeopleTools and the application.
- Provide trace files: PeopleTools trace and RDBMS-specific trace files, SQL explains, and so on.

APPENDIX D

Planning for Upgrade Testing

This appendix discusses:

- Understanding Testing Techniques
- Deciding When to Test
- Evaluating Your Testing Requirements
- Defining Your Testing Strategy
- Determining the Testing Conditions
- Developing Your Test Plan
- Developing Test Scripts
- Reviewing Tips and Techniques

Understanding Testing Techniques

As with any project, testing is a critical part of your upgrade project. With proper testing, you can ensure that you upgrade successfully and you are ready for your Move to Production.

Upgrades vary in complexity and scale from release to release and customer to customer, so the testing periods and the activities required to perform testing vary from upgrade to upgrade. Because PeopleSoft cannot anticipate how every organization uses the system to fit their own business practices, including customizations and data setup, PeopleSoft does not deliver upgrade test scripts. However, there are some general testing guidelines that you can follow to assist with your upgrade testing. In this section, you will find information that will help you plan your testing efforts.

Task D-1: Deciding When to Test

An effective testing strategy involves an understanding of the stages of a PeopleSoft upgrade and where, within these stages, testing should be performed. You can take more than one approach and use more than one method to test your upgrade.

Task D-2: Evaluating Your Testing Requirements

To evaluate your testing requirements, you need the following information:

- The number of products and modules you currently have in your production database.
- The number of customizations you have in your production database.
- The functional design and business requirements addressed by each customization.
- Your online, batch, and reporting business processes that you want to include in testing.

Task D-3: Defining Your Testing Strategy

This section discusses:

- Understanding Your Testing Strategy
- Evaluating Unit Testing
- Evaluating System Testing
- Evaluating Integration Testing
- Evaluating Parallel Testing
- Evaluating Performance Testing
- Evaluating User Acceptance Testing
- Evaluating Regression Testing

Understanding Your Testing Strategy

Once you evaluate your testing requirements, you can determine what types of testing you need. You should define the tests to be performed for the project and the goals of each test—including roles and responsibilities, test-case management, control points, and success criteria. In addition, you should define and document the scope of each type of testing. Use the definitions below to determine the levels of testing required in your organization.

To ensure upgrade success, be sure to train upgrade members before the upgrade. It is critical to have educated testers to ensure adequate test coverage of new functionality.

The testing types below do not necessarily run systematically, one after another. Different test conditions can sometimes run in parallel.

Important! It is important to test not only your customizations and changes in your new release but also your standard business practices. By doing this you ensure that your normal business practices have not been altered by the new release and/or your customizations.

Task D-3-1: Evaluating Unit Testing

In this stage of testing, you have completed your upgrade tasks and your database is now at the new release level. However, you should unit test before you use the new system. Unit testing validates data, business rules, and business process requirements. In addition, it ensures that business processes work as designed and your database is ready for full functionality testing. The processes for performing unit testing are described below:

- Test individual online transactions and batch processes on the upgraded database.
- Validate data converted during the upgrade.
- Verify that you can access existing data and enter new data successfully.
- Test customizations reapplied to the upgraded database.
- Each customization is tested individually along with all related processes.
- Business processes are not tested.
- Test scripts are not required.
- Test – Document – Resolve issues – Retest.

Task D-3-2: Evaluating System Testing

System testing ensures that all business functions and processes execute appropriately from the customer's view. Business processes are tested from beginning to end during system testing; this is sometimes referred to as end-to-end testing. The processes for performing system testing are described below:

- Create system test environment via a test Move to Production.
- Test inbound and outbound interfaces and related business processes.
- Test online business processes using relevant security (that is, user IDs, roles, and permission lists).
- Test batch business processes.
- Test reporting processes (SQR, PS/Query, nVision, and Crystal).
- Test customizations to business processes.
- Perform using test scripts.
- Compare expected results to actual results.
- Test – Document – Resolve issues – Retest – Document – Sign off.

Task D-3-3: Evaluating Integration Testing

After system testing, you perform integration testing. In this stage, you test business processes and groups of related business processes within the application to determine that they function as designed. In addition, you ensure that any design flaws are resolved before user testing. The following list of activities describes integration testing:

- Create integration test environment via a test Move to Production.
- Test specific business processes.
- Test integration between modules and business processes.
- Perform using test scripts.
- Compare expected results to actual results.

- Test – Document – Resolve issues – Retest – Document – Sign off.

Task D-3-4: Evaluating Parallel Testing

Parallel testing validates that the current production system and the upgraded database generate the expected results for specific business events. Parallel testing is optional, but frequently used to ensure that the new release will generate the same results given the same testing scenarios. The processes for performing parallel testing are described below:

- Create a parallel test environment via a test Move to Production.
The Copy of Production should be taken before the major business processes/events are executed so that the same processes can be run during the parallel test.
- Retain any output from production processes for later comparison.
- Run the same business processes/events in the upgraded database.
- Compare results generated in the production system with the results generated using the upgraded database.
- Perform using test scripts.
- Test – Document – Resolve issues – Retest – Document – Sign off.

Task D-3-5: Evaluating Performance Testing

You conduct performance testing to determine if the system can accomplish stated objectives within a specified time period. Performance of the current production system is often used as a baseline. The processes for performing performance testing are described below:

- Define performance objectives for each business process included in the scope of the test.
- Perform business process.
- Monitor performance.
- Compare actual performance and acceptance criteria.
- Perform using test scripts.
- Test – Document – Resolve issues – Retest – Document – Sign off.

Task D-3-6: Evaluating User Acceptance Testing

User acceptance testing determines if day-to-day users can complete daily work activities within the system with an acceptable level of effort. For example, run through business processes such as hiring, terminating, and paying an employee in Human Resources or creating, editing, and posting journals in Financials. The processes for performing user acceptance testing are described below:

- Functional resources should execute test scenarios (with their appropriate production security access to ensure they have access to all the components, pages, and processes used in their daily functions).
- Perform using test scripts.
- User testing should not be performed with developer or Super User access.
- Test – Document – Resolve issues – Retest – Test – Document – Sign off.

Task D-3-7: Evaluating Regression Testing

You perform regression, or re-testing, if problems were found and resolved or changes were made during any of the previous tests. This stage of testing validates the test Move to Production and Move to Production parts of the upgrade. When all the tests have received sign-off, you will use the initial Copy of Production to upgrade the production database/environment. You then perform a test move into the production environment and customers confirm that the test move executed successfully. At this point you conduct regression testing. The following tips will assist you with regression testing:

- Ensure that no new defects have been introduced during the move.
- Execute a predefined set of scripts to confirm the test move.
- Performed by Functional Resources before *Go Live*.
- Rerun scripts from previous testing.

Task D-4: Determining the Testing Conditions

After you identify the types of testing to include in your upgrade, determine conditions for each stage of testing. Be sure to test the actual test Move to Production to resolve any technical issues in the upgrade process itself in addition to performing functional application testing. Perform the following actions for each testing type:

- Determine criteria for successful completion.
- Determine which tests you can run concurrently and which you must run serially.
- Set up test plans and test scripts you will need.
- Define the testing environment.
- Define issue resolution procedures.
- Define change control and migration procedures.
- Define which third-party tools you must install and configure.
- Identify database maintenance procedures, for example, backup and refresh.
- Evaluate the need for a testing tool to aid in the testing process.

Task D-5: Developing Your Test Plan

If you have test plans from your implementation or previous upgrades, consider modifying them for this upgrade project, ensuring that you incorporate features and functions delivered with the new release. Use existing test plans and scripts wherever possible. Identify modifications during the fit/gap analysis and complete script generation during the initial upgrade. Based on the objectives and scope defined in your testing strategy, identify the following items for each type of testing:

- Test procedures
- Assumptions
- Timing
- Deliverables

- Acceptance criteria
- Roles and responsibilities
- Resource requirements
- Training requirements
- Test environment
- Data requirements
- Issue and change control tracking procedures
- Testing Tools

Task D-6: Developing Test Scripts

The process of developing test scripts can assist with detecting problems in the requirements or design of an application. It requires thinking through the entire operation of the application. For this reason, you may find it useful to start preparing test scripts early in the upgrade cycle and, if possible, base them on existing test scripts from your implementation project or previous upgrade.

If you have test scripts from your original implementation, recycle them and modify them to accommodate new functionality. That way, you can be sure to cover your critical end-to-end business processes. You will also want to focus additional testing time on your customizations to verify that they have upgraded successfully.

If you do not have test scripts from your implementation, you can create them by documenting what you currently do within the system.

Create a test script for each business process to define the Action or Event, Input, and the expected result to determine if a feature of an application is working correctly. Functional people who are aware of current processes should write your test scripts. However, when writing test scripts, assume the person testing does not know how to use the system. Use the following procedure for developing test scripts:

- Test scripts should contain specifics, such as test identifier, test name, objective, test conditions and setup, input data requirements, steps, and expected results.
- Write as a step-by-step guide, stating what data should be entered, when, and where.
- Organize by module, business process, and process cycles.
- Create with full production security in mind.
- Create early in the upgrade process.

Make sure that your tests are consistent with the following tips:

- Action
 - Include the script name, description, and purpose.
 - Include the navigation steps within the PeopleSoft system.
 - Include navigation steps outside the PeopleSoft system.
- Input
 - Include security requirements: what User ID, Role, and Permission List should be used to perform the test.

- Specify key data elements: entering new or accessing existing data.
- Results
 - Include the exact results.
 - Print screens to support the results and print the report output.

Task D-7: Reviewing Tips and Techniques

This section discusses:

- Reducing the Time of Upgrade Process
- Performing Security Testing
- Performing Testing on Up to Date Data
- Performing Test Move to Production
- Tracking Issues
- Reviewing Testing Tools
- Discussing Change Control
- Discussing Back Up Procedures
- Evaluating Unexpected Results
- Evaluating Reasons for Failure

Task D-7-1: Reducing the Time of Upgrade Process

All testing can be performed at the end, including running the tests on the current system to obtain results for comparison. One way to reduce the overall timeframe of an upgrade is to execute the tests on the current system while the upgrade is in progress. This way you will have the results ready when the upgraded database is to be tested. This can be achieved by taking two copies of the production database at the start of the upgrade. Only one copy is upgraded, while the other remains at current release. The testing time is now reduced to only performing the tests on one database.

After each test Move to Production, you may want to turn over the upgraded database to the testing team while the technical team begins a new iteration of the test Move to Production. Conducting the two efforts in parallel may decrease the overall time required to upgrade. Any issues that are found by the testing team can be incorporated into the newly upgraded database as soon as it is available.

One approach that may be used for the Move to Production is to run the production database and upgraded database in parallel to ensure that key business processes operate as expected. Although this may require dual maintenance of data during the parallel testing period, it may minimize the impact of the actual Move to Production. If you are interested in using this method, once you have performed a test Move to Production to your satisfaction, schedule the production cutover weekend. Then, perform the next test Move to Production during that weekend. Bring the existing production system back up and run the upgraded database concurrently. If, after comparing the outcome of your critical business processes, you are satisfied with the results, simply set the upgraded database to your production system. If you are not satisfied with the results, make the necessary adjustments and perform another test Move to Production.

Task D-7-2: Performing Security Testing

It is very important that you test security on each test pass you complete. Security is a vital part of the upgrade process and if it is not tested properly before you go live with your new release, there is a great potential for failure.

Task D-7-3: Performing Testing on Up to Date Data

The previous technique will mean that testing is performed on *old* data. The copies of production may have been taken some weeks or months in the past. It will confirm that the data you started with has upgraded successfully. However, it may be required to perform the tests on the most recent data set as follows:

- Take a copy of production and upgrade
- Perform all phases of testing on the upgrade version up to unit testing
- Determine that the database is ready for full functionality testing

Task D-7-4: Performing Test Move to Production

Performing a test Move to Production is a good technique for assuring database readiness as follows:

- Take two up to date copies of the production database.
- Perform the test Move to Production steps to upgrade one of the databases.
- Execute test scripts on the remaining database.
- Perform tests on the upgraded database and compare results.

Task D-7-5: Tracking Issues

You should implement a method for tracking the tests and issues discovered during testing. Tracking issues and resolutions on a central document serves as a communication tool and minimizes duplication effort. The following tips should be considered while tracking issues:

- Categorize issues:
Critical, Major, Minor, Cosmetic
- Use a central document repository or tracking tool

Task D-7-6: Reviewing Testing Tools

SQA Robot :

- Records key strokes (like a macro recorder) into Visual Basic scripts.
- Useful for regression testing.
- SQA Manager—can be used to simulate multiple users.

Test Director by Mercury/Interactive:

- Tool that manages test scripts—tracks execution and defects.
- Useful for regression testing.

Task D-7-7: Discussing Change Control

Make sure that you have a procedure for implementing changes during the testing stage. You may have several databases, if server space permits. All changes should be made in a master database. If an issue is found during testing, the resolution should be applied to the master database and promoted via pre-defined migration procedures. Remember that a master database will also be required to perform the Move to Production.

Task D-7-8: Discussing Back Up Procedures

The following tips should be considered when backing up your data:

- Back up at baseline before testing (use a backup technique that will allow you to restore individual tables).
- Back up at key points for point in time testing.
- Implement refresh procedures to avoid duplicate data.

Task D-7-9: Evaluating Unexpected Results

In the event you receive unexpected results and you cannot determine their cause, attempt to replicate any issues you encounter in your Copy of Production database on a delivered Demo database. If the issue does occur on Demo, it should be reported to the Global Support Center. Check PeopleSoft Customer Connection to see if a fix has been posted to resolve the issue.

See PeopleSoft Customer Connection (Updates + Fixes).

Task D-7-10: Evaluating Reasons for Failure

The list below identifies reasons why your test plan might have failed:

- Testing strategy was poorly defined
- Test plans were poorly defined
- Test scripts were poorly defined
- Lack of resources and resource commitment
- Lack of understanding of the upgrade process

APPENDIX E

Preserving Queries and Tree Objects

This appendix discusses:

- Understanding Preserve Queries and Trees
- Preparing the Database
- Creating a New Project
- Comparing the New Project
- Copying the Project
- Testing the Project
- ReExporting the PeopleTools Tables

Understanding Preserve Queries and Trees

This appendix contains information for preserving queries, trees, and tree structures. At the beginning of your upgrade, you should have informed your end-users and development team that your PeopleSoft system was frozen, meaning that no changes should have been made to any PeopleSoft PeopleTools tables or objects including queries, trees, and tree structures. The freeze on PeopleSoft PeopleTools changes is important because you will lose any changes to these objects made during an upgrade to PeopleSoft PeopleTools tables. Occasionally, however, end-users may have to make critical changes to trees, tree structures, and PS/Query objects. If this has happened in your system, you can perform a process to preserve those additions and changes to trees, tree structures, and queries. You will have to work with your end-users and developers to obtain a list of queries, trees, and tree structures that you need to preserve.

You will run through the test Move to Production (MTP) steps several times for practice and testing purposes. Please note that you have the option to perform the preserving queries and trees procedure during each of your test Move to Production runs, but you must perform it during the last run of the test Move to Production. If you do not perform this procedure during your last run to preserve the trees, tree structures, and queries that have been changed since the beginning of your upgrade, they will be lost.

Note. The process outlined in this appendix to preserve trees and queries should be performed prior to data conversion so that any additional conversion would be taken care of by the appropriate data conversion programs.

This appendix includes instructions to prepare your database and create a project on which to preserve your queries, trees, and tree structure changes.

Task E-1: Preparing the Database

In this step, you create a new copy of your current production database, perform steps on the new copy, and run scripts against the new copy to update the release level.

To prepare the database:

1. At the beginning of the test Move to Production, you should make a new copy of your current production database. To preserve queries and trees, you need to make not only that Copy of Production but also an additional copy of your current production database. For clarity, Oracle refers to this additional copy of your production database as the Tree/Query Copy of Production database. So now you should have a Copy of Production database and a Tree/Query Copy of Production database.
2. Perform the test Move to Production on your Copy of Production database.
3. To obtain the queries and trees that you want to preserve, the Tree/Query Copy of Production database needs to be at the same release level as the Copy of Production database on which you just completed the test Move to Production. To update your Tree/Query Copy of Production to the same release, you run release scripts against this database. Oracle refers to this as “reling up” the database. Use the Custom Compare template to “rel up” your database. Select the Product Line *PEOPLETOOLS* when configuring your Change Assistant job.

Task E-2: Creating a New Project

Now that your Tree/Query Copy of Production is at the same release as your Copy of Production database, you create a project in the Tree/Query Copy of Production that contains all of the queries and trees that you wish to preserve.

To create a new project:

1. Sign on to the Tree/Query Copy of Production using a valid PeopleSoft User ID and launch Application Designer.
2. Select File, New...
3. Select *Project* for Object Type.
4. Select File, Save Project and enter a project name; for example, *PRESERVED*.
5. Select the Upgrade tab in Application Designer.

Note. Queries and trees do not appear in projects under the Development tab in Application Designer. To see the queries and trees that you will insert into the *PRESERVED* project in the next step, you must make sure that you are using the Upgrade view of Application Designer.

6. Select Insert, Definitions into Project...
7. Select Queries from the Definition Type drop-down list box and click Insert.
8. Using your list of identified queries that need to be preserved, highlight each one of those queries from the Application Designer list.

You can highlight more than one by holding down the Control (CTRL) key while you click the name of the query.

9. After you have highlighted all of the queries that you want to preserve, click Insert, then click Close.
Under the PRESERVED project name in the Upgrade view of Application Designer, you will see Queries as an object type in the project.
10. Double-click on queries under the PRESERVED project to see a listing of all of the queries to preserve in the right-hand window of Application Designer.
11. Select File, Save Project.
12. Repeat steps 6 through 11 for trees and tree structures.
Now your PRESERVED project should contain all of the queries, trees, and tree structures that you want to preserve.

Task E-3: Comparing the New Project

In this step, you compare the queries, trees, and tree structures that are in your PRESERVED project against your Copy of Production database. Because the tree objects in your PRESERVED project are not comparable objects in Application Designer, you must manually compare the tree objects that you want to preserve. During the query and tree structure compare process, the Application Upgrade utility sets the project flags. These flags determine whether the following actions will occur:

- Changes will be performed on the Copy of Production (Target) database when you perform the export and copy.
- Changes will be tagged as *Copy* or *Delete* operations.
- The project flags will be set to automatically take these actions or not.

These settings are determined based on whether or not the objects in the project currently exist on the Copy of Production (Target) database.

To compare the new project:

1. Sign on to the Tree/Query Copy of Production using a valid PeopleSoft User ID and launch Application Designer.
2. Select File, Open...
3. For Definition, select Project and click Open to display the list of projects.
4. Select the PRESERVED project and click Open.
5. Select Tools, Compare and Report.
6. Sign on to your Copy of Production.
7. From the Object Type box, select *Queries and Tree Structures*.
8. Click Options...
9. Select *PeopleSoft Vanilla* for the Target Orientation.
10. Select *Project* for the Compare Type.
11. Verify that the Compare Report output directory is set to the correct location.
12. Select the Report Filter tab and set the report filter check boxes appropriately for your compare.
13. Click OK.

14. Select Compare.
15. Review the compare reports for queries and tree structures. In addition, perform a manual compare of the trees that you want to preserve. Based on the results of this review, set the Action and Upgrade check box appropriately in the PRESERVED project.

Task E-4: Copying the Project

In the following steps, you copy the PRESERVED project to the Target database. This is the Copy of Production database on which you ran the test Move to Production.

To copy the project:

1. Sign on to the Tree/Query Copy of Production using a valid PeopleSoft User ID and launch Application Designer.
2. Select File, Open...
3. For Definition, select *Project* and click Open to display the list of projects.
4. Select the PRESERVED project and click Open.
5. Select Tools, Upgrade, Copy.
6. Sign on to your Copy of Production database.
7. Make sure that the Reset Done Flags and Copy Project check boxes are selected.
8. Click Select All.
9. Click Copy.
10. Using the Upgrade view of the PRESERVED project in Application Designer, review the Done flags in the project to make sure that all of the objects that you wanted to preserve were copied to the Target database.

Task E-5: Testing the Project

Now that the queries, trees, and tree structures that you wanted to preserve are in the Copy of Production database, you must test and re-test and make any necessary changes if the test results are not what you expected.

Task E-6: ReExporting the PeopleTools Tables

Once you are satisfied with the test results, you must re-export the PeopleSoft PeopleTools tables to actually preserve the queries, trees, and tree structures. During your test Move to Production, you ran MVPRDEXP.DMS to export the PeopleSoft PeopleTools tables. You will use the output files created from running this job as input files during your Move to Production. Because these files were created before copying the queries, trees, and tree structures that you wanted to preserve, the files do not contain the preserved objects, so you must run the MVPRDEXP.DMS script again. Running the MVPRDEXP.DMS script again ensures that you have the most current PeopleSoft PeopleTools tables.

To re-export the PeopleTools tables:

1. As a PeopleSoft user, launch Data Mover against your Copy of Production database and run the following script:

```
\PS_HOME\SCRIPTS\MVPRDEXP.DMS
```

2. Use the output files created during your final Move to Production.

APPENDIX F

Reviewing Tablespaces

Understanding Tablespace Review

This appendix lists the tables that previously existed in 4K page size tablespaces that now reside in 32K page size tablespaces in the new release.

Task F-1: Reviewing Table Names

Task F-1-1: Reviewing 8.9 Table Names

Review the following 8.9 table.

TR_ATTACHMENTS

APPENDIX G

Upgrading the Content Provider Registry

This appendix discusses:

- Understanding the Content Provider Registry Upgrade
- Copying Your Enterprise Portal Database
- Upgrading Enterprise Portal PeopleTools
- Updating Registry Permission Lists
- Creating the Portal Project
- Comparing the Portal Project
- Reviewing the Portal Project
- Copying the Portal Project
- Copying Portal Project to Production
- Deleting Obsolete Folders
- Updating Registry Folder Permissions

Understanding the Content Provider Registry Upgrade

You should perform this task if you use the Enterprise Portal 8.4 or higher running on PeopleTools 8.4x with the full navigation load access method. This means you do not use a single link to access your content provider database, but instead load some or all of the portal registry structures from the content provider database into your Enterprise Portal database. PeopleSoft refers to its application databases that contain the transaction content as Content Provider databases. Your Copy of Production database is your Content Provider database for this task.

When you upgrade a content provider database, the registry structures are updated, removed and added. These changes need to be copied to the Enterprise Portal database. This task will update the portal registry structures in your Enterprise Portal database to match what is in the Content Provider database. This is accomplished by the following:

- Upgrade the PeopleTools on a copy of the Enterprise Portal database.
This allows a project compare to run between the Enterprise Portal and the Content Provider database.
- Create a portal project in the Enterprise Portal database containing all of the existing Content Provider registry structures.
Copy the portal project (definition only) to the Content Provider database.

- Create a portal project in the Content Provider database containing all of the current Content Provider registry structures, then merge the project definition copied from the Enterprise Portal database into this project.

You will have a complete list of all registry structures for the Content Provider, including what is current and what should be deleted.

- Compare the complete list of registry structures in the Content Provider database to what exists in the Enterprise Portal, using project compare.

This marks the missing registry structures as delete and the updated or added registry structures as copy in the portal project definition.

- Copy the portal project from the Content Provider database to the Enterprise Portal database.

This deletes, updates, and adds registry structures to the Enterprise Portal database which syncs it up with what is current in the Content Provider database.

If you use Enterprise Portal 8 SP2, PeopleSoft recommends that you upgrade your Enterprise Portal to the latest available release.

If you do upgrade your Enterprise Portal database, you must be on PeopleTools 8.46 or higher.

Note. If you use Enterprise Portal 8.4 you *do not* need to upgrade to Enterprise Portal 8.8. You can still upgrade to PeopleTools 8.46.

See Enterprise Portal 8.1x – Managing Information Architecture on PeopleSoft Customer Connection (Support, Documentation, Documentation Updates, Enterprise, Portal Products, Enterprise Portal) for additional information on this topic.

In this appendix, you load your new Portal Registry definitions from your Copy of Production database to a copy of your Enterprise Portal database.

Note. You must complete the tasks in the appendix for each of your separately installed Enterprise Portal databases that correspond to one of the four Portal Registry definitions: EMPLOYEE, CUSTOMER, SUPPLIER, and PARTNER. If your installed Enterprise Portal uses all the registries, then complete this task for each of the portal registries using the same copy of the single Enterprise Portal database.

In the first task of this appendix, you create a copy of your Enterprise Portal database. You use this copy for all subsequent steps for the initial and test Move to Production upgrade passes. For the final Move to Production, do not make a copy. Instead perform the steps on the production Enterprise Portal database.

This document uses the term “target Enterprise Portal database” to refer to the Enterprise Portal database used in the upgrade steps. Use the table below to determine the correct copy of your Enterprise Portal database for each pass:

Upgrade Pass	Target Enterprise Portal Database
Initial pass	Copy of the Enterprise Portal database
Test Move to Production	Copy of the Enterprise Portal database
Final Move to Production	Enterprise Portal production database

Task G-1: Copying Your Enterprise Portal Database

You initially upgrade the Content Provider registry on a copy of your Enterprise Portal database, then test the results of the upgrade. During your test Move to Production, you perform this task against another Copy of the Enterprise Portal.

Create a copy of your current Enterprise Portal production database now. Use this database as your target Enterprise Portal database.

Note. During your final Move to Production, you copy the registry definitions directly to your Enterprise Portal production database. Therefore, you do not need to execute this step during your final Move to Production.

Task G-2: Upgrading Enterprise Portal PeopleTools

During the initial upgrade pass, your Enterprise Portal database must run on the same PeopleTools release level as your Copy of Production database so that you can do the compare step. Because you do not need to run the compare step during your Move to Production passes, you can skip this task during Move to Production passes.

If the release level of PeopleTools on your target Enterprise Portal database is not the same as your Copy of Production database release level, upgrade your PeopleTools now.

See PeopleSoft Customer Connection (Implement Optimize + Upgrade, Upgrade Guide, Upgrade Documentation and Software, Upgrade Documentation and Scripts, Release, Enterprise, PeopleTools).

Task G-3: Updating Registry Permission Lists

This section discusses:

- Understanding Registry Permission Lists Updates
- Updating Portal Registry
- Deleting the Database Cache

Understanding Registry Permission Lists Updates

This task applies only to the initial upgrade pass.

Earlier in this upgrade you copied portal registry data from the Demo database to your Copy of Production database. You must update this registry data to include your permission list changes. After updating the portal registry permission lists, delete the database cache.

This process takes between a few minutes and a few hours, depending on the volume of the portal data.

Note. The user ID that invokes this process must have the security role Portal Administrator, or the process may terminate with an abend.

Note. You must have a process scheduler started for your Copy of Production database.

Task G-3-1: Updating Portal Registry

Follow the steps below to update your portal registry permission lists.

To update the portal registry permission lists:

1. On your Copy of Production database, select PeopleTools, Portal, Portal Security Sync.
2. Select the Add a New Value tab.
3. Add a run control as follows:
 - a. Enter a value for the run control ID. The run control ID is *SECURITY_SYNC_XXXX*, where *XXXX* represents the portal registry name (EMPLOYEE, CUSTOMER, SUPPLIER, or PARTNER).
 - b. Click Add.
4. Enter a value for the portal name.

This value must match the portal registry name you used to replace the *XXXX* in the run control ID.
5. Click Save.
6. Click Run.
7. Set up the process scheduler information and click OK.
8. Click the Process Monitor link to view the progress of the process.

Task G-3-2: Deleting the Database Cache

Follow the steps below to delete the database cache.

To delete the database cache:

1. Delete the Copy of Production database application server cache.
2. Stop and restart the Copy of Production database web server service.

Task G-4: Creating the Portal Project

This section discusses:

- Understanding Portal Project Creation
- Creating the Target Enterprise Portal Project
- Cleaning the Target Enterprise Portal Project
- Deleting the Target Enterprise Portal Database Cache
- Copying the Target Enterprise Portal Project Definition
- Creating the Copy of Production Portal Project
- Cleaning the Copy of Production Portal Project
- Deleting the Copy of Production Database Cache

Understanding Portal Project Creation


This task applies only to the initial upgrade pass. In this task, you create and modify a project on your target Enterprise Portal database. Then you copy the project definition to the Copy of Production database, where you further modify the project.

Task G-4-1: Creating the Target Enterprise Portal Project

Follow the steps below to create the target Enterprise Portal project.

To create the target Enterprise Portal project:

1. Launch Application Designer and sign on to your target Enterprise Portal database.
2. Select Insert, Definitions into Project...
3. Select the following values:
 - a. In the Definition Type field, select *Portal Registry Structures*.
 - b. Leave the Portal Name field blank.
 - c. In the Owner ID field, select *All Owners*.
 - d. Do not select any values in the Related Definitions field.

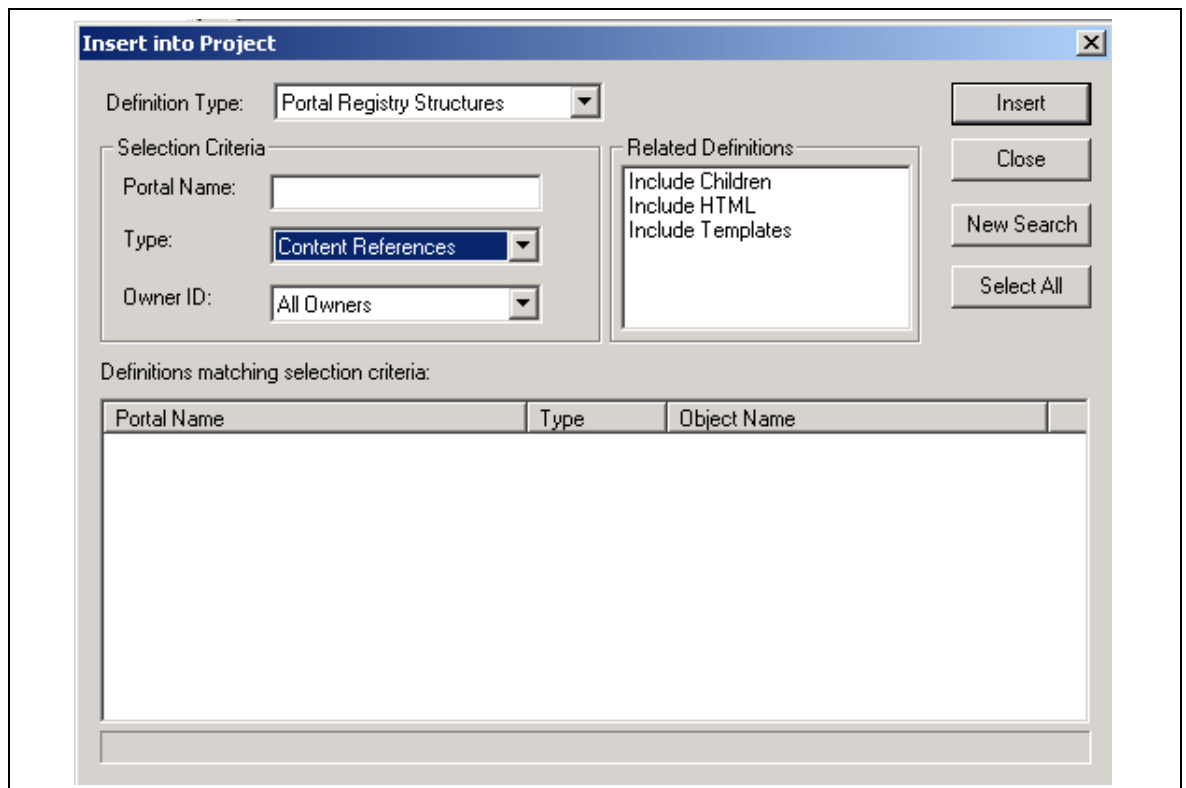

Insert into Project dialog box

4. Click Insert.
5. Click Select All, and then click Insert again.
6. Click Close.
7. From Application Designer, select File, Save Project As....

8. Enter the project name *PORTAL_PA84X_REGISTRY*.
9. Close Application Designer.

Task G-4-2: Cleaning the Target Enterprise Portal Project

In this step, you clean the target Enterprise Portal Project so that it contains only the existing Content Provider registry structure content references.

To clean the target Enterprise Portal project:

1. In your Enterprise Portal database, select PeopleTools, Portal, Portal Utilities, Clean Portal Project.

Warning! Do not follow the instructions on the Clean Portal Project page. Instead, follow the instructions below.

2. Add the run control ID *CLEAN_PORTAL_XXXXXXXX* where *XXXXXXXX* represents the portal definition name: *EMPLOYEE*, *CUSTOMER*, *SUPPLIER* or *PARTNER* for example.
3. In the Project Name field, enter the project name *PORTAL_PA84X_REGISTRY*.
4. Enter a value in the Portal Name field; *EMPLOYEE* for example.
5. Enter a value in the Content Provider Name field; *CRM* for example.

Note. Before running the Clean Portal Project you must enter the node URI text for the message node that you selected.

6. Select *Full Navigation*.
7. Click Save.
8. Click Run.
9. Set up the Process Scheduler information and click OK.
10. Select the Process Monitor link to view the progress of the process.

Task G-4-3: Deleting the Target Enterprise Portal Database Cache

In this step, you delete the target Enterprise Portal database cache.

To delete the target Enterprise Portal database cache:

1. On your target Enterprise Portal database, launch Configuration Manager.
2. On the Startup tab, click Purge Cache Directories.
3. Select the target Enterprise Portal database name.
4. Click Delete.
5. Click OK.
6. Click Close.
7. Click OK to close Configuration Manager.

Task G-4-4: Copying the Target Enterprise Portal Project Definition

In this step, you copy the target Enterprise Portal project definition to your Copy of Production database.

To copy the target Enterprise Portal project definition:

1. Using PeopleSoft Data Mover, sign on to your target Enterprise Portal database.
2. Run the following Data Mover script:

```
PS_HOME\SCRIPTS\UVUPX10E.dms
```

3. Close Data Mover.
4. Using PeopleSoft Data Mover, sign on to the Copy of Production database.
5. Run the following Data Mover script:

```
PS_HOME\SCRIPTS\UVUPX10I.dms
```


6. Close Data Mover.

Task G-4-5: Creating the Copy of Production Portal Project

Create a project containing all Portal Registry data on your Copy of Production database.


To create the Copy of Production Portal project:

1. Launch Application Designer and sign on to your Copy of Production database.
2. Select Insert, Definitions into Project....
3. In the Definition Type field, select *Permission Lists*.

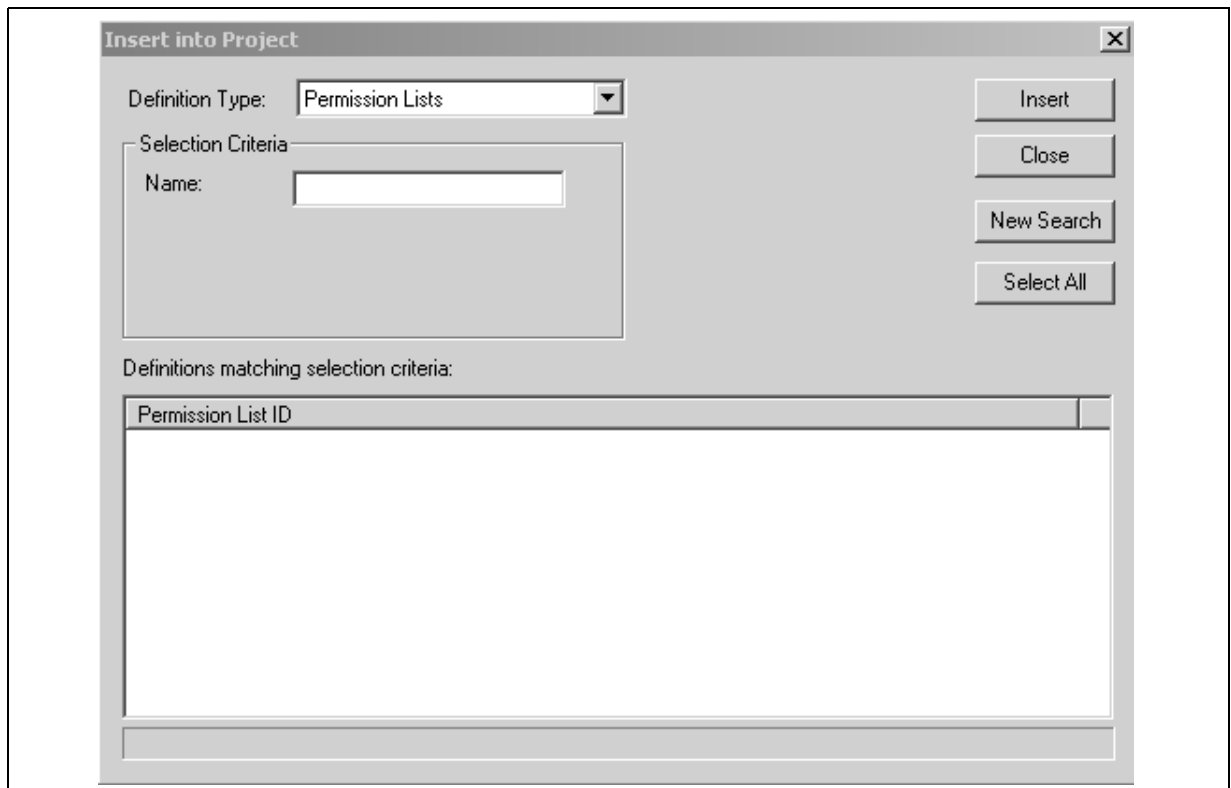

Insert into Project dialog box: Definition Type Permission Lists

4. Click Insert.
5. Click Select All, and then click Insert again.
6. Select the following values:
 - a. In the Definition Type field, select *Portal Registry Definitions*.
 - b. In the Name field, enter the Enterprise Portal database's default portal name (EMPLOYEE, CUSTOMER, SUPPLIER or PARTNER).
 - c. In the Owner ID field, select *All Owners*.
 - d. In the Related Definitions field, select *Portal Registry Structures*.

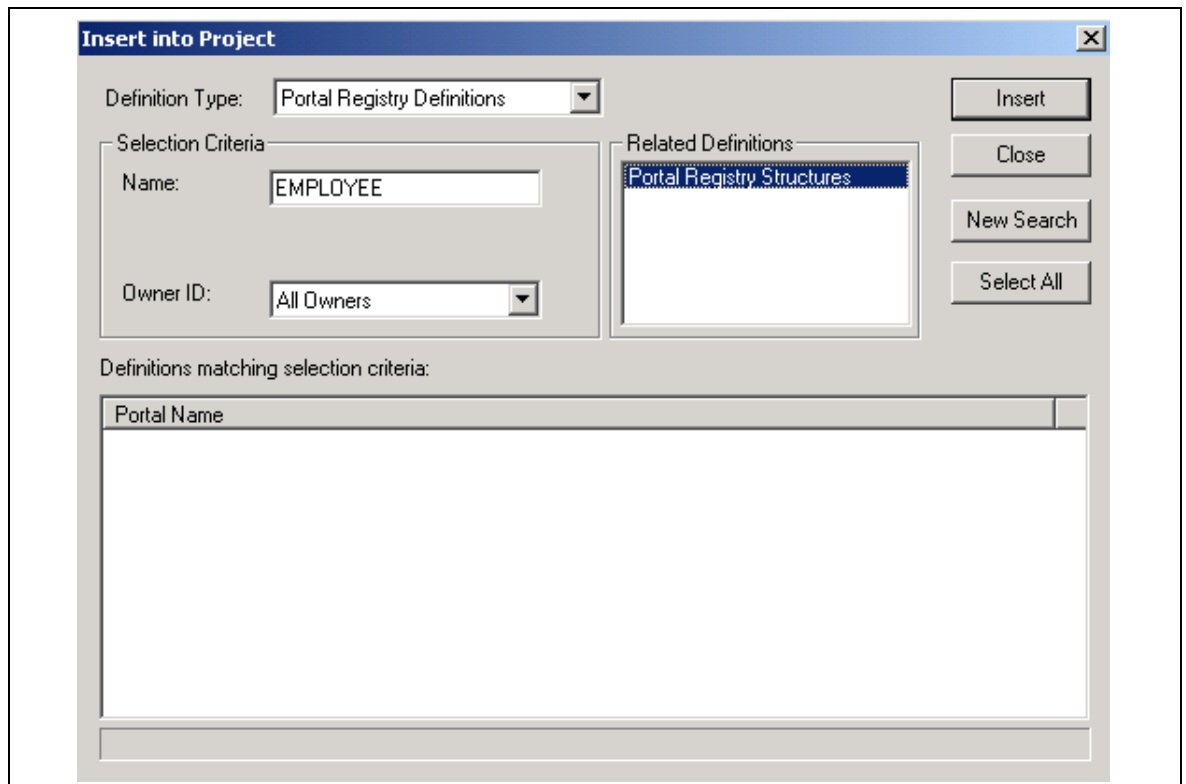

Insert into Project dialog box with Portal Registry Structures selected

7. Click Insert.
8. Click Select All, then click Insert again.
9. Click Close.
10. From Application Designer, select File, Save Project As....
11. Enter the appropriate new project name from the table below. This project is referred to as the Portal Project:

Portal Name	Project Name
EMPLOYEE	PORTAL_APP84X_EMPLOYEE
CUSTOMER	PORTAL_APP84X_CUSTOMER
PARTNER	PORTAL_APP84X_PARTNER
SUPPLIER	PORTAL_APP84X_SUPPLIER

12. Click OK.
13. From Application Designer, select File, Merge Projects...
14. Enter the project name *PORTAL_PA84X_REGISTRY*.
This merges the objects from the PORTAL_PA84XREGISTRY project into your newly created Portal Project.
15. Select File, Save Project to save the updated Portal Project.
16. Close Application Designer.

Task G-4-6: Cleaning the Copy of Production Portal Project

In this step, you clean the Copy of Production Portal project so that it contains only the Content Provider registry data.

Important! Before using the Copy of Production Portal project, you must run the Clean Portal Project on the Copy of Production database. Follow the directions on the Clean Portal Project Page.

To clean the Copy of Production Portal project:

1. In your Copy of Production database, select PeopleTools, Portal, Portal Utilities, Clean Portal Project.
2. Add the run control ID, *CLEAN_PORTAL_XXXXXXX*, where *XXXXXXX* represents the portal definition name; *EMPLOYEE*, *CUSTOMER*, *SUPPLIER*, or *PARTNER*, for example.
3. In the Project Name field, enter the Portal Project name that you created in the Creating the Copy of Production Portal Project step (*PORTAL_APP84X_[your portal name here]*).
4. Enter a value in the Portal Name field; *EMPLOYEE*, for example.
5. Enter a value in the Content Provider Name field; *CRM*, for example.

Important! Before running the Clean Portal Project, you must enter the Node URI text for the Message Node you selected.

6. Select *Full Navigation*.
7. Click Save.
8. Click Run.
9. Set up the Process Scheduler information and click OK.
10. Select the Process Monitor link to view the progress of the process.

Task G-4-7: Deleting the Copy of Production Database Cache

In this step, you delete the Copy of Production database cache.

To delete the Copy of Production database cache:

1. On your Copy of Production database, start Configuration Manager.
2. On the Startup tab, click Purge Cache Directories.
3. Select the Copy of Production database name.
4. Click Delete.
5. Click OK.
6. Click Close.
7. Click OK to close Configuration Manager.

Task G-5: Comparing the Portal Project

This task applies only to the initial upgrade pass.

In this step, you compare the Portal project that you created in the previous step and then review the compare results. This will enable you to adjust the portal project as necessary before copying it into the Enterprise Portal database.

To compare the Portal Project:

1. Launch Application Designer and sign on to your Copy of Production database.
2. Select Tools, Compare and Report....
3. Enter the Portal Project name that you specified in the Creating the Copy of Production Portal Project step (PORTAL_APP84X_[your portal name here]).
4. Enter the database name of your target Enterprise Portal database, and the user ID and password.
5. Click the Options button.
6. In the Compare Type field, select *Project*, and click OK.
7. Select all object types and click OK.
8. Close Application Designer.

Task G-6: Reviewing the Portal Project

This task applies only to the initial upgrade pass.

Review the Portal project (PORTAL_APP84X_[your portal name here]) on the Copy of Production database, looking for customizations that you have applied to your database. Object definitions that you changed have **Changed* or **Unchanged* in the Target column of the compare report. The * indicates that the change was not made by PeopleSoft. Review each of these objects carefully. If PeopleSoft delivered the object, the Source column of the report will read *Changed*. Note the changes that you made to the object. After you complete the upgrade, when you test the system, you can decide whether you still need the customization. You can reapply the customization at that time.

See Appendix: “Using the Comparison Process.”

Task G-7: Copying the Portal Project

This section discusses:

- Understanding Portal Project Copying
- Copying the Portal Project
- Deleting the Enterprise Portal Database Cache

Understanding Portal Project Copying

This task applies only to the initial upgrade pass.

In this step, you copy the project from your Copy of Production database to your target Enterprise Portal database.

Task G-7-1: Copying the Portal Project

Follow the steps below to copy the Portal Project to the Enterprise Portal database.

Important! Before exporting the Portal Project from the Content Provider database, you must successfully clean the Copy of Production Portal Project. If you proceed with this step without cleaning the project, you will overwrite critical Enterprise Portal data.

See [Creating the Portal Project](#), [Cleaning the Copy of Production Portal Project](#).

To copy the Portal Project:

1. Launch Application Designer and sign on to your Copy of Production database.
2. Select File, Open...
3. In the Definition field, select *Project* and click Open.
4. Highlight the newly created Portal Project name (PORTAL_APP84X_[your portal name]) and click Open again.
5. Select Tools, Copy Project, To Database...
6. Enter the name of your target Enterprise Portal database, and the user ID and password.
7. Click Select All.
8. Click Copy.
This may take a few minutes.
9. Close Application Designer.

Note. You do not need to create or alter any records or views.

Task G-7-2: Deleting the Enterprise Portal Database Cache

In this step, you delete the Enterprise Portal database cache.

To delete the Enterprise Portal database cache:

1. Delete the target Enterprise Portal database application server cache.
2. Stop and restart the target Enterprise Portal database web server service.

Task G-8: Copying Portal Project to Production

This section discusses:

- Understanding Portal Project to Production Copying
- Copying the Portal Project to File
- Copying the Portal Project from File
- Deleting the Enterprise Portal Database Cache Again

Understanding Portal Project to Production Copying

You must perform this step during both your test and final Move to Production upgrade passes.

Task G-8-1: Copying the Portal Project to File

Follow the steps below to copy the Portal Project to file.

Note. If your Copy of Production and target Enterprise Portal databases run on the same PeopleTools release and database platform, you can copy the project directly to the target Enterprise Portal database from within the Copy of Production Application Designer and skip the rest of this step.

To copy the Portal Project to file:

1. Launch Application Designer and sign on to your Copy Production database.
2. Select File, Open....
3. In the Definition field, select *Project* and then click Open.
4. Highlight the newly created Portal Project name (PORTAL_APP84X_[your portal name]) and click Open again.
5. Select Tools, Copy Project, To File....
6. Click the Browse button for the Export Directory.
7. Select a temporary directory and then click OK.
8. Click Select All.
9. Click Copy.
This may take a few minutes.
10. Close Application Designer.

Task G-8-2: Copying the Portal Project from File

In this step, you copy the Portal Project from file.

To copy the Portal Project from file:

1. Launch Application Designer and sign on to your target Enterprise Portal database.
2. Select Tools, Copy Project, From File....
3. Browse to the Copy of Production database server's temporary directory.
If you cannot access the Copy of Production database server's temporary directory, then copy the Portal Project folder and files from the temporary directory to the target Enterprise Portal database server's *PS_HOME\PROJECTS* directory, and browse to that directory.
4. Select the Portal Project name that you just copied to file in the previous step.
5. Click Open.
6. Click Select All.
7. Set the project language options as follows:
 - a. Click Options.
 - b. In the Copy Options tab, select *English*, and *COMMON*.

- c. If your Enterprise Portal database is a multi-language database, then also select the languages that you have installed on your Enterprise Portal database.
- d. Click OK.
8. Click Copy.
9. Select the Upgrade tab and view the Output window.
All objects should have copied successfully.
10. Close Application Designer.

Note. After the copy, you do not need to create or alter any records or views on the target Enterprise Portal database.

Task G-8-3: Deleting the Enterprise Portal Database Cache Again

In this step, you delete the Enterprise Portal database cache.

To delete the Enterprise Portal database cache:

1. Delete the target Enterprise Portal database's application server cache.
2. Stop and restart the target Enterprise Portal database web server service.

Task G-9: Deleting Obsolete Folders

This section discusses:

- Understanding Obsolete Folder Deletion
- Deleting Obsolete Folders on Enterprise Portal 8.4
- Deleting Obsolete Folders on Enterprise Portal 8.8

Understanding Obsolete Folder Deletion

This task applies to all upgrade passes: Initial, Test Move to Production, and Final Move to Production.

In this step, you delete folders on your target Enterprise Portal database that the Portal Registry Structures no longer reference. The process that you run depends on your version of Enterprise Portal.

Task G-9-1: Deleting Obsolete Folders on Enterprise Portal 8.4

Follow this procedure to delete obsolete folders on Enterprise Portal 8.4.

To delete obsolete folders on Enterprise Portal 8.4:

1. Using PeopleSoft Data Mover, sign on to your target Enterprise Portal database.
2. Run the following Data Mover script, located in the Enterprise Portal PS_HOME\SCRIPTS directory:

`PORTAL_REG_FOLDER_DEL.DMS`
3. Close Data Mover.

Task G-9-2: Deleting Obsolete Folders on Enterprise Portal 8.8

Follow this procedure to delete obsolete folders on Enterprise Portal 8.8 or higher.

To delete obsolete folders on Enterprise Portal 8.8 or higher:

1. On your target Enterprise Portal database, navigate accordingly:
 - a. For Enterprise Portal 8.8: Portal Administration, Navigation, Run Folder Cleanup.
 - b. For Enterprise Portal 8.9 or higher: Portal Administration, Navigation, Delete Empty Folders.
2. Add a run control as follows:
 - a. Enter a value for the run control ID. The run control ID is *FOLDER_CLEAN_XXXX*, where *XXXX* represents the portal registry name (EMPLOYEE, CUSTOMER, PARTNER, or SUPPLIER).
 - b. Click Add.
3. Enter a value in the Portal Name field.

This value must match the portal registry name that you used to replace *XXXX* in the run control ID (EMPLOYEE, CUSTOMER, PARTNER, or SUPPLIER).
4. Click Save.
5. Click Run.
6. Set up the process scheduler information and click OK.
7. Click the Process Monitor link to view the progress of the process.

Task G-10: Updating Registry Folder Permissions

This section discusses:

- Understanding Registry Folder Permissions Updates
- Updating the Enterprise Portal Registry Folder Permissions
- Deleting the Enterprise Portal Cache

Understanding Registry Folder Permissions Updates

This task applies to all upgrade passes: Initial, Test Move to Production, and Final Move to Production.

Portal data from different Content Provider databases may share a common portal folder. After copying the registry projects, you must update the folder permissions to reflect the changes. After you update the folder permissions, you must delete the target Enterprise Portal database cache files to propagate the changes.

Task G-10-1: Updating the Enterprise Portal Registry Folder Permissions

Follow this procedure to update your Enterprise Portal registry folder permissions.

Note. This process will take between a few minutes to a few hours, depending on the volume of portal data. The user ID that invokes this process must have the security role Portal Administrator, or the process may terminate with an abend.

To update the Enterprise Portal folder permissions:

1. On your target Enterprise Portal database, select PeopleTools, Portal, Portal Security Sync.
2. Add a run control as follows:
 - a. Enter a value for the run control ID.
The run control ID is *SECURITY_SYNC_XXXX*, where *XXXX* represents the portal registry name (EMPLOYEE, CUSTOMER, PARTNER, or SUPPLIER).
 - b. Click Add.
3. Enter a value in the Portal Name field.
This value must match the portal registry name that you used to replace *XXXX* in the run control ID (EMPLOYEE, CUSTOMER, PARTNER, or SUPPLIER).
4. Click Save.
5. Click Run.
6. Set up the process scheduler information and click OK.
7. Click the Process Monitor link to view the progress of the process.

Task G-10-2: Deleting the Enterprise Portal Cache

In this step delete the Enterprise Portal cache.

To delete the Enterprise Portal cache:

1. Delete the target Enterprise Portal database application server cache.
2. Stop and restart the target Enterprise Portal database web server service.

APPENDIX H

Using Data Conversion Utilities

This appendix discusses:

- Understanding Data Conversion Utilities
- Using the Upgrade Driver Program
- Using the Upgrade Drivers Page
- Reviewing the Data Conversion Report

Understanding Data Conversion Utilities

This appendix contains information regarding the Application Engine program UPG_DATACONV and the PS_UPG_DATACONV table.

Task H-1: Using the Upgrade Driver Program

In order to run all data conversions in the correct sequence, Oracle has provided the Application Engine program UPG_DATACONV and the PS_UPG_DATACONV table. This program runs the Application Engine sections defined in the table PS_UPG_DATACONV. The PS_UPG_DATACONV table contains a list of all of the Application Engine sections that you need to run and in what sequence they should be run.

Task H-2: Using the Upgrade Drivers Page

This section discusses:

- Understanding Upgrade Drivers Page
- Accessing the Upgrade Drivers Page
- Adding New Upgrade Drivers Section Page
- Inactivating Upgrade Drivers Section

Understanding Upgrade Drivers Page

Before you run data conversion, you may need to change what the Upgrade Driver program runs. You can add, remove, or deactivate Application Engine sections through the Upgrade Drivers page.

You do not have an active portal on your Copy of Production during data conversion, so you need to view and update the Data Conversion Definitions on your Demo database and then copy the updated data to your Copy of Production database.

Task H-2-1: Accessing the Upgrade Drivers Page

To access the Upgrade Drivers page:

1. From your browser, sign on to the Demo database.
2. Select Set Up Financials/Supply Chain, Upgrade, Define Upgrade Drivers.
3. Enter your upgrade path:
4. Click Search.

You are now on the Upgrade Drivers page. The following are descriptions for each section of the Upgrade Drivers page.

Upgrade Drivers									
Customize Find View All First 1-25 of 86 Last									
Upgrade Path	Program Name	Group #	Section	Sequence	Active Flag	Description	Comments		
CR80	UPG_CDM	1	CDMA010	10	Active	General Preparation	Comments	+	-
CR80	UPG_CDM	1	CDMX140	20	Active	Upgrade Basic Data Tables	Comments	+	-
CR80	UPG_CP	2	CPA00	100	Active	Upgrade Constraint	Comments	+	-
CR80	UPG_CP	2	CPA01	105	Active	Upgrade User Cd Detl	Comments	+	-

Upgrade Drivers page

- Upgrade Path. This field contains the upgrade path on which the section will be run.
- Program Name. This is the Application Engine program that contains the section.
- Group #. This is the group number. All sections with the same group number will be run during the same run of the UPG_DATACONV Application Engine program.
- Section. This is the section that will be called from the UPG_DATACONV Application Engine program.
- Sequence. This is the order in which the sections will be called during the run of UPG_DATACONV for the group number.
- Active Flag. This field determines whether the section will be run. If the value of this field is *Active*, the section will be run. If the value is *Inactive*, it will not be run. If you need to remove a section, change the value in this field to *Inactive*.
- Description.
- Comments.

Task H-2-2: Adding New Upgrade Drivers Section Page

Follow the instructions below to add a new section to the Upgrade Drivers page.

Note. To add a new section, the Application Engine program and section must exist on the Demo database.

To add a new section to the Upgrade Drivers page:

1. From your browser, sign on to the Demo database.
2. Select Set Up Financials/Supply Chain, Upgrade, Define Upgrade Drivers.

3. Select Add a New Value.
4. Click Add.
5. Enter values for Upgrade Path and Program Name.
6. Enter a value for Group #.

Note. Each group number corresponds to a data conversion step in the Change Assistant template. If you select a group number that already exists in the PS_UPG_DATACONV table, your section will be executed when Change Assistant runs the data conversion step that corresponds to the group number you selected. Alternatively, if you assign a group number to your new section that does not already exist in PS_UPG_DATACONV, you must add a new step to your Change Assistant template. The new template step will have the same properties as the other data conversion steps, except for the group number specified in the step properties Parameters box.

7. Enter values for Section and Sequence.
The Description and Comments fields are optional.
8. Click Save.
9. When you have completed all changes, sign on to your Demo database using Data Mover and run the following script to export the updated data conversion data:

```
DLUPX03E.DMS
```

10. Sign on to your Copy of Production database using Data Mover and run the following script to load the updated data conversion data:

```
DLUPX03I.DMS
```

See the Enterprise PeopleTools PeopleBook: PeopleSoft Software Updates for your new release, Appendix: "Using a Change Assistant Template."

Task H-2-3: Inactivating Upgrade Drivers Section

Follow the instructions below to deactivate a section on the Upgrade Drivers page. Once deactivated, the section will not run as part of data conversion.

To inactivate a section on the Upgrade Drivers page:

1. From your browser, sign on to the Demo database.
2. Select Set Up Financials/Supply Chain, Upgrade, Define Upgrade Drivers.
3. Enter your upgrade path:
4. Click Search.
5. Find the row with the Program Name and Section you want to remove and change the value of the Active Flag field to *Inactive*.
6. Click Save.
7. When you have completed all changes, sign on to your Demo database using Data Mover and run the following script to export the updated data conversion data:

```
DLUPX03E.DMS
```

8. Sign on to your Copy of Production database using Data Mover and run the following script to load the updated data conversion data:

DLUPX03I.DMS

Task H-3: Reviewing the Data Conversion Report

Each of the upgrade data conversion sections contains comments that describe the processing performed by the section. PeopleSoft has delivered an SQR to list all of these comments by the group and sequence numbers that determine how they run. The name of this report is UDATAACNV.

To run UDATAACNV:

1. Using SQRW, run SQR UDATAACNV on your Copy of Production database.
2. When prompted for Upgrade Path, enter:
3. When prompted for Group Number, enter the two-digit group number to report on, or enter 0 to see the comments for all groups.

APPENDIX I

Using the Comparison Process

This appendix discusses:

- Understanding the Comparison Process
- Understanding Upgrade Compare Reports

Task I-1: Understanding the Comparison Process

This section discusses:

- Reviewing Source and Target Columns
- Reviewing the Action Column
- Reviewing the Upgrade Column
- Putting it All Together

During the upgrade you run a compare process and then review the resulting reports. The compare process first compares every property of an object definition on the source database to the properties of object definitions on the target database. The PeopleSoft system tracks object changes using the contents of the PSRELEASE table, and the value of two fields, LASTUPDDTTM, and LASTUPDOPRID, used in the PeopleTools tables.

- The PSRELEASE table maintains the Comparison Release Level. This table contains rows of data for every release level at which the database has ever existed. The first column in this table, RELEASEDTTM, contains a date/time stamp identifying when each release level was “stamped.” The second column, RELEASELABEL, identifies the release level. The format of a release label is *M XX.XX.XX.YYY*, where *M* is the market code, *XX* is an integer from 0 to 99, and *YYY* is an integer from 0 to 999. A release label has two parts: the PeopleSoft release number (*M XX.XX.XX*) and the customer release number (*YYY*). Each time you customize your production database, you can stamp it with a new customer release level to help you track your changes over time. You should not change any portion of the PeopleSoft release number unless specifically instructed to do so.
- The LASTUPDDTTM field in our *PSobjectDEFN* tables—such as PSRECDEFN, PSPNLDEFN, and so on—stores a date/time stamp of when each object was last modified.
- The LASTUPDOPRID field stores the operator ID of the user who made the modification. If PeopleSoft made the modification, the proprietary ID *PPLSOFT* is used.

Note. Maintain Security prevents you from creating an operator named PPLSOFT.

If an object definition is defined differently in the source database than in the target, the compare process will check to see whether either object definition has changed since the comparison release. If the object’s LASTUPDDTTM value is greater than the RELEASEDTTM value for the comparison release level (stored in PSRELEASE), the object has changed. If the object’s LASTUPDDTTM value is equal

to or less than RELEASEDTM, the object has not changed (since the comparison release). Whether the compared object has changed or not, if it has *ever* been changed prior to the comparison release by someone other than PeopleSoft (LASTUPDOPRID <> 'PPLSOFT'), the object is identified as a customization.

After you run a compare report, you see the following information when you open an object type in the upgrade project from the Upgrade Tab of Application Designer. This is called the Application Designer Upgrade Definition window.

Task I-1-1: Reviewing Source and Target Columns

The status of each object is reported as it appears on the Source database and the Target database. The following table explains the various status types:

Status Type	Definition
Unknown	The object has not been compared. This is the default status for all objects inserted manually into a project and the permanent status of all non-comparison objects.
Absent	The object was found in the other database, but not in this one. When upgrading to a new PeopleSoft release, all of our new objects should have Absent status in the Target database and all of your new objects should have Absent status in the Source database.
Changed	The object has been compared, its LASTUPDOPRID value is <i>PPLSOFT</i> , and its LASTUPDTIME value is greater than the date/time stamp of the comparison release database. In other words, PeopleSoft modified the object since the comparison release.
Unchanged	The object has been compared, its LASTUPDOPRID value is <i>PPLSOFT</i> , and its LASTUPDTIME value is less than or equal to the date/time stamp of the comparison release database. In other words, PeopleSoft last modified the object prior to the comparison release.
*Changed	The object has been compared, its LASTUPDOPRID value is not <i>PPLSOFT</i> , and its LASTUPDTIME value is greater than the date/time stamp of the comparison release database. In this case, the customer has modified the object since the comparison release.

Status Type	Definition
*Unchanged	The object has been compared, its LASTUPDOPRID value is not <i>PPLSOFT</i> , and its LASTUPDTIME value is less than or equal to the date/time stamp of the comparison release database. In this case, the customer last modified the object prior to the comparison release.
Same	The object has been compared and is defined as the same in both databases. When an object in one database has this status, so will its counterpart in the other database. This status would never be seen when performing a database comparison because in that case, the project is only populated with objects defined differently. However, it can occur when performing a project comparison because in a project comparison, the project contents are static; the project is not repopulated based on the comparison results.

Task I-1-2: Reviewing the Action Column

The default actions for each object that you compared are reported in the Action column. The compare sets the action column based on what you need to do to make the Target database consistent with the Source. You should not change these actions. You can decide whether or not to accept each action by setting the Upgrade value. Action types include:

Action Type	Definition
Copy	Object will be added to the Target database
Copy Prop (Records and Fields only)	Object will be added to the Target database
Delete	Object will be deleted from the Target database.
None	No action will be taken on this object.

The PeopleSoft system assigns one of these action types to every object in a comparison project and in the compare reports. However, these actions are not necessarily carried out during the copy process. The value of the Upgrade column for each object makes that determination.

Task I-1-3: Reviewing the Upgrade Column

The Upgrade values for each object – YES or NO – determine whether the object action will be carried out during the copy process. The upgrade orientation you assign during the compare process determines these settings. You can orient the Upgrade to keep PeopleSoft changes or to retain your changes in the target database. Whichever orientation you choose, you will still have the option to set each Upgrade value individually before launching the copy process.

You may find that after the compare process, your project contains objects that show up as Unchanged on the Demo database and Changed on the Copy of Production and the Upgrade column is not checked. What this status combination means is that the PeopleSoft object on your Copy of Production was changed more recently than on the Demo database. In these instances, PeopleSoft recommends that you accept the Demo database version of the object.

Task I-1-4: Putting it All Together

The following chart summarizes every possible Status, Action, and Upgrade value that could be set by the compare process to a single object:

Source Status	Target Status	Action	PeopleSoft Vanilla	Keep Customizations
(Any)	Absent	COPY	YES	YES
Absent	Changed or Unchanged	DELETE	YES	YES
	Changed* or Unchanged*	DELETE	NO	NO
Changed	Changed or Unchanged	COPY	YES	YES
	Changed* or Unchanged*	COPY	YES	NO
Unchanged	Changed	COPY	NO	NO
	Unchanged	COPY	YES	YES
	Changed* or Unchanged*	COPY	YES	NO
Changed*	Changed or Unchanged	COPY	NO	YES
	Changed* or Unchanged*	COPY	YES	YES
Unchanged*	Changed or Unchanged	COPY	NO	YES
	Changed*	COPY	NO	NO
	Unchanged*	COPY	YES	YES

Task I-2: Understanding Upgrade Compare Reports

This section discusses:

- Reviewing Report Columns
- Using Reports

When you run the compare process, it creates reports to help you understand what objects differ between the Source and Target databases, and how they differ. If you have documentation of your database modifications, you should retrieve it before reviewing these reports. This will help you understand how the Target objects

have changed and enable you to better compare the Target version of the object with the Source version. If you are upgrading to a new PeopleSoft release, you should also review the Release Notes for your product. These notes will identify and explain object changes in the New Release Demo database.

Upgrade reports can be a little intimidating at first glance, until you understand what data you are looking for and how best to use it. This section includes information to help you use the reports.

Task I-2-1: Reviewing Report Columns

For the most part, the columns in upgrade reports correspond with the columns you see in Application Designer's upgrade definition window. Moving from left to right, you see the Name of the object, then other key columns that vary by object type, then the Source and Target status, the Action value and Upgrade flag (*Yes* or *No*).

After these columns are three more that are not included in Application Designer. The first is Attribute. This tells you the type of difference that was found between the two objects. For example, record field Attribute values include *Use/Edit*, which identifies key or audit differences, and Default Field Name (*Def. Fldnm*), which identifies differences in a default value. Lastly, there is a Source column and a Target column. These wide columns display the actual differences between the object definitions. For example, on a *Use/Edit* attribute recfield difference, the Source column might contain *Xlat Table Edit* while the Target column is empty. This means the Source record field has a translate table edit while the Target record field does not.

If you are unsure of the meaning of any value in the last three report columns, open the PeopleTool that edits the particular object. The values in these columns correspond directly to dialog options in the tool.

Task I-2-2: Using Reports

Oracle delivers several cross-reference reports that you can run to provide information about the inter-relationships between various objects. Oracle delivers these reports in the form of SQRs (found in PS_HOME\SQR), Crystal Reports (found in PS_HOME\CRW\ENG), and Queries.

The cross-reference reports include:

Object Type(s)	Report Name	Report Description
Applications and Fields	XRFAPFL	Lists all application windows, such as General Tables, in alphabetical order, as well as the fields within each window. For each field, the report details the Field Name, Field Type, Length, and Format, as well as all the record and page definitions that contain the field (within the window).
Fields Referenced by PeopleCode Programs	XRFFLPC	Lists all PeopleCode programs in alphabetical order by associated record definition/field. The report includes type of field and lists all fields referenced in the PeopleCode program.
Fields and Panels	XRFFLPN	Lists all fields in alphabetical order. The report includes the names of all record and page definitions in which each field is used, as well as the Long Name of each field.

Object Type(s)	Report Name	Report Description
Records and Fields	XRFFLRC	Lists all fields in alphabetical order. The report details the Long Name, Field Type, Field Length, and Formatting specified for the field, and includes the names of all record definitions that contain the field.
Field Listing	XRFIELDS	Lists all fields in alphabetical order. The report includes Field Type, Length, Format, Long Name and Short Name.
Menu Listing	XRFMENU	Lists application windows in alphabetical order. The report details all menus within each window, and all page definitions within each menu. It also includes the associated search record definition name and detail page definition name.
Panel Listing	XRFPANEL	Lists all page definitions in alphabetical order.
PeopleCode Programs and Field References	XRFPCL	Lists record definitions that contain fields with PeopleCode program attributes. The report includes the Field Name, as well as the associated record definitions and fields referenced in the PeopleCode program.
Panels with PeopleCode	XRFPNPC	Lists all pages that contain fields with PeopleCode attributes. For each page, the report includes the name of the record definition(s) that contain the field as well as the Field Name and Type.
Fields and Records	XRFRCL	Lists all fields in alphabetical order by associated record definition name. The report details the Long Name, Field Type, Field Length, and Formatting specified for the field.
Records and Panels	XRFRCPN	Lists all record definitions in alphabetical order. The report includes the menu and page definitions associated with each record definition.
Window Listing	XRFWIN	Lists all application windows in alphabetical order.

In addition to using our standard cross-reference reports, you can also generate ad hoc reports to extract the exact combination of information you need. Or, you can create permanent custom reports for information you extract on a regular basis.

Oracle recommends that you mark your upgrade reports using a color-coding system to help you quickly identify what you need to do to certain objects.

If you have several people reviewing sections of the reports, a good documentation policy is to have everyone on your review cycle initial and date the action defaults and overrides they select.

You may also find it easier to change some objects manually after the upgrade, rather than copying the new versions from the source.

Index

A

- accounts payable, running maintenance
 - pack script 169
- accounts receivable, running maintenance
 - pack script 169
- activities, processing third-party 21
- adding
 - country codes 199
- adding, CUSIP for security 207
- AE SYNCIDGEN, running 167
- Agreement Registration, validating 216
- ALLTABS project, creating 145
- ALLTEMPTABS project, creating 145
- Alter Audit
 - final, reviewing 184
 - final, running 183
 - running initial 12
- alter tables script, running 147
- alter with deletes script
 - building 166
 - running 167
- analysis type and group, setting up for projects 208
- application base data, converted
 - exporting 176
 - importing 176
- application changes, preparing for 117
- application data
 - exporting 158
 - importing 159
- Application Engine driver program, using 281
- application messages
 - exporting 154
 - importing 154
- application messaging
 - objects, deleting 102
 - objects, saving 101
- application servers
 - configuring 161, 188
 - granting administrator permissions 62
 - updating REN servers 96
- application system data
 - exporting 175
 - importing 175

- application tablespaces, creating 88
- applying
 - fixes after copying project 236
 - fixes after data conversion 237
 - fixes between upgrade passes 237
 - fixes during installation 236
 - fixes during Move to Production 238
 - updates before data conversion 160
 - UPGOPT project 6
 - upgrade planning files 6
- Approval workflow framework, reviewing 203
- Asset Management
 - ChartField SQC, updating 141
 - common search configurations 25
 - completing setup 217
 - preparing 23
 - reviewing IT business rules 25
- auditing
 - character length semantics 115
 - disabled constraints 108
 - duplicate length constraints 108
 - long to LOB conversion 113
- audits
 - Alter Audit 12
 - DDDAUDIT, final 182
 - DDDAUDIT, initial 10
 - final 182
 - initial 9
 - SYSAUDIT, final 183
 - SYSAUDIT, initial 10
- Auto Position for all deals, running 32
- Auto Position process, rerunning 207

B

- backing up
 - after data conversion 165
 - after PeopleTools upgrade 116
 - after preparing your database 59
 - after upgrade copy 138
 - before conversion 161
 - before manual changes 195
 - before platform changes 104
 - before testing 225
 - Copy of Current Demo database 42

- demo databases 41
- new release demo again 134
- New Release Demo database 42
- base data, loading 93
- batch transactions, completing 28
- billing
 - completing tasks 17
 - management 3
 - pre-upgrade reports 17
- Billing
 - completing setup 204
- building
 - alter with deletes script 166
 - tablespace alter script 92
 - trigger sync script 142
 - UPGCFCONFIG script 140
 - UPGOPT project 7
- building UPG_SPL_DELSYNCH 142
- Buyer Registration, validating 215

C

- cancelling rescheduled payments 27
- Change Assistant
 - creating new job 229
 - editing multilingual step properties 71
- change control
 - reviewing 224
 - turning off 79
- change requests, loading 31
- character length script 1, running 113
- character length script 2, running 113
- character length script 3, running 113
- character length script 4, running 114
- character length script 5, running 114
- character length script 6, running 114
- character length script 7, running 114
- character length script 8, running 115
- character length semantics, auditing 115
- ChartField
 - resetting flags 124
- ChartField configuration
 - exporting 141
 - importing 141
 - reviewing actions 15
 - running 141
- ChartFields
 - completing configuration 195
 - configuring 138
 - understanding 139
 - updating inactive 139
- commitment control
 - preparing 16
- common portal system options
 - exporting 177
 - importing 177
- compare options, modifying 121
- compare reports
 - columns 289
 - modifying options 50
 - reviewing 124
 - understanding 288
 - using 289
- comparing
 - customizations 50
 - new release 120
 - running UPGCUST 51
- comparing PeopleTools objects
 - queries and trees, preserving 259
- comparison process
 - default actions for objects 287
 - settings for objects 288
 - status of objects 286
 - Upgrade column 287
 - using 285
- completing
 - batch transactions 28
 - Billing setup 204
 - ChartField configuration 195
 - credit card encryption 201
 - data conversion 194
 - Promotions 204
- completing purchasing tasks 31
- completing Receivables changes 213
- completing system setup
 - exporting data 172, 174
 - exporting EDI statements 173
 - exporting mass change data 173
 - importing data 172, 174
 - importing EDI statements 173
 - importing mass change data 174
 - loading data 171
- configuration defaults
 - exporting 140
 - importing 140
- Configuration Manager profile,
 - updating 63
- configuring
 - application servers 161, 188
 - ChartFields 138
 - Order Management 205

- Portal 189
- Process Scheduler 161
- upgrade environment 188
- confirming, ship and deplete orders 29
- CONNECT ID, granting permissions 107
- connect ID, granting privileges to 74
- connector passwords, encrypting 98
- contacting global support 246
- Content Provider registry
 - upgrading 197
- content reference permissions,
 - synchronizing 191
- contract management, running maintenance
 - pack script 169
- Conversation Currency
 - establishing 20
- conversion
 - loading data 98
 - reporting details 99
 - running data conversion 99
- conversion reports, reviewing 115
- conversion scripts
 - Oracle, generating 109
- converting
 - database data types 103
 - Integration Broker 100
 - PeopleTools objects 96
 - Portal objects 97
 - query prompt headings 98
- Copy of Current Demo database
 - backing up 42
 - restoring 53
- Copy of Production
 - creating 5
 - testing 226
- Copy of Production database
 - backing up 116
- Copy of Production database cache,
 - deleting 268
- copy results, reviewing 128
- copying
 - Enterprise Portal database 267
 - PATCH84X project 86
 - PATCH84XML project 87
 - PPLTLS84CUR project 84
 - PPLTLS84CURDEL project 86
 - PPLTLS84CURML project 84
 - PPLTLSML project 85
 - production database 5
 - projects 83

- PT84TBLSPC project 91
- select tables 119
- UPGCFCONFIG project 139
- UPGCUST 128
- UPGCUSTIB 130
- UPGIBCOPY 132
- UPGNONCOMP 132
- costing transactions, processing 30
- country codes
 - adding 199
 - modifying 200
- country data, reviewing 15
- COUNTRY_TBL, setting 198
- create and alter scripts
 - building 145
 - editing 146
- create indexes script, running 167
- create tables script
 - running 147
- create temp tables script
 - building 145
 - running 147
- create triggers script, running 167
- create upgrade tables script
 - building 144
- CREATEVW, running 168
- creating
 - all views 168
 - ALLTABS project 145
 - ALLTEMPTABS project 145
 - application tablespaces 88
 - copy of DbField Definitions 56
 - custom tablespaces 137
 - FNLALTAUD project 183
 - indexes 148
 - indexes, recommended 204
 - INITALTAUD project 11
 - Integration Broker objects 101
 - Microsoft conversion project 106
 - new Change Assistant job 229
 - new tablespaces 136
 - Oracle audit tables 108
 - Oracle-delivered tablespaces 136
 - PPLTOOLS views 99
 - RUNSTATS.DAT 78
 - target Enterprise Portal project 269
 - temporary performance indexes 76
 - updated PeopleTools views 99
 - UPGIBCOPY 131
- credit card

- completing encryption 201
- CUSIP, adding 207
- customizations
 - comparing 50
 - identifying 53
 - reapplying 189
- customized objects
 - adjusting 190
- customizing
 - new release 128

D

- data
 - base data, loading 93
 - conversion data, loading 98
 - data conversion, running 99
 - English messages, loading 95
 - English string data, loading 95
 - language data, loading 94
 - MCF data, populating 97
 - PeopleTools data, loading 94
 - stored statements data, loading 95
- data conversion
 - applying updates before 160
 - backing up after 165
 - creating indexes 149
 - loading data 153
 - loading data for PeopleTools 98
 - reporting details 99
 - running for application changes 162
 - running for group 1 164
 - running for group 11 165
 - running for group 2 165
 - running for group 4 165
 - running for PeopleTools changes 99
 - understanding 162
- data conversion driver data
 - exporting 159
 - importing 159
- data conversion report 284
- data conversion, completing 194
- data model definitions, loading
 - DB2 UNIX/NT 80
 - DB2 z/OS 80
 - Informix 80
 - Oracle 80
 - SQL Server 81
 - Sybase 81
 - understanding 80
- data type steps, editing 72

- database
 - increasing space 5
- database cache
 - deleting from Copy of Production 268
- database data types, converting 103
- database options flag, resetting 77
- database options, updating 116
- database servers, backing up 116
- database structure
 - finalizing 166
 - modifying 143
- databases
 - preparing for the upgrade 38
 - stamping 224
 - Tree/Query Copy of Production 258
 - updating overrides 134
 - verifying integrity 39
- DB2
 - editing upgrade planning scripts 9
- DB2 UNIX RUNSTATS script,
 - generating 152
- DB2 UNIX/NT
 - loading data model definitions 80
 - rerunning RUNSTATS 78
 - updating statistics 78
- DB2 z/OS
 - backing up database 144
 - editing create table scripts 67
 - editing MTP import scripts 68
 - loading data model definitions 80
 - updating statistics 78
- DB2TMPIDXCREATE script 76
- DbField definitions, creating copy 56
- DBTSFIX output scripts
 - editing 65
 - running 74
- DBTSFIX script, running 64
- DDDAUDIT script
 - final, running 182
 - running initial 10
- DDLDB2 script
 - editing 69
 - running 80
- DDLDBX script
 - editing 69
 - running 80
- DDLIFX script
 - editing 70
 - running 80
- DDLMS script, running 81

- DDLORA script
 - editing 70
 - running 80
- DDLSYB script, running 81
- defining
 - asset resource defaults, generic 22
 - payment terms, paid invoices 205
- defining, testing strategy 248
- deleting
 - application messaging objects 102
 - Copy of Production database cache 268
 - node transactions 102
 - Pagelet Wizard Common Components data 56
 - Project staging data 34
 - securities data, duplicate 32
- developing
 - test plan 251
 - test scripts 252
- disabled constraints, auditing 108
- DLCGGLY20E script, running 119
- DLCGGLY20I script, running 119
- dropping
 - indexes 57
 - tables 118
 - views 118
- dropping PeopleTools tables 39
- duplicate length constraints, auditing 108
- duplicate service operation handlers and routings, deleting 182
- duplicate transactions, commitment control 16

E

- EDI tables, identifying 53
- editing
 - data type steps 72
 - DB2 z/OS create table scripts 67
 - DB2 z/OS MTP import scripts 68
 - DBTSFIX output scripts 65
 - DDLDB2 script 69
 - DDLDBX script 69
 - DDLIFX script 70
 - DDLORA script 70
 - GRANT script 66
 - Integration Broker script 71
 - Move to Production import scripts 68
 - MSGTLSUPG script 70
 - multilingual step properties 71
 - MVPRDIMP script 69

- PPLTLS84CURTABLES script 90
- PSLANGUAGES script 66
- PTxxxTLS scripts 66
- tablespace alter script 92
- TLSUPGNONCOMP script 66
- upgrade planning DB2 scripts 9
- encrypting connector passwords 98
- Enterprise Portal
 - copying database 267
 - upgrading PeopleTools 267
- Enterprise Portal project, target creating 269
- eSettlements
 - updating 215
- establishing, customer conversation currency 20
- Expense approvals, managing 23
- exporting
 - application data 158
 - application messages 154
 - application system data 175
 - ChartField configuration 141
 - common portal system options 177
 - configuration defaults 140
 - converted application base data 176
 - data conversion driver data 159
 - new release objects 133
 - node transactions 101
 - notification template table 176
 - Pagelet Wizard application data 157
 - Pagelet Wizard data 157
 - PATCH84X project 86
 - PATCH84XML project 87
 - PeopleTools system tables 77
 - PeopleTools tables, re-exporting 260
 - PPLTLS84CUR project 84
 - PPLTLS84CURDEL project 86
 - PPLTLS84CURML project 84
 - PPLTLSML project 85
 - project definitions 117
 - projects 83
 - PT84TBLSPC project 91
 - record groups 155
 - related language system data 174
 - selected PeopleTools tables 129
 - setup data 178
 - system setup data 156
 - upgrade defaults 158
 - upgrade setup data 57

F

- fields
 - renaming 42
- file servers
 - editing PTxxxTLS scripts 66
- final audit reports, running 182
- fixes
 - applying after copying project 236
 - applying after data conversion 237
 - applying between upgrade passes 237
 - applying during installation 236
 - applying during Move to Production 238
- FNLALTAUD project, creating 183

G

- General Ledger
 - running maintenance pack script 169
- general options setup, performing 13
- generating
 - customer conversation letters 19
 - DB2 UNIX RUNSTATS script 152
 - Microsoft conversion scripts 106
 - Oracle conversion scripts 109
 - PPLTLS84CURTABLES script 90
- getting started 2
- global support, contacting 246
- grant management
 - verify processes 20
- GRANT script
 - editing 66
 - running 74
- granting
 - home page personalization access 193
 - privileges to connect ID 74
- granting permissions
 - CONNECT ID 107

H

- Holidays, loading 211
- home page personalization access,
 - granting 193

I

- identifying
 - customizations 53
 - EDI tables 53
 - mass change 53
- images, shrinking 40

- importing
 - application data 159
 - application messages 154
 - application system data 175
 - ChartField configuration 141
 - common portal system options 177
 - configuration defaults 140
 - converted application base data 176
 - data conversion driver data 159
 - DB2 z/OS-specific information 68
 - new release objects 133
 - notification template table 177
 - Pagelet Wizard application data 157
 - Pagelet Wizard data 157
 - PeopleTools system tables 77
 - project definitions 118
 - record groups 155
 - related language system data 175
 - selected PeopleTools tables 130
 - setup data 178
 - system setup data 156
 - upgrade defaults 158
 - upgrade setup data 7
- increasing space, log file and database 5
- index parameters
 - setting 150
- indexes
 - creating 148
 - creating recommended 204
 - dropping 57
 - parameters, setting after copy 135
 - rebuilding verity search 202
 - reviewing the create indexes log 148
 - temporary performance, creating 76
- Informix
 - loading data model definitions 80
 - updating statistics 78
- INITALTAUD project, creating 11
- initial audits
 - reviewing 12
 - running 9
- installation, applying fixes during 236
- Integration Broker
 - converting 100
 - defaults, updating 100
 - deletes, preparing 101
 - objects, creating 101
- Integration Broker script, editing 71
- integration testing 249
- inventory

- preparing 28
- running balances report 30
- inventory pre-upgrade report
 - reviewing 29
 - running 29
- invoices, defining payment terms 205
- IT Asset Management, reviewing business
 - rules 25

J

- Journal Generator
 - running 26

L

- language data, updating 180
- language system data
 - exporting related 174
 - importing related 175
- languages
 - loading data 94
 - populating 93
 - swapping on system data 154
- Lease Administration, business unit default
 - calendar 35
- license code, updating 75
- Load Holidays process 211
- loading
 - base data 93
 - change requests 31
 - conversion data 98
 - data for data conversion 153
 - data model definitions 79
 - data to complete system setup 171
 - English messages 95
 - English string data 95
 - language data 94
 - message data 81
 - noncomparable objects 94
 - PeopleTools data 94
 - PeopleTools definition security
 - group 96
 - stored statements 178
 - stored statements data 95
 - system messages 81
- local message node, preserving 120
- log
 - reviewing for pagelet and collection
 - issues 194
- log file, increasing space 5

- long data audit, running 105
- long to LOB conversion, auditing 113
- long to LOB script 1, running 111
- long to LOB script 2, running 111
- long to LOB script 3, running 111
- long to LOB script 4, running 111
- long to LOB script 5, running 112
- long to LOB script 6, running 112
- long to LOB script 7, running 112
- long to LOB script 8, running 112

M

- maintenance log table, running maintenance
 - pack script 171
- Maintenance Management, preparing 33
- maintenance pack scripts, running 168
- management, billing and order 3
- managing
 - Expense approvals 23
- mass change, identifying 53
- match rules and transactions
 - Payables 26
- matching process, running 212
- message data
 - loading 81
 - loading English messages 95
- message data, cleaning up 73
- message queues, purging 41
- Microsoft conversion project,
 - creating 106
- Microsoft conversion report, running 107
- Microsoft conversion scripts,
 - generating 106
- Microsoft conversion scripts, running 106
- Microsoft database, validating 105
- Microsoft settings, reviewing 105
- migrating records 91
- model definitions, *See* data model
 - definitions
- modifying
 - compare options 121
 - compare report options 50
 - country codes 200
 - database structure 143
 - trigger tables 142
- Move to Production
 - editing import scripts 68
 - editing password 69
 - performing 230
 - testing 227

- understanding 228
- MSGTLSUPG script, editing 70
- MultiChannel Framework (MCF) data 97
- multilingual step properties, editing 71
- MVPRDIMP script, editing 69

N

- New Copy of Production database
 - importing data 68
- new release
 - exporting objects 133
 - importing objects 133
- new release database
 - backing up again 134
- new release demo
 - restoring 160
- New Release Demo database
 - backing up 42
- node transactions
 - deleting 102
 - exporting 101
- non-comparable objects, reviewing 125
- notes and tips, for your upgrade 3
- notification template table
 - exporting 176
 - importing 177

O

- object version numbers
 - setting 102
 - updating 181
- object version numbers, resetting 133
- optimizing
 - Product Trees 204
- Oracle
 - loading data model definitions 80
 - updating statistics 79
- Oracle audit tables, creating 108
- Oracle conversion scripts, generating 109
- Oracle database, validating 107
- Oracle settings, reviewing 108
- Order Management
 - configuring 205
 - running maintenance pack script 170
- order, management 3
- orders
 - confirm, ship and deplete 29

P

- pagelet and collection log 194
- pagelet publishing, enabling 195
- Pagelet Wizard
 - exporting application data 157
 - exporting data 157
 - importing application data 157
 - importing data 157
- Pagelet Wizard Common Components data,
 - deleting 56
- parallel testing 250
- password, Move to Production 69
- passwords, encrypting connector
 - passwords 98
- patch information, updating 76
- PATCH84X project 86
- PATCH84XML project 87
- Payables
 - match rules and transactions 26
 - performing set up 212
- payment terms, defining 205
- PeopleSoft upgrade survey 230
- PeopleTools
 - data, loading 94
 - definition security group, loading 96
 - exporting system tables 77
 - functionality 196
 - importing system tables 77
 - objects, converting 96
 - objects, reviewing 81
 - re-exporting tables 260
 - script 90
 - tables, dropping 39
 - updating patch information 76
 - updating system tables 72
 - upgrade, backing up after 116
 - upgrading Enterprise Portal 267
- PeopleTools conversion
 - completing 181
- PeopleTools tables
 - exporting 129
 - importing 130
 - swapping languages 130
- performance
 - improving for your platform 244
 - testing 250
 - tips for creating and altering SQL 244
 - tips for data conversion 244
 - tips for DB2 245

- tips for modify database structures 244
- tips for Oracle RDBMS 245
- performing
 - general options setup 13
 - Payables set up 212
- permission lists
 - updating Portal registry 268
- permissions lists
 - understanding registry updates 267
- platform changes, backing up before 104
- Portal
 - configuring 189
 - converting objects 97
 - running security synchronization 192
- Portal navigation objects, registering 190
- portal options data, updating 198
- Portal registry
 - updating permission lists 268
- post Payables transactions 26
- posting
 - Receivables transactions 18
- PPLTLS84CUR project 84
- PPLTLS84CURDEL project 86
- PPLTLS84CURML project 84
- PPLTLS84CURTABLES script
 - editing 90
 - generating 90
 - running 91
- PPLTLSML project 85
- pre-upgrade reports, billing 17
- preparing
 - Asset Management 23
 - commitment control 16
 - for the upgrade 38
 - Integration Broker deletes 101
 - Maintenance Management 33
 - strategic sourcing 31
 - Treasury setup 207
- preserving
 - queries and trees 257
- preserving, local message node 120
- Preventive Management, running
 - processes 33
- Process Scheduler
 - configuring 161
- process scheduler processes, reviewing 14
- processing
 - costing transactions 30
 - credit card payments, receivables 19
 - third-party transactions 21

- product license code, updating 75
- Product Trees, optimizing 204
- production database
 - identifying empty tables 38
- production database, copying 5
- Program Management
 - defining asset resource defaults 22
- project definitions
 - exporting 117
 - importing 118
- Projection staging data, deleting 34
- projects
 - comparing queries and trees 259
 - exporting and copying 83
 - INITALTAUD 11
 - PATCH84X 86
 - PATCH84XML 87
 - PPLTLS84CUR 84
 - PPLTLS84CURDEL 86
 - PPLTLS84CURML 84
 - PPLTLSML 85
 - PRESERVED 258
 - preserving queries and trees 258
 - processing third-party 21
 - PT84TBLSPC 91
 - setting up 21
 - setting up analysis type and group 208
 - UPGCFCONFIG, copying 139
- projects integration
 - setting up 208
- Promotions
 - completing 204
- PSLANGUAGES script
 - editing 66
 - running 93
- PSOBJCHNG table, cleaning 39
- PT84TBLSPC project 91
- PTUPGCONVERT 181
- PTUPGCONVERT program 99
- PTxxxTLS scripts
 - editing 66
 - running 93
- Purchasing
 - running maintenance pack script 170
- purchasing tasks, completing 31

Q

- queries, preserving 257
- query prompt headings, converting 98

R

- re-creating
 - triggers 148
- Real Estate Management
 - completing setup 220
 - setting up 35
 - setting up business unit calendar 35
 - setting up financial term calendar 36
 - setting up lease regions 37
- reapplying customizations 189
- rebuilding, verity search indexes 202
- Receivables
 - changes, completing final 213
 - customer conversation currency, establishing 20
 - generating conversation letters 19
 - posting transactions 18
 - processing credit card payments 19
 - running follow up query, customer conversation 213
 - setting up 18
 - updating existing customer conversations 214
- RecField, definitions 55
- reconciling, notification templates 203
- record groups
 - exporting 155
 - importing 155
- record parameters
 - setting 151
- records
 - migrating 91
 - renaming 42
 - setting parameters after copy 135
- registering Portal navigation objects 190
- registry permission lists, understanding updates 267
- registry, upgrading Content Provider 197
- regression testing 251
- REN servers, updating configuration 96
- rename log files, retaining 46
- renaming
 - fields 42
 - records 42
- reporting conversion details 99
- reports
 - inventory balances 30
- rerunning Auto Position process 207
- rescheduled payments, cancelling 27
- resetting
 - action flags in UPGCUST 123
 - database options flag 77
 - flags for ChartField objects 124
 - object version numbers 133
- Resource Management, setting 211
- restoring
 - Copy of Current Demo database 53
 - new release demo 160
- retaining
 - rename log files 46
- reviewing
 - Alter Audit, final 184
 - approval workflow framework 203
 - change control 224
 - ChartField configuration 15
 - common search configurations 25
 - conversion reports 115
 - copy results 128
 - country data 15
 - create indexes log 148
 - event status 31
 - initial audits 12
 - IT Asset Management business rules 25
 - Microsoft settings 105
 - new release changes 124
 - new release compare reports 124
 - non-comparable objects 125
 - Oracle settings 108
 - PeopleTools functionality 196
 - PeopleTools objects 81
 - pre-upgrade inventory report 29
 - process scheduler processes 14
 - UPGCUST compare log 53
 - UPGCUSTIB copy results 133
 - UPGIBCOPY copy results 133
 - UPGNONCOMP copy results 133
- reviewing reports
 - billing pre-upgrade 17
- RNEPAUCS01
 - running 44
 - running on copy of current demo 47
- running
 - Alter Audit, final 183
 - Alter Audit, initial 12
 - alter tables script 147
 - alter with deletes script 167
 - audits 182
 - Auto Position for all deals 32
 - character length script 1 113

- character length script 2 113
- character length script 3 113
- character length script 4 114
- character length script 5 114
- character length script 6 114
- character length script 7 114
- character length script 8 115
- ChartField configuration 141
- create indexes script 148
- create tables script 147
- create temp tables script 147
- create triggers script 167
- customer conversation follow up query 213
- data conversion, for application changes 162
- data conversion, for PeopleTools changes 99
- DB2TMPIDXCREATE script 76
- DBTSFIX output scripts 74
- DBTSFIX script 64
- DDDAUDIT script, final 182
- DDDAUDIT script, initial 10
- DDLDB2 script 80
- DDLDBX script 80
- DDLIFX script 80
- DDLMS script 81
- DDLORA script 80
- DDLSYB script 81
- DLCGGLY20E script 119
- DLCGGLY20I script 119
- GRANT script 74
- initial audits 9
- inventory balances report 30
- inventory pre-upgrade report 29
- inventory reports, orders and transactions 28
- Journal Generator 26
- long data audit 105
- long to LOB script 1 111
- long to LOB script 2 111
- long to LOB script 3 111
- long to LOB script 4 111
- long to LOB script 5 112
- long to LOB script 6 112
- long to LOB script 7 112
- long to LOB script 8 112
- matching process 212
- Microsoft conversion report 107
- Microsoft conversion scripts 106

- new release UPGCUST 122
- new release UPGCUSTIB 123
- new release upgrade copy 129
- Portal security synchronization 192
- PPLTLS84CURTABLES script 91
- Preventive Management 33
- PSLANGUAGES script 93
- PTUPGCONVERT program 99
- PTxxxTLS scripts 93
- RNEPAUCS01 44
- RNEPAUCS01 on copy of current demo 47
- row count report 38
- SETINDEX script 135, 184
- SETSPACE script 135
- SETTABLE script 135, 185
- STORECP script 179
- STOREFP script 179
- STOREGL script 179
- STOREIN script 179
- STORELC script 180
- STOREMG script 180
- STOREPO script 180
- summary refresh 208
- SYSAUDIT script, final 183
- SYSAUDIT script, initial 10
- tablespace alter script 92
- TLSUPGNONCOMP script 94
- trigger sync script 142
- TSRECPOP script 181
- UPG CF CONFIG script 140
- UPGCOUNT script 38
- UPGCUST 51
- UPGCUST filter script 52
- RUNSTATS.DAT, creating 78

S

- saving
 - application messaging objects 101
- scripts 142
 - DB2 z/OS create table scripts 67
 - DB2 z/OS MTP import scripts 68
 - DB2TMPIDXCREATE 76
 - DBTSFIX, editing 65
 - DBTSFIX, running 64
 - DDDAUDIT 10
 - DDLDB2, editing 69
 - DDLDB2, running 80
 - DDLDBX, editing 69
 - DDLDBX, running 80

- DDLIFX, editing 70
- DDLIFX, running 80
- DDL MSS, running 81
- DDLORA, editing 70
- DDLORA, running 80
- DDLSYB, running 81
- DHC8X01DMS 154–155
- editing DB2 upgrade planning 9
- GRANT 74
- GRANT, editing 66
- Integration Broker 71
- maintenance pack, running 168
- MSGTLSUPG 70
- MVPRDIMP 69
- PeopleTools 90
- PPLTLS84CURTABLES 90
- PSLANGUAGES 93
- PSLANGUAGES, editing 66
- PTxxxTLS scripts 93
- PTxxxTLS scripts, editing 66
- running ALLTABS_ALTTLBL 147
- running ALLTABS_CRTTLBL 147
- SETINDEX 135
- SETSPACE 135
- SETTABLE 135
- SYSAUDIT 10
- TLSUPGNONCOMP 94
- TLSUPGNONCOMP, editing 66
- UPGCOUNT 38
- securities data
 - deleting duplicate 32
- security
 - granting home page personalization access 193
 - loading PeopleTools definition security group 96
 - running Portal security synchronization 192
 - setting up 191
 - setting up, upgrade planning 8
 - synchronizing content reference permissions 191
 - understanding setup 191
- servers
 - application servers 161, 188
 - database servers 116
 - file servers 66
 - REN servers 96
- service operation
 - completing upgrade 182
 - deleting duplicate handlers and routings 182
- SETINDEX script 135, 184
- SETSPACE script 135
- SETTABLE script 135, 185
- setting 102
 - COUNTRY_TBL 198
 - index parameters 135
 - object version numbers 102
 - record parameters after copy 135
 - Resource Management 211
 - Sync IDs 209
 - tablespace names 135
- setting up
 - business unit default calendar 35
 - financial term calendar 36
 - lease region update 37
 - project analysis type and group 208
 - projects 21
 - projects integration 208
 - real estate management defaults 35
 - Receivables 18
 - security 191
 - security for upgrade planning 8
 - Treasury 32, 207
 - VAT processing 221
- settings
 - Microsoft, reviewing 105
 - Oracle, reviewing 108
- setup data
 - exporting 178
 - importing 178
- shrinking images 40
- single signon, setting up 189
- software installation
 - verifying 2
- SQL Server
 - loading data model definitions 81
- stamping the database 224
- starting
 - application servers 188
- statistics
 - DB2 UNIX/NT, updating 78
 - DB2 z/OS, updating 78
 - Informix, updating 78
 - Oracle, updating 79
 - updating 9
- STORECP script, running 179
- stored statements data, loading 95
- stored statements, loading 178

- STOREFP script, running 179
- STOREGL script, running 179
- STOREIN script, running 179
- STORELC script
 - running 180
- STOREMG script, running 180
- strategic sourcing
 - preparing 31
- Strategic Sourcing
 - running maintenance pack script 171
- string data, loading 95
- summary refresh, running 208
- support, contacting 246
- Sybase
 - loading data model definitions 81
- Sync IDs, setting 209
- synchronizing content reference
 - permissions 191
- SYSAUDIT script
 - running final 183
 - running initial 10
- system
 - messages, loading 81
 - tables, exporting 77
 - tables, importing 77
- system catalog views, updating 74
- system data swap script, editing 58
- system setup data
 - exporting 156
 - importing 156
- system testing 249

T

- tables
 - copying 119
 - dropping 118
 - moving to new tablespaces 92
 - PeopleTools system tables, updating 72
 - PeopleTools tables, re-exporting 260
 - PeopleTools, dropping 39
 - PSOBJCHNG 39
 - running row count report 38
 - system tables, exporting 77
 - system tables, importing 77
- tablespaces
 - alter script 92
 - alter script, building 92
 - alter script, editing 92
 - creating custom 137
 - creating new 136

- creating Oracle-delivered 136
- migrating records to 91
- populating data 87
- setting names 135, 151
- setting names for temporary tables 151
- updating names 89
- target values, updating 132
- temporary tables, setting tablespace
 - names 151
- test plan, developing 251
- test scripts, developing 252
- testing
 - after the upgrade 230
 - backing up before 225
 - Copy of Production 226
 - determining conditions 251
 - evaluating requirements 248
 - integration 249
 - Move to Production 227
 - parallel environments 250
 - performance 250
 - preserved queries and trees 260
 - regression 251
 - system 249
 - tips and techniques 253
 - unit 249
 - user acceptance 250
- testing strategy
 - defining 248
 - determining conditions 251
 - when to test 247
- TLSUPGNONCOMP script
 - editing 66
 - running 94
- transactions, post Payables 26
- transactions, processing third-party 21
- Treasury, setting up 32
- Tree/Query Copy of Production
 - database 258
- trees, preserving 257
- trigger sync script
 - building 142
 - running 142
- trigger tables, modifying 142
- triggers, re-creating 148
- TSRECPOP script, running 181
- turning off change control 79

U

- unit testing 249

- updates
 - applying before data conversion 160
- updating
 - Asset Management ChartField
 - SQC 141
 - Configuration Manager profile 63
 - database options 116
 - database overrides 134
 - eSettlements 215
 - existing customer conversations 214
 - inactive ChartFields 139
 - Integration Broker defaults 100
 - language data 180
 - object version numbers 181
 - PeopleTools patch information 76
 - PeopleTools system tables 72
 - portal options data 198
 - product license code 75
 - REN server configuration 96
 - statistics for DB2 UNIX during
 - application changes 152
 - statistics for DB2 UNIX/NT 78
 - statistics for DB2 z/OS 78
 - statistics for DB2 z/OS during application
 - changes 152
 - statistics for Informix 78
 - statistics for Informix during application
 - changes 152
 - statistics for Oracle 79
 - statistics for Oracle during application
 - changes 153
 - statistics, initial 9
 - system catalog views 74
 - tablespace names 89
 - target values 132
 - VAT defaults 222
 - VAT entity report options 223
- updating statistics
 - DB2 UNIX/NT 78
 - DB2 z/OS 78
 - Informix 78
 - Oracle 79
- UPG CF CONFIG, running 140
- UPGCFCONFIG project 139
- UPGCFCONFIG, building 140
- UPGCOUNT script, running 38
- UPGCUST
 - copying 128
 - resetting action flags 123
 - reviewing compare log 53
 - running a compare 51
 - running filter script 52
 - running new release 122
- UPGCUSTIB
 - copying 130
 - reviewing copy results 133
 - running filter script 123
 - running new release 123
- UPGCUSTIB filter script 123
- UPGIBCOPY
 - copying 132
 - creating 131
 - reviewing copy results 133
- UPGNONCOMP
 - copying 132
 - reviewing copy results 133
- UPGOPT project
 - applying 6
 - building 7
- upgrade
 - compare reports, understanding 288
 - configuring environment 188
 - database preparation 2
 - databases, defined 3
 - getting started 2
 - notes and tips 3
 - PeopleTools, backing up after 116
 - planning for performance 243
 - preparing for 38
 - setting up upgrade planning security 8
 - user, verifying 62
- upgrade copy, running 129
- upgrade defaults
 - exporting 158
 - importing 158
- Upgrade Drivers page
 - accessing 281
 - adding new section 282
 - inactivating section 283
- upgrade planning files, applying 6
- upgrade setup data
 - exporting 57
- upgrade setup data, importing 7
- upgrade tables script
 - recreating 144
- upgrade views
 - creating 150
- upgrading
 - Content Provider registry 197
 - Enterprise Portal PeopleTools 267

- user acceptance testing 250
- user interface
 - changing for desktop computers 239
 - changing for mobile devices 241
- using
 - Application Engine Driver program 281

V

- validating
 - Microsoft database 105
 - Oracle database 107
- VAT
 - updating defaults 222
 - updating report options 223
- VAT processing
 - setting up 221
- verifying
 - database integrity 39
 - grant management processes 20
 - software installation 2
 - upgrade user 62
- verity
 - rebuilding search indexes 202
- version numbers
 - setting 102
 - updating 181
- views
 - creating all 168
 - creating PPLTOOLS 99
 - dropping 118

W

- work order
 - running maintenance pack script 170

