

Oracle® Retail Merchandising System
Operations Guide, Volume 3 - Back End Configuration and
Operations
Release 15.0
E65440-01

December 2015

Oracle® Retail Merchandising System Operations Guide, Volume 3 - Back End Configuration and Operations, Release 15.0

E65440-01

Copyright © 2015, Oracle. All rights reserved.

Primary Author: Maria Andrew

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

(i) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.

(ii) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.

(iii) the software component known as **Access Via**TM licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.

(iv) the software component known as **Adobe Flex**TM licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Send Us Your Comments	ix
Preface	xi
Audience	xi
Documentation Accessibility.....	xi
Related Documents.....	xi
Customer Support.....	xii
Review Patch Documentation.....	xii
Improved Process for Oracle Retail Documentation Corrections	xii
Oracle Retail Documentation on the Oracle Technology Network.....	xiii
Conventions.....	xiii
1 Introduction	1
Contents Covered in this Volume.....	1
2 Pro*C Restart and Recovery	3
Table of Description and Definition	3
RESTART_CONTROL	4
RESTART_PROGRAM_STATUS	5
RESTART_PROGRAM_HISTORY	6
RESTART_BOOKMARK	7
V_RESTART_<X>	8
Restart and Recovery Data Model Design.....	8
Physical Set-Up.....	8
Table and File-Based Restart/Recovery.....	8
API Functional Descriptions.....	11
RESTART_INIT	11
RESTART_FILE_INIT.....	11
RESTART_COMMIT	11
RESTART_FILE_COMMIT.....	12
RESTART_CLOSE	12
PARSE_ARRAY_ARGS.....	12
RESTART_FILE_WRITE	12
RESTART_CAT	12
Restart Headers and Libraries.....	12
RESTART.H.....	12
STD_REST.H.....	13
Updating Restart Headers and Libraries.....	13
Query-Based Commit Thresholds	17
3 Pro*C Multi-Threading	19
Threading Description.....	19
Threading Function for Query-Based	19

Restarting View for Query-Based	20
Thread Scheme Maintenance.....	21
File-Based	21
Query-Based	22
Batch Maintenance.....	22
Scheduling and Initialization of Restart Batch.....	22
Pre-Processing and Post-Processing.....	23
ksh Driven Batch Programs	23
4 Pro*C Array Processing	25
5 Pro*C Input and Output Formats.....	27
General Interface Discussion	27
Standard File Layouts	27
Detail-Only Files	27
Master and Detail Files.....	28
6 RETL Program Overview for the RMS-RPAS Interface.....	31
Oracle Retail ETL Architecture	31
RETL Program Overview	32
Configuration	32
Program Return Code	35
Program Status Control Files.....	35
File Naming Conventions.....	35
Restart and Recovery.....	35
Message Logging	36
Daily Log File	36
Format	36
Program Error File.....	36
RMSE Reject Files.....	37
Schema Files Overview	37
Command Line Parameters	37
rmse_rpas_config.env	38
RMSE I/O File Names.....	39
Typical Run and Debugging Situations	40
RPAS/AIP Configuration.....	40
RETL Program Overview for the RMS-Time-Phased Inventory Planning Tool Interface.....	41
Configuration	41
Program Return Code	42
Program Status Control Files	42
Message Logging	44
RMSE and Transformation Reject Files.....	45
Schema Files Overview	45
Command Line Parameters.....	45

Typical Run and Debugging Situations	46
7 Internationalization	49
Translation	49
RMS User Interface Language Display Settings	50
Multiple Languages in one RMS Forms Session	50
Key RMS Tables for User Interface Related Internationalization.....	50
FORM_ELEMENTS	50
FORM_ELEMENTS_LANGS	51
MENU_ELEMENTS	51
MENU_ELEMENTS_LANGS	51
FORM_MENU_LINK.....	51
CODE_DETAIL_TRANS	51
UOM_LANG	51
New Data Translation Tables.....	52
8 Integrating RMS with Store Inventory Management	53
Supplier	54
Merchandise Hierarchy.....	54
Warehouse	54
SIM Store	54
Inventory Adjustment Reason	54
Adding Inventory Adjustment Reason in SIM	55
Mapping Inventory Adjustment Reason in RMS	55
Diff ID	55
Item With/Without UIN And Item Locations	55
SIM GUI Item Look up.....	56
Transactions.....	56
Purchase Order.....	56
Transfers.....	57
Return to Warehouse.....	59
Return to Vendor	61
Store Orders.....	62
Inventory Adjustment.....	62
Stock Count.....	63
Price Change.....	64
9 Integrating RMS with Oracle E-Business Suite Financials Using Oracle Retail	
Financial Integration.....	67
Participating Applications	67
Assumptions and Dependencies	67
Data Setup	68
RMS Data Set up and Configuration.....	68
ReIM Data Setup and Configuration.....	74
ReIM Transactional Maintenance	79

Calculation of TRANS_AMOUNT	79
Generation of Outgoing Data	79
Validation of Accounts When Posting Financial Entries.....	80
Validation of Accounts When Prepaying a Merchandise Invoice	80
Maintenance of Valid Accounts	81
10 Integrating RMS with PeopleSoft Financials Using Oracle Retail Financial	
Integration.....	83
Participating Applications	83
Assumptions and Dependencies	83
Data Constraints.....	84
Data Setup	84
RMS Data Setup and Configuration.....	84
Configuring Drill Back and Forward Web Services.....	90
ReIM Data Setup and Configuration.....	91
CURRENCY_PRECISION	91
Chart of Accounts Setup	92
ReIM Transactional Maintenance	95
Calculation of TRANS_AMOUNT	95
Generation of Outgoing Data.....	95
Validation of Accounts When Posting Financial Entries.....	96
Maintenance of Valid Accounts	97
Building and Posting Reference IDs.....	97
Drilling Back.....	97
Drilling Back to RMS and ReSA from PeopleSoft Enterprise Financials	98
Drilling Back to ReIM from PeopleSoft Enterprise Financials.....	98
Drilling Forward	99
Drilling Forward From RMS/ReSA to PeopleSoft Enterprise Financials	100
Drilling Forward From ReIM to PeopleSoft Enterprise Financials.....	100
11 Understanding Data Access Schema.....	101
DAS Views	102
12 Using Oracle Wallet.....	103

Send Us Your Comments

Oracle Retail Merchandising System Operations Guide, Volume 3 - Back End Configuration and Operations, Release 15.0

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the new Applications Release Online Documentation CD available on My Oracle Support and www.oracle.com. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at www.oracle.com.

Preface

This *Retail Merchandising System Operations Guide, Volume 3 - Back End Configuration and Operations* provides critical information about the processing and operating details of Oracle Retail Merchandising System (RMS), including the following:

- System configuration settings
- Technical architecture
- Functional integration dataflow across the enterprise
- Batch processing

Audience

This guide is for:

- Systems administration and operations personnel
- Systems analysts
- Integrators and implementers
- Business analysts who need information about Merchandising System processes and interfaces

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Related Documents

For more information, see the following documents:

- *Oracle Retail Merchandising System Installation Guide*
- *Oracle Retail Merchandising System Reports User Guide*
- *Oracle Retail Merchandising System User Guide and Online Help*
- *Oracle Retail Merchandising System Release Notes*
- *Oracle Retail Merchandising System Custom Flex Attribute Solution Implementation Guide*
- *Oracle Retail Merchandising System Data Model*
- *Oracle Retail Merchandising System Data Access Schema Data Model*
- *Oracle Retail Merchandising Security Guide*
- *Oracle Retail Merchandising Implementation Guide*
- *Oracle Retail Merchandising Data Conversion Operations Guide*
- *Oracle Retail Merchandising Batch Schedule*
- *Oracle Retail POS Suite/Merchandising Operations Management Implementation Guide*

- *Oracle Retail Xstore Suite 15.0/Merchandising 15.0 Implementation Guide*
- Oracle Retail Sales Audit documentation
- Oracle Retail Trade Management documentation
- Oracle Retail Fiscal Management documentation

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:
<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 15.0) or a later patch release (for example, 15.0.1). If you are installing the base release or additional patch releases, read the documentation for all releases that have occurred since the base release before you begin installation. Documentation for patch releases can contain critical information related to the base release, as well as information about code changes since the base release.

Improved Process for Oracle Retail Documentation Corrections

To more quickly address critical corrections to Oracle Retail documentation content, Oracle Retail documentation may be republished whenever a critical correction is needed. For critical corrections, the republication of an Oracle Retail document may at times **not** be attached to a numbered software release; instead, the Oracle Retail document will simply be replaced on the Oracle Technology Network Web site, or, in the case of Data Models, to the applicable My Oracle Support Documentation container where they reside.

This process will prevent delays in making critical corrections available to customers. For the customer, it means that before you begin installation, you must verify that you have the most recent version of the Oracle Retail documentation set. Oracle Retail documentation is available on the Oracle Technology Network at the following URL:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

An updated version of the applicable Oracle Retail document is indicated by Oracle part number, as well as print date (month and year). An updated version uses the same part number, with a higher-numbered suffix. For example, part number E123456-02 is an updated version of a document with part number E123456-01.

If a more recent version of a document is available, that version supersedes all previous versions.

Oracle Retail Documentation on the Oracle Technology Network

Oracle Retail product documentation is available on the following web site:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

(Data Model documents are not available through Oracle Technology Network. You can obtain them through My Oracle Support.)

Conventions

Navigate: This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens”.

This is a code sample

It is used to display examples of code

Introduction

Welcome to the Oracle Retail Merchandising System Operations Guide, Volume 3 - Back End Configuration and Operations. The guide is designed to inform you about the 'backend' of RMS: data inputs, processes, and outputs. As a member of the Oracle Retail family, RMS provides many benefits of Enterprise Application Integration (EAI).

Contents Covered in this Volume

This volume describes the important features that are necessary to run the Pro*C programs and the RETL programs associated with RMS. Additional RMS configuration, RMS Integration and Operations information is also included in this volume. Topics included are:

- [Pro*C Restart and Recovery](#)
- [Pro*C Multi-Threading](#)
- [Pro*C Array Processing](#)
- [Pro*C Input and Output Formats](#)
- [RETL Program Overview for the RMS-RPAS Interface](#)
- [Internationalization](#)
- [Integrating RMS with Store Inventory Management](#)
- [Integrating RMS with Oracle Financials using Oracle Retail Financial Integration](#)
- [Integrating RMS with PeopleSoft Financials Using Oracle Retail Financial Integration](#)
- [Understanding Data Access Schema](#)
- [Using Oracle Wallet](#)

Note: For setting up Business Intelligence Publisher, see *Oracle Retail Merchandising System Installation Guide*.

Pro*C Restart and Recovery

RMS has implemented a restart/recovery process in most of its batch architecture. The general purpose of restart/recovery is to:


- Recover a halted process from the point of failure.
- Prevent system halts due to large numbers of transactions.
- Allow multiple instances of a given process to be active at the same time.

Further, the RMS restart/recovery tracks batch execution statistics and does not require DBA authority to execute.

The restart capabilities revolve around a program's logical unit of work (LUW). A batch program processes transactions, and commit points are enabled based on the LUW. LUWs consist of a relatively unique transaction key (such as sku/store) and a maximum commit counter. Commit events take place after the number of processed transaction keys meet or exceed the maximum commit counter. For example, after every 10,000 sku/store combinations, a commit occurs. At the time of commit, key data information that is necessary for restart is stored in the restart tables. In the event of a handled or unhandled exception, transactions is rolled back to the last commit point, and upon restart the key information is retrieved from the tables so that processing can continue from the last commit point.

Table of Description and Definition

The RMS restart/recovery process is driven by a set of four tables. These tables are shown in Entity Relationship diagram. For detailed table description, see [RESTART_CONTROL](#), [RESTART_PROGRAM_STATUS](#), [RESTART_BOOKMARK](#) and [RESTART_PROGRAM_HISTORY](#).

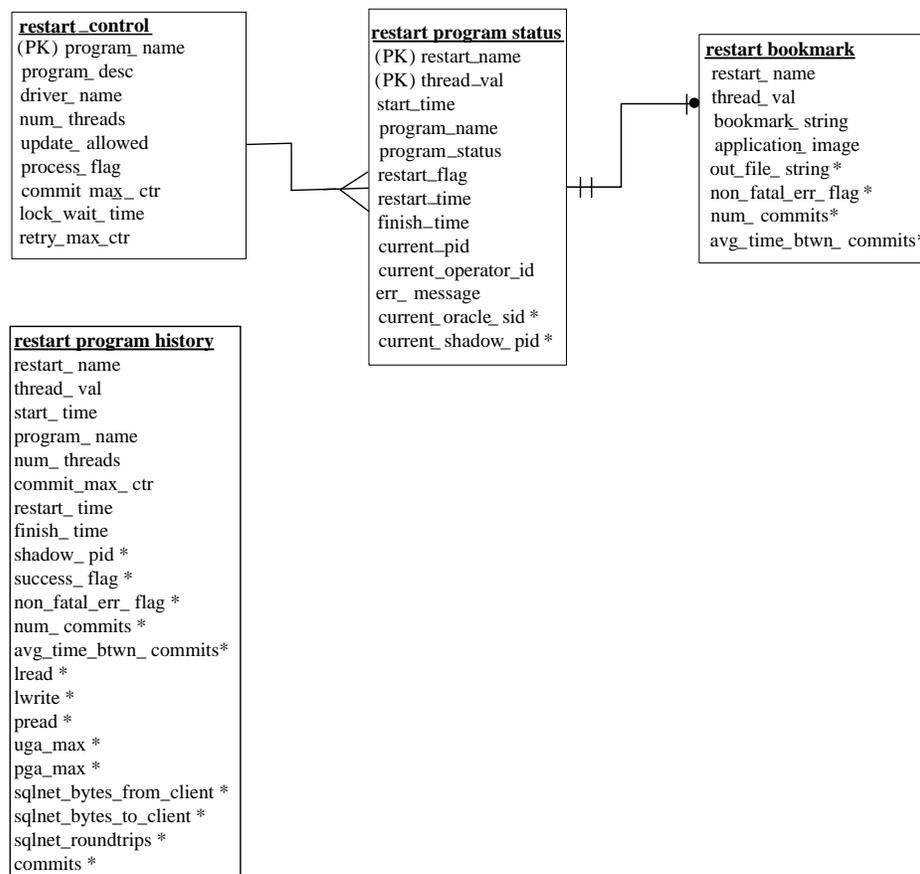

RMS Restart Recovery Entity Relationships Diagram

RESTART_CONTROL

The RESTART_CONTROL table is the master table in the restart/recovery table set. One record exists on this table for each batch program that is run with restart/recovery logic in place. The restart/recovery process uses this table to determine:

- Whether the restart/recovery is table-based or file-based.
- The total number of threads used for each batch program.
- The maximum records processed before a commit event takes place.
- The driver for the threading (multi-processing) logic.
- Time to wait for a lock and the number of lock retry.

RESTART_CONTROL

Column Name	Data Type	Length	Description
(PK) PROGRAM_NAME	varchar2	25	Batch program name.
PROGRAM_DESC	varchar2	120	A brief description of the program function.
DRIVER_NAME	varchar2	25	Driver on query, for example, department (non-updatable).
NUM_THREADS	num	10	Number of threads used for current process.

UPDATE_ALLOWED	varchar2	2	Indicates whether user can update thread numbers or if done programmatically.
PROCESS_FLAG	varchar2	1	Indicates whether the process is table-based (T) or file-based (F).
COMMIT_MAX_CTR	num	6	Numeric maximum value for counter before commit occurs.
LOCK_WAIT_TIME	num	6	Contains the number of seconds between the last and the next lock retry.
RETRY_MAX_CTR	num	10	Contains the maximum number of lock retry.

RESTART_PROGRAM_STATUS

The RESTART_PROGRAM_STATUS table is the table that holds record keeping information about current program processes. The number of rows for a program on the status table is equal to its NUM_THREADS value on the RESTART_CONTROL table. The status table is modified during restart/recovery initialization and close logic. For table-based processing, the restart/recovery initialization logic assigns the next available thread to a program based on the program status and restart flag. For file-based processing, the thread value is passed in from the input file name. When a thread is assigned, the PROGRAM_STATUS is updated to prevent the assignment of that thread to another process. Information is logged on the current status of a given thread, as well as record keeping information such as operator and process timing information.

RESTART_PROGRAM_STATUS

(PK)RESTART_NAME	varchar2	50	Program name
(PK)THREAD_VAL	num	10	Thread counter
START_TIME	date		dd-mon-yy hh:mi:ss
PROGRAM_NAME	varchar2	25	Program name
PROGRAM_STATUS	varchar2	25	Started, aborted, aborted in init, aborted in process, aborted in final, completed, ready for start.
RESTART_FLAG	varchar2	1	Automatically set to 'N' after abnormal end, must be manually set to 'Y' for program to restart.
RESTART_TIME	date		dd-mon-yy hh:mi:ss.
FINISH_TIME	date		dd-mon-yy hh:mi:ss.
CURRENT_PID	num	15	Starting program ID.
CURRENT_OPERATOR_ID	varchar2	20	Operator that started the program.
ERR_MESSAGE	varchar2	255	Record that caused program abort and associated error message.
CURRENT_ORACLE_SID	num	15	Oracle SID for the session associated with the current process.
CURRENT_SHADOW_PID	num	15	O/S process ID for the shadow process associated with the current process. It is used to locate the session trace file when a process is not finished successfully.

RESTART_PROGRAM_HISTORY

The RESTART_PROGRAM_HISTORY table will contain one record for every successfully completed program thread with restart/recovery logic. Upon the successful completion of a program thread, its record on the RESTART_PROGRAM_STATUS table will be inserted into the history table. Table purging will be at user discretion.

RESTART_PROGRAM_HISTORY

RESTART_NAME	varchar2	50	Program name.
THREAD_VAL	Num	10	Thread counter.
START_TIME	Date		dd-mon-yy hh:mi:ss.
PROGRAM_NAME	varchar2	25	Program name.
NUM_THREADS	Num	10	Number of threads.
COMMIT_MAX_CTR	num	6	Numeric maximum value for counter before commit occurs.
RESTART_TIME	date		dd-mon-yy hh:mi:ss.
FINISH_TIME	date		dd-mon-yy hh:mi:ss.
SHADOW_PID	num	15	O/S process ID for the shadow process associated with the process. It is used to locate the session trace file.
SUCCESS_FLAG	varchar2	1	Indicates whether the process finished successfully (reserved for future use).
NON_FATAL_ERR_FLAG	varchar2	1	Indicates whether non-fatal errors have occurred for the process.
NUM_COMMITS	num	12	Total number of commits for the process. The possible last commit when restart/recovery is closed is not counted.
AVG_TIME_BTWN_COMMITS	num	12	Accumulated average time between commits for the process. The possible last commit when restart/recovery is closed is not counted.
LREAD	num		Session logical reads. The sum of "db block gets" plus "consistent gets". This includes logical reads of database blocks from either the buffer cache or process private memory.
LWRITE	num		Session logical writes. The sum of "db block changes" plus "consistent changes".
PREAD	num		Physical reads. Total number of data blocks read from disk.
UGA_MAX	num		Peak UGA (user global area) size for a session.
PGA_MAX	num		Peak PGA (program global area) size for the session.
SQLNET_BYTES_FROM_CLIENT	num		Total number of bytes received from the client over Oracle Net Services.

RESTART_PROGRAM_HISTORY

SQLNET_BYTES_TO_CLIENT	num	Total number of bytes sent to the client from the foreground processes.
SQLNET_ROUNDTRIPS	num	Total number of Oracle Net Services messages sent to and received from the client.
COMMITTS	num	Number of user commits. When a user commits a transaction, the redo generated that reflects the changes made to database blocks must be written to disk. Commits often represent the closest thing to a user transaction rate.

RESTART_BOOKMARK

When a restart/recovery program thread is active, its state is started or aborted, and a record for it exists on the RESTART_BOOKMARK table. Restart/recovery initialization logic inserts the record into the table for a program thread. The restart/recovery commit process updates the record with the following restart information:

- A concatenated string of key values for table processing
- A file pointer value for file processing
- Application context information such as counters and accumulators

The restart/recovery closing process deletes the program thread record if the program finishes successfully. In the event of a restart, the program thread information on this table will allow the process to begin from the last commit point.

RESTART_BOOKMARK

(PK) RESTART_NAME	varchar2	50	Program name.
(PK) THREAD_VAL	num	10	Thread counter.
BOOKMARK_STRING	varchar2	255	Character string of key of last committed record.
APPLICATION_IMAGE	varchar2	1000	Application parameters from the last save point.
OUT_FILE_STRING	varchar2	255	Concatenated file pointers (UNIX sometimes refers to these as stream positions) of all the output files from the last commit point of the current process. It is used to return to the right restart point for all the output files during restart process.
NON_FATAL_ERR_FLAG	varchar2	1	Indicates whether non-fatal errors have occurred for the current process.
NUM_COMMITS	num	12	Number of commits for the current process. The possible last commit when restart/recovery is closed is not counted.

AVG_TIME_BTWN_COMMITS	num	12	Average time between commits for the current process. The possible last commit when restart/recovery is closed is not counted.
-----------------------	-----	----	--

V_RESTART_<X>

Restart views are used for query-based programs that require multi-threading. Separate views (ex v_restart_dept, and v_restart_store) are created for each threading driver, for example, department or store. A join is made to a view based on threading driver to force the separation of discrete data into particular threads. See the threading discussion for more details.

V_RESTART_<X>

DRIVER_NAME	varchar2	Example dept, store, region, and others.
NUM_THREADS	number	Total number of threads in set (defined on restart control).
DRIVER_VALUE	number	Numeric value of the driver_name.
THREAD_VAL	number	Thread value defined for driver_value and num_threads combination.

Restart and Recovery Data Model Design

The RESTART_PROGRAM_STATUS and RESTART_BOOKMARK are separate tables. This is because the initialization process needs to fetch all of the rows associated with RESTART_NAME/schema, but will only update one row. The commit process will continually lock a row with a specific RESTART_NAME and THREAD_VAL. The data involved with these two processes is separated into two tables to reduce the number of hangs that could occur due to locked rows. Even if you allow 'dirty reads' on locked rows, a process will still hang if it attempts to do an update on a locked row. The commit process is only interested in a unique row, so if we move the commit process data to a separate table with row level (not page level) locking, there will not be contention issues during the commit. With the separate tables, the initialization process will now see fewer problems with contention because rows will only be locked twice, at the beginning and end of the process.

Physical Set-Up

The restart/recovery process needs to be as robust as possible in the event of database related failure. The costs outweigh the benefits of placing the restart/recovery tables in a separate database. The tables should, however, be setup in a separate, mirrored table space with a separate rollback segment.

Table and File-Based Restart/Recovery

The restart/recovery process works by storing all the data necessary to resume processing from the last commit point. Therefore, the necessary information is updated on the RESTART_BOOKMARK table before the processed data is committed. Query-based and file-based module stores different information on the restart tables, and therefore calls different functions within the restart/recovery API to perform their tasks. When a program's process is query-based on a module is driven by a driving query that processes the retrieved rows, the information that is stored on the

RESTART_BOOKMARK table is related to the data retrieved in the driving query. If the program fails while processing, the information that is stored on the restart-tables can be used in the conditional where-clause of the driving query to only retrieve data that has yet to be processed since the last commit event.

File-based processing, needs to store the file location at the time of the last commit point. This file's byte location is stored on the RESTART_BOOKMARK table and will be retrieved at the time of a restart. This location information will be used further be used in reopening the file when the data was last committed. Because there is different information being saved to and retrieved from the RESTART_BOOKMARK table for each of the different types of processing, different functions need to be called to perform the restart/recovery logic. The query-based processing calls the RESTART_INIT or RETEK_INIT and RESTART_COMMIT or RETEK_COMMIT functions while the file-based processing calls the RESTART_FILE_INIT and RESTART_FILE_COMMIT functions.

In addition to the differences in API function calls, the batch processing flow of the restart/recovery differs between the files. Table-based restart/recovery needs to use a priming fetch logical flow, while the file-based processing usually reads lines in a batch. Table-based processing requires its structure to ensure that the LUW key has changed before a commit event is allowed to occur, while the file-based processing does not need to evaluate the LUW, which can typically be thought of as the type of transaction being processed by the input file.

The following diagram depicts *table*-based Restart/Recovery program flow:


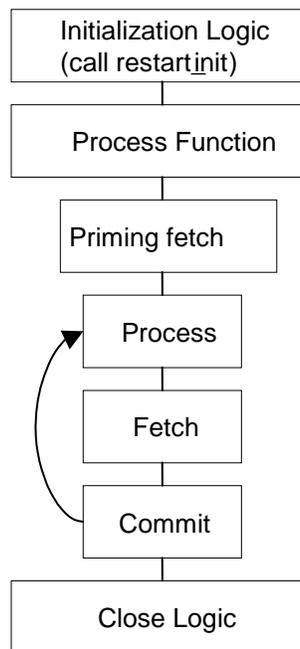


Table-Based Restart/Recovery Program Flow

The following diagram depicts *file*-based Restart/Recovery program flow

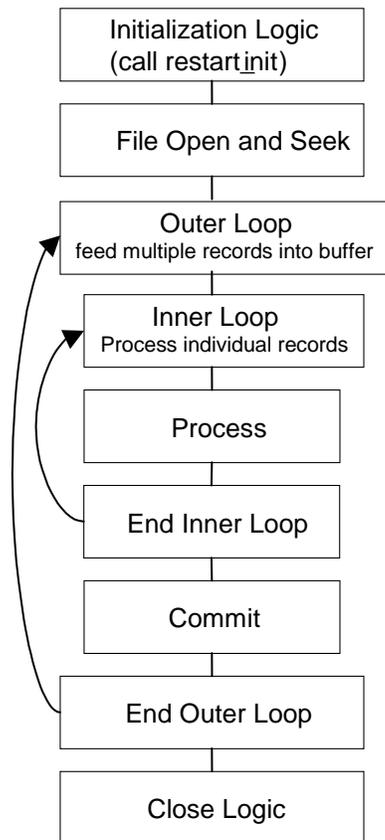

File-based Restart/Recovery Program Flow

Initialization logic:

- Variable declarations
- File initialization
- Call restart_init() or restart_file_init() function - determines start or restart logic
- First fetch on driving query

Start logic: initialize counters/accumulators to start values

Restart logic:

- Parse application_image field on bookmark table into counters/accumulators
- Initialize counters/accumulators to values of parsed fields

Process/commit loop:

- Process updates and manipulations
- Fetch new record
- Create varchar from counters/accumulators to pass into application_image field on restart_bookmark table
- Call restart_commit() or restart_file_commit()

Close logic:

- Reset pointers
- Close files/cursors
- Call Restart_close()

API Functional Descriptions

RESTART_INIT

An initialization functions for table-based batch processing.

The batch process gathers the following information from the restart control tables:

- Total number of threads for a program and thread value assigned to current process.
- Number of records to loop through in driving cursor before commit (LUW).
- Start string - bookmark of last commit to be used for restart or a null string if current process is an initial start and initializes the restart record-keeping (restart_program_status).
- Program status is changed to 'started' for the first available thread.
- Operational information is updated: operator, process, start_time, and bookmarking (restart_bookmark) tables.
- On an initial start, a record is inserted.
- On restart, the start string and application context information from the last commit is retrieved.
- Lock wait time and maximum retry for locking.

RESTART_FILE_INIT

An initialization functions for file-based batch processing. It is called from program modules.

The batch process gathers the following information from the restart control tables:

- Number of records to read from file for array processing and for commit cycle.
- File start point- bookmark of last commit to be used for restart or 0 for initial start.

The process initializes the restart record-keeping (restart_program_status):

- Program status is changed to 'started' for the current thread.
- Operational information is updated: operator, process, START_TIME.

The process initializes the restart bookmarking (restart_bookmark) tables:

- On an initial start, a record is inserted.
- On restart, the file starting point information and application context information from the last commit is retrieved.

RESTART_COMMIT

A function that commits the processed transaction for a given number of driving query fetches. It is called from program modules.

The process updates the RESTART_BOOKMARK start string and application image information if a commit event has taken place:

- The current number of driving query fetches is greater than or equal to the maximum set in the restart_program_status table (and fetched in the restart_init function).
- The bookmark string of the last processed record is greater than or equal to the maximum set in the restart_program_status table (and fetched in the restart_init function).
- The bookmark string increments the counter.
- The bookmark string sets the current string to be the most recently fetched key string.

RESTART_FILE_COMMIT

A function that commits processed transactions after reading a number of lines from a flat file. It is called from program modules.

The process updates the RESTART_BOOKMARK table:

- Start_string is set to the file pointer location in the current read of the flat file.
- Application image is updated with context information.

RESTART_CLOSE

A function that updates the restart tables after program completion.

The process determines whether the program was successful. If the program finished successfully:

- The restart_program_status table is updated with finish information and the status is reset.
- The corresponding record in the RESTART_BOOKMARK table is deleted.
- The restart_program_history table has a copy of the restart_program_status table record inserted into it.
- The restart_program_status is re-initialized.

If the program ends with errors:

- The transactions are rolled back.
- The program_status column on the restart_program_status table is set to 'aborted in *' where * is one of the three main functions in batch: init, process or final.
- The changes are committed.

PARSE_ARRAY_ARGS

This function parses a string into components and places results into multidimensional array. It is only called within API functions and will never be called in program modules.

The process is passes a string to parse, and a pointer to an array of characters.

The first character of the passed string is the delimiter.

RESTART_FILE_WRITE

This function will append output in temporary files to final output files when a commit point is reached. It is called from program modules.

RESTART_CAT

This function contains the logic that appends one file to another. It is only called within the restart/recovery API functions and never called directly in program modules.

Restart Headers and Libraries

The RESTART.H and the STD_ERR.H header files are included in RETEK.H to utilize the restart/recovery functionality.

RESTART.H

This library header file contains constant, macro substitutions, and external global variable definitions as well as restart/recovery functions prototypes.

The global variables that are defined include:

- The thread number assigned to the current process.
- The value of the current process's thread maximum counter:
 - For table-based processing, it is equal to the number of iterations of the driving query before a commit can take place.
 - For file-based processing, it is equal to the number of lines that is read from a flat file and processed using a structured array before a commit can take place.
- The current count of driving query iterations used for table-based processing or the current array index used in file-based processing.
- The name assigned to the program/logical unit of work by the programmer. It is the same as the `restart_name` column on the `restart_program_status`, `restart_program_history`, and `RESTART_BOOKMARK` tables.

STD_REST.H

This library header file contains standard restart variable declarations that are used in the program modules.

The variable definitions that are included are:

- The concatenated string value of the fetched driving query key that is currently being processed.
- The concatenated string value of the fetched driving query key that will be processed next.
- The error message passed to the `restart_close` function and updated to `restart_program_status`.
- Concatenated string of application context information, for example, counters and accumulators.
- The name of the threading driver, for example, department, store, warehouse and others.
- The total number of threads used by this program.
- The pointer to pass to initialization function to retail number of threads value.

Updating Restart Headers and Libraries

Restart/recovery performs the following, among other capabilities:

- Organizes global variables associated with restart recovery.
- Allows the batch developer full control of restart recovery variables parameter passing during initialization.
- Removes temporary write files to speed up the commit process.
- Moves more information and processing from the batch code into the library code.
- Adds more information into the restart recovery tables for tuning purposes.

retek_2.h

This library header file is included by all C code within Retail and serves to centralize system includes, macro defines, globals, function prototypes, and, especially, structs for use in the new restart/recovery library.

The globals used by the old restart/recovery library are all discarded. Instead, each batch program declares variables needed and calls `retek_init()` to get them populated from restart/recovery tables. Therefore, only the following variables are declared:

- `gi_no_commit`: flag for `NO_COMMIT` command line option (used for tuning purposes).
- `gi_error_flag`: fatal error flag.
- `gi_non_fatal_err_flag`: non-fatal error flag.

In addition, a `rtk_file` struct is defined to handle all file interfaces associated with restart/recovery. Operation functions on the file struct are also defined.

```
#define NOT_PAD          1000 /* Flag not to pad thread_val */
#define PAD              1001 /* Flag to pad thread_val at the end */
#define TEMPLATE        1002 /* Flag to pad thread_val using filename template */
#define MAX_FILENAME_LEN 50
typedef struct
{
    FILE* fp; /* File pointer */
    char filename[MAX_FILENAME_LEN + 1]; /* Filename */
    int pad_flag; /* Flag whether to pad thread_val to filename */
} rtk_file;

int set_filename(rtk_file* file_struct, char* file_name, int pad_flag);
FILE* get_FILE(rtk_file* file_struct);
int rtk_print(rtk_file* file_struct, char* format, ...);
int rtk_seek(rtk_file* file_struct, long offset, int whence);
```

The parameters that `retek_init()` needs to populate passed using a format known to `retek_init()`. A struct is defined here for this purpose. An array of parameters of this struct type is needed in each batch program. Other requirements have to be initialized at each batch program.

- The lengths of name, type and sub_type should not exceed the definitions here.
- Type can only be: "int", "uint", "long", "string", or "rtk_file".
- For type "int", "uint" or "long", use "" as sub_type.
- For type "string", sub_type can only be "S" (start string) unless the string is the thread value or number of threads, in which case use "" as sub_type or "I" (image string).
- For type "rtk_file", sub_type can only be "I" (input) or "O" (output).

```
#define NULL_PARA_NAME 51
#define NULL_PARA_TYPE 21
#define NULL_PARA_SUB_TYPE 2
typedef struct
{
    char name[NULL_PARA_NAME];
    char type[NULL_PARA_TYPE];
    char sub_type[NULL_PARA_SUB_TYPE];
} init_parameter;
```

INT RETEK_INIT(INT NUM_ARGS, INIT_PARAMETER *parameter, ...)

RETEK_INIT initializes restart/recovery (for both table and file-based):

Pass in NUM_ARGS as the number of elements in the INIT_PARAMETER array, and then the INIT_PARAMETER array, then variables a batch program needs to initialize in the order and types defined in the INIT_PARAMETER array. Note that all int, uint and long variables need to be passed by reference.

Get all global and module level values from databases.

Initialize records for RESTART_PROGRAM_STATUS and RESTART_BOOKMARK.

Parse out user-specified initialization variables (variable arg list).

Return NO_THREAD_AVAILABLE if no qualified record in RESTART_CONTROL or RESTART_PROGRAM_STATUS.

Commit work.

INT RETEK_COMMIT(INT NUM_ARGS, ...)

RETEK_COMMIT checks and commits if needed (for both table and file-based):

Pass in num_args, then variables for start_STRING first, and those for image string (if needed) second. The num_args is the total number of these two groups. All are string variables and are passed in the same order as in retek_init().

Concatenate start_string either from passed in variables (table-based) or from ftell of input file pointers (file-based).

Check if commit point is reached (counter check and, if table-based, start string comparison).

If reached, concatenated image_string from passed in variables (if needed) and call internal_commit() to get out_file_string and update RESTART_BOOKMARK.

If table-based, increment pl_current_count and update ps_cur_string.

INT COMMIT_POINT_REACHED(INT NUM_ARGS, ...)

COMMIT_POINT_REACHED checks if the commit point is reached (for both table- and file-based). The difference between this function and the check in RETEK_COMMIT() is that here the PL_CURRENT_COUNT and PS_CUR_STRING are not updated. This checking function is designed to be used with RETEK_FORCE_COMMIT(), and the logic to ensure integrity of LUW exists in user batch program. It can also be used together with RETEK_COMMIT() for extra processing at the time of commit.

Pass in num_args, then all string variables for start_string in the same order as in retek_init(). The num_args is the number of variables for start_string. If no start_string (as in file-based), pass in NULL.

For table-based, if pl_curren_count reaches pl_max_counter and if newly concatenated bookmark string is different from ps_cur_string, return 1; otherwise return 0.

For file-based, if pl_curren_count reaches pl_max_counter return 1; otherwise return 0.

INT RETEK_FORCE_COMMIT(INT NUM_ARGS, ...)

RETEK_FORCE_COMMIT always commits (for both table and file-based):

Pass in num_args, then variables for start_string first, and those for image string (if needed) second. The num_args is the total number of these two groups. All are string variables and are passed in the same order as in retek_init().

Concatenate start_string either from passed in variables (table-based) or from ftell of input file pointers (file-based).

Concatenated image_string from passed in variables (if needed) and call internal_commit() to get out_file_string and update RESTART_BOOKMARK.

If table-based, increment pl_current_count and update ps_cur_string.

INT RETEK_CLOSE(VOID)

RETEK_CLOSE closes restart/recovery (for both table and file-based):

If gi_error_flag or NO_COMMIT command line option is TRUE, rollback all database changes.

Update RESTART_PROGRAM_STATUS according to gi_error_flag.

If no gi_error_flag, insert record into RESTART_PROGRAM_HISTORY with information fetched from RESTART_CONTROL, RESTART_PROGRAM_BOOKMARK and RESTART_PROGRAM_STATUS tables.

If no gi_error_flag, delete RESTART_BOOKMARK record.

Commit work.

Close all opened file streams.

INT RETEK_REFRESH_THREAD(VOID)

You must refresh a program's thread, so that it can be run again.

Updates the RESTART_PROGRAM_STATUS record for the current program's PROGRAM_STATUS to be 'ready for start'.

Deletes any RESTART_BOOKMARK records for the current program.

Commits work.

VOID INCREMENT_CURRENT_COUNT(VOID)

INCREMENT_CURRENT_COUNT increases PL_CURRENT_COUNT by 1.

Note: This is called from GET_RECORD() of intrface.pc for file-based input/output.

INT PARSE_NAME_FOR_THREAD_VAL(CHAR* NAME)

PARSE_NAME_FOR_THREAD_VAL parses thread value from the extension of the specified file name.

INT IS_NEW_START(VOID)

IS_NEW_START checks if current run is a new start; if yes, return 1; otherwise 0.

Query-Based Commit Thresholds

The restart capabilities revolve around a program's logical unit of work (LUW). A batch program processes transactions and enables commit points based on the LUW. An LUW is comprised of a transaction key (such as item-store) and a maximum commit counter. Commit events occur after a given number of transaction keys are processed. At the time of the commit, key data information that is necessary for restart is stored in the restart table. In the event of a handled or un-handled exception, transactions will be rolled back to the last commit point. Upon restart the restart key information will be retrieved from the tables so that processing can resume with the unprocessed data.

Pro*C Multi-Threading

Processing multiple instances of a given program can be accomplished through “threading”. This requires driving cursors to be separated into discrete segments of data to be processed by different threads. This is accomplished through a stored procedure that separates threading mechanisms (for example, departments or stores) into particular thread given value (for example, department 1001) and the total number of threads for a given process.

File-based processing will not “thread” its processing. The same data file will never be acted upon by multiple processes. Multi-threading is accomplished by dividing the data into separate files using a separate process for each file. The thread value is related to the input file. This is necessary to ensure that the appropriate information can be tied back to the relevant file in the event of a restart.

The store length in RMS is ten digits. Therefore, thread value which is based on the store number must allow ten digits. As the thread value is declared as a ‘C’ variable of type integer (long), the system restricts thread values to nine digits.

This does not mean that you cannot use ten digit store numbers. It means that if you do use ten digit store numbers you cannot use them as thread values.

Threading Description

The use of multiple threads or processes in Oracle Retail batch processing increases efficiency and decrease processing time. The design of the threading process allows maximum flexibility to the end user in defining the number of processes over which a program is divided.

Originally, the threading function was used directly in the driving queries. This was a slow process. Instead of using the function call directly in the driving queries, the designs call for joining driving query tables to a view (for example, v_restart_store) that includes the function.

Threading Function for Query-Based

A stored procedure has been created to determine thread values. Restart_thread_return returns a thread value derived from a numeric driver value, such as department number, and the total number of threads in a given process. Retailers should be able to determine the best algorithm for their design, and if a different means of segmenting data is required, then either the restart_thread_return function can be altered, or a different function can be used in any of the views in which the function is contained.

Currently the restart_thread_return function is a very simple modulus routine:

```
CREATE OR REPLACE FUNCTION RESTART_THREAD_RETURN(in_unit_value NUMBER,
                                                in_total_threads NUMBER)
RETURN NUMBER IS
  ret_val NUMBER;
BEGIN
  ret_val := MOD(ABS(in_unit_value),in_total_threads) + 1;
  RETURN ret_val;
END;
```

Restarting View for Query-Based

Each restart view will have four elements:

- The name of the threading mechanism, `driver_name`.
- The total number of threads in a grouping, `num_threads`.
- The value of the driving mechanism, `driver_value`.
- The thread value for that given combination of `driver_name`, `num_threads`, and `driver_value`, `thread_val`.

The view will be based on the `restart_control` table and an information table such as `DEPS` or `STORES`. A row will exist in the view for every driver value and every total number of threads value. Therefore, if a retailer were to always use the same number of threads for a given driver (dept, store, and others), then the view would be relatively small. As an example, if all of a retailer's programs threaded by department have a total of 5 threads, then the view will contain only one value for each department. For example, if there are 10 total departments, 10 rows will exist in `v_restart_dept`. However, if the retailer wants to have one of the programs to have ten threads, then there will be 2 rows for every department: one for five total threads and one for ten total threads (for example, if 10 total departments, 20 rows will exist in `v_restart_dept`). Obviously, retailers should be advised to keep the number of total thread values for a thread driver to a minimum to reduce the scope of the table joins of the driving cursor with the view.

Below is an example of how the same driver value can result in differing thread values. This example uses the `restart_thread_return` function as it currently is written to derive thread values.

<code>Driver_name</code>	<code>num_threads</code>	<code>driver_val</code>	<code>thread_val</code>
DEPT	1	101	1
DEPT	2	101	2
DEPT	3	101	3
DEPT	4	101	2
DEPT	5	101	2
DEPT	6	101	6
DEPT	7	101	4

Below is an example of what a distribution of stores might look like given 10 stores and 5 total threads:

<code>Driver_name</code>	<code>num_threads</code>	<code>driver_val</code>	<code>thread_val</code>
STORE	5	1	2
STORE	5	2	3
STORE	5	3	4
STORE	5	4	5
STORE	5	5	1
STORE	5	6	2
STORE	5	7	3
STORE	5	8	4

Driver_name	num_threads	driver_val	thread_val
STORE	5	9	5
STORE	5	10	1

View syntax:

The following is an example of the syntax needed to create the view for the multi-threading join, created with script (see threading discussion for details on RESTART_THREAD_RETURN function):

```
create or replace view v_restart_store as
  select rc.driver_name driver_name,
         rc.num_threads num_threads,
         s.store driver_value,
         restart_thread_return(s.store, rc.num_threads) thread_val
  from restart_control rc, store s
  where rc.driver_name = 'STORE'
```

There is a different threading scheme used within Oracle Retail Sales Audit (ReSA). Because ReSA needs to run 24 hours a day and seven days a week, there is no batch window. This means that there may be batch programs running at the same time that there are online users. ReSA solved this concurrency problem by creating a locking mechanism for data that is organized by store days. These locks provide a natural threading scheme. Programs that cycle through all of the store day data attempt to lock the store day first. If the lock fails, the program simply goes on to the next store day. This has the affect of automatically balancing the workload between all of the programs executing.

Thread Scheme Maintenance

All program names will be stored on the restart_control table along with a functional description, the query driver (department, store, class, and others) and the user-defined number of threads associated with them. Users should be able to scroll through all programs to view the name, description, and query driver, and if the update_allowed flag is set to true, to modify the number of threads (update is set to true).

File-Based

File-based processing does not truly “multi-thread” and therefore the number of threads defined on restart_control will always be one. However, a restart_program_status record needs to be created for each input file that is to be processed for the program module. Further, the thread value that is assigned must be part of the input file name. The restart_parse_name function included in the program module will parse the thread value from the program name and use that to determine the availability and restart requirements on the RESTART_PROGRAM_STATUS table.

Refer to the beginning of this multi-threading section for a discussion of limits on using large (greater than nine digits) thread values.

Query-Based

When the number of threads is modified in the `restart_control` table, the form must first validate that no records for that program are currently being processed in the `restart_program_status_table` (that is, all records = 'Completed'). The program must insert or delete rows depending on whether the new thread number is greater than or less than the old thread number. In the event that the new number is less than the previous number, all records for that `program_name` with a thread number greater than the new thread number will be deleted. If the new number is greater than the old number, new rows will be inserted. A new record is inserted for each `RESTART_NAME/THREAD_VAL` combination.

For example if the batch program SALDLY has its number of processes changed from 2 to 3, then an additional row (3) will be added to the `restart_program_status` table. In the same way, if the number of threads was reduced to 1 in this example, rows 2 and 3 would be deleted.

Row	RESTART_NAME	THREAD_VA	program_name
1	SALDLY	1	SALDLY
2	SALDLY	2	SALDLY

`RESTART_PROGRAM_STATUS` table after insert:

Row	RESTART_NAME	THREAD_VA	program_name
1	SALDLY	1	SALDLY
2	SALDLY	2	SALDLY
3	SALDLY	3	SALDLY

`RESTART_PROGRAM_STATUS` table after delete:

Row	RESTART_NAME	THREAD_VA	program_name
1	SALDLY	1	SALDLY

Users should also be able to modify the `commit_max_ctr` column in `restart_program_status` table. This controls the number of iterations in driving query or the number of lines read from a flat file that determine the logical unit of work (LUW).

Batch Maintenance

Users must be able to view the status of all records in `restart_program_status` table. This is where the user gets to view error messages from aborted programs, and statistics and histories of batch runs. The only fields that are modified will be `program_status` and `restart_flag`. The user should be able to reset the `restart_flag` to 'Y' from 'N' on records with a status of aborted, started records to aborted in the event of an abend (abnormal termination), and all records in the event of a restore from tape/re-run of all batch.

Scheduling and Initialization of Restart Batch

Before any batch with restart/recovery logic is run, an initialization program must be run to update the status in the `restart_program_status` table. This program must update the `program_status` to 'ready for start' wherever a record's `program_status` is 'completed.' This leaves unchanged all programs that ended unsuccessfully in the last batch run.

Pre-Processing and Post-Processing

Due to the nature of threading algorithm, individual programs needs a pre or a post program run to initialize variables or files before any of the threads have run or to update final data when all the threads are run. The decision was made to create pre-programs and post-programs in these cases rather than let the restart/recovery logic decide whether the currently processed thread is the first thread to start or the last thread to end for a given program.

ksh Driven Batch Programs

For ksh driven batch programs that call PL/SQL for its main processing logic, multi-threading is also supported. An example of this type of batch job is ksh script stockcountupload.ksh calling PL/SQL package CORESVC_STOCK_UPLOAD_SQL. The threading configuration for each program is defined in table RMS_PLSQL_BATCH_CONFIG (instead of RESTART_CONTROL for the ProC programs). Column MAX_CONSURRENT_THREAD holds the maximum number of concurrent threads. MAX_CHUNK_SIZE defines the commit size within each thread, similar to the RESTART_CONTROL.COMMIT_MAX_CTR column.

Pro*C Array Processing

Oracle Retail batch architecture uses array processing to improve performance. Instead of processing SQL statements using scalar data, data is grouped into arrays and used as bind variables in SQL statements. This improves performance by reducing the server/client and network traffic.

Array processing is used in selecting, inserting, deleting, and updating statements. Oracle Retail typically does not statically define the array sizes, but uses the restart maximum commit variable as a sizing multiple. The user must remember this when defining the system's maximum commit counters.

Remember, when using array processing in Oracle, it does not allow a single array operation to be performed for more than 32000 records in one step. The Oracle Retail restart/recovery libraries have been updated to define macros for this value: `MAX_ORACLE_ARRAY_SIZE`.

All batch programs that use array processing need to limit the size of their array operations to `MAX_ORACLE_ARRAY_SIZE`.

If the commit max counter is used for array processing size, check it after the call to `restart_init()` and, if necessary, reset it to the maximum value if greater. If `retek_init()` is used to initialize, check the returned commit max counter and reset it to the maximum size if it is greater. In case of `retek_init()`, reset the library's internal commit max counter by calling `extern int limit_commit_max_ctr(unsigned int new_max_ctr)`.

If some other variable is used for sizing the array processing, the actual array-processing step must be encapsulated in a calling loop that performs the array operation in sub segments of the total array size where each sub-segment is at most `MAX_ORACLE_ARRAY_SIZE` large. Currently all Oracle Retail batch programs are implemented in the similar way.

Pro*C Input and Output Formats

Oracle Retail batch processing utilizes input from both tables and flat files. Further, the outcome of processing can both modify data structures and write output data. Interfacing Oracle Retail with external systems is the main use of file based I/O.

General Interface Discussion

To simplify the interface requirements, Oracle Retail requires that all in-bound and out-bound file-based transactions adhere to standard file layouts. There are two types of file layouts, detail-only and master-detail, which are described in the sections below.

An interfacing API exists within Oracle Retail to simplify the coding and the maintenance of input files. The API provides functionality to read input from files, ensure file layout integrity, and write and maintain files for rejected transactions.

Standard File Layouts

The RMS interface library supports two standard file layouts; one for master/detail processing, and one for processing detail records only. True sub-details are not supported within the RMS base package interface library functions.

A 5-character identification code or record type identifies all records within an I/O file, regardless of file type. The following includes the valid record type values:

- FHEAD—File Header
- FDETL—File Detail
- FTAIL—File Tail
- THEAD—Transaction Header
- TDETL—Transaction Detail
- TTAIL—Transaction Tail

Each line of the file must begin with the record type code followed by a 10-character record ID.

Detail-Only Files

File layouts have a standard file header record, a detail record for each transaction to be processed, and a file trailer record. Valid record types are FHEAD, FDETL, and FTAIL.

Example:

```
FHEAD0000000001STKU1996010100000019960929
FDETL0000000002SKU100000040000011011
FDETL0000000003SKU100000050003002001
FDETL0000000004SKU100000050003002001
FTAIL00000000050000000003
```

Master and Detail Files

File layouts consists of:

- Standard file header record
- Set of records for each transaction to be processed
- File trailer record.

The transaction set consists of:

- Transaction set header record
- Transaction set detail for detail within the transaction
- Transaction trailer record

Valid record types are FHEAD, THEAD, TDETL, TTAIL, and FTAIL.

Example:

```
FHEAD0000000001RTV 19960908172000
THEAD00000000020000000000000119960909120200000000003R
TDETL000000000300000000000001000001SKU10000012
TTAIL0000000004000001
THEAD000000000500000000000002199609091202001215720131R
TDETL000000000600000000000002000001UPC400100002667
TDETL0000000007000000000000020000021UPC400100002643 0
TTAIL0000000008000002
FTAIL00000000090000000007
```

Record Name	Field Name	Field Type	Default Value	Description
File Header	File Type Record Descriptor	Char(5)	FHEAD	Identifies file record type.
	File Line Identifier	Number(10)	Specified by external system	Line number of the current file.
	File Type Definition	Char(4)	n/a	Identifies transaction type.
	File Create Date	Date	Create date	Date file was written by external system.
Transaction Header	File Type Record Descriptor	Char(5)	THEAD	Identifies file record type.
	File Line Identifier	Number(10)	Specified by external system	Line number of the current file.
	Transaction Set Control Number	Char(14)	Specified by external system	Used to force unique transaction check.
	Transaction Date	Char(14)	Specified by external system	Date the transaction was created in external system.
Transaction Detail	File Type Record Descriptor	Char(5)	TDETL	Identifies file record type.
	File Line Identifier	Number(10)	Specified by external system	Line number of the current file.

Record Name	Field Name	Field Type	Default Value	Description
	Transaction Set Control Number	Char(14)	Specified by external system	Used to force unique transaction check.
	Detail Sequence Number	Char(6)	Specified by external system	Sequential number assigned to detail records within a transaction.
Transaction Trailer	File Type Record Descriptor	Char(5)	TTAIL	Identifies file record type.
	File Line Identifier	Number(10)	Specified by external system	Line number of the current file.
	Transaction Detail Line Count	Number(6)	Sum of detail lines	Sum of the detail lines within a transaction.
File Trailer	File Type Record Descriptor	Char(5)	FTAIL	Identifies file record type.
	File Line Identifier	Number(10)	Specified by external system	Line number of the current file.
	Total Transaction Line Count	Number(10)	Sum of all transaction lines	All lines in file less the file header and trailer records.

RETL Program Overview for the RMS-RPAS Interface

This chapter covers information about the Oracle Retail Extract Transform and Load (RETL) program overview for the RMS and the RPAS interface. The RETL architecture is mentioned along with the RETL program overview.

Oracle Retail ETL Architecture

RMS works with the Oracle Retail Extract Transform and Load (RETL) framework. This architecture utilizes a high performance data processing tool that allows database batch processes to take advantage of parallel processing capabilities.


The RETL framework runs and parses through the valid operators composed in XML scripts. For more information on RETL tool, see *RETL Programmer's Guide*.

The figure [The two stages of RETL processing](#) illustrates the extraction processing architecture. Instead of managing the change captures as they occur in the source system during the day, the process involves extracting the current data from the source system. The extracted data is output to flat files. These flat files are then available for consumption by products such as RPAS.

The target system has its own way of completing the transformations and loading the necessary data into the system, where it can be used for further processing.. For more information on transformation and loading, see *RPAS documentation*.

The architecture relies upon two distinct stages, shown in the figure [The two stages of RETL processing](#).

- **Stage 1-** Extraction from the RMS database using well-defined flows specific to the RMS database. The resulting output is comprised of data files written in a well-defined schema file format. This stage includes no destination specific code.
- **Stage 2-** Introduces a flow specific to the destination. In this case, flows for RPAS are designed to transform the data so that RPAS can import the data properly.

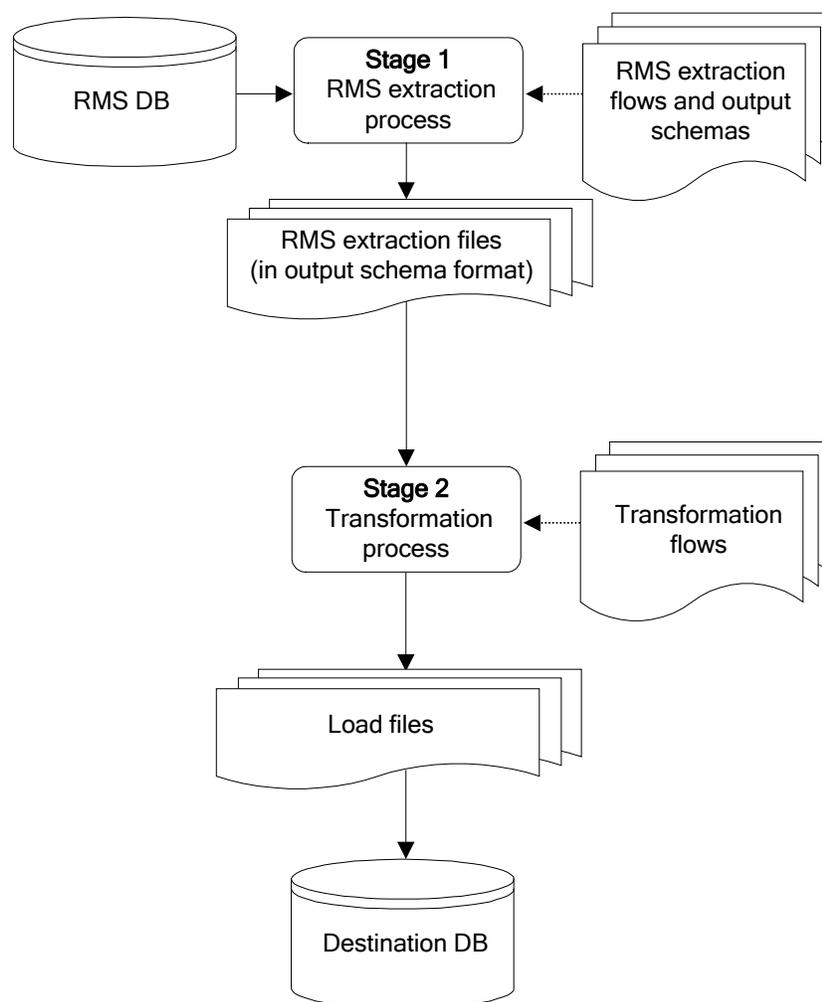

The two stages of RETL processing

RETL Program Overview

This section summarizes the RETL program features utilized in the RMS extractions and loads. Installation information about the RETL tool is available in the latest RETL Programmer's Guide.

Configuration

Version of RETL

Before trying to configure and run RMS RETL, install RETL version 13.0 or later, which is required for RMS RETL to run. For thorough installation procedure, see *RETL Programmer's Guide*.

RETL User and Permissions

The permissions are set up as per the RETL Programmer's Guide. RMS RETL reads and writes data files, you can also create, delete, update and insert into tables. The extraction fails, if it is not set up properly.

Environment Variables

See the RETL Programmer's Guide for RETL environment variables that must be set up for your version of RETL. You will need to set `RDF_HOME` to your base directory for RMS RETL. This is the top level directory that you select during the installation process. Add `export RDF_HOME=<base directory for RMS RETL>` in profile.

rmse_rpas_config.env Settings for RPAS

There are several constants that must be set in `rmse_rpas_config.env` depending upon a retailer's preferences and the local environment. This is summarized in the table below.

Constant Name	Default Value	Alternate Value	Description
DATE_TYPE	vdate	current_date	Determines whether the date used in naming the error, log, and status files is the current date or the VDATE value found in the PERIOD table.
DBNAME	rtkdev01	Depends on installation	The database schema name.
RMS_OWNER	RPASINT	Depends on installation	The username of the RMS database schema owner.
BA_OWNER		Depends on installation	The username of the RMS batch user (not currently used by RMS-RPAS).
CONN_TYPE	thin	oci	The way in which RMS connects to the database.
DBHOST	mspdev17	Depends on installation	The computer hardware node name.
DBPORT	1524	Depends on installation	The port on which the database listener resides.
LOC_ATTRIBUTES_ACTIVE	False	True	Determines whether <code>rmse_rpas_attributes.ksh</code> is run or not.
PROD_ATTRIBUTES_ACTIVE	False	True	Determines whether <code>rmse_rpas_attributes.ksh</code> is run or not.
DIFFS_ACTIVE	True	False	Determines whether <code>rmse_rpas_merchhier.ksh</code> generates data files that contain diff allocation information.

Constant Name	Default Value	Alternate Value	Description
ISSUES_ACTIVE	True	False	If set to 'True', rmse_rpas_stock_on_hand also extracts stock at the warehouse level. If set to 'False', rmse_rpas_stock_on_hand extracts stock at the store level only.
LOAD_TYPE	CONVENTIONAL	DIRECT	Data loading method to be used by SQL*Loader (Direct may be faster than conventional).
DB_ENV	ORA	DB2, TERA	Database type (Additional changes to the software may be needed if a database other than Oracle is selected).
NO_OF_CPUS	4	Depends on installation	Used in parallel database query hints to improve performance.
LANGUAGE	en	Various	En = English
RFX_OPTIONS	-c \$RDF_HOME/ rfx/etc/rfx.conf -s SCHEMAFILE	-c \$RDF_ HOME/ rfx/etc/rfx .conf	Processing speed may be increased for some extractions if the -s SCHEMAFILE option is omitted.

You must set up the wallet alias in the `rmse_aip_config.env`. The wallet and wallet alias creation is required to use programs in a secured mode. The following variables must be setup `RETL_WALLET_ALIAS`, `ORACLE_WALLET_ALIAS`, `SQLPLUS_LOGON`.

Be sure to review the environmental parameters in the `rmse_rpas_config.env` file before executing batch modules.

Steps to Configure RETL

Log in to the UNIX server with a UNIX account that will run the RETL scripts.

Change directories to `<base_directory>/rfx/etc`.

Modify the constants from the table above in the `rmse_rpas_config.env` script as needed.

Program Return Code

RETL programs use a return code to indicate successful completion. If the program successfully runs, a zero (0) is returned. If the program fails, no number is returned.

Program Status Control Files

To prevent a program from running while the same program is already running against the same set of data, the code utilizes a program status control file. At the beginning of each module, `rmse_rpas_config.env` is run. This script checks for the existence of the program status control file. If the file exists, then a message stating, '`{PROGRAM_NAME}` has already started', is logged and the module exits. If the file does not exist, a program status control file is created and the module executes.

If the module fails at any point, the program status control file is not removed, and the user is responsible for removing the control file before running the module again.

File Naming Conventions

The name and directory of the program status control file is set in the configuration script (`rmse_rpas_config.env`). The directory defaults to `$RDF_HOME/error`.

The naming convention for the program status control file itself defaults to the following dot separated file name:

- The program name.
- The program status is mentioned under the 'status' parameter.
- The business virtual date for which the module was run.

For example, a program status control file for the `rmse_rpas_daily_sales.ksh` program is named as follows for a batch run on the business virtual date of January 5, 2001:

```
$RDF_HOME/error/rmse_rpas_daily_sales.status.20010105
```

Restart and Recovery

Because RETL processes all records as a set, as opposed to one record at a time, the method for restart and recovery must be different from the method that is used for Pro*C. The restart and recovery process serves the following two purposes:

It prevents the loss of data due to program or database failure.

It increases performance when restarting after a program or database failure by limiting the amount of reprocessing that needs to occur.

The RMS extract (RMSE) modules extract from a source transaction database or text file and write to a text file. The RMS loads module import data from flat files, performs necessary transformations, and then loads the data into the applicable RMS table.

Most modules use a single RETL flow and do not require the use of restart and recovery.

If the extraction process fails for any reason, the problem can be fixed, and the entire process is started again without the loss of data. No RMS to RPAS extraction programs has any restart/recovery capability. The single RMS load program,

`rmsl_rpas_forecast.ksh`, takes a text file as its input, and the following choices are available, that enables the program to complete the load in the event of an error:

- Re-run the program with the entire input file.
- Re-run the program with only the input records that were not processed successfully the first time.

Message Logging

Message logs are written daily in a format as described in this section.

Daily Log File

Every RETL program writes a message to the daily log file when it starts and when it finishes. In some cases, progress messages are also written. The name and directory of the daily log file is set in the configuration script (`rmse_rpas_config.env`). The directory defaults to `$RDF_HOME/log`. All log files are encoded UTF-8.

The naming convention of the daily log file defaults to the following “dot” separated file name:

- The business virtual date for which the modules are run.
- The log file format should be `.log`.

For example, the location and the name of the log file for the business virtual date of January 5, 2001 would be the following:

```
$RDF_HOME/log/20010105.log
```

Format

As the following examples illustrate, every message written to a log file has the name of the program, a timestamp, and either an informational or error message. For example:

```
rmse_rpas_item_retail 17:09:07: Program started ...  
rmse_rpas_item_retail 17:09:12: Program completed successfully
```

Some error messages are also written to the log file, such as `'No output file specified'`.

Program Error File

In addition to the daily log file, each program also writes its own detailed flow and error messages. Rather than clutter the daily log file with these messages, each program writes out its errors to a separate error file unique to each execution.

If a program finishes unsuccessfully, a message is usually written in the error file that indicates where the problem occurred in the process.

The name and directory of the program error file is set in the applicable configuration file (`rmse_rpas_config.env`). The directory defaults to `$RDF_HOME/error`. All errors and *all routine processing messages* for a given program on a given day go into this error file (for example, it contains both the `stderr` and `stdout` produced during execution of the program).

The naming convention for the program's error file defaults to the following “dot” separated file name:

- The program name
- The business virtual date for which the module was run

For example, all errors and detailed log information for the `rms_item_master.ksh` program would be placed in the following file for the batch run on the business virtual date of January 5, 2001:

```
$MMHOME/error/rms_item_master.20010105
```

RMSE Reject Files

RMSE extract modules may produce a reject file if they encounter data related problems, such as the inability to find data on required lookup tables. The module tries to process all data and then indicates that records were rejected so that all data problems can be identified in one pass and corrected; then, the module can be re-run to successful completion. If a module does reject records, the reject file is not removed, and the user is responsible for removing the reject file before re-running the module. The records in the reject file consist of the rejected records.

The name and directory of the reject file are defined in the applicable configuration script (`rmse_rpas_config.env`). The directory defaults to `$RDF_HOME/data`.

Note: A directory specific to reject files can be created. The `rmse_rpas_config.env` script would need to be changed to define the reject directory constant such that it would point to that directory.

The naming convention for the reject file defaults to the following “dot” separated file name:

- The program name.
- The first filename, if one is specified on the command line.
- The file format should be as `’.rej’`.
- The business virtual date for which the module was run.

Schema Files Overview

RETL uses schema files to specify the format of incoming or outgoing datasets. The schema file defines each column’s data type and format, which is then used within RETL to format/handle the data. For more information about schema files, see the latest RETL Programmer’s Guide. Schema file names are hard-coded within each module because they do not change on a day-to-day basis. All schema files end with `“.schema”` and are placed in the `“$RDF_HOME/rfx/schema”` directory.

Command Line Parameters

The only programs or scripts that allows the command line parameters (or arguments) are:

- `rmse_rpas_config.env` script
- `pre_rmse_rpas.ksh`
- `rmse_rpas.ksh` programs.

All of the command line parameters for these modules are optional and are described in section [rmse_rpas_config.env](#), the square brackets indicate that the parameter is optional.

rmse_rpas_config.env

Usage: \$RDF_HOME/rfx/etc/rmse_rpas_config.env [-t \$*] [-r \$*] [-s \$*] [-v \$* | -c \$*]

Description of Command Line Options

Note: See the end of this description for an explanation of the need for the '\$*' that appears after each command line option.

- **-t:** This option causes rmse_rpas_config.env to skip the initializing of the environment variables that obtains the values from the '.txt' files, except for VDATE which is initialized with the date found in the vdate.txt file. This option is utilized by pre_rmse_rpas.ksh, rmse_rpas.ksh, rdft.ksh and outage.ksh when they call rmse_rpas_config.env.
- **-r:** This option prevents the redirection of all output (stdout and stderr) to the error file. This can be useful during debugging and maintenance. This option can also be utilized by rmse_rpas.ksh, rdft.ksh and outage.ksh when they call rmse_rpas_config.env.
 - The '-t' and '-r' options must be followed by '\$*' on the line which invokes this script. This step is necessary in order to preserve the command line arguments or options that may have been present on the command line for the RETL script that invokes this script. However, the '\$*' must only appear once if both options are used.
- **-s:** This option causes rmse_rpas_config.env to skip the STATUS_FILE test. This is also useful during maintenance and debugging.
- **-v:** If DATE_TYPE (in rmse_rpas_config.env) is set to 'vdate', this option prevents the normal exit with an error message when the vdate.txt file is empty or non-existent; instead, it uses the current date to derive FILE_DATE. However, if DATE_TYPE is set to 'vdate', and vdate.txt actually does exist and is non-empty, the date in vdate.txt continues to be used even if this option is set. If DATE_TYPE is set to 'current_date', this option has no effect.
- **-c:** This option overrides the DATE_TYPE switch setting and causes the current date to be used to derive FILE_DATE regardless of what DATE_TYPE is set to. This option is utilized by pre_rmse_rpas.ksh when it calls rmse_rpas_config.env, if it is run with the -c option on its command line. The '-c' option is normally only used when rmse_rpas_config.env is called from pre_rmse_rpas.ksh.
 - If only one command line option is used, it must be followed by '\$*'. But if more than one option is specified, then '\$*' must be entered on the command line only once after all options have been entered. The '\$*' is necessary in order to preserve the command line arguments or options (if there are any) that are present on the command line that is used to execute the RETL script which invokes this script.
 - If more than one option is specified, options must appear on the command line in the same order as shown on the "Usage" line, above.

pre_rmse_rpas.ksh

- Usage: pre_rmse_rpas.ksh [-c]
- The '-c' option is used to specify what option is to be placed on the rmse_rpas_config.env command line when it is called by this program. It is usually used the first time that pre_rmse_rpas.ksh is run at a new installation or if the state of the vdate.txt file is unknown. This option is passed directly to rmse_rpas_config.env when it is called by pre_rmse_rpas.ksh. No other use is made of this parameter by pre_rmse_rpas.ksh.
- This option causes rmse_rpas_config.env to use the current date to initialize FILE_DATE instead of possibly setting it to VDATE, which is obtained from the vdate.txt file. (FILE_DATE is the date that is used to name the error, log, and status files).
- The current date is used regardless of how DATE_TYPE is set in rmse_rpas_config.env. By using the '-c' option, there is no need to manually set up the vdate.txt file before running this script.
- The normal mode for pre_rmse_rpas.ksh (without the -c option) is that when it calls rmse_rpas_config.env, FILE_DATE is set to VDATE or the current date, depending on how DATE_TYPE is set in rmse_rpas_config.env. If DATE_TYPE is set to 'vdate', and if the vdate.txt file does not exist or is empty, rmse_rpas_config.env (and this program) exits with an error message.
- The use of this option does not affect what date is used by any of the other RETL scripts that run after this script is done. After pre_rmse_rpas.ksh has run, when the other RETL scripts are run, they call rmse_rpas_config.env with no options on the command line, and their files are named using VDATE or the current date, depending on how DATE_TYPE is set in rmse_rpas_config.env.

rmse_rpas.ksh

- Usage: rmse_rpas.ksh [-c]
- The presence of the '-c' option causes FILE_DATE in rmse_rpas_config.env to be set to the current date instead of possibly using VDATE (which gets its value from the vdate.txt file), but only when it is called by rmse_rpas.ksh and pre_rmse_rpas.ksh (pre_rmse_rpas.ksh is invoked by rmse_rpas.ksh). It has no effect when other extract programs call rmse_rpas_config.env, at the time that they are invoked by rmse_rpas.ksh. This option is passed directly to rmse_rpas_config.env and pre_rmse_rpas.ksh when they are called by rmse_rpas.ksh. No other use is made of this parameter by rmse_rpas.ksh.

Note: During the rmse_rpas_config.env configuration to connect to the JDBC, enter the connection details as follows:
 jdbc:oracle:thin:@<DB host server>:<PORT ID>:<connection string>. For example,
 oracle:thin:@msp52417.us.oracle.com:1521:dolsp01app.

RMSE I/O File Names

Most of the output path/filenames have the format, \$DATA_DIR/(RMSE_RPAS_program name).dat. Similarly, the schema format for the records in these files are specified in the file - \$SCHEMA_DIR/(RMSE_RPAS_program name).schema.

Typical Run and Debugging Situations

The following examples illustrate typical run and debugging situations for programs. The log, error, etc. file names referenced below assumes that the module is run on the business virtual date of March 9, 2001. For more information on naming convention, see [File Naming Conventions](#) section.

For example:

To run `rmse_rpas_stores.ksh`:

Change directories to `$RDF_HOME/rfx/src`.

At a UNIX prompt (\$) enter:

```
$rmse_rpas_stores.ksh
```

If the module runs successfully, the following results:

Log file: Today's log file, `20010309.log`, contains the messages "Program started ..." and "Program completed successfully" for `rmse_rpas_stores`.

Data: The `rmse_rpas_stores.dat` file exists in the data directory and contains the extracted records.

Schema: The `rmse_rpas_stores.schema` file exists in the schema directory and contains the definition of the data file in #2 above.

Error file: The program's error file, `rmse_rpas_stores.20010309`, contains the standard RETL flow (ending with "All threads complete" and "Flow ran successfully") and no error messages.

Program status control: The program status control file, `rmse_rpas_stores.status.20010309`, will not exist.

Reject file: The reject file, `rmse_rpas_stores.rej.20010309`, will not exist.

If the module does *not* run successfully, the following results:

Log file: Today's log file, `20010309.log`, does not contain the "Program completed successfully" message for `rmse_rpas_stores`.

Data: The `rmse_rpas_stores.dat` file may exist in the data directory but may not contain all the extracted records.

Schema: The `rmse_rpas_stores.schema` file exists in the schema directory and contains the definition of the data file in #2 above.

Error file: The program's error file, `rmse_rpas_stores.20010309`, may contain one or more error messages.

Program status control: The program status control file, `rmse_rpas_stores.status.20010309`, exists.

Reject file: The reject file, `rmse_rpas_stores.status.20010309`, does not exist because this module does not reject records.

To re-run the module, perform the following actions:

Determine and fix the problem causing the error.

Remove the program's status control file.

Change directories to `$RDF_HOME/rfx/src`. At a UNIX prompt, enter:

```
$rmse_rpas_stores.ksh
```

RPAS/AIP Configuration

This section covers information about the configuration of RPAS/AIP. It gives an overview of handling installation and configuration in RMS ETL.

RETL Program Overview for the RMS-Time-Phased Inventory Planning Tool Interface

This section summarizes the RETL program features utilized in the RMS Extractions (RMSE) for the RMS-time-phased inventory planning tool integration. Starting with RMS version 11, the RMS extract for a time-phased inventory planning tool is separate from the RMS extracts for RPAS. In prior RMS version, time-phased inventory planning tool and RPAS had common RETL extracts.

More installation information about the RETL tool is available in the latest RETL Programmer's Guide.

Note: In this section, some examples refer to RETL programs that are not related to RMS or are related to other versions of RMS than this document addresses. Such examples are included for illustration purposes only.

Installation

Select a directory where you would like to install RMS ETL. This directory (also called MMHOME) is the location from which the RMS ETL files are extracted.

The following code tree is utilized for the RETL framework during the extractions, transformations, and loads and is referred to in this documentation.

```
<base directory (MMHOME)>
  /data
  /error
  /log
  /rfx
      /bookmark
      /etc
      /lib
      /schema
      /src
```

Configuration

RETL

Before trying to configure and run RMS RETL, install RETL version 13.0 or later, which is required to run RMS ETL. For thorough installation process, see the latest RETL Programmer's Guide.

RETL user and permissions

RMS ETL is installed and run as the RETL user. Additionally, the permissions are set up as per the RETL Programmer's Guide. RMS ETL reads data, creates, deletes and updates tables. If these permissions are not set up properly, extractions fail.

Environment Variables

To set up RETL environment variable for the RETL version you have installed, see RETL Programmers Guide. You will need to set MMHOME to your base directory for RMS RETL. This is the top level directory that you selected during the installation process (see the section, 'Installation', above). In your .kshrc, you should add a line such as the following:

```
export MMHOME=<base directory for RMS ETL>
```

rmse_aip_config.env Settings

There variables you must be change depending upon your local settings:

For example:

```
export DBNAME=int9i
export RMS_OWNER=steffej_rms1011
export BA_OWNER=rmsint1011
```

You must set up the wallet alias in the `rmse_aip_config.env`. The wallet and wallet alias creation is required to use programs in a secured mode. The following variables must be setup `RETL_WALLET_ALIAS`, `ORACLE_WALLET_ALIAS`, `SQLPLUS_LOGON`.

Make sure to review the environmental parameters in the `rmse_aip_config.env` file file before executing batch modules.

Steps to Configure RETL

Log in to the UNIX server with a UNIX account that will run the RETL scripts.

Change directories to `<base_directory>/rfx/etc`.

Modify the `rmse_aip_config.env` script.

For example:

- b. Change the `DBNAME` variable to the name of the RMS database.
- c. Change the `RMS_OWNER` variable to the username of the RMS schema owner.
- d. Change the `BA_OWNER` variable to the username of the RMSE batch user.

Note: During the `rmse_aip_config.env` configuration to connect to the JDBC, enter the connection details as follows: `jdbc:oracle:thin:@<DB host server>:<PORT ID>:<connection string>`. For example, `oracle:thin:@msp52417.us.oracle.com:1521:dolsp01app`.

Program Return Code

RETL program uses one return code to indicate successful completion. If the program successfully runs, a zero (0) is returned. If the program fails then, zero is not returned.

Program Status Control Files

To prevent a program from running while the same program is already running against the same set of data, the code utilizes a program status control file. At the beginning of each module, `rmse_aip_config.env` is run. These files check for the existence of the program status control file. If the file exists, then a message stating, `'${PROGRAM_NAME} has already started'`, is logged and the module exits. If the file does not exist, a program status control file is created and the module executes.

If the module fails at any point, the program status control file is not removed, and the user is responsible for removing the control file before re-running the module.

File Naming Conventions

The naming convention of the program status control file allows a program whose input is a text file to be run multiple times at the same time against different files.

The name and directory of the program status control file is set in the applicable configuration file (rmse_aip_config.env). The directory defaults to \$MMHOME/error. The naming convention for the program status control file itself defaults to the following dot separated file name:

- The program name.
- The status of the program name should be specified in 'status'.
- The business virtual date for which the module was run.

For example, a program status control file for one program is named as follows for the batch run of January 5, 2001:

```
$MMHOME/error/rmse_aip_banded_item.status.20010105
```

Restart and Recovery

Because RETL processes all records as a set, as opposed to one record at a time, the method for restart and recovery must be different from the method that is used for Pro*C. The restart and recovery process serves the following two purposes:

It prevents the loss of data due to program or database failure.

It increases performance when restarting after a program or database failure by limiting the amount of reprocessing that needs to occur.

The RMS Extract (RMSE) module extracts a source transaction database or text file and writes to a text file. The RMS Load (RMSL) modules import data from flat files, performs transformation if necessary and then loads the data into the applicable RMS tables.

Most modules use a single RETL flow and do not require the use of restart and recovery. If the extraction process fails for any reason, the problem is fixed, and the entire process runs from the beginning without the loss of data. For a module that takes a text file as its input, the following two choices are available that enables the module to be re-run from the beginning:

Re-run the module with the entire input file.

Re-run the module with only the records that were not processed successfully the first time and concatenate the resulting file with the output file from the first time.

To limit the amount of data that needs to be re-processed, more complicated modules that require the use of multiple RETL flows utilize a bookmark method for restart and recovery. This method allows the module to be restarted at the point of last success and run to completion. The bookmark restart/recovery method incorporates the use of a bookmark flag to indicate which step of the process should be run next. For each step in the process, the bookmark flag is written to and read from a bookmark file.

Note: If the fix for the problem causing the failure requires changing data in the source table or file, then the bookmark file must be removed and the process must be re-run from the beginning in order to extract the changed data.

Message Logging

Message logs are written daily in a format described in this section.

Daily Log File

Every RETL program writes a message to the daily log file when it starts and when it finishes. The name and directory of the daily log file is set in the configuration file (`rmse_aip_config.env`). The directory defaults to `$MMHOME/log`. All log files are encoded UTF-8.

The naming convention of the daily log file defaults to the following “dot” separated file name:

- The business virtual date for which the modules are run
- `.log`

For example, the location and the name of the log file for the business virtual date of January 5, 2001 would be the following:

```
$MMHOME/log/20010105.log
```

Format

As the following examples illustrate, every message written to a log file has the name of the program, a timestamp, and either an informational or error message:

```
aipt_item 17:07:43: Program started ...
aipt_item 17:07:50: Program completed successfully
rmse_aip_item_master 17:08:53: Program started ...
rmse_aip_item_master 17:08:59: Program completed successfully
rmse_item_retail 17:09:07: Program started ...
rmse_item_retail 17:09:12: Program completed successfully
```

If a program finishes unsuccessfully, an error file is usually written that indicates where the problem occurred in the process. There are some error messages written to the log file, such as `'No output file specified'`, that require no further explanation written to the error file.

Program Error File

In addition to the daily log file, each program also writes its own detail flow and error messages. Rather than clutter the daily log file with these messages, each program writes out its errors to a separate error file unique to each execution.

The name and directory of the program error file is set in the applicable configuration file (`rmse_aip_config.env`). The directory defaults to `$MMHOME/error`. All errors and *all routine processing messages* for a given program on a given day go into this error file (for example, it will contain both the `stderr` and `stdout` from the call to RETL). All error files are encoded UTF-8.

The naming convention for the program's error file defaults to the following “dot” separated file name:

- The program name
- The business virtual date for which the module was run

For example, all errors and detail log information for the `rms_aip_item_master` program would be placed in the following file for the batch run of January 5, 2001:

```
$MMHOME/error/rms_aip_item_master.20010105
```

RMSE and Transformation Reject Files

RMSE extract and transformation modules may produce a reject file if they encounter data related problems, such as the inability to find data on required lookup tables. The module tries to process all data and then indicates that records were rejected so that all data problems can be identified in one pass and corrected; then, the module can be re-run to successful completion. If a module does reject records, the reject file is not removed, and the user is responsible for removing the reject file before re-running the module.

The record in the reject file contains an error message and key information from the rejected record. The following example illustrates a record that is rejected due to problems within the currency conversion library:

```
Currency Conversion Failed|101721472|20010309
```

The following example illustrates a record that is rejected due to problems looking up information on a source table:

```
Unable to find item_master record for Item|101721472
```

The name and directory of the reject file is set in the applicable configuration file (rmse_config.env or config.env). The directory defaults to \$MMHOME/data.

Note: A directory specific to reject files can be created. The rmse_config.env and/or config.env file would need to be changed to point to that directory.

The naming convention for the reject file defaults to the following “dot” separated file name:

- The program name
- The first filename, if one is specified on the command line
- ‘rej’
- The business virtual date for which the module was run

For example, all rejected records for the slsildmex program would be placed in the following file for the batch run of January 5, 2001:

```
$MMHOME/data/slsildmex.slsildmdm.txt.rej.20010105
```

Schema Files Overview

RETL uses schema files to specify the format of incoming or outgoing datasets. The schema file defines each column’s data type and format, which is then used within RETL to format/handle the data. For more information about schema files, see the latest RETL Programmer’s Guide. Schema file names are hard-coded within each module since they do not change on a day-to-day basis. All schema files end with “.schema” and are placed in the “rfx/schema” directory.

Command Line Parameters

In order for each RETL module to run, the input/output data file paths and names may need to be passed in at the UNIX command line.

RMSE and Transformation

Most RMSE and transformation modules do not require the passing in of any parameters. The output path/filename defaults to \$DATA_DIR/(RMSE and transfer program name).dat. Similarly, the schema format for the records in these files are specified in the file - \$SCHEMA_DIR/(RMSE program name).schema.

Scripts that need Parameter to Run

The scripts below are run on a full snapshot basis. The parameter is F (for full snapshot).

- `rmse_aip_store_cur_inventory.ksh`
- `rmse_aip_wh_cur_inventory.ksh`

Typical Run and Debugging Situations

The following examples illustrate typical run and debugging situations for types of programs. The log, error, and other file names referenced below assume that the module is run on the business virtual date of March 9, 2001. See the previously described naming conventions for the location of each file.

For example:

To run `rmse_aip_store.ksh`:

Change directories to `$MMHOME/rfx/src`.

At a UNIX prompt enter:

```
%rmse_aip_store.ksh
```

If the module runs successfully, the following results:

- **Log file:** Today's log file, `20010309.log`, contains the messages "Program started ..." and "Program completed successfully" for `rmse_aip_store`.
- **Data:** The `rmse_aip_store.dat` file exists in the data directory and contains the extracted records.
- **Schema:** The `rmse_aip_store.schema` file exists in the schema directory and contains the definition of the data file in #2 above.
- **Error file:** The program's error file, `rmse_aip_store.20010309`, contains the standard RETL flow (ending with "All threads complete" and "Flow ran successfully") and no additional error messages.
- **Program status control:** The program status control file, `rmse_aip_store.status.20010309`, does not exist.
- **Reject file:** The reject file, `rmse_aip_store.rej.20010309`, does not exist because this module does not reject records.
- If the module does *not* run successfully, the following results:
 - **Log file:** Today's log file, `20010309.log`, does not contain the "Program completed successfully" message for `rmse_stores`.
 - **Data:** The `rmse_aip_store.dat` file may exist in the data directory but may not contain all the extracted records.
 - **Schema:** The `rmse_aip_store.schema` file exists in the schema directory and contains the definition of the data file in #2 above.
 - **Error file:** The program's error file, `rmse_aip_store.20010309`, may contain an error message.
 - **Program status control:** The program status control file, `rmse_aip_store.status.20010309`, exists.
 - **Reject file:** The reject file, `rmse_aip_store.status.20010309`, does not exist because this module does not reject records.

To re-run the module, perform the following actions:

Determine and fix the problem causing the error.

Remove the program's status control file.

Change directories to \$MMHOME/rfx/src. At a UNIX prompt, enter:
%rmse_aip_store.ksh.

Internationalization

Internationalization is the process of creating software that can be translated more easily. Changes to the code are not specific to any particular market. RMS is internationalized to support multiple languages.

This section describes configuration settings and features of the software that ensure that the base application can handle multiple languages.

Translation

Translation is the process of interpreting and adapting text from one language into another. Although the code itself is not translated, components of the application that are translated may include the following:

- Graphical user interface (GUI)
- Error messages
- Reports

The following components are not translated:

- Documentation (online help, release notes, installation guide, user guide, operations guide)
- Batch programs and messages
- Log files
- Configuration tools
- Demonstration data
- Training materials

The user interface for RMS is translated into:

- Chinese (simplified)
- Chinese (traditional)
- Croatian
- Dutch
- French
- German
- Greek
- Hungarian
- Italian
- Japanese
- Korean
- Polish
- Portuguese (Brazilian)
- Russian
- Spanish
- Swedish
- Turkish

RMS User Interface Language Display Settings

You can select a preferred language through the RMS UI or the database on the USER_ATTRIB table. The selected language is connected to your ID in RMS and the translated strings are displayed in the selected language. RMS has a fail/safe mechanism built into the code. If the preferred language is not found, then RMS rolls back to English language display of the UI label.

Note: A retailer has the three options regarding internationalization when installing the application. See the *RMS Installation Guide* for the procedures related to each.

- English and multiple secondary languages.
 - Translated language (fully translated non-English installation). No secondary languages are installed when your primary language is one other than English.
 - Install a translated language as the primary language. Obtain the whitepapers, which allows you to install English as a secondary language.
-

Multiple Languages in one RMS Forms Session

RMS allows for multiple application servers to point to a single instance of forms and database. This is specific to users who want to have a multi-lingual install of RMS and have two URLs, each with a separate NLS_LANG session setting. This helps to facilitate secondary user language sessions as some UI elements are displayed in the language of the NLS_LANG session of the application server.

To set up multiple URLs:

Copy URL information in formsweb.cfg.

- e. Change the URL (the part in square brackets) to something new.
- f. Change the .env file reference to a new file (to be created in step 2).

Copy the current .env file to the new name created in step 1.

Modify the new .env file by setting NLS_LANG to the new value.

Key RMS Tables for User Interface Related Internationalization

Several tables handle displayable text that can also be translated.

If the retailer creates a new form, a new menu, or a new object on a form, then the retailer has to populate these tables with the corresponding information. If the retailer customizes the information in any of the tables FORM_ELEMENTS, FORM_ELEMENTS_LANGS, MENU_ELEMENTS, or MENU_ELEMENTS_LANGS, the base_ind field in customized records must contain 'N'.

FORM_ELEMENTS

This table is used for screen display and holds the master list of items for all forms whose labels/prompts are translated. This information will always be in English. The BASE_IND=Y means that the item is part of the base Oracle Retail code set. BASE_IND=N indicates that the item was added as part of retailer customization.

FORM_ELEMENTS_LANGS

This table is used for screen display. This table holds translated values for labels/prompts on forms. This information will be in a language that is defined on the lang column of the user_attr table. All users see data from this table, as the retailer may customize the text of a given field. The access key for a button is defined by filling in the LANG_ACCESS_KEY/LANG_LABEL_PROMPT field. At run time, that character will be marked in the string, and function as the access key. Any time the retailer changes the LANG_ACCESS_KEY/LANG_LABEL_PROMPT or LANG_ACCESS_KEY/LANG_LABEL_PROMPT, the BASE_IND should be updated to N because it is not part of the base language translations provided by Oracle Retail.

MENU_ELEMENTS

This table is used for screen display. This table holds the master list for all menus whose items are translated. This information will always be in English. The access key for a menu option is defined by using the ampersand (&) before the character that is the access key in the default description. The BASE_IND=Y means that the item is part of the base Oracle Retail code set. BASE_IND=N indicates that the item was added as part of retailer customization.

MENU_ELEMENTS_LANGS

This table is used for screen display. This table holds the values for all menus whose items are translated. This information will be in a language that is defined on the lang table. Even English language users see data from this table, as the retailer may customize the text of a given menu option. Any time the retailer changes the LANG_LABEL, the BASE_IND should be updated to N because it is not part of the base language translations provided by Oracle Retail.

FORM_MENU_LINK

This table is used for screen display. This table holds the intersection of form and menu files, mapping each form to the menu that it displays.

CODE_DETAIL_TRANS

This table holds non-primary language descriptions of code types defined on the CODE_DETAIL table. The retailer has a multi-language option. The column CODE_DESC on the tables CODE_DETAIL and CODE_DETAIL_TRANS have been increased to 250 bytes. (They were 40 in previous versions of RMS).

UOM_LANG

This table contains translations for the UOM_CLASS table. The column UOM_TRANS holds translations of the abbreviations of the units of measure. UOM_DESC_TRANS holds translated descriptions.

New Data Translation Tables

In RMS, several tables have been redesigned to handle multilingual information. For these tables, the translated text has been moved to a related table that has the same name but with “_TL” added to it.

The original table contains all information that does not need translation. All of the strings that could be translated are on the related *_TL table. The following is a list of new tables:

- ADD_TYPE_TL
- COST_CHG_REASON_TL
- DEAL_COMP_TYPE_TL
- FREIGHT_SIZE_TL
- FREIGHT_TERMS_TL
- FREIGHT_TYPE_TL
- INV_ADJ_REASON_TL
- INV_STATUS_CODES_TL
- INV_STATUS_TYPES_TL
- NON_MERCH_CODE_HEAD_TL
- ORDER_TYPES_TL
- TERMS_HEAD_TL

Integrating RMS with Store Inventory Management

Oracle Retail Store Inventory Management (ORSIM or SIM) is a Java based application with multitier architecture. SIM assists store operation, tracking item and item inventory with all the integrated systems.

SIM helps store personnel in performing the following in-store operations:

- Receiving merchandise from the warehouse or directly from the vendor.
- Replenishing and order stock.
- Requesting and implementing price changes.
- Managing physical inventories and performing stock count.
- Lookup for the detailed information about merchandise items, suppliers, containers, and customer orders.
- Transferring or returning stock.

SIM function includes administration, shipping, receiving, inventory management, lookups and reporting.

The administration function is performed either by the SIM administrator or the Manager. The function includes:

- Setup and technical maintenance of SIM.
- Security setup to define SIM users and their roles.
- Setup and maintenance of serial numbers that are Unique Identification Numbers (UIN) based.

The usage of serial numbers for item is an optional feature.

The inventory management function helps to maintain an accurate perpetual store Inventory for the Stock Counts, Sequencing, Pick Lists, Item Requests, Store Orders, Price Changes, and Ticketing.

The inventory management system provides detailed information about inventory items, suppliers, containers and customer orders which are created in RMS. You can check for the related information in parallel. For example, when you are checking for an item, the supplier information of the item can also be viewed.

Using inventory management, you can perform lookup along with the other SIM tasks. For example, lookup for an item while preparing an item request or lookup for a supplier information when preparing the store order.

SIM includes many standard reports, which can be customized as per your requirement. SIM uses Oracle BI Publisher as an interface for the SIM reports. The SIM reports are custom designed as per the organizational requirement. The BI Publisher interface is also customized to organize and present the reports available to the SIM users.

All the location, item and supplier information are created in RMS whether it is ranged or not ranged to a store, flows to SIM using the RIB Adapter.

Supplier

Supplier is created in RMS. The details of the supplier are sent to SIM through RIB.

RIB Validation: After successful execution of the batches, check for the stores in the RIB.

- VENDOR_PUBLISHER in RIB-RMS
- VENDOR_SUBSCRIBER in RIB-SIM

When RIB message shows as succeeded, the vendor will be available in the SIM.

Merchandise Hierarchy

Merchandise hierarchy includes Department, Class, and Sub-Class which are created in RMS. After they are created successfully in RMS, the details are sent to SIM through RIB.

RIB Validation: After successful execution of the batches, check for the stores in the RIB.

- MERCHHIER_PUBLISHER in RIB-RMS
- MERCHHIER_SUBSCRIBER in RIB-SIM

When RIB message shows as succeeded, the Department, Class and Subclass is available in SIM.

Warehouse

When a warehouse is created in the RMS, the details of warehouse are sent to SIM through RIB.

RIB Validation: After successful execution of the batches, check for the stores in the RIB.

- WH_PUBLISHER in RIB-RMS
- WH_SUBSCRIBER in RIB-SIM

When RIB message shows as succeeded, warehouse will be available in SIM.

SIM Store

The SIM Store function allows you to set operating parameters for stores managed with SIM. The Store is created in RMS and flows to SIM application.

RIB Validation: After successful creation of the stores, check for the stores message in the RIB.

- STORES_PUBLISHER in RIB-RMS
- STORE_SUBSCRIBER in RIB-SIM

When RIB message shows as succeeded, the store is available in SIM.

Inventory Adjustment Reason

You can add, change, and delete reason codes used for inventory adjustments. In addition to showing the reasons for inventory adjustments, the reason code specifies how inventory adjustments affect stock on hand, unavailable inventory, or customer order reserve inventory.

Note: The Reason Codes created in SIM must be mapped to the RMS Inventory Adjustment Reason Codes.

Adding Inventory Adjustment Reason in SIM

To add an Inventory Adjustment Reason in SIM:

Navigate and select **Admin > Setup > Inv. Adj. Reason.** >The Inventory Adjustment Reason Maintenance window opens.

Click **Add**.

Enter ID: 123.

Description: Test Inventory Reason Code.

The UI must be check.

Select **Stock on Hand** from the Disposition dropdown list.

Click **Done**.

Validate the database in the INV_ADJUSTMENT_REASON table.

When the Inventory reason code is set up in SIM, it must be mapped to RMS.

Mapping Inventory Adjustment Reason in RMS

To map Inventory Adjustment Reasons in RMS:

Navigate and select Control > Setup > Inventory Adjustment Reason >Edit.

Click **Add**. The next available line is enabled.

Enter the details as entered in SIM, enter ID: **123**.

Description: Test Inventory Reason Code.

Click **OK** to save your changes and close the window.

Database Validation

Functionality	SIM Table	RMS Table
Inventory Adjustment Reason	INV_ADJUSTMENT_REAS ON	INV_ADJ_REASON

Diff ID

To create a Diff ID in RMS, navigate and select **Items > Diffs > Diff Group/Diff IDs**.

RIB Validation: Validate the details in RIB.

- Diffs Publisher in RIB-RMS
- Diffs Subscriber in RIB-SIM

When the Diff ID is available in both publisher and subscriber, it will be available in SIM.

Item With/Without UIN And Item Locations

You can create the item with diff or without diff in RMS. To create you must navigate and select **Item> Items**. Select the items to be created in RMS. If you have associated the stores to the item, then you can validate the item availability in SIM.

RIB Validation: Validate the details in RIB.

- Items Publisher (for item) and ItemLoc Publisher (For location) in RIB-RMS.
- Items Subscriber and ItemLoc Subscriber in RIB-SIM.
- When the item and location are available in publisher and subscriber, it will be available in SIM.

Database Validation

Functionality	SIM Table	RMS Table
Item	ITEM	ITEM_MASTER
Country of Manufacture	SUPPLIER_ITEM_MANUFACTURE	ITEM_SUPP_MANU_COUNTRY
Item Supplier Relationship	SUPPLIER_ITEM	ITEM_SUPPLIER
Item Supplier Relationship	SUPPLIER_ITEM_COUNTRY	ITEM_SUPP_COUNTRY
Item Location Relationship	STORE_SEQUENCE_ITEM	ITEM_LOC

SIM GUI Item Look up

To view SIM GUI item lookup:

Log in to SIM and select the associated store.

Navigate and select **Lookups > Item Lookup**.

Enter the item created in RMS and search.

You get the details with the diff (optional) available in the Merchandise Hierarchy block.

Transactions

There are different types of transactions created and maintained in SIM.

Purchase Order

Transfer

Return to Warehouse

Return to Vendor

Store Order

Inventory Adjustment

Stock Count

Price Change

Purchase Order

To create a purchase order in RMS for a store you must navigate and select **Ordering>Orders**. When the order is created and submitted, approve the Purchase Order (PO). The order details is be sent to SIM successfully.

RIB Validation: When the purchase order is create, make sure to verify the order number for the following:

- ORDER_PUBLISHER in RIB-RMS
- ORDER_SUBSCRIBER in RIB-SIM

Receiving the Order in SIM

The Purchase Order is received with different combinations as given below:

Receive with Exact Quantity.

Under Receive Quantity.

Over Receive Quantity.

Receive with Damage Quantity.

PO On The FLY – In this scenario, the Purchase Order is created in SIM and not RMS.

This can be done based on the item and supplier's detail, when we have the details in SIM a PO is displayed.

Transfers

Transfer implies to movement of goods from one location to another. Accordingly to SIM, transfer is either store to store transfer or warehouse to store transfer. Transfers can be generated in SIM also.

Store To Store Transfer

The Store to Store transfer is created for the movement of goods from Store A to Store B.

RIB Validation:

- Verify the Stock-Order/Transfer in Transfer_Publisher in RIB-RMS.
- Verify the Stock-Order/Transfer in StockOrder_Subscriber in RIB-SIM.

Transfer Receiving

To receive a transfer, select the receiving store in the SIM login form. For dispatching transfer from store to store:

Log in to the correct **FROM** store.

Navigate and select > **Shipping/Receiving** > **Transfers**.

Double-click the record and update the quantity column with the unit which needs to be transferred. The transfer functionality supports both overage and underage.

Click **Dispatch** and accept the warnings.

RIB Validation: When the dispatch is completed, a message is sent to RMS.

- ASNOUT_PUBLISHER in RIB SIM
- ASNOUT_SUBSCRIBER in RIB RMS

To receive the transfer from store to store:

Log in to the correct **TO** store.

Navigate and select **Shipping/Receiving** > **Transfers**.

Double-click the record and updates the quantity column with the unit which needs to be transferred. The transfer functionality supports overage and underage.

Click **Receive All** and accept the warning.

RIB Validation: When the receiving is done, a message is sent to RMS. Verify the order number in:

- Receiving_Publisher in RIB-SIM
- Receiving_Subscriber in RIB-RMS

RMS Database Validation

- Stock on Hand gets updated in ITEM_LOC_SOH table in RMS. Received quantity is deducted from FROM store and added in TO store.
- Tran code 37 and 38 is posted in TRAN_DATA table.

Warehouse To Store Transfer

In this case of transfer, the goods are moved from warehouse to another store. The user must login to the receiving store to receive the transfer. Before receiving in SIM, the transfer must to be shipped from the corresponding warehouse.

To receive the transfer from Warehouse to Store:

Log in to the correct **TO** store.

Navigate and select Shipping/Receiving > Warehouse Delivery.

Double-click the container ID which has received from Warehouse.

Edit quantities or record damages.

Click **Receive**. The status changes to Received.

Click **Confirm** and accept the warning message.

RIB Validation: When the transfer is received, a message is sent to RMS. Verify the order number in:

- Receiving_Publisher in RIB-SIM
- Receiving_Subscriber in RIB-RMS

RMS Database Validation:

- Stock on Hand gets updated in ITEM_LOC_SOH table in RMS. Received quantity is deducted from FROM Warehouse and added in TO store.
- Tran code 30 and 32 is posted in TRAN_DATA table.

SIM Database Validation:

- STORE_ITEM_STOCK is increased in SOH for the store.

Transfer On The Fly

You can create the transfers from one store to another. No other transfers are possible.

Navigate and select Shipping/Receiving > **Transfer > Create Transfer**.

Select **Transfer To store** from the dropdown.

Enter the item and shipped quantity.

Click **BOL** and select the pickup date.

Click **Dispatch** and accept the warning message.

To receive the transfer on the FLY:

The user must log in to the correct TO store.

Navigate and select Shipping/Receiving > Transfers.

Double-click on the record and updates the quantity column with the units which needs to be transferred. The transfer functionality supports overage and underage.

Click **Receive All** and accept the warning in the pop up.

Click **Done** to save changes and confirm the transfer.

RIB Validation: When receiving is done, message is sent to RMS. Verify the order number in:

- Receiving_Publisher in RIB-SIM
- Receiving_Subscriber in RIB-RMS

RMS Database Validation

- Stock on Hand is updated in ITEM_LOC_SOH table in RMS. The received quantity is deducted from FROM store and added in TO store.
- Tran code 30, 32 and 22 is posted in TRAN_DATA table.

Note:

- The Reason Codes created in SIM must be mapped to the RMS Inventory Adjustment Reason Codes.
 - If the external ID is a number and the user is external it implies that the transfer is generated in RMS.
 - If a transfer request is initiated in SIM this message is not published in RMS or any other integrated application.
 - A transfer handles damaged quantities which in turn are put in the non-sellable bucket in RMS.
 - Negative receiving though cannot be done nor can be transferred.
 - We can also receive multiple times against the same transfer for the expected quantity. This action will be allowed as long as the transfer is open and not restricted by expected quantity.
 - While transferring we can also add items which were not part of the original transfer but we cannot remove the original item while we transfer as long as we have stock on hand.
 - Non ranged items can also be part of the transfer. These are items which are not ranged to that particular location but it is ranged by raising the transfer.
-
-

Return to Warehouse

You can create, edit, and dispatch returns from the store to a company-owned warehouse, or directly to a vendor. If there is unavailable stock for a returned item, you have an option to use items from unavailable stock for the return. A completed (dispatched) return decreases available Stock on Hand.

The store to warehouse transfer is created in RMS, which is displayed as a return to warehouse in SIM. A similar transfer is created in SIM.

Note: Unless the return is dispatched from SIM, WMS cannot see the transaction.

Creating Return to Warehouse in SIM

To create a return to Warehouse in SIM:

Select the correct store from the dropdown in the Login page.

Navigate and select Shipping/Receiving > Returns.

Click **Create**.

In the Return Type field, select **Warehouse** from the dropdown.

Enter warehouse, inventory status, authorization number, item details, reason to return and quantity.

Click Dispatch.

Click **Done** to save the changes.

RIB Validation: After dispatch is cleared, a message is sent to RMS.

Verify the order number in:

- RTV_Publisher in RIB-SIM
- RTV_Subscriber in RIB-RMS

A transfer (RTW) is created in RMS with **APPROVED** status.

RMS/SIM Database Validation

- Stock on Hand gets updated in ITEM_LOC_SOH table in RMS. Inventory must be reduced from SIM and RMS by correct quantity.
- Tran code 30 and 32 is posted in TRAN_DATA table.

Creating Return to Warehouse in RMS

When initiated by RMS, a warehouse to store transfer is created in RMS, and is returned back to warehouse then it is called Return to Warehouse.

RMS functionality includes, create a transfer, return to warehouse in RMS and APPROVE it.

RIB Validation: When the dispatch is completed, a message is sent to RMS.

- RTV_Publisher in RIB-RMS
- RTV_Subscriber in RIB-SIM
- Transfer_Publisher in RIB-RMS

Dispatching in SIM

To dispatch to SIM:

Select the correct store from the login form.

Navigate and select Shipping/Receiving > Returns.

Select the transfer you need to return. The user ID will be external along with the external ID number which indicates that the transfer originated in ORMS.

Double-click on the **Record**.

Update the quantity column with the unit which needs to be returned.

Click **Dispatch** and accept the warning message.

RIB Validation: When the dispatch is completed, a message is sent to RMS.

- RTV_Publisher in RIB-SIM
- RTV_Subscriber in RIB-RMS

RMS/SIM Database Validation:

- Stock on Hand is updated in ITEM_LOC_SOH table in RMS. Inventory should be reduced from SIM and RMS by correct quantity.
- Tran code 30 and 32 is posted in TRAN_DATA table.

Return to Vendor

Return to vendor can be created both in SIM and ORMS.

Initiating SIM in RTV

Following the the steps to initiate SIM in RTV:

Select the correct store from the dropdown in the login page.

Navigate and select Main menu > Shipping/Receiving > Returns.

Click **Create**.

In the Return Type field, select **Supplier** from the dropdown.

Enter supplier, authorization number, item details, reason to return and quantity.

Click Dispatch.

RIB Validation: When the dispatch is done, message is sent to RMS

- RTV_Publisher in RIB-SIM
- RTV_Subscriber in RIB-RMS

A transfer (RTV) is created in ORMS.

RMS/SIM Database Validation

- Stock on hand gets updated in ITEM_LOC_SOH table in RMS (Inventory should be reduced from SIM and RMS by correct quantity).
- Tran code 24 is posted in TRAN_DATA table.

Initiating RMS in RTV

When a Return to vendor along with a mass return transfer is created in ORMS, and is returned back to vendor then it is called Return to Vendor.

Steps for creating Returns in SIM:

Select the correct store from the login form.

Navigate and select Main menu > Shipping/Receiving > Returns.

Select the transfer you need to return. (The user ID will be external along with the external ID number which indicates that the transfer originated in RMS).

Double-click on the record which needs to be returned.

Update the quantity column with the units which need to be returned.

Click **Dispatch** and accept the warning message.

RIB Validation: When dispatch is completed, message is sent to RMS

- RTV_PUBLISHER in RIB-SIM
- RTV_SUBSCRIBER in RIB-RMS

RMS/SIM Database Validation:

Stock on hand gets updated in ITEM_LOC_SOH table in RMS (Inventory should be reduced from SIM and RMS by correct quantity). Tran code 24 is posted in TRAN_DATA table.

Store Orders

Store ordering allows to View, Create, Modify, and Approve orders to a supplier or Transfer requests from a warehouse. Use store-level ordering to order items that are not set up for automatic replenishment, when items run short, or demand increases.

Creating a Store Order

Create a store orders to replenish items for which you have the authority to place orders from the store.

Log in to SIM with the correct store.

Navigate and select **Inv Mgmt > Store Orders**.

Click **Create Order**.

Specify a delivery date range.

Enter Item number, quantity, and UOM.

Click **Done**. Order is created in Pending Status.

Approving a Store Order

Log in to the SIM with the correct store.

Navigate and select **Inv Mgmt > Store Orders**.

Double-click on the store order to be approved.

Specify a delivery date range.

Click **Approve**. Order status is changed to Approved Status.

Database Validation

Functionality	SIM Table	RMS Table
Store Order	PRINT_STORE_ORDER_ITE M	STORE_ORDER
	PRINT_STORE_ORDER	N/A

Inventory Adjustment

Inventory adjustments that you enter in SIM are supplied to the merchandising system to adjust stock levels and maintain perpetual inventory. Inventory adjustments increment or decrement inventory levels such as Stock on Hand and unavailable inventory.

Each inventory adjustment contains a reason code that determines the disposition of the inventory being adjusted. For example, inventory removed for repair is added to the unavailable inventory and the Stock on Hand is decreased. When the items are returned to inventory, unavailable inventory is decreased and the Stock on Hand is increased.

Log in to SIM with the store where you need to do the inventory adjustment.

Navigate and select **Inv Mgmt > Inventory Adjustment**.

Click **Create**.

Enter the item number in the Item field.

Update the UOM, Quantity, and Reason.

Click **Done**.

Enter UINs for an Inventory Adjustment

If an item requires a serial number type UIN, the Quantity field is disabled on the Inventory Adjustment Detail window.

Double-click the **UIN Qty** field.

Click **Add**.

Enter valid number in the in the Unique Identification Number (UIN) field.

Click Save to return to the Inventory Adjustment Detail window.

RIB Validation: When the Inventory adjustment is completed in SIM, a message is sent to ORMS to update the inventory stock. Message flows through RIB:

- InvAdjust_Publisher in RIB-SIM
- InvAdjust_Subscriber in RIB-RMS

SIM TABLES Validation:

- INV_ADJUSTMENT: STORE_ID, ITEM_ID, QUANTITY

RMS DATABASE Validation

- INV_ADJ: ITEM, ADJ_QTY, LOCATION
- INV_STATUS_QTY : ITEM, QTY

Stock Count

Stock counts are the principal tools to ensure that the perpetual inventory for a store remains accurate. For maximum flexibility in performing stock counts, SIM allows the following types of stock counts:

- **Unit** - Unit stock counts are scheduled counts that update the RMS and SIM inventory positions, but only for the physical count values. These counts are performed on regular schedules.
- **Unit and Amount** - A Unit and Amount count is an annual count that can be used to adjust the financial systems in a corporate merchandising system, in addition to updating inventory positions in SIM.
- **Problem Line** - Problem Line stock counts are similar to Unit counts. Problem Line product groups use.
 - Pre-defined criteria to the identify problem items. For example, you might use a Problem Line count for all of the items that have negative Stock on Hand values.
- **Ad hoc** - An ad hoc stock count is an unscheduled stock count that is initiated on a handheld device. An ad hoc count is similar to a Unit count, but the items are not pre-assigned and there is no schedule.

Each stock count must be generated, except for ad hoc stock count type. To generate a stock count, you must first create a product group and schedule. Product groups can include a particular inventory item or entire segments of the inventory hierarchy, including all items in a store.

Stock Counting Process

The general process to conduct a stock count in SIM is as follows:

Create the stock count product group.

Schedule the stock count.


Perform a stock count using both or any of the hand held devices or a personal computer.

Recount discrepant items, depending on whether the product group requires a recount.

Review the count information and authorize the count quantities.

For Unit and Amount counts, export the stock count results to the merchandising system to update Stock on Hand.

The following diagram illustrates the general process flow.

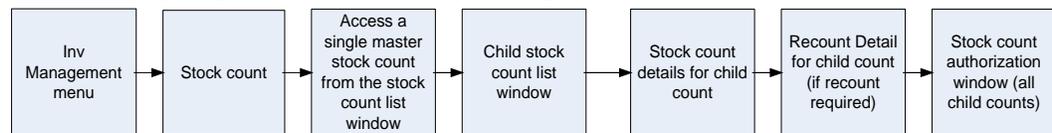

General Process Flow

Executing a Stock Count

The steps to execute a stock count from start to finish are as follows:

Take a Snapshot.

Enter Stock Count Results.

Enter Recount Results.

Complete a Child Stock Count.

Authorize a Stock Count.

RIB Validations: When the Stock Count is schedule, a message flows to ORMS using RIB as interface:

- STKCOUNTSCH_PUBLISHER in RIB-SIM
- STKCOUNTSCH_SUBSCRIBER in RIB-RMS

Price Change

Using the Price Change function, you can request price changes for items at your store. Price changes are set in the pricing system. The pricing system might be in Oracle Retail Price Management (RPM) or another application.

You can request price changes only for items for which you can control prices. This is controlled by an indicator at the store (location) level. Your price change requests are submitted to the pricing system, where they may be approved or rejected. After a price change is approved in the pricing system, a price change event is sent from the pricing system to SIM.

A price change request that is approved in the pricing system creates a pricing event that is sent back to SIM. For an approved price change, you can print labels and tickets for the re-priced items.

Creating Price Change

You can request price changes for those items for which you are allowed to make pricing changes at the store (location) level. For these items, you can request changes to retail, promotion, or clearance pricing.

The request is sent to the pricing system, where it may be approved or rejected. Your price change requests are checked for possible conflicts. You cannot request price

changes for items involved in complex promotions (such as buy one, get one free). You cannot request multiple price changes on the same day. Your request may be rejected if it conflicts with any other pricing events.

To create price change and promotions in SIM:

Navigate and select **Inv Mgmt > Price Change**.

Enter search criteria to limit the price change requests that you want displayed, and click **Search**.

Click **Create**.

Enter Item, start date, price change description and new price.

For clearance or promotion, select end date.

Click **Done** and accept the warning message.

RIB Validations: When the price is completed, a message is sent to ORPM using RIB as interface.

- PRCCHGREQ_PUBLISHER in RIB-SIM

SIM DATABASE VALIDATION

- ITEM_PRICE : ID_ITM, EFFECTIVE_DATE, UNIT_RETAIL, STATUS.

Integrating RMS with Oracle E-Business Suite Financials Using Oracle Retail Financial Integration

This chapter describes the integration between Oracle Retail systems and Oracle E-Business Suite Financials (including Oracle General Ledger and Oracle Payables), as developed and supported by Oracle Retail Financial Integration (ORFI).

When the option to integrate is chosen, the selected information is shared between the systems. Integration and validation services are in place to ensure the shared data matches.

Note: This chapter addresses the points within Oracle Retail systems that are essential to integration. For more information about the entire integration process, including mapping to Oracle E-Business Suite data and settings, see the ORFI documents, *Oracle Retail Financial Integration for Oracle Retail Merchandising Suite* and *Oracle E-Business Suite Financials - Implementation Guide*. For more information about Web services, see the following chapters in the *Oracle Retail Merchandising System Operations Guide, Volume 2: "Service Provider Implementations API Designs" and "Web Services"*.

Participating Applications

The following Oracle Retail applications are included in the integration covered by this chapter:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Integration Bus (RIB)

Assumptions and Dependencies

- The option to integrate must be selected during initial set up of the RMS system.
- ReIM accesses RMS to determine if integration is active. The RMS set up must be done before integrating with REIM.
- The URLs for the RFI Web services that are necessary for this integration are maintained in the RETAIL_SERVICE_REPORT_URL table and in the ReIM IM_SYSTEM_OPTIONS table.
- Real time account validation is done only when the financial integration with Oracle E-Business Suite is ON.

- Partners must be set up as suppliers in Oracle E-Business Suite and manually set up in RMS using the RMS Supplier ID. The RMS supplier ID generated when the Oracle E-Business Suite supplier is interfaced with Oracle Retail. The RMS supplier generated as part of this process is not used.
- Payment terms and freight terms are manually maintained.

Data Setup

Integration of Oracle Retail applications and Oracle E-Business Suite Financials relies on synchronization of essential data, such as currency exchange rates and suppliers. Through careful discussions, the users of both systems determine the common codes and descriptions that will best serve their business needs.

When an agreement is reached, this information is set up and maintained. Depending on the volume, some shared information is set up in Oracle Retail applications or in Oracle E-Business Suite and electronically transferred to other systems. Otherwise, shared information is set up manually within each system, and the users of both systems must ensure that the code and the description match.

RMS Data Set up and Configuration

This section describes setup considerations for RMS data.

RMS System Options

As part of the RMS system options setup, set the following options as indicated:

The SYSTEM_OPTION indicates that the Oracle Retail system is integrated with a financial system:

- FINANCIAL_AP=A

A value of A indicates that the financial system to which RMS is interfaced is Oracle E-Business Suite through Oracle Retail Financial Integration (ORFI).

- GL_ROLL_UP can be D/S/C
- SUPPLIER_SITES_IND = Y
- ORG_UNIT_IND = Y

Organization Units

Use the Organizational Unit window (**RMS Start Menu > Control > Setup > Org Unit > Edit**) to define organizational units in RMS that match those being setup in Oracle E-Business Suite. When an organizational unit is entered in RMS, the valid organizational units are those associated with the Set Of Books (SOB) used for the general ledger interface.

Currency Exchange Rates

Currency exchange rate is used to translate the monetary value of one currency in terms of another. Depending on business needs, a Currency Exchange Rate Type of Operational or Consolidation is selected for use in all transactions.

This value is set up manually in RMS and mapped to Oracle E-Business Suite through the Currency Exchange Type mapping window. Currency Exchange Rate data is owned by Oracle General Ledger and updates are sent to Oracle Retail applications.

Determine the Exchange Type being sent by Oracle General Ledger (for example, Consolidation or Operational) that you want RMS to use.

Update the FIF_CURRENCY_XREF for mapping the external exchange type being sent by Oracle General Ledger with RMS Exchange Type. For example, for Consolidation and Operational exchange types, the FIF_CURRENCY_XREF table holds the following entries:

FIF_EXCHANGE_TYPE	RMS_EXCHANGE_TYPE
C	C
O	O

Supplier Address Types

Within RMS, supplier information (such as Order From and Remit To addresses) is used for generating the purchase orders. Oracle Payables uses supplier information for payment generation. It is important that this information is synchronized.

Partner Type: Supplier Site
Partner: 2900 Local Supplier #1

Org Unit ID	Description	Primary Pay Site
1111111111	Org Unit Id - NA	<input checked="" type="checkbox"/>
		<input type="checkbox"/>
		<input type="checkbox"/>
		<input type="checkbox"/>
		<input type="checkbox"/>

Org Unit ID: 1111111111 Org Unit Id - NA

Buttons: Apply, Delete, OK, Add, Cancel

Partner Org Unit

Suppliers are created in Oracle Payables and exported to RMS. When FINANCIAL_AP is set to A, suppliers cannot be created using the RMS forms. However, if a supplier exists in RMS, all data values for the supplier (except supplier name and status) are updated using the RMS forms. The association of supplier sites to organization units is accessed only in view mode through RMS forms. One supplier site per supplier and organization unit combination can be marked as primary payment site.

Where SYSTEM_OPTIONS.FINANCIAL_AP is A, disable auto generate supplier/partner numbers and associated check boxes.

Note: Supplier information is created, updated and inactivated only in Oracle Payables. This information is transferred from Oracle Payables to the participating Oracle Retail applications, where additional retail-specific attributes are maintained.

Country Codes

When country codes are defined and seeded in RMS, ensure that country codes are mapped to Oracle E-Business Suite country codes through RFI DVM mapping. The following is an example of RFI DVM Mapping (Table RFI_XREF_DVM, available in RFI schema in Retail).

EXT_SYSTEM_ID	COMMON_ID	RETL_ID
USA	700	US
CAN	701	CA

Financial Calendar

The financial calendar within Oracle Retail systems is manually set up and maintained separately from the Oracle General Ledger financial calendar.

Freight Terms

A freight term is an agreement between the retailer and a supplier regarding transportation charges for goods delivered by the supplier. Freight terms are used by RMS as purchase orders are generated.

Within the RMS system, freight terms are set up and maintained manually. They are also maintained in Oracle Payables.

Payment Terms and Currency Exchange Rates

Currency, exchange rates are created and updated in Oracle General Ledger and exported to RMS. Changes to Retail currency exchange rates are not propagated to Oracle General Ledger. Payment terms, however, are manually set up and maintained in each system.

Oracle E-Business Suite Financials Units and Site IDs

The data concepts of Org Units and Site IDs in RMS mirror the data maintained in Oracle E-Business Suite. RMS forms are used to manage and view Oracle Org Units and Site IDs. The RMS windows for Store and Warehouse maintenance allow for the association of each store and warehouse with an Org Unit. The following is an example of the Organizational Unit form:

The following are examples of the Store Maintenance and Warehouse Maintenance forms:

Store Maintenance Window

ORG Entry Type	Virtual Warehouse	Name	WH Type	Channel	Channel Description	Pricing Location	Transfer Entity	Transfer Entity Description	Finisher	Org Unit ID	Stockholding	Customer Order Location
M	10002 F.Release wh 10002						10001	Tst Entity 1 - SOB US	<input type="checkbox"/>	1001	<input type="checkbox"/>	<input type="checkbox"/>
R	10003 F-release wh 10003						10001	Tst Entity 1 - SOB US	<input type="checkbox"/>	1001	<input type="checkbox"/>	<input type="checkbox"/>

Virtual Warehouse Maintenance

RMS General Ledger Setup

For RMS and ReSA, manual setup is required for validating the chart of accounts. Valid chart of accounts are created and stored in general ledger cross reference tables. Once the validation is completed, transaction data is assigned to specific account codes.

Ongoing maintenance of the chart of accounts information (such as adding, changing, or deleting chart of accounts) requires re-validation. In this regard, Oracle General Ledger is the system of record, as it is used to verify the chart of accounts used by Oracle Retail applications. When these applications send a chart of accounts for validation, Oracle General Ledgers issues a message with:

- Valid or invalid status
- Response date
- Chart of accounts

The RMS table FIF_GL_SETUP, stores the Oracle E-Business Suite Set of Books IDs to post financial information. This table must be setup manually after Set of Books IDs are determined. Where a system indicator Multiple Set of Books ID is set to N, FIF_GL_SETUP must hold a single Set of Books (SOB) record.

The Set of Books IDs is associated with the chart of accounts when setting up general ledger cross-reference.

RMS General Ledger Cross Reference

Select **RMS Start Menu > Finance > GL Cross Reference**. The General Ledger Search window opens. Map Chart of Accounts to department, Class, Subclass, Set Of Books, location, and transaction codes using the GL cross reference form in RMS.

GL Cross Reference

ReSA General Ledger Cross Reference

Select **ReSA** task list>**Foundation Data**>**Data Loading**>**Manage Data**. The manage data screen opens. Through this screen, the user can choose the General Ledger template to maintain the data using spreadsheet download and upload.

When SYSTEM_OPTIONS.FINANCIAL_AP is A, the upload validates entries of valid segment combinations.

The screenshot shows the 'Manage Data' screen with the following fields:

- Action:** Download
- Template Category:** ReSA
- Template Type:** GL Cross Reference
- Template:** Maintain GI Cross Reference
- Process Name:** (empty)
- Source File:** Browse... No file selected.

Manage Data

ReIM Data Setup and Configuration

This section describes setup considerations for ReIM data.

System Options

As part of the RMS system options setup script, set the following options as indicated:

- FINANCIAL_AP =A

Chart of Accounts Setup

The chart of accounts is set up manually in Oracle Retail applications and in Oracle General Ledger. All account combinations are set up in each Set Of Books. Account validation is done while executing Financial Posting batch.

Segment Mapping

The retailer determines how many segments are populated. Up to 20 account segments can be specified. The following is an example of how segments are mapped between the ReIM transaction table and Oracle General Ledger:

ReIM Segments	Oracle General Ledger Chart of Accounts
Segment 1	PRODUCT
Segment 2	ACCOUNT
Segment 3	ALTACCT
Segment 4	OPERATING_UNIT
Segment 5	FUND_CODE
Segment 6	DEPTID
Segment 7	PROGRAM_CODE
Segment 8	CLASS_FLD
Segment 9	BUDGET_REF
Segment 10	BUSINESS_UNIT_PC
Segment 11	PROJECT_ID
Segment 12	ACTIVITY_ID
Segment 13	RESOURCE_TYPE
Segment 14	RESOURCE_CATEGORY
Segment 15	RESOURCE_SUB_CAT
Segment 16	CHARTFIELD1
Segment 17	CHARTFIELD2
Segment 18	CHARTFIELD3
Segment 19	AFFILIATE
Segment 20	AFFILIATE_INTRA1

If any one of the values in the 20 segments does not match the Oracle General Ledger, the account combination is considered as invalid. The following error message is added to IM_POSTING_DOC_ERRORS table "One or more accounts subjected to posting is invalid".

Segments 1 and 2 may be set up as dynamic at the Location level, or Segments 4 and 5 can be dynamic at the Department and Class level respectively. Segments defined as dynamic are allowed to be null for certain types of Basic Transaction or Reason Code cross-reference types. When a segment is null, the segment is assigned dynamically when transactions are posted. (Non-dynamic segments cannot be blank). Validation applies to the segment combination, not to individual segments.

Note: For Tran code TAP, each segment must have a value regardless of whether the segment is dynamic.

Running the Initial Load from Oracle E-Business Suite Financials

The initial load for ReIM is run by Oracle E-Business Suite and includes the following information:

- Suppliers
- Currency Rates

Note: The view, `mv_currency_conversion_rates` should be refreshed once the initial loads of currencies from Oracle General Ledger are loaded to ReIM.

IM_SYSTEM_OPTIONS table setup

To accommodate integration, the `IM_SYSTEM_OPTIONS` table should be configured with the following properties.


WS_FIN_ACC_VALID_URL - This attribute holds the URL for the financial account validation web service.

WS_FIN_ACC_VALID_CRED - This attribute indicates if the account validation web service call is authenticated or not. Y means Authentication enabled. N means Authentication is not enabled (See configuring web service credentials in weblogic server).

WS_FIN_DRILL_FWD_URL - This attribute holds the URL for the financial drill forward web service.

WS_FIN_DRILL_FWD_CRED - This attribute indicates if the drill forward web service call is authenticated or not. Y means Authentication enabled. N means Authentication is not enabled (See configuring web service credentials in weblogic server).


The above attributes are configured in the System Options screen.

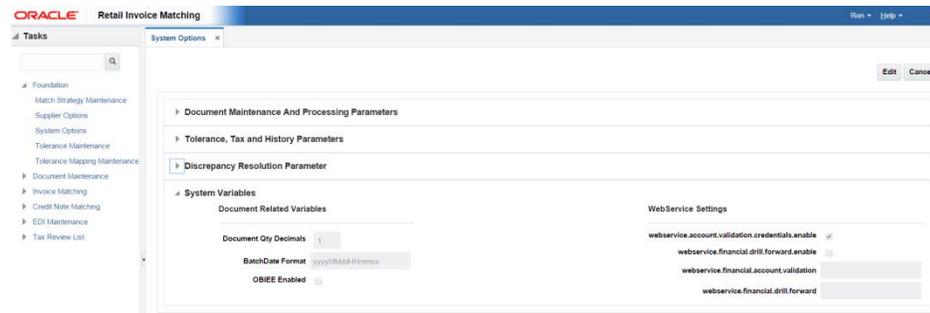


Configuring WebService Credentials in Weblogic Server Enterprise Manager:

The credentials for the web service call are configured in the default domain credential store of the weblogic server through the admin console.


Create A Map:

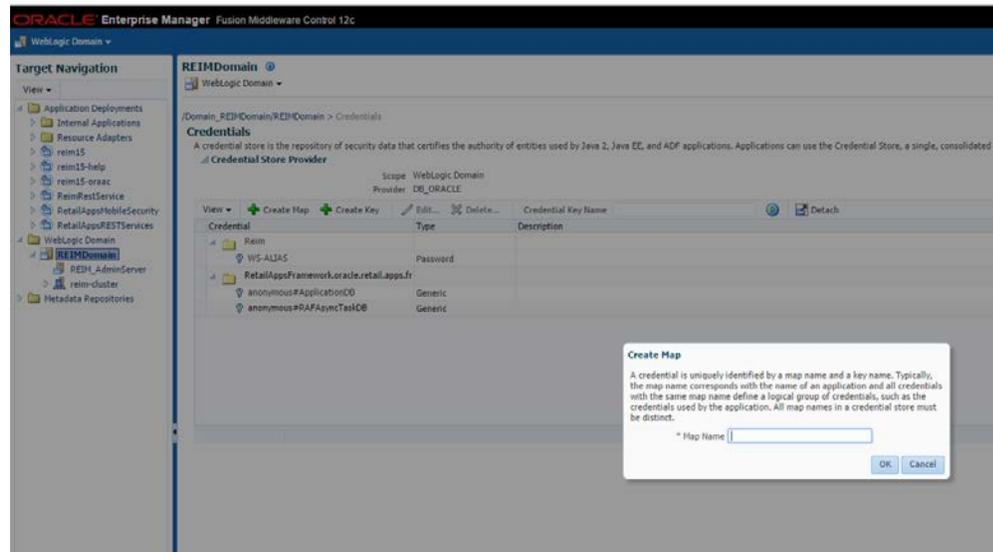

Creating Credentials:

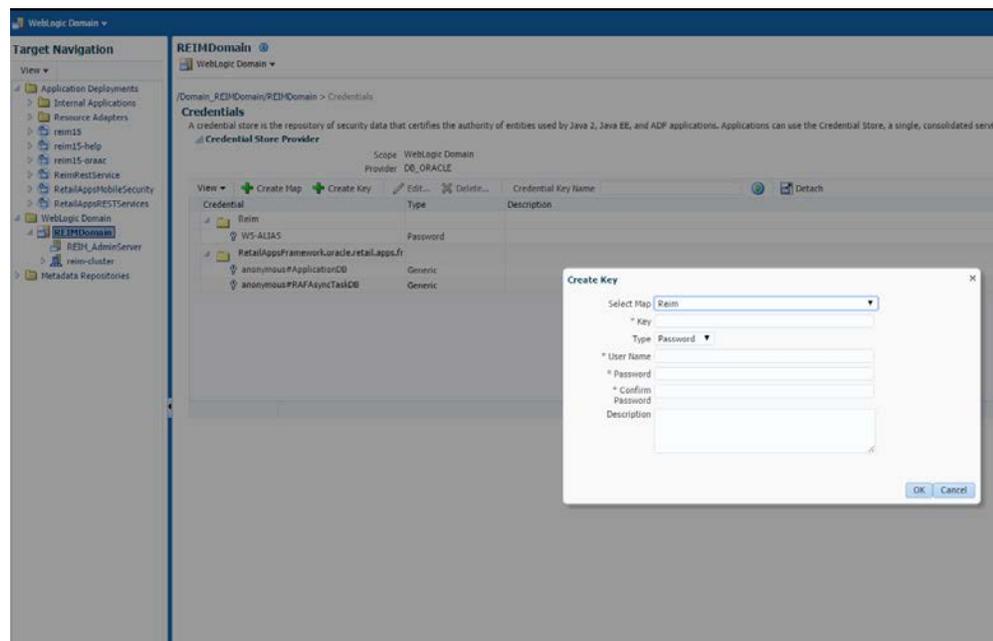

Note: Select the map as ReIM. The Key name should always be WS-ALIAS. Any user name / password can be assigned to the key

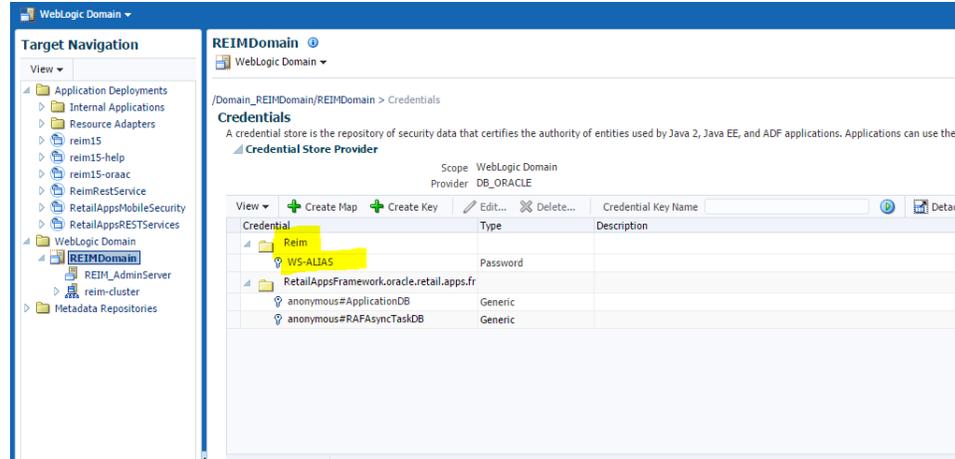

Reports are created by Business Intelligence Publisher for the following:
 The URL for each report must be updated in the table, RETAIL_SERVICE_REPORT_URL. The following table provides sample URLs.

ReIM Transactional Maintenance

Integration to Oracle General Ledger includes a number of transactions, as described below.

Calculation of TRANS_AMOUNT

The TRANS_AMOUNT field in the IM_FINANCIAL_STAGE table stores the value of the journal entry to be posted to Oracle General Ledger. (The currency for the calculated amount is the currency assigned to the transaction). The TRANS_AMOUNT value is calculated as follows:

Row Description	DEBIT_CREDIT_IND	TRANS_AMOUNT Value
Normal	Debit	Transaction Amount
Normal	Credit	(-1) * Transaction Amount
VAT	Debit	Transaction Amount * VAT Rate
VAT	Credit	(-1) * Transaction Amount * VAT Rate

Note: Transaction Amount is taken from the database column, IM_FINANCIALS_STAGE.AMOUNT.

Generation of Outgoing Data

A staging table accommodates the outgoing transfer of data. The reference key assigned to each document or receipt is used to find data on this table.

From	To	Transactions
ReIM	Oracle Payables	Invoices Debit Memos Credit Memos Credit Notes

From	To	Transactions
ReIM	Oracle General Ledger	General Ledger accounting entries resulting from the Invoice Matching process, including: Pre-paid invoices Receipt Write-offs
RMS	Oracle General Ledger	Accounting entry data (potentially very high volume)
ReSA	Oracle General Ledger	Accounting entry data (potentially very high volume)

Validation of Accounts When Posting Financial Entries

Valid chart of accounts are stored in the ReIM table, IM_VALID_ACCOUNTS, which includes the Set of Books ID (sob_id) and 20 segments. An ORFI Web service validates accounts against the Oracle General Ledger. Valid accounts are posted to IM_VALID_ACCOUNTS; invalid accounts are posted to IM_POSTING_DOC_ERROR. The following steps describe the validation process:

1. The ReIM system invokes the validation Web service to validate the chart of accounts. (A URL for the ORFI Web service is configured in the SYSTEM_OPTIONS table.

The posting batch job checks the accounts to be posted against the IM_VALID_ACCOUNTS table.

If the chart of accounts is in the table, the transaction is posted to staging tables.

If the chart of account does not exist in the table, a collection of accounts is built. These collected accounts are validated against the Oracle General Ledger, and a status is returned.

- If the status of the collected accounts is valid, the accounts are inserted in the IM_VALID_ACCOUNTS table, and the transactions are posted to the staging tables.
- If the status of the accounts is NOT valid, the entire collection is flagged as errors, and transactions are posted to IM_POSTING_DOC_ERROR.

Note: ReIM completes the first level of account validation and posts the transaction to staging tables. It is assumed the second level of account validation is done at the end of the extraction process (where transactions are moved from ReIM staging tables to Oracle General Ledger). If account validation fails at this point, Oracle General Ledger must change the account information before transactions are loaded to Oracle General Ledger, and the chart of accounts must be re-validated in ReIM.

Validation of Accounts When Prepaying a Merchandise Invoice

A Merchandise document with a ready for match status can be pre paid before matching. The Document Search screen provides this option.

The screenshot shows the Oracle Retail Invoice Matching interface. The main window displays a search results table with the following data:

Document Type	Status	Document Date	Order No.
Merchandise Invoice	Ready for match	2/3/2015	18601
Merchandise Invoice	Ready for match	2/3/2015	6201
Merchandise Invoice	Ready for match	2/4/2015	33501
Merchandise Invoice	Ready for match	2/21/2015	63410
Merchandise Invoice	Ready for match	2/24/2015	73106
Merchandise Invoice	Ready for match	2/28/2015	85601
Merchandise Invoice	Ready for match	2/28/2015	75707
Merchandise Invoice	Ready for match	3/1/2015	90101
Merchandise Invoice	Ready for match	3/1/2015	92902
Merchandise Invoice	Ready for match	3/7/2015	93701
Merchandise Invoice	Ready for match	3/7/2015	95802

Valid chart of accounts are stored in the ReIM table, `IM_VALID_ACCOUNTS`, which includes the Set of Books ID (`sob_id`) and 20 segments. An ORFI Web service validates accounts against the Oracle General Ledger. Valid accounts are posted to `IM_VALID_ACCOUNTS`; invalid accounts are posted to `IM_POSTING_DOC_ERROR`. The following steps describe the validation process:

1. The ReIM system invokes the validation Web service to validate the chart of accounts. (A URL for the ORFI Web service is configured in the `SYSTEM_OPTIONS` table.
2. The Prepay operation checks the accounts to be posted against the `IM_VALID_ACCOUNTS` table.

If the chart of accounts is in the table, the transaction is posted to staging tables.

If the chart of account does not exist in the table, a collection of accounts is built. These collected accounts are validated against the Oracle General Ledger, and a status is returned.

- If the status of the collected accounts is valid, the accounts are inserted in the `IM_VALID_ACCOUNTS` table, and the transactions are posted to the staging tables.
- If the status of the accounts is NOT valid, the entire collection is flagged as errors, and transactions are posted to `IM_POSTING_DOC_ERROR` and the user will be shown an error message "One or more accounts subjected to posting is invalid".

Maintenance of Valid Accounts

As account information is changed in the Oracle General Ledger, Retail must re-validate the locally stored chart of accounts. Oracle General Ledger will not propagate chart of account changes to Retail. The `AccountWorkspacePurge` Batch can clear all valid accounts in the `IM_VALID_ACCOUNTS` table or only those that are considered updates in Oracle E-Business Suite.

Usage

```
AccountWorkspacePurge userid/password PURGE [ALL | <Accounts>]
```

Where:

- The argument is a combination of user ID and password.
- The argument is the word `PURGE`.
- The argument is either `ALL` or specific accounts to be deleted from the local table.

Integrating RMS with PeopleSoft Financials Using Oracle Retail Financial Integration

This chapter describes the integration between Oracle Retail systems and PeopleSoft Financials (including PeopleSoft General Ledger and PeopleSoft Payables), as developed and supported by Oracle Retail Financial Integration (ORFI).

When the option to integrate is chosen, the selected information is shared between the systems. Integration and validation services are in place to ensure the shared data matches.

Note: This chapter addresses the points within Oracle Retail systems that are essential to integration. For more information about the entire integration process, including mapping to data and settings, see the ORFI document, *Oracle Retail Financial Integration for Oracle Retail Merchandise Operations Management and Oracle Financials Implementation Guide*. For more information about Web services, see the following chapters in the *Oracle Retail Merchandising System Operations Guide, Volume 2: "Service Provider Implementations API Designs" and "Web Services"*.

Participating Applications

The following Oracle Retail applications are included in the integration covered by this chapter:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Integration Bus (RIB)

Assumptions and Dependencies

- The option to integrate must be selected during initial set up of the RMS system.
- ReIM accesses RMS to determine if integration is active. The RMS set up must be done before integrating with REIM.
- The URLs for the RFI Web services that are necessary for this integration are maintained in the RETAIL_SERVICE_REPORT_URL table and in the ReIM SYSTEM_OPTIONS table.
- Real time account validation is done only when the financial integration with Oracle E-Business Suite is ON.

- Partners must be set up as suppliers in Oracle E-Business Suite and manually set up in RMS using the RMS Supplier ID. The RMS supplier ID generated when the Oracle E-Business Suite supplier is interfaced with Oracle Retail. The RMS supplier generated as part of this process is not used.
- Payment terms and freight terms are manually maintained.

Data Constraints

The Location ID field is restricted to eight characters, to accommodate PeopleSoft Operating Unit, which has a maximum of eight characters.

The Ext_Doc_ID field is restricted to 30 characters, because the corresponding PeopleSoft field has only 30 characters. Characters beyond 30 are truncated.

RMS allows for four decimals, and PeopleSoft allows only three. Truncation may occur when data is passed to PeopleSoft Enterprise Financials.

ReIM values in the IM_CURRENCY_LOCALE are restricted to three decimals, because the corresponding PeopleSoft Enterprise Financials field can accept no more than three decimal positions.

Data Setup

Integration of Oracle Retail applications and PeopleSoft Financials relies on synchronization of essential data, such as currency exchange rates, suppliers, and payment terms. Through careful discussions, the users of both systems determine the common codes and descriptions that will best serve their business needs.

Once agreement is reached, this information is set up and maintained. Depending on the volume, some shared information is set up in Oracle Retail applications or in PeopleSoft and electronically transferred to the other systems. Otherwise, shared information is set up manually within each system, and the user of both systems must ensure that the code and the description match.

RMS Data Setup and Configuration

This section describes setup considerations for the RMS data.

This SYSTEM_OPTION indicates that the Oracle Retail system is integrated with a financial system:

- FINANCIAL_AP=A

A value of A indicates that the financial system to which RMS is interfaced is PeopleSoft through Oracle Retail Financial Integration (ORFI).

- GL_ROLL_UP can be D/S/C
- SUPPLIER_SITE_IND = Y
- ORG_UNIT_IND = Y

Organization Units

Use the Organizational Unit window (**RMS Start Menu > Control > Setup > Org Unit > Edit**) to define organizational units in RMS that match those being setup in PeopleSoft. When an organizational unit is entered in RMS, the valid organizational units are those associated with the Set Of Books (SOB) that is being used for the general ledger interface.

Currency Exchange Rates

Currency exchange rate is used to translate the monetary value of one currency in terms of another. Depending on business needs, a Currency Exchange Rate Type of Operational or Consolidation is selected for use in all transactions.

This value is set up manually in RMS and mapped to PeopleSoft through the Currency Exchange Type mapping window. Currency Exchange Rate data is owned by PeopleSoft General Ledger and updates are sent to Oracle Retail applications.

Determine the Exchange Type being sent by PeopleSoft General Ledger (for example, Consolidation or Operational) that you want RMS to use. Update the FIF_CURRENCY_XREF for mapping the external exchange type being sent by PeopleSoft General Ledger with RMS Exchange Type.

For example, for Consolidation and Operational exchange types, the FIF_CURRENCY_XREF table holds the following entries:

FIF_EXCHANGE_TYPE	RMS_EXCHANGE_TYP E
C	C
O	O

Supplier Address Types

Within RMS, supplier information (such as Order From and Remit To addresses) is used for generating the purchase orders. PeopleSoft Payables uses supplier information for payment generation. It is important that this information is synchronized.

Partner Org Unit (supporg)

Partner Type: Supplier Site

Partner: 2900 Local Supplier #1

Org Unit ID	Description	Primary Pay Site
1111111111	Org Unit Id - NA	<input checked="" type="checkbox"/>
		<input type="checkbox"/>
		<input type="checkbox"/>
		<input type="checkbox"/>
		<input type="checkbox"/>

Org Unit ID: 1111111111 Org Unit Id - NA

Buttons: Apply, Delete, OK, Add, Cancel

Partner Org Unit window

Suppliers are created in PeopleSoft Payables and exported to RMS. When FINANCIAL_AP is set to A, suppliers cannot be created using the RMS forms. However, after the supplier exists in RMS, all data values for the supplier (except supplier name and status) continue to be updated using the RMS forms. The association of supplier sites to organization units is accessed only in view mode through RMS forms. One supplier site per supplier organization unit combination can be marked as primary payment site. Where SYSTEM_OPTIONS.FINANCIAL_AP is A, disable auto generate supplier/partner numbers and associated check boxes.

Note: Supplier information is created, updated and inactivated only in PeopleSoft Payables. This information is transferred from PeopleSoft Payables to the participating Oracle Retail applications, where additional retail-specific attributes may be maintained.

Country Codes

When country codes are defined and seeded in RMS, ensure that country codes are mapped to PeopleSoft country codes through RFI DVM mapping. The following is an example of RFI DVM Mapping (Table RFI_XREF_DVM, available in RFI schema in Retail).

EXT_SYSTEM_ID	COMMON_ID	RETL_ID
USA	700	US
CAN	701	CA

Financial Calendar

The financial calendar within Oracle Retail systems is manually set up and maintained separately from the PeopleSoft General Ledger financial calendar.

Freight Terms

A freight term is an agreement between the retailer and a supplier regarding transportation charges for goods delivered by the supplier. Freight terms are used by RMS as purchase orders are generated.

Within the RMS system, freight terms are set up and maintained manually. They also are maintained in PeopleSoft Payables.

Payment Terms and Currency Exchange Rates

Currency exchange rates are created and updated in PeopleSoft General Ledger and exported to RMS. Changes to Retail currency exchange rates are not propagated to PeopleSoft General Ledger. Payment terms set up in PeopleSoft are propagated to RMS but changes to payment terms in RMS are not propagated back to PeopleSoft.

The following are examples of the Store Maintenance and Warehouse Maintenance forms:

Store Maintenance Window (store)

Store Type: Company

Store: Stock Holding Co Store

Manager: Retail

Phone Number: 52342332

Fax Number: 23423432

Email Address: retail@test.com

VAT Region: 1000 (Vat Region 1000)

District: 1000 (F Release District 1000)

Transfer Zone: 1 (Transfer Zone 1)

Store Format: 8 (Fashion)

Mail Name: [empty]

Channel: 3842 (AUTO_Channel_3842)

Default Warehouse: 29146540 (AUTO_V_WH_29146540)

Currency: AED (U.A.E. Dirham)

Language: 13 (Arabic)

DUNS Number: 3423423 | DUNS Location Number: 2

Sister Store: [empty]

Transfer Entity: 30001 (Tst Entity 1 - SOB CA)

Org Unit ID: [empty]

Secondary Name: CO Store

(10 chars) compstore

(3 chars) STR

Total Area: 1000

Selling Area: 900

Linear Distance: 100

Store Class: Class Stores B

Store Open Date: 14-AUG-13

Start Order Days: 1

Store Close Date: 31-AUG-13

Stop Order Days: [empty]

Acquired Date: 26-AUG-13

Remodel Date: 28-AUG-13

Unique Tran.No.By: Store

Timezone Name: Africa/Sao_Tome

Integrated POS

Stockholding

Remerch

Customer Order Location

Buttons: OK, OK + Repeat, Address, Like Store, Zoning Loos, Walk Through, Cancel

Store Maintenance Window

Virtual Warehouse Maintenance (vwh)

Physical Warehouse: 10000 F-Release wh 10000

ORG Entity Type	Virtual Warehouse	Name	VWH Type	Channel	Channel Description	Pricing Location	Transfer Entity	Transfer Entity Description	Finisher	Org Unit ID	Stockholding	Customer Order Location
R	10001	F-Release vwh 10001 CS_RG	CS_RG	1	B1 - Brick and Mortar C		10001	Tst Entity 1 - SOB US	<input type="checkbox"/>	1001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
M	10002	F-Release vwh 10002					10001	Tst Entity 1 - SOB US	<input type="checkbox"/>	1001	<input type="checkbox"/>	<input type="checkbox"/>
R	10003	F-release vwh 10003 CS_RG	CS_RG	1	B1 - Brick and Mortar C		10001	Tst Entity 1 - SOB US	<input type="checkbox"/>	1001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Virtual Warehouse: 10001 F-Release vwh 10001

Secondary Name: F-Release vwh 10001

ORG Entity Type: R (Regular Warehouse)

VWH Type: CS_RG (CSCs)

Channel: 1 (B1 - Brick and Mortar Channel)

Pricing Location: [empty]

Transfer Entity: 10001 (Tst Entity 1 - SOB US)

Stockholding:

Finisher:

Customer Order Location:

Org Unit ID: 1001 (Org Unit 1 - SOB - US)

Buttons: OK, Add, Cancel

Virtual Warehouse Window

RMS General Ledger Setup

For RMS and ReSA, manual setup is required for validating the chart of accounts. Valid chart of accounts are created and stored in general ledger cross reference tables. Once the validation is completed, transaction data can be assigned to specific account codes.

Ongoing maintenance of the chart of accounts information (such as adding, changing, or deleting chart of accounts) requires re-validation. In this regard, PeopleSoft General Ledger is the system of record, as it is used to verify the chart of accounts used by Oracle Retail applications. When these applications send a chart of accounts for validation, PeopleSoft General Ledgers issues a message with:

- Valid or invalid status
- Response date
- Chart of accounts

The RMS table, FIF_GL_SETUP, stores the PeopleSoft Set of Books IDs to post financial information. This table must be setup manually after Set of Books IDs are determined. Where system indicator Multiple Set of Books ID is set to N, FIF_GL_SETUP must hold a single Set of Books (SOB) record.

The Set of Books IDs is associated with the chart of accounts when setting up general ledger cross reference.

RMS General Ledger Cross Reference

Navigate: RMS Start Menu > Finance > GL Cross Reference. The General Ledger Search window opens. Map Chart of Accounts to department, Class, Subclass, Set Of Books, location, and transaction codes using the GL cross reference form in RMS.

The screenshot shows the 'GL Cross Reference' window with the following data:

Field	Value
Department	4222
Class	-1
Subclass	-1
Set of Books	1111111111111111
Location	2333333
Transaction Code	20
Line Type	ITEM

The window also features two columns of segment fields for Debit and Credit Accounts, each with 10 segments. Buttons for 'Refresh', 'Find Account', 'OK', 'OK/Repeat', 'Delete', and 'Cancel' are visible at the bottom.

GL Cross Reference

ReSA General Ledger Cross Reference

Select **ReSA** task list>**Foundation Data**>**Data Loading**>**Manage Data**. The manage data screen opens. Through this screen, the user can choose the General Ledger template to maintain the data using spreadsheet download and upload.

When SYSTEM_OPTIONS.FINANCIAL_AP is A, the upload validates entries of valid segment combinations.

The screenshot shows the 'Manage Data' interface. At the top, there are two tabs: 'ReSA Dashboard' and 'Manage Data'. Below the tabs, there is a form with the following fields:

- Action:** A dropdown menu currently showing 'Download'.
- Template Category:** A dropdown menu currently showing 'ReSA'.
- Template Type:** A dropdown menu currently showing 'GL Cross Reference'.
- Template:** A dropdown menu currently showing 'Maintain GI Cross Reference'.
- Process Name:** An empty text input field.
- Source File:** A 'Browse...' button followed by the text 'No file selected.'

Manage Data

Configuring Drill Back and Forward Web Services

Retail web services table, RETAIL_SERVICE_REPORT_URL, must be updated with appropriate URLs to integrate with PeopleSoft Enterprise Financials.

The records in the table for Services (indicated by RS_TYPE=S) for Account Validation (RAV) and Drill Forward (RDF), must be updated with the URL information from AIA where the services are hosted.

Note: If Web services are secure, then the SYS_ACCOUNT column must be populated with authentication information in the form of *user name/password*.

The records in the table for Reports (indicated by RS_TYPE=R) for both RMS and ReIM reports, must be updated with the URL information from the BIP Server where the reports are hosted.

ReIM Data Setup and Configuration

This section describes setup considerations for ReIM data.

System Options

As part of the RMS system options setup script, set the following options as indicated:

- FINANCIAL_AP =A

CURRENCY_PRECISION

Because PeopleSoft Enterprise Financials uses only three decimals, the transactions generated by the Oracle Retail ReIM application must not include more than three decimals.

Make sure that the RMS table CURRENCIES has maximum of 3 decimal places for the currency_cost_dec attribute for difference currency codes. The currency_rates table in RMS should be loaded initially by PeopleSoft Enterprise Financials.

System Options window

Chart of Accounts Setup

The chart of accounts is set up manually in Oracle Retail applications and in PeopleSoft General Ledger. All account combinations are set up in each Set Of Books. Account validation is done while executing Financial Posting batch.

Segment Mapping

The retailer determines how many segments are populated. Up to 20 account segments can be specified. The following is an example of how segments are mapped between the ReIM transaction table and PeopleSoft General Ledger:

ReIM Segments	PeopleSoft General Ledger Chart of Accounts
Segment 1	ACCOUNT
Segment 2	ALTACCT
Segment 3	DEPTID
Segment 4	OPERATING_UNIT
Segment 5	PRODUCT
Segment 6	FUND_CODE
Segment 7	CLASS_FLD
Segment 8	PROGRAM_CODE
Segment 9	BUDGET_REF
Segment 10	AFFILIATE
Segment 11	AFFILIATE_INTRA1
Segment 12	AFFILIATE_INTRA2
Segment 13	CHARTFIELD1
Segment 14	CHARTFIELD2
Segment 15	CHARTFIELD3
Segment 16	RESOURCE_TYPE
Segment 17	RESOURCE_CATEGORY
Segment 18	RESOURCE_SUB_CAT
Segment 19	BUSINESS_UNIT_PC
Segment 20	PROJECT_ID

If any one of the values in the 20 segments does not match the PeopleSoft General Ledger, the account combination is considered as invalid. The following error message is added to IM_POSTING_DOC_ERRORS table: "One or more accounts subjected to posting is invalid"

Segments 1 and 2 may be set up as dynamic at the Location level, or Segments 4 and 5 can be dynamic at the Department and Class level respectively. Segments defined as dynamic are allowed to be null for certain types of Basic Transaction or Reason Code cross-reference types. When a segment is null, the segment is assigned dynamically when

transactions are posted. (Non-dynamic segments cannot be blank). Validation applies to the segment combination, not to individual segments.

Note: For Tran code TAP, each segment must have a value regardless of whether the segment is dynamic.

Running the Initial Load from PeopleSoft Financials

The initial load for ReIM is run by PeopleSoft and includes the following information:

- Suppliers
- Currency Rates
- Payment Terms

Note: The view, mv_currency_conversion_rates should be refreshed once the initial loads of currencies from PeopleSoft General Ledger are loaded to ReIM

IM_SYSTEM_OPTIONS table Setup

To accommodate integration, IM_SYSTEM_OPTIONS table should be configured to with the following properties.

Note: Drill forward functionality is applicable for PeopleSoft – RMS and ReIM integration. Drill backward functionality is only applicable for PeopleSoft – RMS integration.

Drill forward and drill backward functionality is applicable for Peoplesoft - RMS integration only.

WS_FIN_ACC_VALID_URL - This attribute holds the URL for the financial account validation web service.

WS_FIN_ACC_VALID_CRED - This attribute indicates if the account validation web service call is authenticated or not. Y means Authentication enabled. N means Authentication is not enabled (See configuring web service credentials in weblogic server).

WS_FIN_DRILL_FWD_URL - This attribute holds the URL for the financial drill forward web service.

WS_FIN_DRILL_FWD_CRED - This attribute indicates if the drill forward web service call is authenticated or not. Y means Authentication enabled. N means Authentication is not enabled (See configuring web service credentials in weblogic server).

The above attributes are configured in the System Options screen.

Reports are created by Business Intelligence Publisher for the following:

The URL for each report must be updated in the table, retail_service_report_url. The following table provides sample URLs.

Reporting

Reports are created by Business Intelligence Publisher for the following:

- Merchandise Invoice
- Non-Merchandise Invoice

- Credit Note
- Credit Memo
- Debit Memo
- Receipt Write-Off

The URL for each report must be updated in the table, `retail_service_report_url`. The following table provides sample URLs:

Document Type	Report Name	Sample Report URL
MRCHI	Merchandise invoice document Report	<code>http://hostname:portno/xmlpserver_nonsso/Guest/REIM13/Finance/invreport/invreport.xdo</code>
NMRCHI	Non-Merchandise invoice document Report	<code>http://hostname:portno/xmlpserver_nonsso/Guest/REIM13/Finance/invreport/invreport.xdo</code>
CRDNT	Credit Note document Report	<code>http://hostname:portno/xmlpserver_nonsso/Guest/REIM13/Finance/invreport/crnreport.xdo</code>
CRDMEC	Credit Memo cost document Report	<code>http://hostname:portno/xmlpserver_nonsso/Guest/REIM13/Finance/invreport/memoreport.xdo</code>
CRDMEQ	Credit Memo quantity document Report	<code>http://hostname:portno/xmlpserver_nonsso/Guest/REIM13/Finance/invreport/memoreport.xdo</code>
DEBMEC	Debit Memo cost document Report	<code>http://hostname:portno/xmlpserver_nonsso/Guest/REIM13/Finance/invreport/imemoreport.xdo</code>
DEBMEQ	Debit Memo quantity document Report	<code>http://hostname:portno/xmlpserver_nonsso/Guest/REIM13/Finance/invreport/memoreport.xdo</code>
DEBMEV	Debit Memo Tax document Report	<code>http://hostname:portno/xmlpserver_nonsso/Guest/REIM13/Finance/invreport/memoreport.xdo</code>

Document Type	Report Name	Sample Report URL
RWO	Receipt Write Off document Report	http://hostname:portno/xmlpserver_nonsso/Guest/REIM13/Finance/invoice/report/rworeport.xdo

ReIM Transactional Maintenance

Integration to PeopleSoft General Ledger includes a number of transactions, as described below.

Calculation of TRANS_AMOUNT

The TRANS_AMOUNT field in the im_financial_stage table stores the value of the journal entry to be posted to PeopleSoft General Ledger. (The currency for the calculated amount is the currency assigned to the transaction). The TRANS_AMOUNT value is calculated as follows:

Row Description	DEBIT_CREDIT_IN D	TRANS_AMOUNT Value
Normal	Debit	Transaction Amount
Normal	Credit	(-1) * Transaction Amount
VAT	Debit	Transaction Amount * Tax Rate
VAT	Credit	(-1) * Transaction Amount * Tax Rate

Note: Transaction Amount is taken from the database column, IM_FINANCIALS_STAGE.AMOUNT.

Generation of Outgoing Data

A staging table accommodates the outgoing transfer of data. The reference key assigned to each document or receipt is used to find data on this table.

Outgoing Data

From	To	Transactions
ReIM	PeopleSoft Accounts Payable	Invoices Debit Memos Credit Memos Credit Notes
ReIM	PeopleSoft General Ledger	General Ledger accounting entries resulting from the Invoice Matching process, including: Pre-paid invoices Receipt Write-offs

RMS	PeopleSoft General Ledger	Accounting entry data (potentially very high volume)
ReSA	PeopleSoft General Ledger	Accounting entry data (potentially very high volume)

Validation of Accounts When Posting Financial Entries

Valid accounts are stored in the ReIM table, `IM_VALID_ACCOUNTS`, which includes the Set of Books ID (`sob_id`) and 20 segments. An ORFI Web service validates accounts against the PeopleSoft Enterprise Financials system. Valid accounts are posted to `IM_VALID_ACCOUNTS`; invalid accounts are posted to `IM_POSTING_DOC_ERROR`. The following steps describe the validation process:

1. The ReIM system invokes the account validation Web service to validate the account. (A URL for the ORFI Web service is configured in the ReIM `SYSTEM_OPTIONS` table.)
2. The posting batch job checks the accounts to be posted against the `IM_VALID_ACCOUNTS` table.
3. If the account entries are in the table, the transaction is posted to the G/L or AP tables.
4. If the account does not exist in the table, a collection of accounts is built. These collected accounts are validated against the PeopleSoft Enterprise Financials system, and a status is returned.
 - If the status of the collected accounts is valid, the accounts are inserted in the `IM_VALID_ACCOUNTS` table, and the transactions are posted to the staging tables.

- If the status of the accounts is NOT valid, the entire collection is flagged as errors, and transactions are posted to IM_POSTING_DOC_ERROR.

Note: ReIM completes the first level of account validation and posts the transaction to staging tables. It is assumed the second level of account validation is done at the end of the extraction process (where transactions are moved from ReIM staging tables to PeopleSoft). If account validation fails at this point, Oracle Data Integrator (ODI) or PeopleSoft must change the account information before transactions are loaded to PeopleSoft, and the account change must be communicated to ReIM.

Maintenance of Valid Accounts

As account information is changed in the PeopleSoft system, the same changes are communicated to, and manually completed in, the ReIM system. After ReIM is updated accordingly, the AccountWorkspacePurge Batch is run to clear the valid accounts maintained locally in ReIM.

The AccountWorkspacePurge Batch can clear all valid accounts in the IM_VALID_ACCOUNTS table or only those that are considered updates in PeopleSoft.

Usage:

```
AccountPurge batch-alias-name PURGE [ALL | <Accounts>]
```

Where:

The first argument is batch alias name.

The second argument is the word PURGE.

The third argument is either ALL or specific accounts to be deleted from the local table.

Building and Posting Reference IDs

Drill back and drill forward functionality uses Reference ID to locate documents and receipts. A Reference ID is a combination of document type and document (or receipt) ID, as illustrated in the table below:

Type	Doc ID	Receipt ID	Reference ID
Merchandise Invoice	101	Null	MRCHI#101
Non-Merchandise Invoice	102	Null	NMRCHI#102
Receipt	Null	103	RECEIPT#103

For documents, the Resolution Posting Batch program builds the Reference ID using the standard, Document Type + DeDelimiter + Doc_id. For receipts, the program builds the Reference ID using the standard, Document Type + DeDelimiter + Receipt_id.

To enable drill down functionality, Reference IDs are loaded to staging tables. FinancialsAPStageDao and FinancialsGLStageDao are populated, as are IM_RWO_SHIPMENT_HIST and IM_RWO_SHIPSKU_HIST.

Drilling Back

Drilling back allows users to view the source of posted PeopleSoft transactions that originated in Oracle Retail systems (from a voucher to an invoice, for example).

When drilling back from PeopleSoft Enterprise Financials, users are not directed to an actual screen within RMS, ReIM or ReSA. Rather, a retail Web service generates and launches a URL to a BI Publisher report. The report contains the information that typically appears on the appropriate retail screen.

Depending on the information requested by the user, PeopleSoft invokes web service in the ORFI layer which in turn calls the report locator service available in RMS. This service returns back BIP report reference URL which is passed back to PeopleSoft and report gets launched in browser window.

Information from the reference key determines what kind of report URL to issue. For example, if the retail key has a prefix of ReIM, the ReIM_REPORT_URL function is called, else the RMS_REPORT_URL function is called to retrieve the appropriate report URL. If the key does not match any key in the retail systems, an error message is launched.

Drilling Back to RMS and ReSA from PeopleSoft Enterprise Financials

The following function determines which RMS report to return to the user:

```
RMS_REPORT_URL() -
  O_error_message      IN OUT      RTK_ERRORS.RTK_TEXT%TYPE
  O_rpt_url            IN OUT      RETAIL_SERVICE_REPORT_URL.URL%TYPE
  I_ref_key            IN          KEY_MAP_GL.REFERENCE_TRACE_ID%TYPE
```

The appropriate report URL is found and issued as follows:

1. The ref_trace_type is found on KEY_MAP_GL by matching I_ref_key with the KEY_MAP_GL.REFERENCE_TRACE_ID column.
2. When ref type is determined, the re_trace_type is used to find the appropriate report URL on the RETAIL_SERVICE_REPORT_URL table.
3. The value of I_ref_key is appended to the end of the URL retrieved from the table.
4. The URL is sent back to the calling function.
5. If I_ref_key does not exist on KEY_MAP_GL, an error message is sent back to the calling function.

Drilling Back to ReIM from PeopleSoft Enterprise Financials

The following drill back options are available for viewing information within the ReIM system:

Using Document ID, users can drill back to ReIM to view information related to a voucher or payment. The report includes information from im_doc_head and im_invoice_detail, the same data shown on the Document Maintenance Header screen within ReIM.

Using the Receipt ID, users can drill back to view information from the Receipt Write-off History screen. Receipt write-offs occur either when an open receipt is closed in ReIM or if a receipt is purged in RMS before it is fully matched. Details come from the IM_RWO_SHIPMENT_HIST and IM_RWO_SHIPSKU_HIST tables.

The function below determines which of the two ReIM reports to return to the user:

```
REIM_REPORT_URL() -
  O_error_message      IN OUT      RTK_ERRORS.RTK_TEXT%TYPE
  O_rpt_url            IN OUT      RETAIL_SERVICE_REPORT_URL.URL%TYPE
  I_ref_key            IN          KEY_MAP_GL.REFERENCE_TRACE_ID%TYPE
```

The `I_ref_key` contains the reference ID, which ultimately determines the type of report required. The appropriate BI Publisher report URL is found on the `RETAIL_SERVICE_REPORT_URL` table.

In general, if the reference ID has a prefix of `RECEIPT`, the report type (`RS_CODE`) is `RCPT`. Otherwise, the report type is `DOC`. For example:

Reference ID	Report Type (RS_CODE)
MRCHI#101	DOC
NMRCHI#102	DOC
RECEIPT#103	RCPT

The following is an example of a BI Publisher URL that is generated upon drilling back to PeopleSoft Enterprise Financials for information on an invoice in ReIM, using Document ID as the search parameter:

```
http://mspdev6970vip:7777/BIPublisher/Guest/ReIM/13.0.3/doc/tsf_det.xdo
?doc_id=101
```

Where

`http://mspdev6970vip:7777/BIPublisher` = the BI Publisher application server address and port

`Guest/ReIM/13.0.3` = the directory/folder location

`doc/tsf_det.xdo ?` = report name (Document Report)

`doc_id=101` = the parameter name and value (Document ID 101)

The following is an example of an Oracle Business Intelligence Publisher URL that is generated upon drilling back to PeopleSoft Enterprise Financials for information on an invoice in ReIM, using Receipt ID as the search parameter:

```
http://mspdev6970vip:7777/BIPublisher/Guest/ReIM/13.0.3/doc/tsf_det.xdo ?receipt_id=101
```

Where

`http://mspdev6970vip:7777/BIPublisher` = the BI Publisher application server address and port

`Guest/ReIM/13.0.3` = the directory/folder location

`doc/tsf_det.xdo ?` = report name (Receipt Report)

`receipt_id=101` = the parameter name and value (Receipt ID 101)

Drilling Forward

Drilling forward allows users to see detailed information about retail transactions that have been posted to PeopleSoft Enterprise Financials. When drilling forward, users are directed to selected "view-only" screens.

Drilling Forward From RMS/ReSA to PeopleSoft Enterprise Financials

The following forms may be used to drill forward from RMS/ReSA:

- RMS StartMenu->Finance->Transaction Data View (trandata.fmb)
- RMS StartMenu->Ordering->Fixed Deals->Fixed Deal Transaction Data View (fdltrandata.fmb)
- Resa Task List->Operations->General Level Transaction View

Drilling Forward From ReIM to PeopleSoft Enterprise Financials

For drilling forward, the ORFI Web service uses the Invoice ID and Accounting Entry parameters. The ReIM system uses these parameters together as the Reference ID.

From the Document search screen, users can drill forward to PeopleSoft Enterprise Financials accounts payable to view voucher and payment status. The information is displayed on a read-only Payment Doc Status Inquiry screen. Drill forward access to the accounts payable system is available only for pre-paid invoices (but not for manually pre-paid invoices).

To drill down to the payables/ledger screens, the user invokes the Web service as follows:

Invoice ID/Accounting Entry parameter = Reference ID

Drill forward access to the G/L system is available only for pre-paid and manually pre-paid invoices.

Note: For more information on drilling forward, see the *Oracle Retail Financial Integration for Oracle Retail Merchandise Operations Management and Oracle Financials Suite (E-Business Suite Financials or PeopleSoft Financials)*.

Understanding Data Access Schema

The Data Access Schema (DAS) is a new schema that allows third party applications to access RMS owned data. A subset of the data mastered by RMS is replicated to a new database schema. This replicated data is in a READ ONLY format. The DAS is an optional function; where the base RMS does not require DAS. However, you may want to install DAS for the following reasons:


- Accelerate integration with some of the third party systems.
- Insulate core RMS processes from the resource demands for the third party systems.
- Provide downstream applications with data 24x7, instead of a predetermined time for the batch cycle that extracts RMS data.
- Perform custom operational reporting without impacting the core RMS operations.
- Use out of box integration with Merchandise Financial Planning's (MFP) PoViewer micro application.

Views are layered on top of the replicated data to shape it in a less RMS specific terms.

Oracle recommends that DAS be deployed in a separate database instance on a separate hardware. This insulates the operations and performance of RMS from all demands made of DAS by other systems.

For more information on DAS, see the *Oracle Retail Merchandising System Data Access Schema Developer's Guide* and the *Oracle Retail Merchandising System Data Access Schema Data Model*.

The process flow diagram of a DAS system:

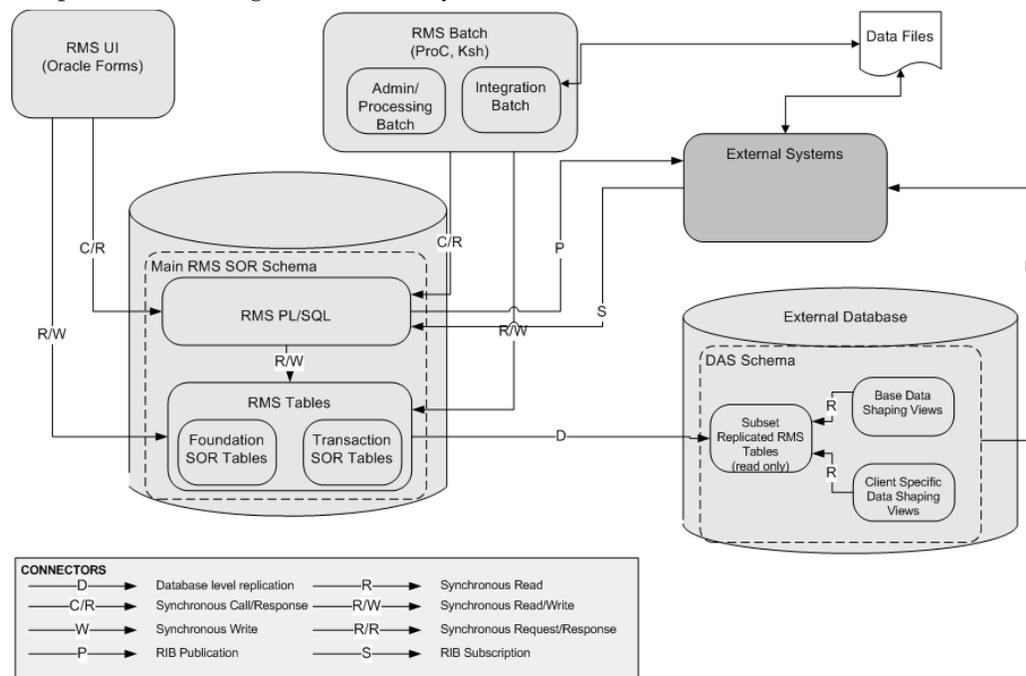


DAS Process Flow

DAS Views

DAS contains replicated tables and parallel layers of views. The two parallel layers of views are:

- Generic Data Shaping View
- Client Specific Data Shaping View

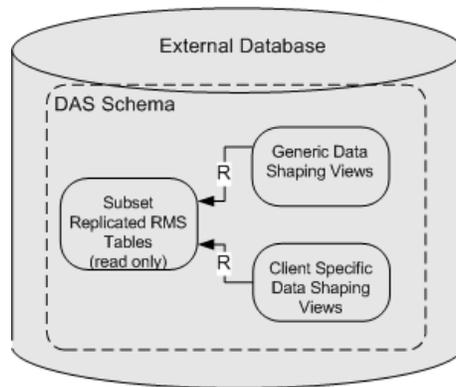

DAS Views

The Generic Data Shaping View makes RMS owned data more understandable to external systems by both flattening and exploding some of the concepts in RMS.

The client specific data shaping views presents data for specific downstream client applications. You can add additional client specific data shaping views to execute queries that are important to manage the DAS integrations with the third party systems.

You are encouraged to use the DAS for downstream, custom integration batch, and query service integrations. The following are the advantages of using DAS instead of the core RMS system of record tables:

- DAS insulates core RMS processing from the resource demands of third party systems.
- DAS allows constant access to data that of a RMS batch cycle which is processed once in a day, restricting the access of data or a real time query that is slower when processing demands of high point of RMS batch cycles.
- Custom client specific data shaping views can accelerate the development of custom integrations.

Using Oracle Wallet

RMS Batch programs runs using wallet alias as the first parameter to the batch command line arguments. This is enabled to prevent the security concerns around exposing database user ID and password while running the batch programs.

The wallet creation steps are described in the RMS Installation Guide. The wallet and wallet alias creation are a required in order to use batch programs in secured mode.

If we assume wallet alias is "dvols29_rms01batch";

Usage:

```
./dtesys $UP
```

(where UP will be set during installation to the wallet alias, that is:

```
$UP=@dvols29_rms01batch)
```

or

```
./dtesys /@dvols29_rms01batch (wallet alias)
```

RMS/RPAS and RMS/AIP RETL scripts uses Oracle Wallet. Defined Oracle Wallet is referenced in `rmse_config.env`, `rmse_aip_config.env` and `rmse_rpas_config.env` files.