

Oracle® Rdb

Guide to Using the Oracle SQL/Services Client API

Release 7.3.2.0

October 2013

ORACLE®

Copyright © 1993, 2013, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle America, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle, Java, Oracle Rdb, Oracle SQL/Services, and SQL*Net are trademarks or registered trademarks of Oracle and / or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Contents

Send Us Your Comments	xiii
Preface.....	xv
Intended Audience	xv
Access to Oracle Support.....	xv
Operating System Information	xvi
Structure.....	xvi
Related Manuals	xvi
Conventions	xvii
Technical Changes and New Features.....	xix
1 Overview	
1.1 Introduction to Oracle SQL/Services	1-3
1.1.1 Client Components.....	1-4
1.1.2 Network Components	1-5
1.1.3 Server System Components	1-6
1.2 Supported Client Platforms	1-6
1.3 Preparing Programmers to Use Oracle SQL/Services.....	1-9
1.3.1 What Programmers Must Know to Write Applications.....	1-9
1.3.2 Reading Path for Programmers	1-10
1.4 Location of Oracle SQL/Services Error Documentation	1-10
1.5 What System Managers Must Know to Support Oracle SQL/Services	1-11

2 Developing Oracle SQL/Services Applications

2.1	Introduction to the Dynamic SQL Interface of Oracle Rdb	2-2
2.2	Overview of Dynamic SQL Interface Statements	2-2
2.2.1	Execution Statements	2-2
2.2.2	Result Table Statements	2-3
2.3	Using the Dynamic SQL Interface of Oracle Rdb.....	2-4
2.3.1	Parameter Markers	2-6
2.3.2	Select List Items	2-6
2.3.3	Unknown Statements.....	2-7
2.3.4	SQL Descriptor Area (SQLDA or SQLDA2)	2-7
2.3.5	SQL Communications Area (SQLCA)	2-8
2.4	Overview of Client API Routines.....	2-8
2.4.1	Association Routines.....	2-8
2.4.2	SQL Statement Routines	2-9
2.4.3	Result Table Routines	2-9
2.4.4	Utility Routines	2-10
2.4.5	Functional Interface Routines	2-11
2.5	Overview of Data Structures	2-13
2.6	Developing Applications with the Functional Interface Routines	2-13
2.7	Building Oracle SQL/Services Application Programs	2-14
2.7.1	Building Applications on the OpenVMS Operating System	2-15
2.7.2	Building Applications on the MS Windows Operating System.....	2-16
2.7.2.1	Building 32-Bit Applications for Windows X86 Systems.....	2-16
2.7.2.2	Building 64-Bit Applications for Windows X64 Systems.....	2-16
2.7.2.3	Building 32-Bit or 64-Bit Applications for Windows	2-16
2.7.2.4	Programming Multithreaded Applications with Microsoft Windows	2-17
2.7.3	Building Applications on the HP-UX Operating System.....	2-17
2.7.4	Building Applications on the Linux Operating System	2-18

3 Sample Application Guidelines

3.1	Sample Application	3-1
3.2	Building the Sample Application	3-2
3.2.1	Building the Sample Application on the OpenVMS Operating System	3-2
3.2.2	Building the Sample Application on Windows X86 Systems.....	3-2
3.2.3	Building the Sample Application on Windows X64 Systems.....	3-3

3.2.4	Building the Sample Application on the HP-UX Operating System	3-3
3.2.5	Building the Sample Application on the Linux Operating System.....	3-4
3.3	Running the Sample Application	3-4
3.4	Driver Module	3-5
3.5	Dynamic Module.....	3-6
3.5.1	Creating an Association	3-6
3.5.2	Processing the Dynamic SQL Statement	3-9
3.5.2.1	Declaring and Allocating SQLDA_ID Identifiers	3-12
3.5.2.2	Executing SQL Statements Using the sqlsrv_execute_immediate API Routine.....	3-12
3.5.2.3	Preparing the SQL Statement	3-12
3.5.2.4	Allocating Data and Indicator Variables	3-13
3.5.2.5	Processing Parameter Markers.....	3-14
3.5.2.6	Testing for SELECT Statements.....	3-18
3.5.2.7	Processing a SELECT Statement.....	3-18
3.5.2.8	Processing Executable Statements	3-19
3.5.2.9	Processing Select List Items	3-20
3.5.2.10	Error Handling	3-23
3.5.2.11	Releasing Prepared Statements	3-25

4 Performance Considerations

4.1	Batched Execution.....	4-1
4.2	Improving Row Fetch Performance	4-4
4.3	Using Stored Procedures	4-7
4.4	Using Compound Statements	4-7
4.5	Reusing SQL Statements.....	4-8

5 Logging for Performance and Debugging

5.1	Enabling and Disabling Logging.....	5-1
5.2	Association Logging	5-3
5.3	Routine Logging.....	5-4
5.4	Message Protocol Logging.....	5-6

6 API Routines

6.1	Documentation Format.....	6-1
-----	---------------------------	-----

6.1.1	Routine Name.....	6-1
6.1.2	Return Values.....	6-2
6.1.3	C Format Section.....	6-2
6.2	Oracle SQL/Services Data Types.....	6-2
6.3	API Routines	6-3
6.3.1	Association Routines.....	6-3
	sqlsrv_abort	6-4
	sqlsrv_associate	6-5
	sqlsrv_get_associate_info	6-10
	sqlsrv_release	6-13
6.3.2	SQL Statement Routines	6-14
	sqlsrv_prepare.....	6-15
	sqlsrv_execute_in_out	6-18
	sqlsrv_execute_immediate	6-22
	sqlsrv_release_statement	6-24
6.3.3	Result Table Routines	6-26
	sqlsrv_declare_cursor	6-27
	sqlsrv_open_cursor.....	6-30
	sqlsrv_fetch.....	6-33
	sqlsrv_fetch_many.....	6-36
	sqlsrv_close_cursor	6-38
6.3.4	Utility Routines	6-39
	sqlsrv_allocate_sqlda_data or sqlsrv_allocate_sqlda2_data.....	6-40
	sqlsrv_free_sqlda_data or sqlsrv_free_sqlda2_data	6-42
	sqlsrv_set_option.....	6-44
6.3.5	Functional Interface Routines	6-46
	sqlsrv_sqlca_error.....	6-48
	sqlsrv_sqlca_error_text.....	6-49
	sqlsrv_sqlca_count	6-50
	sqlsrv_sqlca_sqlerrd	6-51
	sqlsrv_sqlca_sqlstate	6-52
	sqlsrv_sqlda_sqld or sqlsrv_sqlda2_sqld	6-53

sqlsrv_sqlda_sqld73 or sqlsrv_sqlda2_sqld73	6-54
sqlsrv_sqlda_column_name or sqlsrv_sqlda2_column_name	6-55
sqlsrv_sqlda_column_name73 or sqlsrv_sqlda2_column_name73	6-57
sqlsrv_sqlda_column_type or sqlsrv_sqlda2_column_type.....	6-59
sqlsrv_sqlda_column_type73 or sqlsrv_sqlda2_column_type73.....	6-61
sqlsrv_sqlda_bind_data or sqlsrv_sqlda2_bind_data	6-63
sqlsrv_sqlda_bind_data73 or sqlsrv_sqlda2_bind_data73	6-66
sqlsrv_sqlda_unbind_sqlda or sqlsrv_sqlda2_unbind_sqlda	6-70
sqlsrv_sqlda_unbind_sqlda73 or sqlsrv_sqlda2_unbind_sqlda73	6-71
sqlsrv_sqlda_ref_data or sqlsrv_sqlda2_ref_data	6-73
sqlsrv_sqlda_ref_data73 or sqlsrv_sqlda2_ref_data73	6-76
sqlsrv_sqlda_unref_data or sqlsrv_sqlda2_unref_data	6-79
sqlsrv_sqlda_unref_data73 or sqlsrv_sqlda2_unref_data73	6-80
sqlsrv_sqlda_get_data or sqlsrv_sqlda2_get_data	6-82
sqlsrv_sqlda_get_data73 or sqlsrv_sqlda2_get_data73	6-85
sqlsrv_sqlda_set_data or sqlsrv_sqlda2_set_data	6-88
sqlsrv_sqlda_set_data73 or sqlsrv_sqlda2_set_data73	6-90
sqlsrv_sqlda_set_sqllen or sqlsrv_sqlda2_set_sqllen.....	6-93
sqlsrv_sqlda_set_sqllen73 or sqlsrv_sqlda2_set_sqllen73.....	6-96
sqlsrv_sqlda2_char_set_info	6-99
sqlsrv_sqlda2_char_set_info73	6-101

7 Data Structures

7.1	Documentation Format.....	7-1
7.2	ASSOCIATE_STR-Association Structure.....	7-3
7.3	SQLCA-SQL Communications Area.....	7-10
7.4	SQLERRD-Part of SQLCA	7-12
7.5	SQLDA or SQLDA2-SQL Descriptor Area	7-13
7.6	SQLVAR-Parameter Marker or Select List Item	7-17
7.7	SQLVAR2-Parameter Marker or Select List Item.....	7-20

8 Data Types

8.1	Data Types.....	8-1
8.2	SQLSRV_ASCII_STRING.....	8-2
8.3	SQLSRV_VARCHAR.....	8-2
8.4	SQLSRV_GENERALIZED_NUMBER.....	8-3
8.5	SQLSRV_GENERALIZED_DATE.....	8-5
8.6	SQLSRV_INTERVAL.....	8-7
8.7	SQLSRV_VARBYTE.....	8-8
8.8	SQLSRV_LIST_VARBYTE.....	8-9
8.9	Deciding Whether to Use SQLDA or SQLDA2.....	8-10

A Obsolete Features

A.1	Obsolete Features.....	A-1
A.1.1	Obsolete Network Communications Software.....	A-1
A.1.2	Obsolete Client Platforms.....	A-2
A.1.3	Obsolete Server Platforms.....	A-2

Index

List of Figures

1-1	Client/Server Model for Oracle SQL/Services.....	1-1
1-2	Oracle SQL/Services Architecture	1-4
3-1	Statement Execution Flow.....	3-11

List of Tables

1-1	Network Transports Supported by Oracle SQL/Services Clients	1-2
2-1	SQL Statements That Can Be Processed Using Dynamic SQL Operations	2-5
2-2	SQL Statements That Cannot Be Processed Using Dynamic SQL Operations	2-5
5-1	Client Logging Flags and Values	5-2
6-1	Sections in the Routine Template.....	6-1
6-2	API Return Values	6-2
6-3	API Parameter Data Types	6-2
6-4	Valid Combinations of Buffer-Related Parameters for the sqlsrv_associate Routine	6-6
6-5	Values of the info_type Parameter	6-10
6-6	Values of the SQLSRV_INFO_SERVICE_ATTRS Bit Masks	6-11
6-7	Values of the execute_flag Parameter in sqlsrv_execute_in_out.....	6-19
6-8	Values of the scroll_option Parameter	6-33
6-9	Special Requirements of Data Types to Determine Extra Byte Lengths to Allocate	6-41
6-10	Value Parameter Arguments If the Option Parameter Argument Is SQLSRV_OPT_SQLDA_ TYPE 6-44	
7-1	Sections in the Data Structure Template	7-1
8-1	Data Types.....	8-1
8-2	Oracle SQL/Services Date-Time Data Types	8-6
8-3	Oracle SQL/Services Interval Type	8-7

Send Us Your Comments

Guide to Using the Oracle SQL/Services Client API, Release 7.3.2.0

Oracle welcomes your comments and suggestions on the quality and usefulness of this document. Your input is an important part of the information used for revision.

- Did you find any errors?
- Is the information clearly presented?
- Do you need more information? If so, where?
- Are the examples correct? Do you need more examples?
- What features did you like most?

If you find any errors or have any other suggestions for improvement, please indicate the document title and part number, and the chapter, section, and page number (if available). You can send comments to us in the following ways:

- Electronic mail: nedc-doc_us@oracle.com
- FAX: 603.897.3825 Attn: Oracle Rdb
- Postal service:
Oracle Corporation
Oracle Rdb Documentation
One Oracle Drive
Nashua, NH 03062-2804
USA

If you would like a reply, please give your name, address, telephone number, and (optionally) electronic mail address.

If you have problems with the software, please contact your local Oracle Support Services.

Preface

Oracle SQL/Services, a client/server component of Oracle Rdb, enables a client application program invoked on a client computer running on a supported operating system or transport, to access Oracle Rdb databases on an OpenVMS server system. See the overview chapter for a complete list of supported clients.

This manual describes how to develop Oracle SQL/Services client application programs.

Intended Audience

This manual is written primarily for experienced applications programmers; however, some sections are intended for the system manager responsible for maintaining and fine-tuning Oracle SQL/Services. Both programmers and system managers should read [Chapter 1](#) for a recommended approach to the material in this guide and a discussion of the pertinent sections. In addition, system managers should refer to the *Oracle SQL/Services Installation Guide*, which provides information important to the installation of an Oracle SQL/Services system, and to the *Oracle SQL/Services Server Configuration Guide*, which provides information important to the configuration and maintenance of an Oracle SQL/Services system.

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Operating System Information

You can find information about the versions of the operating system and optional software that are compatible with this release of Oracle Rdb and Oracle SQL/Services in the *Oracle Rdb Installation and Configuration Guide* and the *Oracle SQL/Services Installation Guide*, and also in the *Oracle Rdb Release Notes* and the *Oracle SQL/Services Release Notes*.

Contact your Oracle Corporation representative if you have other questions about product requirements or compatibility.

Structure

This manual contains the following chapters and appendix.

Chapter 1	Introduces Oracle SQL/Services. Provides a reading path for programmers and system managers.
Chapter 2	Provides a condensed discussion of dynamic SQL, API routines, Oracle SQL/Services data structures, recommendations for API development, and API application linking.
Chapter 3	Provides guidelines for application development using the Oracle SQL/Services sample application.
Chapter 4	Explains how to enhance application performance.
Chapter 5	Describes execution logging and how to use it for debugging and monitoring application performance.
Chapter 6	Presents detailed reference descriptions of the Oracle SQL/Services API routines.
Chapter 7	Presents detailed reference descriptions of the Oracle SQL/Services data structures.
Chapter 8	Describes the data types used in Oracle SQL/Services.
Appendix A	Lists and describes the obsolete features for Oracle SQL/Services V7.3.0.3 and higher.

Related Manuals

For more information, see the other manuals in this documentation set, especially the following:

- *Oracle Rdb7 Guide to SQL Programming*

- *Oracle Rdb SQL Reference Manual*
- *Oracle Rdb Release Notes*
- *Oracle SQL/Services Release Notes*
- *Oracle Rdb Installation and Configuration Guide*
- *Oracle SQL/Services Installation Guide*
- *Oracle SQL/Services Server Configuration Guide*

The *Oracle SQL/Services Release Notes* and the *Oracle SQL/Services Installation Guide* are provided as part of the software kit. Adobe Portable Document Format (.pdf) files for the release notes are available in SYSSHELP.

The remaining manuals and Oracle Rdb documentation are available on the OTN web site.

Conventions

In this manual, Oracle Rdb refers to Oracle Rdb for OpenVMS software.

OpenVMS I64 refers to the HP OpenVMS Industry Standard 64 for Integrity Servers operating system.

OpenVMS refers to the OpenVMS Alpha and OpenVMS I64 operating systems.

The SQL interface to Oracle Rdb is referred to as SQL. This interface is the Oracle Rdb implementation of the SQL standard adopted in 1999, in general referred to as the ANSI/ISO SQL standard or SQL:1999. See the *Oracle Rdb Release Notes* for additional information about this SQL standard.

Oracle ODBC Driver for Rdb software is referred to as the ODBC driver.

The following conventions are also used in this manual:

Convention	Meaning
.	Vertical ellipsis points in an example mean that information not directly related to the example has been omitted.
[]	In text, brackets enclose optional information from which you can choose one or none.

\$ The dollar sign represents the DIGITAL Command Language promptn OpenVMS.

boldface text Boldface type in text indicates a term defined in the text.

e, f, t Index entries in the printed manual may have a lowercase e, f, or t following the page number; the e, f, or t is a reference to the example, figure, or table, respectively, on that page.

Technical Changes and New Features

This section lists some of the new and changed features described in this manual since it was last revised with Version 7.0. The *Oracle SQL/Services Release Notes* provide information on all the new features and technical changes included in 7.3 release 7.3.2.0. The major new features described in this manual include the following:

New API Clients Supported

Several new client platforms are now supported by the Oracle SQL/Services client API, including 64-bit client platforms. The following list includes all supported API client platforms.

- Windows XP, Vista, 7, 8, Server 2003, Server 2008, XP X64, Vista X64, 7 X64, 8 X64, Server 2003 X64 and Server 2008 X64
- HP-UX 64-bit
- Oracle Enterprise Linux and Red Hat Enterprise Linux, 32-bit, release 5.0 or later
- Oracle Enterprise Linux and Red Hat Enterprise Linux, 64-bit, release 6.3 or later
- openSUSE 12.1 or later, 32-bit and 64-bit
- SUSE Linux Enterprise 11 SP2 or later, 32-bit and 64-bit
- OpenVMS Alpha and OpenVMS I64

API Clients Desupported

The following API client has been desupported as of Oracle SQL/Services release 7.3.2.

- TRU64 Unix

New SQLSRV_SQLCA_SQLSTATE Routine in Release 7.3.1

A new routine SQLSRV_SQLCA_SQLSTATE has been added to the Oracle SQL/Services client API. See [Section 6.3.5](#) for more information about this routine.

New SQLSRV_SQLDA... Routines in Release 7.3.0.3

The following routines include an optional association ID parameter and are otherwise identical to the similarly named routines without the “73” appended. The use of these routines improves performance on Windows platforms. See [Section 6.3.5](#) for more information about these routines.

- sqlsrv_sqlda_sqld73 and sqlsrv_sqlda2_sqld73
- sqlsrv_sqlda_column_name73 and sqlsrv_sqlda2_column_name73
- sqlsrv_sqlda_column_type73 and sqlsrv_sqlda2_column_type73
- sqlsrv_sqlda_bind_data73 and sqlsrv_sqlda2_bind_data73
- sqlsrv_sqlda_unbind_sqlda73 and sqlsrv_sqlda2_unbind_sqlda73
- sqlsrv_sqlda_ref_data73 and sqlsrv_sqlda2_ref_data73
- sqlsrv_sqlda_unref_data73 and sqlsrv_sqlda2_unref_data73
- sqlsrv_sqlda_get_data73 and sqlsrv_sqlda2_get_data73
- sqlsrv_sqlda_set_data73 and sqlsrv_sqlda2_set_data73
- sqlsrv_sqlda_set_sqllen73 and sqlsrv_sqlda2_set_sqllen73
- sqlsrv_sqlda2_char_set_info73

New Association Structure Version in Release 7.3.0.3

The association structure has been updated to include an optional TCPIP port id and DECnet object name. Therefore the TCPIP port or DECnet object name can be specified during the call to sqlsrv_associate, making it possible to associate with multiple servers on the same node in a multiversion SQL/Services environment. See [Section 7.2](#) for more information.

Technical changes have been made where necessary to provide technical clarifications, to fix errors of omission, and to make corrections.


Overview

Oracle SQL/Services is a client/server system that enables client applications on PCs and workstations to access data in Oracle Rdb databases on server systems. Oracle SQL/Services follows the client/server model in which:

- The client requests a set of services from the server through an agreed upon interface.
- The server responds by accepting client requests, calling the server function to execute requests, and sending results back to the client.

A simplified view of Oracle SQL/Services is shown in [Figure 1-1](#).

Figure 1-1 Client/Server Model for Oracle SQL/Services

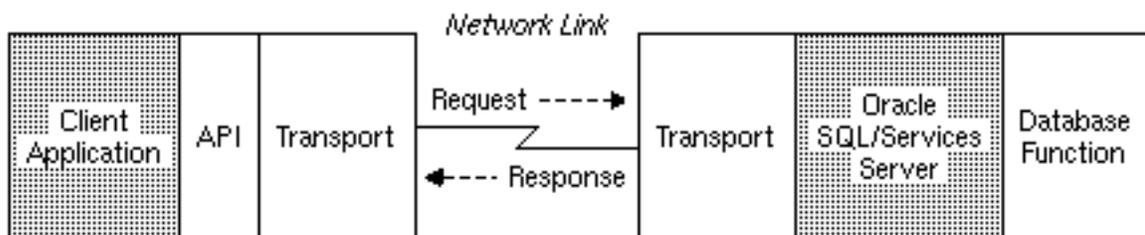

NU-2057A-RA

In its implementation of the client/server model, Oracle SQL/Services enables programmers working on any of several computing platforms shown in [Table 1-1](#) to develop client

applications that remotely access server databases stored on OpenVMS using an available* network transport.

Table 1–1 Network Transports Supported by Oracle SQL/Services Clients


Clients	DECnet	TCP/IP	Oracle Net
Windows XP	–	X	–
Windows Vista	–	X	–
Windows 7	–	X	–
Windows 8	–	X	–
Windows Server 2003	–	X	–
Windows Server 2008	–	X	–
Windows XP X64	–	X	–
Windows Vista X64	–	X	–
Windows 7 X64	–	X	–
Windows 8 X64	–	X	–
Windows Server 2003 X64	–	X	–
Windows Server 2008 X64	–	X	–
HP-UX	–	X	–
Oracle Linux 32-bit	–	X	–
Red Hat Linux 32-bit	–	X	–
openSUSE 32-bit	–	X	–
SUSE Linux Enterprise 32-bit	–	X	–
Oracle Linux 64-bit	–	X	–
Red Hat Linux 64-bit	–	X	–
openSUSE 64-bit	–	X	–
SUSE Linux Enterprise 64-bit	–	X	–
OpenVMS Alpha	X	X	X
OpenVMS I64	X	X	X

1.1 Introduction to Oracle SQL/Services

Remote application access through Oracle SQL/Services to databases on the server system requires a system configuration similar to the one illustrated in [Figure 1-2](#). Although your system may not exactly mirror the one shown, it must have at least client, network, and server system components.

[Section 1.1.1](#), [Section 1.1.2](#), and [Section 1.1.3](#) briefly describe the client, network, and server system components respectively. Each section identifies the role the component plays in allowing client application access to databases on the server system.

Figure 1-2 Oracle SQL/Services Architecture

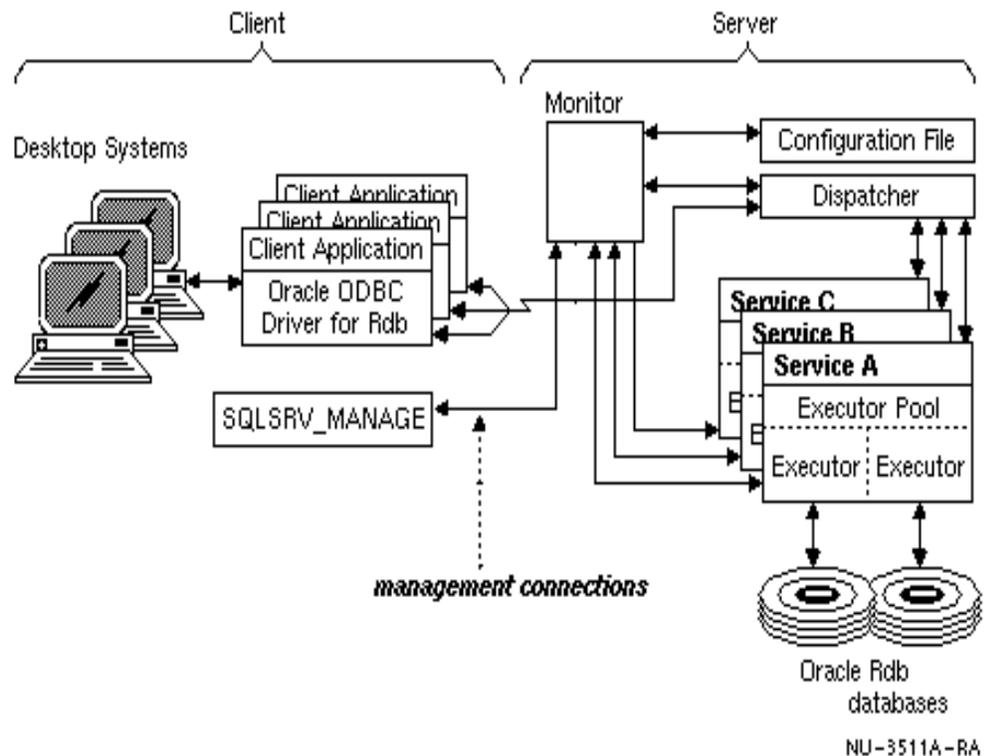

1.1.1 Client Components

Client application programs access Oracle SQL/Services on a server node using the Oracle SQL/Services client API. The Oracle SQL/Services client API is a library of callable routines that use layered communications software to communicate with the server node.

- Client API routines

The Oracle SQL/Services client API routines provide an interface to client applications that is functionally very similar to the dynamic SQL interface. This enables client applications to execute SQL statements against data stored in a database on a server node. The SQL statements can either be defined as string constants in the source code or formulated at run time. The SQL statement syntax accepted by Oracle SQL/Services is identical to that of the dynamic SQL interface of Oracle Rdb.

- Communications software

Communications software facilitates the transfer of information between the client and server systems. Using a request/response protocol that is virtually transparent to the application, the API accepts client application input, builds Oracle SQL/Services request messages, and transmits them to the server system using DECnet, Transmission Control Protocol/Internet Protocol (TCP/IP), or Oracle Net (SQL*Net) communications protocol. (See [Section 1.1.2](#) for descriptions of these network components.) Because the Oracle SQL/Services client API provides an interface that is functionally very similar to the dynamic SQL interface, programmers need not understand the communications software to develop Oracle SQL/Services client applications.

Oracle SQL/Services currently supports API software for the client systems described in [Table 1-1](#). See [Section 1.2](#) for more information on supported client platforms.

1.1.2 Network Components

The appropriate client API software can communicate with the Oracle SQL/Services server using DECnet, TCP/IP, or Oracle Net (SQL*Net) communications software:

- DECnet software

The DECnet network transport is supported by the Oracle SQL/Services OpenVMS server platform.

- TCP/IP software

The TCP/IP network transport is supported by all Oracle SQL/Services client and server platforms.

- Oracle Net (SQL*Net) software

The Oracle Net (SQL*Net) network transport is supported by the Oracle SQL/Services OpenVMS server and client platforms.

Oracle SQL/Services uses Oracle Net as a network transport to send Oracle SQL/Services protocol messages between Oracle SQL/Services clients and servers. The following additional features are supported with Oracle SQL/Services using Oracle Net:

- Secure Network Services

Secure Network Services encrypts and performs security checks on data as it moves across LANs and WANs, preventing any unauthorized user from viewing or tampering with information. Specifically, Secure Network Services provides:

- * Network authentication
- * Tamper-proof data

- * High-speed global data encryption
- * Cross-protocol data security
- Diagnostic tools (tracing and logging)

Diagnostic tools include Oracle Trace and Oracle Net logging.

Regardless of the communications software used, Oracle SQL/Services relieves application programmers of any need to understand networking to develop Oracle SQL/Services applications.

See the *Oracle SQL/Services Installation Guide* for network, transport, client, and server operating system version information.

1.1.3 Server System Components

The server system accepts request messages from the application through network transport software, processes the requests against a server system database, and sends response messages back to the waiting application on the client system. For a detailed discussion of the server and its components for the OpenVMS platform, see the *Oracle SQL/Services Server Configuration Guide*.

1.2 Supported Client Platforms

Oracle SQL/Services supports the following client platforms:

- MS Windows XP, Vista, 7, 8, Server 2003, Server 2008, XP X64, Vista X64, 7 X64, 8 X64, Server 2003 X64 and Server 2008 X64 clients

The Oracle SQL/Services client API is shipped as a Dynamic Link Library (DLL) on all Windows platforms. You use any C, C++ or C# on Windows to develop client applications that you link against the DLL to access the Oracle SQL/Services client API. The name of the DLL file for Windows XP, Vista, 7, 8, Server 2003 and Server 2008 clients is sqsapi32.dll. The name of the DLL file for Windows XP X64, Vista X64, 7 X64, 8 X64, Server 2003 X64 and Server 2008 X64 clients is sqsapi64.dll.

The Windows platforms support the use of an .ini file to customize various aspects of Oracle SQL/Services client API operations including communications, client logging, and so forth. The name of the .ini file for Windows XP, Vista, 7, 8, Server 2003 and Server 2008 clients is sqsapi32.ini. The name of the .ini file for Windows XP X64, Vista X64, 7 X64, 8 X64, Server 2003 X64 and Server 2008 X64 clients is sqsapi64.ini. The .ini file that is provided by the installation procedure has all the customizations commented out. You can tailor the operation of the Oracle SQL/Services client API to

your specific requirements by reading the directions, then uncommenting and providing appropriate values for the options you need to set.

The Oracle SQL/Services Windows XP, Vista, 7, 8, Server 2003, Server 2008, XP X64, Vista X64, 7 X64, 8 X64, Server 2003 X64 and Server 2008 X64 client API software supports the TCPIP network transport.

Client applications on all Windows platforms select the TCP/IP transport using an Oracle SQL/Services client API service or using an .ini file. Specifying a transport in an .ini file overrides a selection made using the Oracle SQL/Services client API service. If you are connecting to a server node running multiple versions of Oracle SQL/Services, then you must use an .ini file to select an alternate TCP/IP network port if the server you are using does not use the default network ports. See the .ini file on your platform for more information on setting Oracle SQL/Services client API options.

To use an alternate network port on server node A, define an alternate network port in the section of the .ini file for server node A. The alternate network port parameter in the .ini file is TCPIPPortNumber. This parameter is defined under the nodename subsection.

The TCPIPPortNumber should be specified as the TCP/IP port number of the sqlsrv_disp, or other user defined, dispatcher on the server side. To specify an alternate TCP/IP port number, define the TCPIPPortNumber parameter, where the port number must be a number:

```
;
; Use server TCP/IP port number 119 when connectiong to RDBSRV
;
[RDBSRV]
TCPIPPortNumber=119
```

Alternate network ports can also be specified when calling the sqlsrv_associate routine, within the associate_str structure. Values passed to sqlsrv_associate supercede the values specified in the .ini file.

- HP-UX client

The Oracle SQL/Services HP-UX client API software is shipped as an object library against which you link your client application programs.

The Oracle SQL/Services HP-UX client API software supports the TCP/IP network transport. If you are connecting to a server node running multiple versions of Oracle SQL/Services and the server you are using does not use the default network ports, then you can specify alternate network ports.

To specify an alternate TCP/IP port number, define the `SQLSRV_TCPIP_PORT` environment variable, where the port number must be a number:

```
csh> setenv SQLSRV_TCPIP_PORT 1234
```

The definition for alternate network ports is made on a per-client basis. Alternate network ports can also be specified when calling the `sqlsrv_associate` routine, within the `associate_str` structure. Values passed to `sqlsrv_associate` supercede the values specified in the environment variables.

- Linux client

The Oracle SQL/Services Linux client API software is shipped as an object library against which you link your client application programs.

The Oracle SQL/Services Linux client API software supports the TCP/IP network transport. If you are connecting to a server node running multiple versions of Oracle SQL/Services and the server you are using does not use the default network ports, then you can specify alternate network ports.

To specify an alternate TCP/IP port number, define the `SQLSRV_TCPIP_PORT` environment variable, where the port number must be a number:

```
csh> setenv SQLSRV_TCPIP_PORT 1234
```

The definition for alternate network ports is made on a per-client basis. Alternate network ports can also be specified when calling the `sqlsrv_associate` routine, within the `associate_str` structure. Values passed to `sqlsrv_associate` supercede the values specified in the environment variables.

- OpenVMS clients

The Oracle SQL/Services OpenVMS Alpha and OpenVMS I64 client API software is shipped as shared images against which you link your client application programs.

The Oracle SQL/Services OpenVMS client API software supports the DECnet, TCP/IP, and Oracle Net network transports. If you are connecting to a server node running multiple versions of Oracle SQL/Services and the server you are using does not use the default network ports, then you can specify alternate network ports.

To specify an alternate DECnet object, define the `SQLSRV$DECNET_OBJECT` logical name using the following syntax where the DECnet object can be either a number or a name:

```
$ DEFINE SQLSRV$DECNET_OBJECT "<number> | <name>"
```

For example:

```
$ DEFINE SQLSRV$DECNET_OBJECT "142"
```

or

```
$ DEFINE SQLSRV$DECNET_OBJECT "SQLSRV73"
```

To specify an alternate TCP/IP port number, define the `SQLSRV$TCPIP_PORT` logical name using the following syntax where the `TCPIP_PORT` number must be a number:

```
$ DEFINE SQLSRV$TCPIP_PORT "<number>"
```

For example:

```
$ DEFINE SQLSRV$TCPIP_PORT "10042"
```

The definition for alternate network ports is made on a per-client-process basis. Alternate network ports can also be specified when calling the `sqlsrv_associate` routine, within the `associate_str` structure. Values passed to `sqlsrv_associate` supercede the values specified by the logical names.

1.3 Preparing Programmers to Use Oracle SQL/Services

This section describes what application programmers must know to develop applications, and provides a recommended reading path for learning how to develop applications.

1.3.1 What Programmers Must Know to Write Applications

As a programmer creating Oracle SQL/Services applications, you must be familiar with the following:

- C, C++ or C# programming languages

Have experience in writing programs in the C, C++ or C# programming languages. Know how to call Oracle SQL/Services client API routines from C, C++ or C# programs to create Oracle SQL/Services applications.

OpenVMS client applications can be written in any language that supports the OpenVMS Calling Standard.

- Client system environment

Know how to invoke and use a text editor on your client system to create programming source files. Be able to run your compiler and linker and run the resulting executable image.

- SQL language (and the dynamic SQL interface) concepts

Have a working knowledge of the SQL language. A conceptual familiarity with the dynamic SQL interface of Oracle Rdb can help you understand the client API routines.

- Oracle SQL/Services API

Understand how to use the client API routines in your applications.

1.3.2 Reading Path for Programmers

As a programmer assigned to write client applications, you can become familiar with the process of developing applications using Oracle SQL/Services by reading this guide as follows:

- [Chapter 2](#) helps you to understand the relationship between the dynamic SQL interface and the client API routines, the function of the SQL Communications Area (SQLCA) and the SQL Descriptor Area (SQLDA or SQLDA2) data structures in Oracle SQL/Services, and how to build applications using the Oracle SQL/Services callable API.
- [Chapter 3](#) introduces you to an Oracle SQL/Services sample application that illustrates how to use the Oracle SQL/Services callable client API routines, and includes information on how to compile, link and run the sample application on all the client platforms supported by Oracle SQL/Services.
- [Chapter 6](#) helps you to understand the client API routines that you call from your applications. The chapter provides detailed reference information about all routines in the API callable library.
- [Chapter 7](#) presents detailed reference descriptions of the Oracle SQL/Services data structures.
- [Chapter 8](#) describes the data types used in Oracle SQL/Services.

Other chapters in this guide will support you in your programming as you refine your application development skills.

1.4 Location of Oracle SQL/Services Error Documentation

Programmers developing Oracle SQL/Services API client applications can encounter error messages from a variety of sources:

- Oracle SQL/Services

When error mnemonics are preceded by SQLSRV_, refer to the sqlsrv.h file and Oracle SQL/Services help for descriptions of errors generated by Oracle SQL/Services client

API routines and the Oracle SQL/Services server. [Chapter 6](#) of this guide describes the specific errors that can be returned by each Oracle SQL/Services client API routine.

- SQL
When error mnemonics are preceded by SQL_, refer to the SQL documentation and SQL help for further error information.
- Oracle Rdb
When error mnemonics are preceded by SQL_RDBERR_, refer to the *Oracle Rdb SQL Reference Manual*, the *Oracle Rdb7 Guide to SQL Programming*, and Oracle Rdb help for pointers to error information.
- Network
When you receive the primary SQLSRV_NETERR or SQLSRV_HOSTERR errors, look at the network error documentation for the network error referred to in the secondary error status. Refer to the *Oracle SQL/Services Installation Guide* for more information.

1.5 What System Managers Must Know to Support Oracle SQL/Services

If you are the person responsible for managing Oracle SQL/Services at your site, see the *Oracle SQL/Services Installation Guide* and the *Oracle SQL/Services Server Configuration Guide*.

Information about installing the client API software for all interfaces supported by Oracle SQL/Services is not included in this document. Refer to the *Oracle SQL/Services Installation Guide* for instructions on installing the OpenVMS clients and to the readme and install guide files provided on the Oracle SQL/Services Client kit for installing all other clients described in [Table 1-1](#).

Developing Oracle SQL/Services Applications

This chapter describes a number of topics programmers must understand before writing client applications. Topics covered in this chapter include:

- A description of the dynamic SQL interface for Oracle Rdb

The Oracle SQL/Services client API routines that programmers use in client applications to access the dynamic SQL interface on the server system correspond closely to the dynamic SQL interface statements. An understanding of the dynamic SQL interface can help programmers understand the way the client API routines work. See [Section 2.1](#) to [Section 2.3](#).
- An overview of Oracle SQL/Services client API routines

Programmers include in their applications calls to the Oracle SQL/Services client API routines to access Oracle SQL/Services functions on the server system. Client applications link against the Oracle SQL/Services client API library, DLL, or shared image to access these routines. See [Section 2.4](#).
- An overview of Oracle SQL/Services data structures

The Oracle SQL/Services client API routines use a set of data structures that allow two-way communication between applications on the client system and SQL on the server system. See [Section 2.5](#).
- A recommended approach to developing Oracle SQL/Services applications

Oracle Corporation recommends that you let Oracle SQL/Services allocate memory for SQLCA, SQLDA, and SQLDA2 data structures and that you use functional interface routines to access these data structures. See [Section 2.6](#).
- Steps for building Oracle SQL/Services application programs

Programmers must compile and link their applications to create an executable image that can access Oracle SQL/Services. The steps to link an application program differ from one client system to another and are thus provided for each client system. See [Section 2.7](#).

If you are already familiar with the dynamic SQL interface, you may want to skip to [Section 2.4](#), which describes the structures used by Oracle SQL/Services client API routines.

2.1 Introduction to the Dynamic SQL Interface of Oracle Rdb

The **dynamic SQL** interface of Oracle Rdb allows application programs to formulate and execute SQL statements at run time. It consists of:

- Dynamic SQL statements
A set of SQL statements with which you can write applications using either the SQL precompiler or the SQL module processor
- Data structures
A set of data structures that provides a way for the dynamic SQL interface and application programs to exchange data and metadata

Applications that use the dynamic SQL interface might, for example, translate interactive user input into SQL statements, or open, read, and execute files containing SQL statements. The Oracle SQL/Services executor is itself a dynamic SQL interface application.

For more detailed information on the dynamic SQL interface of Oracle Rdb, see the *Oracle Rdb7 Guide to SQL Programming* and the *Oracle Rdb SQL Reference Manual*.

2.2 Overview of Dynamic SQL Interface Statements

The dynamic SQL interface statements are summarized in [Section 2.2.1](#) and [Section 2.2.2](#), which group the statements according to function. For each dynamic SQL interface statement, there is an Oracle SQL/Services client API routine that performs the same function. Some client API routines, like `sqlsrv_prepare`, combine the functions of two dynamic SQL interface statements.

2.2.1 Execution Statements

Execution statements prepare and execute SQL statements and release prepared SQL statement resources.

- PREPARE

Compiles the SQL statement, checking it for errors, and returns a handle to the prepared statement. The handle is subsequently used to reference the prepared statement.

- **DESCRIBE**
Stores the number and metadata information of any select list items or parameter markers in an `SQLDA` structure.
- **EXECUTE**
Executes a previously prepared SQL statement that is not a `SELECT` statement.
- **EXECUTE IMMEDIATE**
Prepares and executes in one step any SQL statement (other than `SELECT`) that does not contain parameter markers or select list items.
- **RELEASE**
Releases all resources used by a prepared SQL statement.

Except for the `DESCRIBE` statement, each of these dynamic SQL statements has an equivalent Oracle SQL/Services routine. In Oracle SQL/Services, the `DESCRIBE` and `PREPARE` statements are combined in a single routine, as shown in [Table 2–2](#).

2.2.2 Result Table Statements

Result table statements allow your program to declare a cursor, open a cursor, fetch data from an open cursor, and close an open cursor.

- **DECLARE CURSOR**
Declares a cursor for a prepared `SELECT` statement.
- **OPEN**
Opens a cursor declared for a prepared `SELECT` statement.
- **FETCH**
Retrieves values from a cursor declared for a prepared `SELECT` statement.
- **CLOSE**
Closes a cursor.

2.3 Using the Dynamic SQL Interface of Oracle Rdb

Note: The following general discussion is relevant only to the dynamic SQL interface. Some of the functionality described in this section may not be directly accessible to an Oracle SQL/Services client application.

You can execute the simplest SQL statements that neither accept variable data values from nor return data values to your application using the EXECUTE IMMEDIATE dynamic SQL statement. If you use EXECUTE IMMEDIATE to execute a statement, SQL automatically prepares, executes, and releases the statement for you. However, if you need to execute the same SQL statement more than once, using EXECUTE IMMEDIATE is inefficient because SQL must prepare and release the statement each time it is executed. In this situation, it is more efficient for your application to prepare the statement, execute it as many times as necessary, and release it only when it is no longer needed.

More complex SQL statements can accept variable data values from or return data values to your application. Your application provides variable data values to SQL statements as parameter markers, using a question mark character (?) to identify each parameter marker. A SELECT statement will return a select list item for each column named in the select list clause. In addition, you also identify the data values returned by singleton-SELECT, UPDATE . . . RETURNING, and CALL statements using a question mark character (?) for each returned data value.

To process more complex SQL statements with parameter markers or select list items, and to improve the efficiency of your application when processing SQL statements that are used multiple times, you first use PREPARE to dynamically compile the statement. You then optionally use DESCRIBE to obtain the metadata for any parameter markers or select list items. You use the EXECUTE statement to process executable SQL statements, such as INSERT, UPDATE, DELETE, singleton-SELECT, CALL, and compound statements. To process a result table formed by a SELECT statement, you first use DECLARE CURSOR and OPEN to declare and open a cursor. You then use FETCH to retrieve rows from the result table. Finally, you use CLOSE to close the cursor at the end. When a statement is no longer needed, you free the resources used by the prepared statement using the RELEASE statement.

[Section 2.3.1](#) describes how to use dynamic SQL operations to process statements that contain parameter markers. [Section 2.3.2](#) describes how to access the data returned by SELECT statements. [Section 2.3.3](#) describes how to handle statements about which the program has no prior information.

[Table 2–1](#) lists the major SQL statements that can be processed using dynamic SQL. However, certain SQL statements cannot be processed using dynamic SQL. This includes all

the SQL statements listed in [Table 2–2](#) including those that comprise the dynamic SQL interface itself. Furthermore, statements and commands such as SHOW that are processed only by the interactive SQL utility cannot be processed using the dynamic SQL interface.

Table 2–1 SQL Statements That Can Be Processed Using Dynamic SQL Operations

Statement	Associated Dynamic SQL Statements
SELECT	PREPARE, Extended Dynamic DECLARE CURSOR, DESCRIBE (optional), OPEN, FETCH, CLOSE, RELEASE
INSERT, UPDATE, DELETE, CALL, Singleton-SELECT, ATTACH, CONNECT, SET CONNECT, DISCONNECT	PREPARE, DESCRIBE (optional), EXECUTE and RELEASE, or EXECUTE IMMEDIATE (if no parameter markers or select list items)
CREATE, ALTER, DROP, DECLARE TRANSACTION, SET TRANSACTION, COMMIT, ROLLBACK, GRANT, REVOKE, COMMENT ON	PREPARE, EXECUTE and RELEASE, or EXECUTE IMMEDIATE

Table 2–2 SQL Statements That Cannot Be Processed Using Dynamic SQL Operations

SQL Statement	Related Oracle SQL/Services Routine
BEGIN DECLARE	none
CLOSE	sqlsrv_close_cursor
DECLARE ALIAS	none
DECLARE CURSOR	sqlsrv_declare_cursor
DECLARE STATEMENT	none
DECLARE TABLE	none
DESCRIBE	sqlsrv_prepare (implicit in)
END DECLARE	none
EXECUTE	sqlsrv_execute_in_out
EXECUTE IMMEDIATE	sqlsrv_execute_immediate
FETCH	sqlsrv_fetch
INCLUDE	none

Table 2–2 SQL Statements That Cannot Be Processed Using Dynamic SQL Operations (Cont.)

SQL Statement	Related Oracle SQL/Services Routine
OPEN	sqlsrv_open_cursor
PREPARE	sqlsrv_prepare
RELEASE	sqlsrv_release_statement
WHENEVER	none

2.3.1 Parameter Markers

Parameter markers represent variables that can be processed using dynamic SQL operations with SQL SELECT, INSERT, UPDATE, DELETE, CALL, Singleton-SELECT, ATTACH, CONNECT, SET CONNECT, and DISCONNECT statements. Question marks (?) embedded in the statement string denote parameters that are to be replaced when the statement is processed using the dynamic SQL interface. An example of an SQL statement with parameter markers is:

```
INSERT INTO EMPLOYEES
      (EMPLOYEE_ID, FIRST_NAME, LAST_NAME, CITY)
VALUES ( ?, ?, ?, ? );
```

The mechanism for mapping parameter markers to variables in application programs is a data structure called the SQLDA or SQLDA2 (see [Section 2.3.4](#) and [Section 7.5](#)). The DESCRIBE statement writes information about parameter markers into an SQLDA or SQLDA2 structure. Your program examines the SQLDA or SQLDA2 structure, allocates a data variable and an indicator variable for each parameter marker, obtains values for each parameter marker, and stores the values in the SQLDA or SQLDA2 data variables before processing the SQL statement using the dynamic SQL interface.

2.3.2 Select List Items

Programs that process SELECT statements using dynamic SQL operations must declare a cursor to receive the result table, and must allocate memory for each select list item in the SELECT statement. After the cursor is opened, FETCH statements return values for rows of the result table.

INSERT . . . RETURNING, UPDATE . . . RETURNING, CALL, compound statements and singleton-SELECT statements are executable statements that are processed using the EXECUTE dynamic SQL statement that can return information in a select list SQLDA. For example,

```
UPDATE EMPLOYEES SET SALARY=SALARY+? WHERE BADGE=? RETURNING SALARY INTO ?;
```

As with parameter markers, the mechanism for mapping select list items to host variables is a data structure called the SQLDA or SQLDA2 (see [Section 2.3.4](#) and [Section 7.5](#)). The DESCRIBE statement writes select list information into the SQLDA or SQLDA2.

If the SQL statement contains parameter markers in addition to select list items, the program must also set up host variables for the parameter markers and assign values to them.

2.3.3 Unknown Statements

It is possible to process SQL statements using the dynamic SQL interface about which the program has no prior information. Such statements may contain parameter markers or select list items or both. The program can use the DESCRIBE statement to obtain an SQLDA or SQLDA2 structure containing information about the numbers and data types of select list items and parameter markers. Then the program allocates data and indicator variables as appropriate and writes the addresses of those variables into the SQLDA or SQLDA2 structures before executing the statement.

2.3.4 SQL Descriptor Area (SQLDA or SQLDA2)

The SQL Descriptor Area (**SQLDA**) or Extended SQL Descriptor Area (**SQLDA2**) is a data structure that enables programs to communicate with SQL about parameter markers and select list items.

Oracle Rdb SQL provides an extended version of the SQLDA structure, called the SQLDA2, which supports additional fields and field sizes. Oracle SQL/Services supports this SQLDA2 structure. For more information about the SQLDA2 data structure and its use with the SQL interface of Oracle Rdb, refer to [Section 7.5](#) and to the appendix of the *Oracle Rdb SQL Reference Manual*.

When SQL processes a DESCRIBE statement, it writes information about select list items (for a DESCRIBE . . . SELECT LIST statement) or parameter markers (for a DESCRIBE . . . MARKERS statement) of a prepared statement into an SQLDA or SQLDA2.

The host language program examines the SQLDA or SQLDA2 to determine how many select list items or parameter markers are present and the data type of each. The program must provide memory for data and indicator variables for each parameter marker or select list item, and write the address of each memory location into the SQLDA or SQLDA2.

For parameter markers, the program writes values into the SQLDA or SQLDA2 before processing the SQL statement using dynamic SQL operations. For select list items, the program reads the data written into the SQLDA or SQLDA2 by subsequent FETCH statements.

The *Oracle Rdb SQL Reference Manual* contains an appendix on the SQLDA and SQLDA2 and a section on the DESCRIBE statement that discusses the MARKERS and SELECT LIST clauses of the DESCRIBE statement in more detail.

2.3.5 SQL Communications Area (SQLCA)

The SQL Communications Area (**SQLCA**) is a data structure that SQL uses to provide information about the execution of SQL statements to application programs. SQL updates the contents of the SQLCA after completion of every executable SQL statement. Fields of interest in the SQLCA are the SQLCODE field and several elements of the SQLERRD array.

The SQLCODE field contains the completion status of every SQL request.

Both SQL and Oracle SQL/Services may store information in one or more elements of the SQLERRD array to provide additional details about the execution of a SQL statement. For example, SQL stores the statement type in the SQLERRD array following a PREPARE request; while Oracle SQL/Services stores additional network error information in the SQLERRD array if an associate fails due to a network error.

See [Section 7.4](#) for a description of the other values of the SQLERRD array. [Section 7.3](#) describes the SQLCA in detail. In addition, the *Oracle Rdb SQL Reference Manual* contains an appendix on the SQLCA.

2.4 Overview of Client API Routines

The Oracle SQL/Services client application programming interface (API) is a set of callable routines that client applications use to access Oracle SQL/Services functions. The client API routines are grouped according to function and summarized in [Section 2.4.1](#) through [Section 2.4.5](#).

2.4.1 Association Routines

Association routines create and terminate client/server associations and control the association environment. These routines are:

- [sqlsrv_abort](#)
Terminates a client/server association. Disconnects from the server and releases all client resources related to the association.
- [sqlsrv_associate](#)

Creates a client/server association. Makes the remote connection to the server process and negotiates association characteristics and attributes.

- [sqlsrv_get_associate_info](#)

Gets association information.

- [sqlsrv_release](#)

Terminates a client/server association in an orderly fashion. Sends a message to the server requesting termination of the association, disconnects the network link, and releases all client resources related to the association.

2.4.2 SQL Statement Routines

SQL statement routines prepare and execute SQL statements, and release prepared SQL statement resources. These routines map directly to the dynamic SQL interface. These routines are:

- [sqlsrv_prepare](#)

Prepares a dynamic SQL statement. It returns a statement identifier and SQLDA or SQLDA2 metadata information. This routine maps to the dynamic SQL interface PREPARE and DESCRIBE statements.

- [sqlsrv_execute_in_out](#)

Executes a prepared SQL statement. This routine maps to the dynamic SQL interface EXECUTE statement.

- [sqlsrv_execute_immediate](#)

Prepares and executes an SQL statement. This routine cannot be used if the SQL statement contains parameter markers or select list items. This routine maps to the dynamic SQL interface EXECUTE IMMEDIATE statement.

- [sqlsrv_release_statement](#)

Releases client and server statement resources associated with a prepared statement. This routine maps to the dynamic SQL interface RELEASE statement.

2.4.3 Result Table Routines

Result table routines allow the caller to fetch data from the server by providing calls to open a cursor, fetch from an open cursor, and close an open cursor. These routines are:

- [sqlsrv_declare_cursor](#)

Declares the type and mode of an extended dynamic cursor. Note that the cursor is actually declared at the server when `sqlsrv_open_cursor` is called the first time for a specific cursor name. If you do not call the `sqlsrv_declare_cursor` routine for a particular cursor name before calling `sqlsrv_open_cursor`, Oracle SQL/Services implicitly declares the cursor as type table and mode update.

This routine conceptually maps to the dynamic SQL interface `DECLARE CURSOR` statement.

- [sqlsrv_open_cursor](#)

Opens a cursor by associating a cursor name with a prepared statement identifier. The cursor name is used in each reference to the cursor. The `sqlsrv_open_cursor` routine also declares the extended dynamic cursor at the server the first time it is called for a specific cursor name.

This routine conceptually maps to the dynamic SQL interface `OPEN` statement.

- [sqlsrv_fetch](#)

Fetches one row of data from an open cursor.

This routine maps to the dynamic SQL interface `FETCH` statement.

- [sqlsrv_fetch_many](#)

Requests that multiple rows of data be fetched and transmitted to the client, which frequently reduces the number of network messages.

This routine has no equivalent dynamic SQL interface statement. Rather, it controls the way the server sends row data back to the client after it has been retrieved by the server using the dynamic SQL interface `FETCH` statement.

- [sqlsrv_close_cursor](#)

Closes an open cursor.

This routine maps to the dynamic SQL interface `CLOSE` statement.

2.4.4 Utility Routines

Utility routines provide miscellaneous services to the caller. These routines are:

- [sqlsrv_allocate_sqlda_data](#) or [sqlsrv_allocate_sqlda2_data](#)

Allocates memory for the `SQLDA` or `SQLDA2` data buffer and indicator variable fields.

- [sqlsrv_free_sqlda_data](#) or [sqlsrv_free_sqlda2_data](#)

Frees memory for the `SQLDA` or `SQLDA2` data buffer and indicator variable fields.

- [sqlsrv_set_option](#)
Sets the option that determines whether an SQLDA or SQLDA2 is used.

2.4.5 Functional Interface Routines

The functional interface routines provide access to data and metadata stored in the SQLCA, SQLDA, and SQLDA2 structures. These routines replace the need for making direct references to structure fields in client applications. These routines are:

- [sqlsrv_sqlca_error](#)
Returns from the SQLCA structure the error codes for the last statement executed.
- [sqlsrv_sqlca_error_text](#)
Returns from the SQLCA structure the error text for the last statement executed.
- [sqlsrv_sqlca_count](#)
Returns from the SQLCA the number of rows processed by a statement and replaces direct access to the SQLCA.SQLERRD[2] field.
- [sqlsrv_sqlca_sqlerrd](#)
Returns to your application the contents of the entire SQLCA.SQLERRD array which includes, for example, optimizer information for a table cursor, and number of segments, maximum segment length, and so forth for a list cursor, following a successful call to [sqlsrv_open_cursor](#).
- [sqlsrv_sqlca_sqlstate](#)
Returns the SQLSTATE associated with the SQLCODE for the last statement executed.
- [sqlsrv_sqlda_sqld](#) or [sqlsrv_sqlda2_sqld](#), [sqlsrv_sqlda_sqld73](#) or [sqlsrv_sqlda2_sqld73](#)
Returns the number of parameter markers or select list items in the SQLDA or SQLDA2 and replaces direct access to the SQLD field in an SQLDA or SQLDA2.
- [sqlsrv_sqlda_column_name](#) or [sqlsrv_sqlda2_column_name](#), [sqlsrv_sqlda_column_name73](#) or [sqlsrv_sqlda2_column_name73](#)
Copies the column name for a particular column from the SQLDA or SQLDA2 into the variable passed in this call.
- [sqlsrv_sqlda_column_type](#) or [sqlsrv_sqlda2_column_type](#), [sqlsrv_sqlda_column_type73](#) or [sqlsrv_sqlda2_column_type73](#)
Returns from the SQLDA or SQLDA2 information about the data type of a column.

- [sqlsrv_sqllda_bind_data](#) or [sqlsrv_sqllda2_bind_data](#), [sqlsrv_sqllda_bind_data73](#) or [sqlsrv_sqllda2_bind_data73](#)

Allows programs to allocate their own storage for data and indicator variables in an SQLDA or SQLDA2.
- [sqlsrv_sqllda_unbind_sqllda](#) or [sqlsrv_sqllda2_unbind_sqllda](#), [sqlsrv_sqllda_unbind_sqllda73](#) or [sqlsrv_sqllda2_unbind_sqllda73](#)

Releases all variables bound with the [sqlsrv_sqllda_bind_data](#), [sqlsrv_sqllda_bind_data73](#), [sqlsrv_sqllda2_bind_data](#) or [sqlsrv_sqllda2_bind_data73](#) routines.
- [sqlsrv_sqllda_ref_data](#) or [sqlsrv_sqllda2_ref_data](#), [sqlsrv_sqllda_ref_data73](#) or [sqlsrv_sqllda2_ref_data73](#)

Returns from the SQLDA or SQLDA2 the type and length and addresses of the data and indicator variables for a column.
- [sqlsrv_sqllda_unref_data](#) or [sqlsrv_sqllda2_unref_data](#), [sqlsrv_sqllda_unref_data73](#) or [sqlsrv_sqllda2_unref_data73](#)

Frees resources tied up by the [sqlsrv_sqllda_ref_data](#), [sqlsrv_sqllda_ref_data73](#), [sqlsrv_sqllda2_ref_data](#) or [sqlsrv_sqllda2_ref_data73](#) routines.
- [sqlsrv_sqllda_get_data](#) or [sqlsrv_sqllda2_get_data](#), [sqlsrv_sqllda_get_data73](#) or [sqlsrv_sqllda2_get_data73](#)

Copies data and indicator values from the SQLDA or SQLDA2 to program variables and provides access to SQLDA or SQLDA2 information for languages that do not support explicit type coercion.
- [sqlsrv_sqllda_set_data](#) or [sqlsrv_sqllda2_set_data](#), [sqlsrv_sqllda_set_data73](#) or [sqlsrv_sqllda2_set_data73](#)

Copies data and indicator values from program variables into the SQLDA or SQLDA2.
- [sqlsrv_sqllda_set_sqllen](#) or [sqlsrv_sqllda2_set_sqllen](#), [sqlsrv_sqllda_set_sqllen73](#) or [sqlsrv_sqllda2_set_sqllen73](#)

Sets the length of a column of type `SQLSRV_ASCII_STRING`, `SQLSRV_VARCHAR`, and `SQLSRV_VARBYTE` by setting the `SQLEN` field in an SQLDA or SQLDA2. [Sqlsrv_sqllda2_set_sqllen](#) and [sqlsrv_sqllda2_set_sqllen73](#) also set the `SQLOCTET_LEN` in an SQLDA2.
- [sqlsrv_sqllda2_char_set_info](#), [sqlsrv_sqllda2_char_set_info73](#)

Returns SQL character set information from the SQLDA2.

2.5 Overview of Data Structures

Oracle SQL/Services uses data structures to communicate with the client application. The client API routines use the following data structures:

- ASSOCIATE_STR

This structure is passed as a parameter to `sqlsrv_associate` to set the characteristic of an association. The `sqlsrv_associate` routine opens the communications link between client and server and creates an association. For more information, see [Section 7.2](#).

- SQLCA

The SQLCA (SQL Communications Area) is used to store error messages and SQL statement information returned by Oracle SQL/Services. When a client API routine returns a nonzero value indicating that an error occurred, the SQLCA contains additional error information. For more information, see [Section 7.3](#).

- SQLDA or SQLDA2

The SQLDA (SQL Descriptor Area) or SQLDA2 (Extended SQL Descriptor Area) is used to exchange database metadata and data for parameter markers (input) and select list items (output). The Oracle SQL/Services SQLDA or SQLDA2 is identical to that used by the dynamic SQL interface for Oracle Rdb. For more information, see [Section 2.3.4](#) and [Section 7.5](#).

2.6 Developing Applications with the Functional Interface Routines

When designing an application, you must decide how to allocate memory for SQLCA, SQLDA, and SQLDA2 data structures and how to access these data structures.

Oracle Corporation recommends that you let Oracle SQL/Services allocate memory for SQLCA, SQLDA, and SQLDA2 data structures. To let Oracle SQL/Services allocate memory for the SQLCA data structure, specify a NULL pointer in the call to `sqlsrv_associate`. To let Oracle SQL/Services allocate memory for SQLDA and SQLDA2 data structures, specify NULL `SQLDA_ID` pointers in the call to `sqlsrv_prepare`. Note that you can direct Oracle SQL/Services to use application-specific memory allocation and deallocation routines by specifying their addresses in the `associate` data structure (`ASSOCIATE_STR`) that you pass to `sqlsrv_associate`. Alternatively, you can allocate memory for SQLCA, SQLDA, and SQLDA2 data structures prior to calling `sqlsrv_associate` and `sqlsrv_prepare`.

The Oracle SQL/Services client API provides a set of functional interface routines that allow indirect access to the SQLCA, SQLDA, and SQLDA2 data structures. Oracle Corporation recommends that you use the functional interface routines to access the SQLCA, SQLDA,

and SQLDA2 data structures to facilitate portability across all supported client platforms. See [Section 2.4.5](#) for a complete list of the functional interface routines and a brief description of each routine. Alternatively, you can directly access the SQLCA, SQLDA, and SQLDA2 data structures. Direct access to SQLCA, SQLDA, and SQLDA2 data structures is supported but is not recommended by Oracle Corporation.

2.7 Building Oracle SQL/Services Application Programs

The process of building Oracle SQL/Services application programs consists of these steps:

1. Compile your code using the following *#include* compiler directive:

```
#include <sqlsrv.h> /* Typedefs, function prototypes, error literals*/
```

If your application accesses the SQLCA, SQLDA, or SQLDA2 structures directly, also include the sqlsrvca.h or sqlsrvda.h header files as follows.

```
#include <sqlsrvca.h> /*SQLCA structure */
#include <sqlsrvda.h> /*SQLDA and SQLDA2 structures */
#include <sqlsrv.h>
```

Compile errors will result if the include files are not in this order.

On most operating systems, include files are kept in a standard location, indicated in C by placing angle brackets around the name of the file. If these directives do not work on your system, ask the person who installed the Oracle SQL/Services API where the include files are located.

Note: Some C compilers have a problem with %S and %D when printing error messages (for example, %SQLSRV and %DBS).

To avoid this problem, Oracle Corporation recommends that you use either a printf or puts statement when printing Oracle SQL/Services error messages:

```
printf ("%s", message);
```

or

```
puts (message);
```

2. Use a Jacket Header File When Calling the Oracle SQL/Services API From C++

The Oracle SQL/Services header files, sqlsrv.h, sqlsrvca.h, and sqlsrvda.h, do not provide built-in support for use with the C++ programming language. However, by

providing a jacket header file, you may call the Oracle SQL/Services API from C++ as you would from C. To include the Oracle SQL/Services header files in a C++ application, create the following header file, called `sqlsrv.hxx`, and `#include` it in your application program:

```
//
// Define VMS if compiling on OpenVMS to pick up the $ versions of
// the service names.
//
#ifdef __VMS
#ifndef VMS
#define VMS
#endif
#endif

//
// Include the headers files using C, not C++. No need to include
// sqlsrvca.h or sqlsrvda.h unless the application directly accesses
// the SQLCA and SQLDA structures.
//
extern "C"
{

// #include <sqlsrvca.h>
// #include <sqlsrvda.h>
#include <sqlsrv.h>

}

```

3. Link your object module with the Oracle SQL/Services client API. Linking procedures are system dependent and are thus discussed separately in the following sections.

Linking procedures can also depend on the network transport you want to use with Oracle SQL/Services and the specific client.

2.7.1 Building Applications on the OpenVMS Operating System

The OpenVMS include files are installed in `SYSS$LIBRARY`.

To link your program, enter the following command:

```
$ LINK object.obj,SYSS$LIBRARY:SQLSRV$API/OPT
```

Replace *object* with the name of your object module.

If you want to relink a client application that was compiled with VAX C, you must create an options file that specifies `SY$LIBRARY:VAXCTRL/SHARE` and link against this new options file as well as `SY$LIBRARY:SQLSRV$API.OPT`.

2.7.2 Building Applications on the MS Windows Operating System

This section describes how to build and run applications for Windows XP, Vista, Server 2003, Server 2008, 7, XP X64, Vista X64, Server 2003 X64, Server 2008 X64 and 7 X64.

2.7.2.1 Building 32-Bit Applications for Windows X86 Systems

The Oracle SQL/Services client API for Windows XP, Vista, 7, 8, Server 2003 or Server 2008 is supplied in the form of a Dynamic Link Library (DLL) called `sqsap32.dll`, together with a library file called `sqsap32.lib`. Review your Windows documentation for information about creating applications that link against a DLL. If you use `sqsdyn32.mak` as a template, you will need to customize it to your application's particular requirements.

2.7.2.2 Building 64-Bit Applications for Windows X64 Systems

The Oracle SQL/Services client API for Windows XP X64, Vista X64, 7 X64, 8 X64, Server 2003 X64 or Server 2008 X64 is supplied in the form of a Dynamic Link Library (DLL) called `sqsap64.dll`, together with a library file called `sqsap64.lib`. Review your Windows documentation for information about creating applications that link against a DLL. If you use `sqsdyn64.mak` as a template, you will need to customize it to your application's particular requirements.

2.7.2.3 Building 32-Bit or 64-Bit Applications for Windows

See the *Oracle SQL/Services Release Notes* for a complete list of software products and their versions that are required to support different network transports.

If you want to call Oracle SQL/Services using threads, you must be aware of the following:

- Oracle SQL/Services synchronizes calls to the Oracle SQL/Services client API routines between threads. That is, only one Oracle SQL/Services call may be active per associate at a time. All subsequent concurrent calls for an association stall until all previous calls complete.
- The error and error messages returned into the `SQLCA` data structure should *not* be accessed or manipulated directly by the application programmer. This structure will contain the message returned by the last thread that accessed it. Therefore, an error received in one thread may be overwritten by another thread. This may cause the application program to receive the wrong error and associated messages for the thread

that initially received the error. To receive the correct error and messages, use the following Oracle SQL/Services routines:

- sqlsrv_sqlca_error
- sqlsrv_sqlca_error_text
- sqlsrv_sqlca_sqlstate
- sqlsrv_sqlca_sqlerrd

2.7.2.4 Programming Multithreaded Applications with Microsoft Windows

The native Oracle SQL/Services API has locking internally to protect critical data structures. However, when programming multithreaded applications, the programmer must take some extra precautions to ensure the threads do not interfere with each other. Following are some guidelines for writing multithreaded applications with the native SQL/Services API.

Use the newer enhanced API calls whenever possible. Starting in Oracle SQL/Services release 7.3, many of the API calls that deal specifically with SQLDA structures have new versions, identified with a 73 on the end of the routine name. These routines eliminate some internal locking and enhance performance when working with multiple threads. Examples of these new API calls might be `sqlsrv_sqlda_get_data73`, `sqlsrv_sqlda_set_data73` and `sqlsrv_sqlda_bind_data73`. For a complete list of these calls, review the API routines section of this manual.

No two threads should attempt to operate on the same statement at the same time. It is best practice for each thread to open its own connection (`sqlsrv_associate`) and to only manipulate the statements and resources allocated by that thread. It is also important to ensure all resources allocated by that thread are released by that thread when the statements are closed.

When freeing resources, statements, etc. allocated by a thread, be sure to use `sqlsrv_free_sqlda_data73` before calling `sqlsrv_release_statement`. This will eliminate some locking issues that may occur when `sqlsrv_release_statement` is called. Ensure for each `sqlsrv_allocate_sqlda_data(73)` there is a corresponding `sqlsrv_free_sqlda_data` within the thread.

2.7.3 Building Applications on the HP-UX Operating System

The HP-UX include files are installed in the `/usr/include` directory.

By default, the HP-UX C compiler compiles and links your program in one command, including support for TCP/IP. For example:

```
% gcc -o name file -mlp64 -DSQLSRV_LOCAL_INCLUDES -lsqs
```

Replace *file* with the name of your source file and *name* with the name that you want for the executable file.

You may find it useful to examine the makefile that builds the HP-UX API Installation Verification Procedure (sqsvph.mak) and the makefile that builds the sample application, sqsdynh.mak (see [Section 3.2.4](#)).

2.7.4 Building Applications on the Linux Operating System

The Linux include files are installed in the `/usr/include` directory.

By default, the Linux C compiler compiles and links your program in one command, including support for TCP/IP. For example:

```
% gcc -o name file -DSQLSRV_LOCAL_INCLUDES -lsqs
```

Replace *file* with the name of your source file and *name* with the name that you want for the executable file.

You may find it useful to examine the makefile that builds the Linux API Installation Verification Procedure (sqsvpl.mak for 32-bit systems and sqsvpl64.mak for 64-bit systems) and the makefile that builds the sample application, sqsdynl.mak for 32-bit systems and sqsdynl64.mak for 64-bit systems (see [Section 3.2.5](#)).

Sample Application Guidelines

This chapter guides you through the Oracle SQL/Services sample application.

3.1 Sample Application

[Section 3.1](#), [Section 3.2](#), and [Section 3.3](#) describe a sample interactive application that accepts dynamic SQL statements and processes them using the Oracle SQL/Services client API. The sample application consists of two or three modules, depending on your client platform:

- A driver module named `sqsdrv.c` (on all Windows platforms), `sqsdrvu.c` (on the HP-UX and Linux platforms) or `sqlsrv$driver.c` (on all OpenVMS platforms). This module accepts dynamic SQL statements from the user and calls the dynamic SQL processing module to process the statements. It is described in [Section 3.4](#).
- A dynamic SQL processing module named `sqsdyn.c` (on all Windows platforms), `sqsdynu.c` (on the HP-UX and Linux platforms) or `sqlsrv$dynamic.c` (on all OpenVMS platforms). This module accepts dynamic SQL statements from the driver module and calls Oracle SQL/Services client API routines to process the statements. It is described in [Section 3.5](#).
- An I/O module named `winivp.c` for Windows platforms only. This module calls Windows services to implement a basic Windows I/O interface and is not described in this chapter.

The sample application is able to process any dynamic SQL statement, including executable statements such as `INSERT`, `UPDATE`, `DELETE`, `singleton-SELECT`, and `CALL` statements, as well as `SELECT` statements. To process a statement entered by the user, the sample application first prepares the statement. If a statement contains parameter markers, the sample application then prompts the user for parameter marker values. To process an

executable statement, the sample application executes the statement, then displays any results that the statement might produce. To process a SELECT statement, the sample application declares and opens a cursor, fetches and displays rows from the result table, then closes the cursor when all rows have been fetched. Finally, the sample application releases the statement to free the resources held by the prepared statement.

In some respects, the Oracle SQL/Services sample application resembles a limited, portable implementation of the Oracle Rdb interactive SQL application. Like interactive SQL, the driver module recognizes the semicolon (;) as an SQL statement terminator and thus accepts multiline statements. However, unlike interactive SQL, it does not parse the SQL statements entered by the user and thus cannot handle compound statements or the definition of stored procedures. Input lines beginning with an exclamation point (!) are considered comments and are not executed.

3.2 Building the Sample Application

This section describes how to build the sample application on the client platforms supported by Oracle SQL/Services.

3.2.1 Building the Sample Application on the OpenVMS Operating System

The source code for the sample application is available on line in a directory under SYS\$EXAMPLES. To copy, compile, link, and run the sample application, enter the following commands:

```
$ copy sys$common:[syshlp.examples.sqlsrv] sqlsrv$.c *
$ cc sqlsrv$driver,sqlsrv$dynamic
$ link/exe=sqlsrv$dynamic sqlsrv$driver,sqlsrv$dynamic,-
_$ sys$library:sqlsrv$api/opt
$ run sqlsrv$dynamic
```

3.2.2 Building the Sample Application on Windows X86 Systems

An executable form of the sample application is supplied when you install the Oracle SQL/Services client kit. This executable program was built using the default settings and switches in sqsdyn32.mak, and so it might not be suitable for all environments and transports. The executable is named sqsdyn32.exe; you may wish to copy or rename this file if you rebuild the sample application locally.

The source files for the sample application are supplied in the directory where you installed the Oracle SQL/Services client kit. The sqsdyn32.mak file uses the Microsoft C compiler to create an executable named sqsdyn32.exe. Review sqsdyn32.mak as a sample guide and for information on default settings and switches.

Use the following commands to build the sample application from the MS-DOS prompt. Select the appropriate NMAKE command depending on whether or not you want to build a debuggable executable.

```
> cd \[sql/services-install-dir] | Oracle SQL/Services installation directory
> nmake -a -f sqsdyn32.mak | To build a nodebug executable, or
> nmake -a -f sqsdyn32.mak debug=1 | to build a debuggable executable
> sqsdyn32 | Invoke sample after successful build
```

3.2.3 Building the Sample Application on Windows X64 Systems

An executable form of the sample application is supplied when you install the Oracle SQL/Services client kit. This executable program was built using the default settings and switches in sqsdyn64.mak, and so it might not be suitable for all environments and transports. The executable is named sqsdyn64.exe; you may wish to copy or rename this file if you rebuild the sample application locally.

The source files for the sample application are supplied in the directory where you installed the Oracle SQL/Services client kit. The sqsdyn64.mak file uses the Microsoft C compiler to create an executable named sqsdyn64.exe. Review sqsdyn64.mak as a sample guide and for information on default settings and switches.

Use the following commands to build the sample application from the MS-DOS prompt. Select the appropriate NMAKE command depending on whether or not you want to build a debuggable executable.

```
> cd \[sql/services-install-dir] | Oracle SQL/Services installation directory
> nmake -a -f sqsdyn64.mak | To build a nodebug executable, or
> nmake -a -f sqsdyn64.mak debug=1 | to build a debuggable executable
> sqsdyn64 | Invoke sample after successful build
```

3.2.4 Building the Sample Application on the HP-UX Operating System

You can build the HP-UX sample application by issuing the following command:

```
make -f sqsdynh.mak "LIB=libsqs.a" "DNET="
```

To invoke the sample application after a successful build, issue the following command:

```
sqsdynu
```

See [Section 2.7.3](#) for information on building applications on HP-UX systems.

3.2.5 Building the Sample Application on the Linux Operating System

You can build the Linux sample application by issuing the following command on a 32-bit system:

```
make "STUB=stubdnet.o" "LIB=libsqs.a" "DNET=" "DEFS=-DSQLSRV_LOCAL_INCLUDES" -f
sqsdynl.mak
```

or the following command on a 64-bit system:

```
make "STUB=stubdnet.o" "LIB=libsqs.a" "DNET=" "DEFS=-DSQLSRV_LOCAL_INCLUDES" -f
sqsdynl64.mak
```

To invoke the sample application after a successful build, issue the following command:

```
sqsdynu
```

See [Section 2.7.4](#) for information on building applications on Linux systems.

3.3 Running the Sample Application

When the sample executable program starts up, it prompts you for the information required to create an association with a remote system. When the association is made, the program prompts for SQL statements to execute. For example, on the OpenVMS operating system, this is what you would see:

```
$ run sqlsrv$dynamic
Server node OR SQL*Net service name: MYNODE
Network Transport: DECNET
Server account name: MYNAME
Server account password: ****
Service name [GENERIC]:
```

```
Enter any dynamically executable SQL statement,
continuing it on successive lines.
Terminate the statement with a semicolon.
Built-in commands are: [no]echo and exit.
```

```
SQL> ATTACH 'FILENAME sql_personnel';
SQL> SELECT * FROM EMPLOYEES WHERE FIRST_NAME STARTING WITH ?;
Enter value for:   FIRST_NAME
Maximum length is: 10
DATA> Norman
```

```

----- BEGIN RESULT TABLE -----
EMPLOYEE_ID      : 00168
LAST_NAME        : Nash
FIRST_NAME       : Norman
MIDDLE_INITIAL   :
ADDRESS_DATA_1   : 87 West Rd.
ADDRESS_DATA_2   :
CITY             : Meadows
STATE            : NH
POSTAL_CODE      : 03587
SEX              : M
BIRTHDAY         : 1932102300000000
STATUS_CODE      : 1
----- END OF ROW -----
.
.
.
----- END OF ROW -----
EMPLOYEE_ID      : 00245
LAST_NAME        : Roberts
FIRST_NAME       : Norman
MIDDLE_INITIAL   : U
ADDRESS_DATA_1   : 162 Tenby Dr.
ADDRESS_DATA_2   :
CITY             : Chocorua
STATE            : NH
POSTAL_CODE      : 03817
SEX              : M
BIRTHDAY         : 1949061100000000
STATUS_CODE      : 1
----- END OF ROW -----
----- END RESULT TABLE -----
SQL> exit;
$

```

To select the network transport, type D or DECnet to select the DECnet transport; type T or TCP to select the TCP/IP transport; type S or SQLNET to select the Oracle Net transport. Note that not all these transports are supported on all the client platforms and that all the transports supported by Oracle SQL/Services may not be installed on your node. See [Table 1-1](#) for a list of the network transports supported for each client platform.

3.4 Driver Module

When a user runs the sample application, the flow of control is as follows:

- Call a routine to create an association. Although the driver creates only one association, Oracle SQL/Services allows an application to have several associations active at any given time.
- Enter a loop that inputs SQL statements and passes them to the `execute_statement` function for processing.
- Call a routine to close the association.

The implementation of the terminal input/output in the driver is unimportant. The module is intended to be easily replaced.

3.5 Dynamic Module

This section describes how the sample application works and provides some examples that illustrate how to call some of the more commonly used Oracle SQL/Services API routines.

3.5.1 Creating an Association

The sample program contains a function named `create_association` that does the following:

- Declares the variables required for creating an association.
 - Association identifier

Most Oracle SQL/Services API routines require an association identifier that specifies for which association a call is being made. An association identifier is returned as an output argument during the successful completion of a call to the `sqlsrv_associate` API routine. The association identifier is then specified as an input argument to most of the other Oracle SQL/Services API routines and, optionally, with the `sqlsrv_sqlda_XXX` and `sqlsrv_sqlda2_XXX` functional interface routines.

In the sample application, the main routine in the driver module passes in the address of the association identifier, which it declares as follows:

```
ASSOCIATE_ID    assoc_id;
```

- Error message buffer

If you do not specify an alternate error message buffer, Oracle SQL/Services uses the 70-byte `SQLERRMC` field in the `SQLCA` data structure. However, because the `SQLERRMC` field may not be long enough to hold all the possible error messages that can be returned by the Oracle SQL/Services server and Oracle Rdb, Oracle Corporation recommends that you allocate a larger message buffer for each association.

In the sample application, the main routine in the driver module passes in the address of a 512-byte message buffer, which is sufficient for all possible messages. The driver routine declares the error buffer as follows:

```
unsigned char    error_buf [512];
```

- Gets the node name, network transport, user name, password, and service name for the server system from the argument vector; if any of these are missing, the create_ association function prompts the user.
- Sets up the association structure as follows:

```
associate_str.VERSION = SQLSRV_V730;          /* Structure version number */
associate_str.CLIENT_LOG = 0;                 /* Disable client logging. */
associate_str.SERVER_LOG = 0;                 /* Obsolete */
associate_str.LOCAL_FLAG = 0;                 /* Obsolete */
associate_str.MEMORY_ROUTINE = NULL;          /* Use default memory rtns. */
associate_str.FREE_MEMORY_ROUTINE = NULL;     /* Use default memory rtns. */
associate_str.ERRBUFLLEN = error_buf_len;     /* Alternate err buf length */
associate_str.ERRBUF = error_buf;             /* Alternate error buffer */
associate_str.class_name = (CHARPTR)service_name; /* Service name */
associate_str.xpttyp = xpt;                   /* Transport type */
associate_str.port_id = 0;                    /* TCPIP port number */
associate_str.attach = NULL;                  /* No SQL ATTACH statement */
associate_str.declare = NULL;                 /* No SQL DECLARE statement */
associate_str.appnam = (CHARPTR)"Sample App"; /* Our application name */
associate_str.objnam = NULL;                  /* DECnet object name */
```

This structure is described in detail in [Section 7.2](#).

- Calls the API routine `sqlsrv_associate` to create the association.

```
sts = sqlsrv_associate(
    node_name,          /* node name. */
    user_name,          /* user name. */
    password,           /* password. */
    NULL,               /* protocol read buffer. */
    NULL,               /* protocol write buffer. */
    0,                  /* read buffer size. */
    0,                  /* write buffer size. */
    NULL,               /* Let SQL/Services allocate SQLCA. */
    &associate_str,     /* ASSOCIATE structure. */
    assoc_id            /* Association handle. */
);
```

By specifying the read and write buffer pointers as NULL and the read and write buffer lengths as zero, the sample application directs Oracle SQL/Services to allocate read and write buffers of the default size. By specifying a NULL SQLCA pointer, the sample application directs Oracle SQL/Services to allocate memory for the SQLCA structure. Note that by specifying the associate structure as Version 7.3, the sample application directs Oracle SQL/Services to process extensions to the original structure, which include the service (class) name, transport type, application name, TCPIP port number and DECnet object name fields.

Creating an association is a multiphase process, which starts with the Oracle SQL/Services client API validating the routine arguments, allocating memory for the association, establishing a network connection to the server, and so forth. Because a new association can fail for different reasons, client applications must be written to handle different types of failure.

If the Oracle SQL/Services client API detects any invalid arguments, it does not allocate any memory for the association, stores a NULL value in the association ID variable, and returns a single error status as the function return value. In this situation, the client application need perform no additional work to clean up the association; however, no additional error information is available.

If the routine arguments are valid, Oracle SQL/Services allocates memory for the association and attempts to connect to the server. Once the routine arguments have been successfully validated, Oracle SQL/Services always returns a non-NULL value in the association ID, even if the connection to the server is not established successfully. For example, perhaps a user typed an invalid password. In this situation, the client application can obtain additional error information by calling the `sqsrv_sqlca_error_text`, `sqsrv_sqlca_error` and `sqsrv_sqlca_sqlstate` API routines. After retrieving any additional error information, the client application must then clean up the association by calling the `sqsrv_release` API routine.

The sample application uses the following logic to handle the situation where a call to the `sqsrv_associate` API routine fails:

```
if (sts != SQL_SUCCESS)
{
    if (*assoc_id != NULL)
    {
        report_error(*assoc_id);
        sqsrv_release(
            *assoc_id,          /* association ID.          */
            NULL,              /* reserved argument.     */
        );
    }
    else
```

```
    {  
        report_sqlsvcs_error((SQS_LONGWORD)sts, 0, 0);  
    }  
}
```

The `report_error` and `report_sqlsvcs_error` functions in the sample application are described in [Section 3.5.2.10](#).


3.5.2 Processing the Dynamic SQL Statement

The sample program contains a function named `execute_statement` that processes the statement string passed to it by the driver module. As shown in [Figure 3-1](#), the `execute_statement` function does the following:

- Checks for statements, such as COMMIT and ROLLBACK, that can be executed using the `sqlsrv_execute_immediate` API routine, processes them accordingly, and returns.
- Calls the `sqlsrv_prepare` API routine, which prepares the SQL statement and returns a statement ID.
- Calls the `sqlsrv_sqlca_sqlerrd` API routine to retrieve the SQLERRD array to obtain the statement type from the SQLERRD[1] array element.
- If the statement contains parameter markers, calls the `sqlsrv_sqllda_allocate_data` API routine to allocate memory for the data and indicator variables, then calls the `get_params` function to prompt for parameter marker values.
- If the statement contains select list items, calls the `sqlsrv_allocate_sqllda_data` API routine to allocate memory for the data and indicator variables.
- If the statement is a SELECT statement:
 - Calls the `sqlsrv_open_cursor` API routine to open a cursor
 - For each row in the result table, calls the `sqlsrv_fetch` API routine to fetch the row and calls the `display_select_list` routine to display the data
 - Calls the `sqlsrv_close_cursor` API routine to close the cursor
- If the statement is not a SELECT statement, calls the `sqlsrv_execute_in_out` API routine to execute the statement. If the statement has output, such as a singleton-SELECT statement or a CALL statement to a procedure with output or input/output arguments, calls the `display_select_list` function to display the data.
- Calls the `sqlsrv_release_statement` API routine to release the prepared statement.

[Section 3.5.2.1](#) through [Section 3.5.2.10](#) explain the workings of the `execute_statement` and `get_params` functions in more detail.

Figure 3-1 Statement Execution Flow

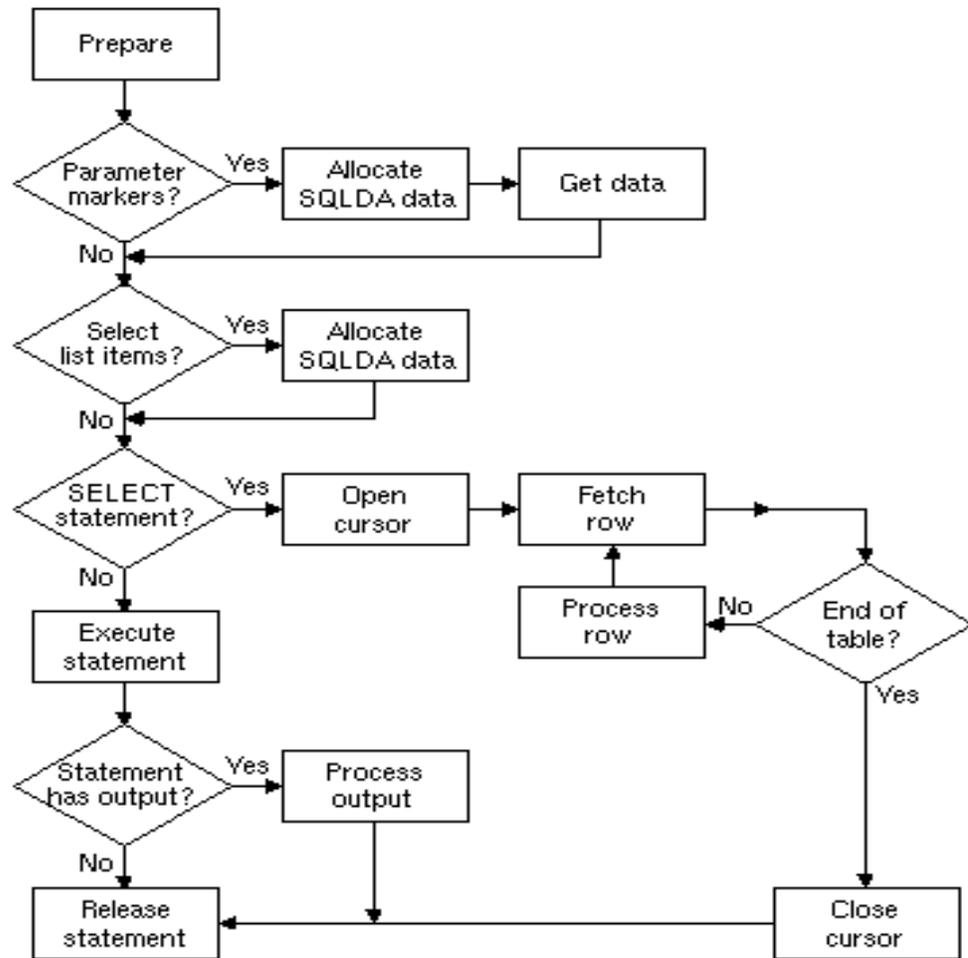

NU-2049A-RA

3.5.2.1 Declaring and Allocating SQLDA_ID Identifiers

The SQLDA structure contains SQL parameter marker and select list metadata as well as pointers to the data and indicator variables. The SQLDA_ID identifiers are the means by which your application and the Oracle SQL/Services API communicate about the SQL statement being prepared for execution.

Oracle SQL/Services applications must allocate variables that point to the SQLDA_ID identifiers. The `execute_statement` function contains the following declarations:

```
SQLDA_ID    param_sqlda;  
SQLDA_ID    select_sqlda;
```

3.5.2.2 Executing SQL Statements Using the `sqlsrv_execute_immediate` API Routine

Simple SQL statements that do not contain parameter markers or select list items can be executed using the `sqlsrv_execute_immediate` API routine. The sample application checks for statements such as `COMMIT` and `ROLLBACK`, and executes them using the `sqlsrv_execute_immediate` API routine as follows:

```
sts = sqlsrv_execute_immediate(  
    assoc_id,          /* association ID.          */  
    0,                /* database id, must be zero. */  
    sql_statement     /* SQL statement.          */  
);
```

Note: The sample application uses the `sqlsrv_execute_immediate` API routine to process SQL statements such as `COMMIT` and `ROLLBACK` in order to demonstrate how to use the `sqlsrv_execute_immediate` API routine. However, in a real application, where such statements may be used frequently, you should consider preparing such statements once and executing the prepared statements as needed.

3.5.2.3 Preparing the SQL Statement

All applications call the `sqlsrv_prepare` API routine to prepare an SQL statement. The sample application lets Oracle SQL/Services allocate memory for the parameter marker and select list SQLDA structures; therefore, it initializes the `select_sqlda` and `param_sqlda` SQLDA_IDs to `NULL`. For example:

```
select_sqlda = NULL;  
param_sqlda = NULL;  
  
sts = sqlsrv_prepare(  
    sql_statement,  
    param_sqlda,  
    select_sqlda,  
    sqlsrv_options);
```

```

        assoc_id,          /* association ID.          */
        0,                 /* database id, must be zero. */
        sql_statement,     /* SQL statement.          */
        &statement_id,     /* to receive prepared statement id */
        &param_sqllda,     /* to receive parameter marker SQLDA */
        &select_sqllda     /* to receive select list SQLDA      */
    );

```

If the server successfully prepares the statement, it returns a statement ID to the client, which the Oracle SQL/Services client API stores in the `statement_id` variable. If an SQL statement contains either parameter markers or select list items, then the Oracle SQL/Services client API allocates memory for one or both SQLDAs and returns the memory pointer or handle to the application in the `param_sqllda` or `select_sqllda` variables.

The sample application calls the `sqlsrv_sqlca_sqlerrd` API routine to obtain the statement type from the `SQLERRD[1]` array element as follows:

```

sts = sqlsrv_sqlca_sqlerrd(
    assoc_id,          /* association ID.          */
    sqlerrd_array     /* to receive SQLERRD array */
);
.
.
.
statement_type = sqlerrd_array[1];

```

3.5.2.4 Allocating Data and Indicator Variables

The sample application checks the `param_sqllda` and `select_sqllda` variables for non-NULL values to determine if the SQL statement contains any parameter markers or select list items. If any are present, the sample calls the `sqlsrv_allocate_sqllda_data` API routine to allocate memory for the data and indicator variables. For example, to allocate the data and indicator variables for a select list SQLDA:

```

if (select_sqllda != NULL)
{
    sts = sqlsrv_allocate_sqllda_data(
        assoc_id,          /* association ID.          */
        select_sqllda     /* Select list SQLDA.      */
    );
    .
    .
    .
}

```

If any parameter markers are present, the sample application also calls the `get_params` function, which is described in [Section 3.5.2.5](#), to prompt the user for values for all parameter markers.

3.5.2.5 Processing Parameter Markers

The sample program includes a function named `get_params` that prompts the user for parameter markers. As in the driver module, the implementation of the terminal input/output is unimportant. As demonstrated in the `get_params` function, your application must perform the following steps:

1. Execute a loop that iterates once for each parameter marker in the SQL statement. The `sqlsrv_sqllda_sqld73` API routine returns the number of parameter markers.

```
for (i = 0; i < sqlsrv_sqllda_sqld73( param_sqllda, assoc_id ); i++)
{
    .
    .
    .
}
```

2. Within the loop, call the `sqlsrv_sqllda_ref_data73` API routine to obtain the data type and length, and pointers to the data and indicator variables for each parameter marker.

```
sts = sqlsrv_sqllda_ref_data73(
    param_sqllda,      /* parameter marker SQLDA      */
    i,                 /* column index number         */
    &coltyp,            /* to receive column data type */
    &collen,           /* to receive column length    */
    &colsc1,           /* to receive column scale/type */
    &coldata,          /* to receive column data ptr.  */
    &nullp,            /* to receive column ind. ptr.  */
    NULL,              /* reserved argument           */
    assoc_id           /* associate ID                 */
);
```

3. Obtain a value for each parameter marker. The sample application checks that the user enters a data value that is not too long. To do so, it must check for certain data types and adjust the length returned by the `sqlsrv_sqllda_ref_data73` API routine accordingly. For example, the length for the `SQLSRV_GENERALIZED_DATE` data type includes space for the null-terminator, so the maximum length must be decreased by 1, whereas the length for the `SQLSRV_GENERALIZED_NUMBER` data type does not include the additional 5 bytes that the `sqlsrv_allocate_sqllda_data` API routine allocates for integer values expressed in scientific notation, so the maximum length must be increased by 5.

See [Chapter 8](#) for more information on the data types supported by the Oracle SQL/Services client API.

```
switch (coltyp)
{
  case SQLSRV_GENERALIZED_DATE:
    maxlen--;
    break;

  case SQLSRV_GENERALIZED_NUMBER:
    maxlen += 5;
    break;
}
```

4. Set the indicator variable and store the value in the parameter marker's data variable according to each parameter marker's data type.

To specify a NULL value for a parameter marker, store -1 in the indicator variable; otherwise, store 0 in the indicator variable.

There are three fundamental data types in Oracle SQL/Services: fixed-length strings, null-terminated strings, and variable-length data with leading length field. Each Oracle SQL/Services data type maps to one of these fundamental data types. The sample application supports a subset of the full range of Oracle SQL/Services data types as follows.

- Fixed-length strings

There are two fixed-length data types: `SQLSRV_LIST_VARBYTE` (not supported by the sample application) and `SQLSRV_ASCII_STRING`. To store a fixed-length string in a parameter marker, the sample uses the `memcpy` C library function to copy the value, and the `memset` C library function to pad the value with spaces, if necessary.

If your application calls the `sqlsrv_allocate_sqlda_data` API routine to allocate parameter marker variables, then Oracle SQL/Services allocates an extra byte of memory for parameter marker variables of type `SQLSRV_ASCII_STRING`. Therefore, your application can also use the `strcpy` C library function to copy a value to a parameter marker variable, because there is sufficient space for the trailing null-terminator. However, you should be aware that when Oracle SQL/Services sends fixed-length string parameter marker values to the server, it always sends the number of bytes specified by the parameter marker length in the `SQLDA`, regardless of the possible presence of a null-terminator anywhere in the string. Because Oracle SQL/Services does not treat fixed-length strings as a null-terminated string, the sample application always pads these values with spaces.

Note: The `SQLSRV_LIST_VARBYTE`, which is not supported by the sample application, is another instance of a fixed-length data type. However, because values of this data type can contain binary values, including null bytes, you should always use the `memcpy` C library function when processing values of this data type.

- Null-terminated strings

There are three null-terminated data types: `SQLSRV_GENERALIZED_NUMBER`, `SQLSRV_GENERALIZED_DATE`, and `SQLSRV_INTERVAL`. To store a null-terminated string in a parameter marker, the sample simply uses the `strcpy` C library function to copy the value and null-terminator.

If your application calls the `sqlsrv_allocate_sqlda_data` API routine to allocate parameter marker variables, Oracle SQL/Services always allocates the extra byte of memory required for the null-terminator. When Oracle SQL/Services sends null-terminated string parameter marker values to the server, it uses the `strlen` C library function to determine how much data to send.

- Variable-length data with leading length field

There are two variable-length data types: `SQLSRV_VARBYTE` (not supported by the sample application) and `SQLSRV_VARCHAR`. To store a variable-length data value in a parameter marker, the sample first stores the length in the leading unsigned 16-bit length field, then uses the `memcpy` C library function to copy the data value.

If your application calls the `sqlsrv_allocate_sqlda_data` API routine to allocate parameter marker variables, then Oracle SQL/Services allocates sufficient memory to accommodate the leading length field and a data value of the maximum length; however, it does not allocate space for a null-terminator. Therefore, your application should not use the `strcpy` C library function to copy a variable-length data value. When Oracle SQL/Services sends a variable-length data value to the server, it uses the leading length field to determine how much data to send.

Note: If your application uses the `SQLDA2` format, the leading length field is an unsigned 32-bit integer.

See [Chapter 8](#) for more information on the data types supported by the Oracle SQL/Services client API.

The following code example illustrates how the sample application processes each data type.

```
switch(coltyp)
{
    case SQLSRV_ASCII_STRING:

        /* fixed-length string: copy the data to the      */
        /* SQLDATA memory; pad with spaces if necessary */

        memcpy( (SCHARPTR)coldata, lcldata, len );
        if (len < maxlen)
        {
            memset( (SCHARPTR)coldata+len, ' ', maxlen-len );
        }
        break;

    case SQLSRV_GENERALIZED_NUMBER:
    case SQLSRV_GENERALIZED_DATE:
    case SQLSRV_INTERVAL:

        /* null-terminated strings: just use strcpy to   */
        /* copy the data value and the null-terminator  */

        strcpy( (SCHARPTR)coldata, lcldata );
        break;

    case SQLSRV_VARCHAR:

        /* variable-length data with length field: write */
        /* the length into the leading 16-bit length field */
        /* of the buffer, then advance the pointer over   */
        /* the length to the beginning of the data and   */
        /* copy the data                                  */

        varchar_ptr = coldata;
        *(unsigned short int *)varchar_ptr = len;
        varchar_ptr += sizeof(unsigned short int);
        memcpy( (SCHARPTR)varchar_ptr, lcldata, len );
        break;

} /* switch */
```

5. After processing each parameter marker, call the `sqlsrv_sqlda_unref_data73` API routine to de-reference the parameter marker's data and indicator variables.

```
sts = sqlsrv_sqlda_unref_data73(  
    param_sqlda,      /* parameter marker SQLDA */  
    i,                /* column index number   */  
    assoc_id         /* associate ID          */  
);
```

3.5.2.6 Testing for SELECT Statements

To test for a SELECT statement, the sample application checks the `statement_type` variable, which it set previously using the `SQLERRD[1]` field of the `SQLCA`. Whenever Oracle Rdb SQL prepares an SQL statement, it stores the statement type in the `SQLERRD[1]` field, as follows:

- 0 = executable statement, excluding CALL statements
- 1 = SELECT statement
- 2 = CALL statement

3.5.2.7 Processing a SELECT Statement

To process a SELECT statement, the sample application opens a cursor, fetches and displays each row in the result table, then closes the cursor, as follows:

- Calls the `sqlsrv_open_cursor` API routine to open the cursor. Note that the sample has previously prompted the user for the values of any parameter marker values.

```
sts = sqlsrv_open_cursor(  
    assoc_id,        /* association id          */  
    cursor_name,    /* cursor name            */  
    statement_id,   /* statement ID           */  
    param_sqlda     /* parameter marker SQLDA */  
);
```

- For each row in the result table, calls the `sqlsrv_fetch` API routine to fetch the row, then calls the `display_select_list` function to display the values. See [Section 3.5.2.9](#) for more information about the `display_select_list` function.

```
printf("----- BEGIN RESULT TABLE -----\\n");  
do  
{  
    sts = sqlsrv_fetch(  
        assoc_id,    /* association id          */  
        cursor_name, /* cursor name            */  
    );
```

```

        0,          /* scroll option          */
        0L,        /* position            */
        select_sqlda /* select list SQLDA   */
    );
switch (sts)
{
case SQL_SUCCESS:
    sts = display_select_list(assoc_id, select_sqlda);
    printf("----- END OF ROW ----- \n");
    break;

case SQL_EOS:
    printf("----- END RESULT TABLE ----- \n");
    break;

default:
    handle_error(assoc_id);
    break;
}
} while (sts == SQL_SUCCESS);

```

- Calls `sqlsrv_close_cursor` API routine to close the cursor when all rows have been fetched.

```

sts = sqlsrv_close_cursor(
    assoc_id,          /* association id          */
    cursor_name       /* cursor name            */
);

```

3.5.2.8 Processing Executable Statements

To process an executable SQL statement, including CALL statements, the sample application calls the `sqlsrv_execute_in_out` API routine as follows:

```

sts = sqlsrv_execute_in_out(
    assoc_id,          /* association ID.        */
    0,                /* database_id, must be zero. */
    statement_id,     /* Prepared statement id. */
    SQLSRV_EXE_W_DATA, /* Normal nonbatched execute mode. */
    param_sqlda,     /* Parameter marker SQLDA. */
    select_sqlda     /* Select list SQLDA.    */
);

```

The `sqlsrv_execute_in_out` API routine handles any executable statement, regardless of whether the statement has any input in the form of parameter markers, or output in the form

of select list items. See [Chapter 4.1](#) for information on batched execution of executable statements with parameter markers.

If the executable SQL statement has any output, the sample application calls the `display_select_list` to display the values of the select list items.

3.5.2.9 Processing Select List Items

The sample application includes a function named `display_select_list` that displays the values of any select list items in a select list `SQLDA`. As in the driver module, the implementation of the terminal input/output is unimportant. As demonstrated in the `display_select_list` function, your application must perform the following steps.

1. Execute a loop that iterates once for each select list item in the SQL statement. The `sqlsrv_sqlda_sqld73` API routine returns the number of select list items.

```
for (i = 0; i < sqlsrv_sqlda_sqld73( select_sqlda, assoc_id ); i++)
{
    .
    .
    .
}
```

2. Within the loop, call the `sqlsrv_sqlda_ref_data73` API routine to obtain the data type and length, and pointers to the data and indicator variables for each select list item.

```
sts = sqlsrv_sqlda_ref_data73(
    select_sqlda, /* select list SQLDA */
    i,           /* column index number */
    &coltyp,     /* to receive column data type */
    &collen,    /* to receive column length */
    &colsc1,    /* to receive column scale/type */
    &coldata,   /* to receive column data ptr. */
    &nullp,     /* to receive column ind. ptr. */
    NULL,      /* reserved argument */
    assoc_id   /* associate ID */
);
```

3. Check the indicator variable and process the value in each select list item's data variable according to the data type.

If the indicator variable for a select list item is set to `-1`, indicating a `NULL` value, the sample application displays "NULL" and proceeds to the next select list item.

Otherwise, the sample application displays the data value based on the data type of the select list item.

There are three fundamental data types in Oracle SQL/Services: fixed-length strings, null-terminated strings, and variable-length data with leading length field. Each Oracle SQL/Services data type maps to one of these fundamental data types. The sample application supports a subset of the full range of Oracle SQL/Services data types as follows.

– Fixed-length strings

There are two fixed-length data types: `SQLSRV_LIST_VARBYTE` (not supported by the sample application) and `SQLSRV_ASCII_STRING`. To process a fixed-length string in a select list item's data variable, use the length and pointer variables set by the `sqlsrv_sqlda_ref_data73` API routine. The sample application passes both the length and the pointer as arguments to the `printf` C library function using the format string `"%.*s\n"`. Alternatively, to copy the same value to a local variable, the sample could call the `memcpy` C library function, again specifying the length and pointer variables as arguments.

If your application calls the `sqlsrv_allocate_sqlda_data` API routine to allocate select list item variables, then Oracle SQL/Services allocates an extra byte of memory for select list item data variables of type `SQLSRV_ASCII_STRING`. This allows Oracle SQL/Services to null-terminate a string value when it receives fixed-length string select list item data values from the server. Therefore, you can also treat variables of type `SQLSRV_ASCII_STRING` as null-terminated strings using, for example, the `strcpy` C library function.

Note: The `SQLSRV_LIST_VARBYTE`, which is not supported by the sample application, is another instance of a fixed-length data type. However, because values of this data type can contain binary values, including null bytes, you should always use the `memcpy` C library function when processing values of this data type.

– Null-terminated strings

There are three null-terminated data types: `SQLSRV_GENERALIZED_NUMBER`, `SQLSRV_GENERALIZED_DATE`, and `SQLSRV_INTERVAL`. To display a null-terminated string from a select list item's data variable, the sample simply passes the data pointer as an argument to the `printf` C library function using the format string `"%s\n"`. Alternatively, to copy the same value to a local variable, the sample could simply call the `strcpy` C library function, again specifying the pointer variable as an argument.

– Variable-length data with leading length field

There are two variable-length data types: `SQLSRV_VARBYTE` (not supported by the sample application) and `SQLSRV_VARCHAR`. To process a variable-length data value in a select list item's data variable, the sample first uses a pointer to retrieve the length from the leading unsigned 16-bit length field, then advances the pointer past the length field to the data area of the variable. The sample application passes both the length and the data pointer as arguments to the `printf` C library function using the format string `"%-*s\n"`. Alternatively, to copy the same value to a local variable, the sample could call the `memcpy` C library function, again specifying the length and data pointer variables as arguments.

If your application calls the `sqlsrv_allocate_sqlda_data` API routine to allocate parameter marker variables, then Oracle SQL/Services allocates sufficient memory to accommodate the leading length field and a data value of the maximum length; however, it does not allocate space for a null-terminator. Therefore, your application should not use the `strcpy` C library function to copy a variable-length data value.

Note: If your application uses the `SQLDA2` format, the leading length field is an unsigned 32-bit integer.

See [Chapter 8](#) for more information on the data types supported by the Oracle SQL/Services client API.

The following code example illustrates how the sample application processes each data type.

```
/* check the indicator variable for NULL value */

if (*nullp < 0)
{
    printf("NULL\n");
}
else
{
    switch (coltyp)
    {
        case SQLSRV_ASCII_STRING:

            /* Fixed-length character strings */

            printf("%-*s\n", collen, coldata);
            break;
    }
}
```

```

case SQLSRV_GENERALIZED_NUMBER:
case SQLSRV_GENERALIZED_DATE:
case SQLSRV_INTERVAL:

    /* Null-terminated strings */

    printf("%s\n", coldata);
    break;

case SQLSRV_VARCHAR:

    /* Counted string. The first 16-bit unsigned word of    */
    /* the data buffer is the length. Get length then      */
    /* advance the pointer to the data.                    */

    /* Note: SQLSRV_VARCHAR data may contain nonprintable */
    /* binary data; a real application may not display the */
    /* data value using printf.                             */

    varchar_ptr = coldata;
    varchar_len = *(unsigned short int *)varchar_ptr;
    varchar_ptr += sizeof(unsigned short int);
    printf("%-.*s\n", varchar_len, varchar_ptr);
    break;

} /* switch */

} /* else */

```

4. After processing each select list item, call the `sqlsrv_sqlda_unref_data73` API routine to de-reference the select list item's data and indicator variables.

```

sts = sqlsrv_sqlda_unref_data73(
    select_sqlda, /* select list SQLDA */
    i,           /* column index number */
    assoc_id     /* associate ID */
);

```

3.5.2.10 Error Handling

The sample application contains three functions that handle error conditions.

- `handle_error` function

The `handle_error` function is the main error handling routine for the sample application. It first calls the `report_error` function to display an error message. It then checks the

error status and terminates the application if a nonrecoverable error occurred, such as a network error or if the server was shut down.

```
major_error = report_error(assoc_id);
if (major_error == SQLSRV_NETERR ||
    major_error == SQLSRV_INTERR ||
    major_error == SQLSRV_EXEINTERR ||
    major_error == SQLSRV_CONNTIMEOUT ||
    major_error == SQLSRV_SVC_SHUTDOWN)
{
    sqlsrv_release(assoc_id, NULL);
#ifdef _WINDOWS
    IvpExit();
#else
    exit(2);
#endif
}
```

- **report_error** function

The `report_error` function is responsible for displaying an error message associated with the most recent error. It is called by the `handle_error` function and by the `create_` association function if an error occurred trying to connect to the server. The `report_error` function first calls the `sqlsrv_sqlca_error_text` API routine to retrieve any error text that might have been returned by the server or produced by the Oracle SQL/Services client API.

```
sts = sqlsrv_sqlca_error_text(
    assoc_id,          /* associate ID          */
    &err_msg_len,     /* to receive error message length */
    err_msg_buf,     /* error message buffer */
    sizeof(err_msg_buf) /* size of error message buffer */
);
```

If an error message is available, the `report_error` function displays the error message text and returns. If no error message is available, the `report_error` function calls the `sqlsrv_sqlca_error` API routine to retrieve the major and minor error codes, then calls the `report_sqlsvcs_error` function to display an error message based on the error codes.

```
sts = sqlsrv_sqlca_error(
    assoc_id,          /* associate ID          */
    &major_error,     /* to receive major error code */
    &minor_error_1,   /* to receive first suberror */
    &minor_error_2   /* to receive second suberror */
);
```

- `report_sqlsvcs_error` function

The `report_sqlsvcs_error` function accepts as input major and minor error codes, then displays an error message based on those error codes. It is called by the `report_error_` function if no error message is available and called by the `create_association` if an error occurs trying to connect to the server and the `sqlsrv_associate` API routine does not return an association ID.

The `execute_statement` function checks the return status after calling every Oracle SQL/Services client API routine. If a call fails, the `execute_statement` function calls the `handle_error` function, calls the `sqlsrv_release_statement` API routine to release the prepared statement, then returns the failure status to the caller.

```
if (sts != SQL_SUCCESS)
{
    handle_error(assoc_id);
    sqlsrv_release_statement(assoc_id, 1, &statement_id);
    return sts;
}
```

Note that if a call to the `sqlsrv_execute_immediate` or `sqlsrv_prepare` API routines fails, there is no prepared statement to release.

3.5.2.11 Releasing Prepared Statements

When a prepared statement is no longer needed, the `execute_statement` function calls the API routine `sqlsrv_release_statement` to release the resources allocated for that statement:

```
sts = sqlsrv_release_statement(
    assoc_id,          /* association handle.      */
    1,                /* no. of statement ids.  */
    &statement_id     /* statement id array.     */
);
```

If your application prepares several statements at one time, you can release any or all of them together by passing an array of statement identifiers to the API routine `sqlsrv_release_statement`. The sample application prepares only one statement at a time; therefore, it passes the address of the statement ID variable to `sqlsrv_release_statement`. Effectively this is an array of one element.

Performance Considerations

This chapter describes how to improve the performance of your programming applications by reducing the number of client/server network messages required to perform operations.

4.1 Batched Execution

When your application executes a prepared INSERT, UPDATE, or DELETE statement that contains parameter markers, it can control whether the API sends one row or several rows of data at a time to the server for processing. Frequently, batched execution reduces the number of messages required to complete the operation.

The mechanism for controlling batched execution is the `execute_flag` parameter in the `sqlsrv_execute_in_out` routine, which is described in [sqlsrv_execute_in_out](#). The values of the `execute_flag` parameter are shown in [Table 6-7](#).

In batched execution, the API stores sets of parameter marker values in the message buffer until your application signals the end of the batched execution. If the message buffer becomes full during batched execution, the API sends the message to the server and begins a new message in a manner that is transparent to your application. In that case, when the batched parameter marker values arrive at the server, the server stores the values in a buffer until the application signals the end of the batched execution. If the application aborts the batched execution, the API clears the buffers on both the client and the server. Thus, the database remains consistent and there is no need to roll back the transaction.

In nonbatched execution, the API places each set of parameter marker values in the message buffer and sends the message to the server for execution.

Note: Once you initiate batched execution for a particular statement ID by calling the `sqlsrv_execute_in_out` API routine with the `SQLSRV_EXE_BATCH` flag, you cannot call other API routines or execute other statement IDs until you end batched execution for the current statement ID using the `SQLSRV_EXE_WO_DATA`, `SQLSRV_EXE_W_DATA`, or `SQLSRV_EXE_ABORT` flag.

The following example illustrates how to use the batched execution mechanism. Note that the error checking code has been removed from the example for brevity; however, your application should always check for and handle error conditions.

In this example, the application calls the `prompt_for_order_details` application function to prompt the user for new order details and to store the data into the parameter marker variables in the `SQLDA`.

As the user enters each line of the order, the application calls the `sqlsrv_execute_in_out` API routine with the `SQLSRV_EXE_BATCH` flag. This flag directs the Oracle SQL/Services client API to start or continue batched execution by queuing the row data for subsequent execution.

When the user has finished the order, the application calls the `sqlsrv_execute_in_out` API routine with the `SQLSRV_EXE_WO_DATA` flag to end batched execution. This flag directs the server to execute the previously queued requests, but does *not* send the data that is currently stored in the parameter marker `SQLDA`, which in this case would be the data from the most recent order line.

If the user cancels the order, the application calls the `sqlsrv_execute_in_out` API routine with the `SQLSRV_EXE_ABORT` flag to cancel batched execution without executing any previously queued requests.

```

.
.
.
sql_statement = "INSERT INTO NEW_ORDERS VALUES ( ?, ?, ?, ?, ?, ?, ? )";
sts = sqlsrv_prepare(
    assoc_id,          /* association ID.          */
    0,                /* database id, must be zero. */
    sql_statement,    /* SQL statement.          */
    &statement_id,    /* to receive prepared statement id. */
    &param_sqlda,     /* to receive parameter marker SQLDA. */
    &select_sqlda     /* to receive select list SQLDA.      */
);

```

```
do
{
action = prompt_for_order_details( param_sqlda );

switch ( action )
{
case ADD_ORDER_LINE:
    exec_flag = SQLSRV_EXE_BATCH; /* Queue for later execution */
    break;

case END_OF_ORDER:
    exec_flag = SQLSRV_EXE_WO_DATA; /* Execute queued requests */
    break;

case CANCEL_ORDER:
    exec_flag = SQLSRV_EXE_ABORT; /* Cancel batched execution */
    break;
}

sts = sqlsrv_execute_in_out(
    assoc_id,          /* association ID.          */
    0,                /* reserved, must be zero. */
    statement_id,     /* Prepared statement id.  */
    exec_flag,        /* Execute function flag.  */
    param_sqlda,      /* Parameter marker SQLDA. */
    select_sqlda      /* Select list SQLDA.      */
);

} while ( action == ADD_ORDER_LINE );

sts = sqlsrv_release_statement(
    assoc_id,          /* association ID.          */
    1,                /* number of statement id's. */
    &statement_id     /* statement id array.      */
);

.
.
.
```

Note: Alternatively, you can use the `SQLSRV_EXE_W_DATA` flag to end a batched execution operation. This flag directs the server to execute the previously queued requests, *including* the data that is currently stored in the parameter marker `SQLDA`.

4.2 Improving Row Fetch Performance

You can improve row fetch performance of your application by setting appropriate read and write buffer sizes for your client application based on the sizes of the data values. In addition, you can improve row fetch performance using the `sqlsrv_fetch_many` routine.

Setting Buffer Sizes

Oracle Corporation recommends that for a fetch-intensive application, in which you are using the `sqlsrv_fetch_many` routine and are working with large data values, such as images stored in lists (segmented strings), that you specify values greater than 1300 bytes for the `read_buffer` and `write_buffer` parameters in the `sqlsrv_associate` routine. You do this to ensure optimal performance for moving data between the server and client.

If you specify values greater than 5000 bytes for these two parameters in your application program, be sure to check that the server's dispatcher `MAX_CLIENT_BUFFER_SIZE` value is greater than these two parameter values. The default and minimum value allowed for the maximum client buffer size in a dispatcher process is 5000 bytes.

If the server's dispatcher `MAX_CLIENT_BUFFER_SIZE` is less than the `read_buffer` and `write_buffer` parameter values, the client picks the lower of the two sizes.

Fetching Multiple Rows

When your application fetches rows from a result table, it can control whether the server sends one row or several rows of data at a time to the API. Fetching multiple rows at a time generally reduces the number of client/server messages required to complete the operation.

The mechanism for fetching multiple rows is the `sqlsrv_fetch_many` routine, which is described in [sqlsrv_fetch_many](#). Using the `sqlsrv_fetch_many` API routine to initiate a fetch many operation is as follows. Call the routine after calling the `sqlsrv_open_cursor` routine before the first call to the `sqlsrv_fetch` routine. The `repeat_count` parameter specifies the number of rows that the server can send to the API the next time your application calls `sqlsrv_fetch`. When you specify a repeat count of 0, the server continuously fetches rows from the result table and transmits them to the client until all rows have been fetched. When you specify a `repeat_count` other than 0, your application must call the `sqlsrv_fetch_many` routine again once the specified number of rows have been fetched. You can call the `sqlsrv_close_cursor` API routine at any time to end a multiple row fetch operation.

Oracle Corporation recommends that you set the `repeat_count` to 0 if all rows are to be fetched. When the `sqlsrv_fetch_many` routine is called with a `repeat_count` of 0, all rows in the result table can be accessed with successive calls to `sqlsrv_fetch`. In this situation, the `sqlsrv_fetch_many` routine does not need to be called again. Oracle SQL/Services manages the message buffer transparently by filling each message buffer with as many rows as possible whenever the data in the buffer is exhausted by a `sqlsrv_fetch` call. Each successive call to the `sqlsrv_fetch` API routine retrieves the next row of data from the message buffer. When all the rows have been read from the buffer, the client API posts a network receive to read the next buffer from the server without having to send a fetch request to the server. When the specified number of rows has been fetched or when the last row in the table has been fetched, the API returns to the default behavior.

The `sqlsrv_fetch_many` API routine is responsible for configuring the Oracle SQL/Services API to begin a multiple row fetch operation; however, it does not fetch any rows. The multiple row fetch operation is not actually started until the application calls the `sqlsrv_fetch` API routine. Therefore, the `sqlsrv_fetch_many` API routine returns a success status even if no rows are in the result table.

Note: Once you initiate a multiple row fetch operation by calling the `sqlsrv_fetch_many` API routine, you cannot call other API routines until the specified number of rows or all rows have been fetched. The only exception is the `sqlsrv_close_cursor` API routine, which you can call to end a multiple row fetch operation. For this reason, and because the position of the cursor within the result table at the server is always ahead of the number of rows fetched by the client when a multiple row fetch operation is active, you cannot call the `sqlsrv_execute_in_out` API routine to execute statements such as `INSERT . . . WHERE CURRENT OF cursor_name`, `UPDATE . . . WHERE CURRENT OF cursor_name`, or `DELETE . . . WHERE CURRENT OF cursor_name` when a multiple row fetch is active.

The following example extends the sample application described in [Chapter 3](#) to use the `sqlsrv_fetch_many` API routine. In this example, note that the only change to the logic is the addition of the call to the `sqlsrv_fetch_many` API routine; the rest of the routine remains the same.

```

.
.
.
sts = sqlsrv_open_cursor(
        assoc_id,          /* association id          */

```

```

        cursor_name,          /* cursor name          */
        statement_id,        /* statement ID        */
        param_sqllda         /* parameter marker SQLDA */
    );
    .
    .
    .
    sts = sqlsrv_fetch_many(
        assoc_id,            /* association id      */
        cursor_name,        /* cursor name        */
        1,                  /* Row increment      */
        0,                  /* Fetch all rows     */
    );
    .
    .
    .
    printf("----- BEGIN RESULT TABLE -----\\n");
    do
    {
        sts = sqlsrv_fetch(
            assoc_id,        /* association id      */
            cursor_name,    /* cursor name        */
            0,              /* direction          */
            0L,             /* row number         */
            select_sqllda   /* select list SQLDA  */
        );
        switch (sts)
        {
            case SQL_SUCCESS:
                sts = display_select_list(assoc_id, select_sqllda);
                printf("----- END OF ROW -----\\n");
                break;

            case SQL_EOS:
                printf("----- END RESULT TABLE -----\\n");
                break;

            default:
                handle_error(assoc_id);
                break;
        }
    } while (sts == SQL_SUCCESS);
    .
    .
    .

```

```

sts = sqlsrv_close_cursor(
    assoc_id,          /* association id      */
    cursor_name       /* cursor name       */
);
.
.
.

```

4.3 Using Stored Procedures

A stored procedure is a set of operations performed on an Oracle Rdb database by one or more SQL statements that execute as a unit to perform a wide variety of database operations. The stored procedure resides within a stored module that is the object of compilation and encapsulates an operation, such as updating, deleting, or adding information to a table. The stored module resides as a schema object inside an Oracle Rdb database and defines at least one stored procedure. Stored procedures allow you to place an operation (or set of operations) in the database for reference by other users.

With client/server processing, your client system applications can attain much better performance by calling a set of stored procedures that reside on the server system. The stored procedures perform an operation or a series of operations on the database from the server side rather than locally storing and maintaining database requests containing the same SQL statements from the client side. With stored procedures, multiple SQL statements can be processed with a single CALL statement. This is useful if certain transactions are executed frequently. In such a case, the stored procedure can be created in advance on the server and called as needed by the client. Therefore, use stored procedures whenever possible.

For more information on using stored procedures, see the *Oracle Rdb7 Guide to SQL Programming*.

4.4 Using Compound Statements

You can dynamically prepare and execute compound statements using the dynamic SQL interface. A compound statement is a set of one or more SQL statements delimited by BEGIN and END statements. The SQL statements contained in a compound statement can contain parameter markers, select list items, or both. For example:

```

BEGIN
SET TRANSACTION READ WRITE;
INSERT INTO EMPLOYEES VALUES ( ?, ?, ?, ?, ?, ?, ?, ?, ? );
INSERT INTO SALARY HISTORY VALUES ( ?, ?, ?, ?, ? );
SELECT AVG( SALARY ), SUM( SALARY ) INTO ?, ? FROM EMPLOYEES;

```

```
COMMIT;  
END
```

Compound statements have some of the same performance advantages as stored procedures, because a series of SQL statements can be executed at the server with a single call to the `sqlsrv_execute_in_out` API routine. In some situations, compound statements have an advantage over stored procedures because they can be constructed dynamically by an application as and when required. However, it is more efficient to use a stored procedure if a particular set of SQL statements are executed frequently. Furthermore, an application must have precise knowledge of the order of all parameter markers and select list items because parameter marker names and select list item names are not returned by Oracle Rdb when you prepare a compound statement.

For more information on using compound statements, see the *Oracle Rdb7 Guide to SQL Programming*.

4.5 Reusing SQL Statements

A prepared SQL statement should not be released when the statement can be reused. After a statement is prepared, the statement can be executed many more times with the same `statement_id` (see the `sqlsrv_prepare` and `sqlsrv_execute_in_out` routines for more information). This not only reduces the number of network messages, but also reduces resource consumption by not performing extra `sqlsrv_prepare` and `sqlsrv_release` routine calls. The only disadvantage is that extra memory will be needed to keep these prepared statements before they are released. For example:

```
sts = sqlsrv_prepare(  
    assoc_id,  
    0L,  
    sql_statement_1,  
    &statement_id_1,  
    &param_sqlda_1,  
    &select_sqlda_1,  
    );  
  
sts = sqlsrv_prepare(  
    assoc_id,  
    0L,  
    sql_statement_2,  
    &statement_id_2,  
    &param_sqlda_2,  
    &select_sqlda_2,  
    );  
  
.  
.
```

```
.
do {
  GetUserChoice(&choice);
  switch (choice)
  case CHOICE_1:
    sts = sqlsrv_execute_in_out(
      assoc_id,
      0L,
      statement_id_1,
      execute_flag,
      param_sqlda_1,
      select_sqlda_1
    );
    if (sts != SQL_SUCCESS) {
      /*
       error condition
      */
    }
    break;
  case CHOICE_2:
    sts = sqlsrv_execute_in_out(
      assoc_id,
      0L,
      statement_id_2,
      execute_flag,
      param_sqlda_2,
      select_sqlda_2
    );
    if (sts != SQL_SUCCESS) {
      /*
       error condition
      */
    }
    break;
  .
  .
  .
  default:
  .
  .
  .
} /* switch (choice) */
.
.
.
```

```
} while (choice != END_OF_CHOICE);
sts = sqlsrv_release_statement(
    assoc_id,
    1,
    &statement_id_1
);
sts = sqlsrv_release_statement(
    assoc_id,
    1,
    &statement_id_2
);
.
.
.
```

Logging for Performance and Debugging

This chapter describes how to use client logging to help debug and monitor the performance of Oracle SQL/Services applications. Logging can be useful in debugging an application to verify that the application is sending the correct data to the server. Logging can be useful in tuning the performance of an application to set the network buffer size so that frequently sent messages fit into a single network packet and do not have to be split into multiple packets.

5.1 Enabling and Disabling Logging

You enable client logging by setting one or more logging flags in the CLIENT_LOG field in the association structure (see [Section 7.2](#)) before calling `sqlsrv_associate` or by using one of the following operating system-specific mechanisms:

- 32-Bit Windows operating systems

Set the `ClientLogging` option to the appropriate value in the `sqsap32.ini` file before running the application. For example:

```
ClientLogging=7
```

- 64-Bit Windows operating systems

Set the `ClientLogging` option to the appropriate value in the `sqsap64.ini` file before running the application. For example:

```
ClientLogging=7
```

- OpenVMS operating system

Define the `SQLSRV$CLIENT_LOG` logical name using the appropriate value before running the application. For example:

```
$ DEFINE SQLSRV$CLIENT_LOG 7
```

- HP-UX and Linux operating systems

Set the `SQLSRV_CLIENT_LOG` environment variable to the appropriate value before running the application. For example:

```
% setenv SQLSRV_CLIENT_LOG 7
```

Table 5–1 shows all the logging flag names and their numeric values.

Table 5–1 Client Logging Flags and Values

Flag Name	Value	Description
<code>SQLSRV_LOG_DISABLED</code>	0	Disables logging (default).
<code>SQLSRV_LOG_ASSOCIATION</code>	1	Enables association logging.
<code>SQLSRV_LOG_ROUTINE</code>	2	Enables API routine logging.
<code>SQLSRV_LOG_PROTOCOL</code>	4	Enables message protocol logging.
<code>SQLSRV_LOG_SCREEN</code> ¹	8	Sends logging to standard output on the client system as well as to the log file.
<code>SQLSRV_LOG_OPNCLS</code>	64	Opens and closes the log file around each log file write and is useful if a client is terminating abnormally while calling an Oracle SQL/Services client API routine. If the client process is terminating due to an unhandled error condition in an Oracle SQL/Services client API service, then it may be necessary to use the <code>SQLSRV_LOG_OPNCLS</code> option in order to write as much information as possible to the log file during every call to an Oracle SQL/Services client API service.
<code>SQLSRV_LOG_FLUSH</code>	128	Flushes pending output to the log file only at the end of each complete association-level, routine-level, and protocol-level log entry and is useful if a client application is terminating abnormally while executing application code. If the client process is terminating due to an unhandled error condition in the client application, use the <code>SQLSRV_LOG_FLUSH</code> option to flush pending output to the client log before each call to an Oracle SQL/Services client API service completes.
<code>SQLSRV_LOG_BINARY</code>	256	Dumps memory in structured format if data contains nonprintable characters.

¹ The `SQLSRV_LOG_SCREEN` flag is ignored on all Windows platforms.

To enable more than one type of logging, add the appropriate constants. For example:

```
associate_str.CLIENT_LOG = SQLSRV_LOG_ROUTINE + SQLSRV_LOG_SCREEN;
```

Most of the operating systems supported by the Oracle SQL/Services client API do not support multiple versions of the same file. However, sometimes it is necessary or advantageous to preserve the client log files produced by multiple associations. For example, Microsoft Access frequently uses two associations to process user requests. Therefore, Oracle SQL/Services uses the following algorithm to construct a unique client log file name to retain multiple client log files:

1. Use client.log if there is no existing log file named client.log.
2. Using client<nn>.log as a template, increment nn from 00 to 99 looking for a log file name for which there is no existing log file. For example client00.log, client01.log, and so forth. Use the first available unused file name.
3. If client.log and client00.log through client99.log all exist, use client.log, overwriting the existing client.log file.

Using this algorithm, Oracle SQL/Services can retain up to 101 client log files. Client log files can consume large amounts of disk space, depending on the application. Therefore, you may want to delete or archive log files once you have finished monitoring or debugging an application.

5.2 Association Logging

Association logging occurs whenever a client/server association is created, terminated, or aborted. Use this type of logging to debug server access in application programs.

Depending on the API routine called, association log entries include some or all of the following items:

- ❶ A header that identifies the entry as ASSOCIATE LEVEL LOG
- ❷ The name of the API routine
- ❸ The association identifier
- ❹ The name of the server node
- ❺ The name of the user account on the server
- ❻ The error status for the API routine
- ❼ The detailed error code for network or server errors

- ❸ The type of network transport used for client/server communication: DECnet, TCP/IP, or Oracle Net

For example:

```

ASSOCIATE LEVEL LOG ❶
----SQLSRV_ASSOCIATE ❷
-----SQLSRV_ASSOCIATE ID: 7ac50 ❸
-----NODE: abcdef, ❹ USERNAME: xxxxxx, ❺ SQLCODE: 0, ❻ SQLERRD[0] 0 ❼
-----NETWORK TRANSPORT: DECnet ❽
    
```

These messages indicate that an association with a server system was created normally.

5.3 Routine Logging

Routine logging occurs whenever your application calls an Oracle SQL/Services API routine. Use this type of logging to debug execution flow in application programs.

Routine log entries include some or all of the following items:

- ❶ A header that identifies the entry as ROUTINE LEVEL LOG and contains a timestamp
- ❷ The name of the API routine
- ❸ The length in bytes of the SQL statement string
- ❹ The SQL statement string
- ❺ The name of the cursor
- ❻ The SQL statement identifier
- ❼ The execution flag

For example:

```

ROUTINE LEVEL LOG at 07:57:08 on 15-DEC-2009 ❶
----SQLSRV_PREPARE ❷
-----SQL STATEMENT
-----len: 45, ❸ value: Select * from sqlsrv_table
                           where USERNAME = ? ❹
    
```

```

ROUTINE LEVEL LOG at 07:57:08 on 15-DEC-2009
----SQLSRV_OPEN_CURSOR
-----CURSOR NAME
-----sqlsrv_cursor ❺
-----STATEMENT ID
                           1199896 ❻
    
```

```

ROUTINE LEVEL LOG at 07:57:08 on 15-DEC-2009
----SQLSRV_EXECUTE_IN_OUT
-----STATEMENT ID
-----1199897
-----EXECUTE FLAG:SQLSRV_EXE_W_DATA ⑦
.
.
.

```

Routine log entries that follow the `sqlsrv_prepare` routine also include metadata:

- ① The type of SQLDA (parameter marker or select list)
- ② The number of parameter markers or select list items
- ③ The Oracle SQL/Services data type
- ④ For character data types, the length of the data variable
- ⑤ For numeric and date-time data types, the length of the data variable and the scale factor or type of date or interval, respectively (see [Section 7.6](#))
- ⑥ The name of the column

For example:

```

ROUTINE LEVEL LOG at 07:57:08 on 15-DEC-2009
----SELECT LIST SQLDA ①
-----SQLDA: SQLD 4 ②
-----[0].SQLTYPE: SQLSRV_ASCII_STRING, ③ SQLLEN: 33 ④
-----SQLNAME: USERNAME
-----[1].SQLTYPE: SQLSRV_GENERALIZED_NUMBER, SIZE 11, SCALE 0 ⑤
-----SQLNAME: INTEGER_VALUE ⑥
-----[2].SQLTYPE: SQLSRV_GENERALIZED_NUMBER, SIZE 24, SCALE 0
-----SQLNAME: DOUBLE_VALUE
-----[3].SQLTYPE: SQLSRV_GENERALIZED_DATE, SIZE 17, TYPE 0
-----SQLNAME: DATE_VALUE

```

Routine log entries that follow the `sqlsrv_fetch`, `sqlsrv_open_cursor`, and `sqlsrv_execute_in_out` routines also include data:

- ① The type of SQLDA (parameter marker or select list)
- ② The number of parameter markers or select list items
- ③ The Oracle SQL/Services data type
- ④ The value of the indicator variable
- ⑤ The length of the value of the data variable

⑥ The value of the data variable

For example:

```

ROUTINE LEVEL LOG at 07:57:08 on 15-DEC-2009
----SELECT LIST SQLDA ①
-----SQLDA: SQLD 4 ②
----- [0].SQLTYPE: SQLSRV_ASCII_STRING, ③ SQLIND: 0 ④
-----len: 32, ⑤ value: xxxxxx ⑥
----- [1].SQLTYPE: SQLSRV_GENERALIZED_NUMBER, SQLIND: 0
-----len: 1, value: 1
----- [2].SQLTYPE: SQLSRV_GENERALIZED_NUMBER, SQLIND: 0
-----len: 23, value: 1.2800000000000000E+002
----- [3].SQLTYPE: SQLSRV_GENERALIZED_DATE, SQLIND: 0
-----len: 16, value: 1988070100000000
    
```

5.4 Message Protocol Logging

Message protocol logging occurs whenever a message is transmitted between the client API and the server process. Use this type of logging to verify that the Oracle SQL/Services client/server communications protocol is working as expected and to determine if request or response messages are being split into multiple network packets.

Protocol log entries include some or all of the following items:

- ① A header that identifies the entry as `PROTOCOL LEVEL` and contains a timestamp
- ② The word `CLIENT` to indicate where the log file was written
- ③ The word "read" or "write" to indicate whether the packet was received or transmitted, respectively
- ④ The timestamp
- ⑤ The packet identification number, which is incremented from 0 from the beginning of the association
- ⑥ The packet sequence number, which is nonzero in the following instances:
 - Batched execution
 - Multiple row fetches
 - Any message that is too large for a single packet
- ⑦ The message tag, which indicates a function to be executed on the server, an acknowledgment (ACK) that a function was executed successfully, or an error (ERROR) message
- ⑧ Tags that represent routine parameters, including:

- ⑨ The total length in bytes of the data
- ⑩ The number of bytes of data in this packet
- ⑪ The data value
- ⑫ Subtags that describe SQLDA structures; indicates whether an SQLDA(1) or SQLDA2 is being used

For example:

```

PROTOCOL LEVEL LOG ① CLIENT: ② write (logonly) ③ at 07:57:08 on 15-DEC-2009 ④
----PACKET ID: 11, ⑤ PACKET SEQUENCE: 0 ⑥
-----SQLSRV_FETCH ⑦
-----STATEMENT ID ⑧
-----len: 4, ⑨ value: 1000001 ⑩
-----END OF MESSAGE

```

```

PROTOCOL LEVEL LOG CLIENT: read at 07:57:08 on 15-DEC-2009
----PACKET ID: 11, PACKET SEQUENCE: 0
-----SQLSRV_FETCH ACK
-----FETCH ROW NUMBER
-----len: 4, value: 3
-----SELECT LIST DATA ⑪
-----len: 2, value: 4
-----SQLVAR INDEX SQLDATA SQLIND ⑫
-----SQLSRV_SQLVAR_INDEX ⑬
-----len: 2, value: 0
-----SQLSRV_SQLVAR_SQLIND1 ⑭
-----len: 2, value: 0
-----SQLSRV_SQLVAR_SQLDATA1, len: 32 ⑮
-----len: 32, value: SMITH
-----SQLVAR INDEX SQLDATA SQLIND
-----SQLSRV_SQLVAR_INDEX
-----len: 2, value: 1
-----SQLSRV_SQLVAR_SQLIND1
-----len: 2, value: 0
-----SQLSRV_SQLVAR_SQLDATA1, len: 1
-----len: 1, value: 3
.
.
.
-----END OF MESSAGE

```

To determine the data type of an SQLDATA value, review the SQLDA information from the routine level log that is written at prepare time. For example:

```

ROUTINE LEVEL LOG at 07:57:08 on 15-DEC-2009
----SELECT LIST SQLDA
-----SQLDA: SQLD 2
-----[0].SQLTYPE: SQLSRV_ASCII_STRING, SQLLEN: 15
-----SQLNAME: EMPLOYEE_NAME
-----[1].SQLTYPE: SQLSRV_GENERALIZED_NUMBER, SIZE 6, SCALE 0
-----SQLNAME: COST_CENTER
.
.
.

```

The following information is logged in the ASSOCIATION ACK message for the protocol level log:

- ❶ A header that identifies the entry as PROTOCOL LEVEL LOG CLIENT and contains a timestamp
- ❷ The name of the API routine
- ❸ The version of SQL used by the server
- ❹ The version of Oracle Rdb used by the server
- ❺ The server protocol version number
- ❻ The version of the server
- ❼ The process ID (PID) of the executor
- ❽ A flag to indicate the service attributes
- ❾ The maximum server buffer size

For example:

```

.
.
.
PROTOCOL LEVEL LOG CLIENT: read ❶ at 07:57:08 on 15-DEC-2009
----PACKET ID: 1, PACKET SEQUENCE: 0
-----SQLSRV_ASSOCIATE ACK ❷
-----DEC SQL VERSION ❸
-----SQLSRV_ASCII_STRING, len: 8
-----len: 7, value: V7.2-400
-----RDB ENG VERSION ❹
-----SQLSRV_ASCII_STRING, len: 8
-----len: 7, value: V7.2-400

```

```

-----SERVER PROTOCOL VERSION ⑤
-----len: 2, value: 14
-----SQLSRV SRV VERSION ⑥
-----SQLSRV_ASCII_STRING, len: 8
-----len: 7, value: V7.3-030
-----EXECUTOR PID ⑦
-----len: 4, value: 727725642
-----SERVICE ATTRIBUTES ⑧
-----len: 2, value: 0
-----MAXIMUM SERVER BUFFER SIZE
-----len: 4, value: 5000 ⑨
-----END OF MESSAGE
.
.
.

```

These messages indicate that an association is made between a client and a server with a protocol of 14, using V7.2 of SQL and V7.2 of Oracle Rdb, using an executor whose process ID is 727725642 (decimal), using a universal (nondatabase) service, and a maximum server buffer size of 5000 bytes. This information can be beneficial in resolving server-related environmental issues and protocol version issues.

This chapter describes the routines in the Oracle SQL/Services client application programming interface (API).

6.1 Documentation Format

Each Oracle SQL/Services API routine is documented using a structured format called the routine template. Table 6–1 lists the sections of the routine template, along with the information that is presented in each section and the format used to present the information. Some sections require no further explanation beyond what is given in Table 6–1. Those that require additional explanation are discussed in the subsections that follow the table.

Table 6–1 Sections in the Routine Template

Section	Description
Routine Name	Appears at the top of the page, followed by the English name of the routine
Overview	Appears directly below the routine name and explains, usually in one or two sentences, what the routine does
C Format	Shows the C function prototype from the include file sqlsrv.h
Parameters	Provides detailed information about each parameter
Notes	Contains additional pieces of information related to applications programming
Errors	Lists the Oracle SQL/Services errors that can occur in the routine

6.1.1 Routine Name

The Oracle SQL/Services API routine names are shown in the form sqlsrv_XXX, sqlsrv_sqlca_XXX, sqlsrv_sqllda_XXX, or sqlsrv_sqllda2_XXX, throughout the manual.

6.1.2 Return Values

The Oracle SQL/Services routine template does not include a "Returns" section. Except where explicitly noted, the Oracle SQL/Services API routines return a signed longword integer containing one of the values shown in [Table 6–2](#).

Table 6–2 API Return Values

Return Value	Description
$n = \text{SQL_SUCCESS}^1$	The routine completed successfully.
$n < \text{SQL_SUCCESS}$	An error occurred during processing. Refer to the <code>SQLCA.SQLCODE</code> for the specific error.
$n > \text{SQL_SUCCESS}$	A warning was issued during processing. Refer to the <code>SQLCA</code> for additional information.

¹ The symbol `SQL_SUCCESS` is defined as 0 in the include file `sqlsrv.h`.

6.1.3 C Format Section

The C Format section shows the function prototypes for the Oracle SQL/Services API routines exactly as they are declared in the include file `sqlsrv.h`.

6.2 Oracle SQL/Services Data Types

[Table 6–3](#) lists the data types used in Oracle SQL/Services API routine calls and structures.

Table 6–3 API Parameter Data Types

Data Type	Description
<code>ASSOCIATE_ID</code>	An identifier that uniquely distinguishes one association from all others
<code>ASSOCIATE_STR</code>	Structure that specifies association characteristics
character string	Pointer to a null-terminated character string of type <code>char</code>
<code>CHARPTR</code>	Pointer to a buffer or variable of type <code>unsigned char</code>
<code>PTRCHARPTR</code>	Pointer to a variable of type <code>CHARPTR</code>
<code>SHORTPTR</code>	Pointer to a variable of type <code>short</code>
<code>LONGPTR</code>	Pointer to a variable of type <code>SQS_LONGWORD</code>
<code>PTRSHORTPTR</code>	Pointer to a variable of type <code>short *</code> or <code>SHORTPTR</code>
<code>PTRLONGPTR</code>	Pointer to a variable of type <code>LONGPTR</code>

Table 6–3 API Parameter Data Types(Cont.)

Data Type	Description
word (signed)	16-bit signed integer
word (unsigned)	16-bit unsigned integer
longword (signed)	32-bit signed integer
longword (signed) array	Array of signed 32-bit integers
longword (unsigned)	32-bit unsigned integer
pointer	An address whose size is platform specific
SQLDA_ID	An identifier (pointer or handle) used to access SQLDA data and metadata information
void	Arguments described with the void data type are reserved for future use
SQLCA_ID	An identifier (pointer or handle) used to access the data and structure SQLCA

To facilitate the development of portable Oracle SQL/Services client software modules, the following two 32-bit integer data types are type defined in the `sqlsrv.h` file and may be used to define variables in your programs:

```
SQLS_LONGWORD          32-bit signed longword
SQLS_UNSIGNED_LONGWORD 32-bit unsigned longword
```

6.3 API Routines

This section describes each of the API routines.

6.3.1 Association Routines

Association routines create and terminate client/server associations and control the association environment. Association routines include the following routines:

- `sqlsrv_abort` routine (see [sqlsrv_abort](#))
- `sqlsrv_associate` routine (see [sqlsrv_associate](#))
- `sqlsrv_get_associate_info` routine (see [sqlsrv_get_associate_info](#))
- `sqlsrv_release` routine (see [sqlsrv_release](#))

sqlsrv_abort

The `sqlsrv_abort` routine drops the network link between the client and server, frees client association resources, and rolls back active transactions on the server.

C Format

```
extern int sqlsrv_abort(  
    ASSOCIATE_ID associate_id);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

Errors

SQLSRV_INTERR Internal error.

SQLSRV_INVASC Invalid association identifier.

sqlsrv_associate

The `sqlsrv_associate` routine creates a network link between your application and the server, using the node name, user name, and password input parameters. It creates an association identifier used in subsequent routine calls and optionally binds specific input parameters, such as the message protocol buffers and SQLCA structure, to the association.

C Format

```
extern int sqlsrv_associate(  
    char *node_name,  
    char *user_name,  
    char *password,  
    CHARPTR read_buffer,  
    CHARPTR write_buffer,  
    SQS_LONGWORD read_buffer_size,  
    SQS_LONGWORD write_buffer_size,  
    SQLCA_ID *sqlca_str,  
    struct ASSOCIATE_STR *associate_str,  
    ASSOCIATE_ID *associate_id);
```

Parameters

node_name

Address of a null-terminated string containing the name of the server node. If you are using the Oracle Net transport, this parameter specifies either the Oracle Net Service Name or the Oracle Net Alias.

user_name (optional)

Address of a null-terminated string containing the user name that the server uses to authenticate the user and determine if the user is authorized to access the specified service. If this parameter is NULL and the DECnet transport is selected, then the server looks for an Oracle SQL/Services proxy for the client node name. If there is no proxy for the client node, or a transport other than DECnet is selected, the server checks to see if unknown users are authorized to access the specified service. If unknown users are not authorized to access the service, the association fails. See the *Oracle SQL/Services Server Configuration Guide* for more information on client authentication and authorization, and how Oracle SQL/Services uses the client user name.

password (optional)

Address of a null-terminated string containing the corresponding password to the specified user name. You must include a password when you specify a user name.

read_buffer (optional)

Address of a buffer of type unsigned char used by the API to receive messages from the server. If you specify a buffer address of NULL, Oracle SQL/Services allocates the buffer. Oracle Corporation recommends that you pass a NULL value.

write_buffer (optional)

Address of a buffer of type unsigned char used by the API to build messages to send to the server. If you specify a buffer address of NULL, Oracle SQL/Services allocates the buffer. Oracle Corporation recommends that you pass a NULL value.

read_buffer_size (optional)

The size in bytes of the read_buffer. If a read_buffer is passed, the read_buffer_size must contain its size. The minimum value is 256 bytes. If no read_buffer is passed, Oracle SQL/Services allocates a buffer of size read_buffer_size if the parameter is non-zero, or of a default size if the parameter is zero. See [Table 6-4](#) for valid combinations of buffer-related parameters. The values for read_buffer_size and write_buffer_size must be equal. This is true for both user-allocated buffers, or when the application requests that Oracle SQL/Services allocate buffers of a specified size.

Table 6-4 Valid Combinations of Buffer-Related Parameters for the sqlsrv_associate Routine

Buffer Specified	Buffer Size Specified	Oracle SQL/Services Result	Comments
NULL	0	API allocates 1300	1300 is default
NULL	256+	API allocates what user specified up to 3200	Client drops back to the server-supported value
Valid user-allocated buffer	256+	API uses what user specified up to 3200	Client drops back to the server-supported value

write_buffer_size (optional)

The size in bytes of the API buffer used to send messages. If a write_buffer is passed, the write_buffer_size must contain its size. The minimum value is 256 bytes. If no write buffer is passed, Oracle SQL/Services allocates a buffer of size write-buffer-size if the parameter is non-zero, or of a default size if the parameter is zero. See [Table 6-4](#) for valid combinations of buffer-related parameters. The values for write_buffer_size and read_buffer_size must be equal.

sqlca_str (optional)

Address of an SQLCA (SQL Communications Area) structure (see [Section 7.3](#)). If you specify a buffer address of NULL, Oracle SQL/Services allocates the SQLCA structure. Oracle Corporation recommends that you pass a NULL value.

The SQLCA structure is defined in the include file sqlsrvc.h. All valid error codes are defined in sqlsrv.h.

associate_str

Address of an ASSOCIATE_STR structure used to define optional association characteristics (see [Section 7.2](#)). The ASSOCIATE_STR structure is defined in the include file sqlsrv.h.

associate_id

A pointer to a variable of type ASSOCIATE_ID into which the API writes the association identifier. This identifier distinguishes one active association from all others.

Notes

- Errors that are detected early in the processing of the sqlsrv_associate routine are returned only in the longword return value from sqlsrv_associate. These errors include SQLSRV_INVARG, SQLSRV_INVSQLCA, SQLSRV_NO_MEM, and SQLSRV_INVBUFSIZ.
- If the read or write buffer size is less than 256 bytes, Oracle SQL/Services returns an SQLSRV_INVARG error on sqlsrv_associate.
- If the read_buffer or write_buffer parameter values are user-allocated buffers, but the read_buffer_size or write_buffer_size parameter values are specified as 0, Oracle SQL/Services returns an SQLSRV_INVARG error on sqlsrv_associate.
- If the read_buffer and write_buffer size are not of equal size, Oracle SQL/Services returns an SQLSRV_INVBUFSIZ error on sqlsrv_associate.
- When errors are detected before an associate_id is allocated for the associate session, the sqlsrv_associate routine writes NULL to the associate_id variable to indicate that no associate_id is assigned to this association. In this case, applications should not make subsequent Oracle SQL/Services API calls that require an associate_id.
- When errors are detected after an associate_id is allocated for the association, the sqlsrv_associate routine writes a non-NULL value to the associate_id variable. In this case, applications can make calls to a limited subset of Oracle SQL/Services API routines, such as the sqlsrv_sqlca_error, sqlsrv_sqlca_error_text and sqlsrv_sqlca_sqlstate routines, to retrieve additional information about the error. In this situation, the

application should call the `sqlsrv_release` API routine to release the resources held by the association after retrieving the additional error information.

- If a client application connects to a server using read and write buffer sizes that are larger than the server can handle, the `sqlsrv_associate` routine adjusts the buffer sizes locally and immediately returns a success status to the client application.

The mechanism used by the `sqlsrv_associate` routine to select an appropriate buffer size is transparent to the client application. Client applications can call the `sqlsrv_get_associate_info` routine to determine the actual buffer size being used for the association.

- When a user connects to a database service, the `sqlsrv_associate` routine completes with the SQL error code `-1028, SQL_NO_PRIV`, if the user has been granted access to the Oracle SQL/Services service, but has not been granted the right to attach to the database. A record of the failure is written to the executor process's log file.
- When an association is no longer required, your application calls the `sqlsrv_release` routine to commit any outstanding transactions, release any prepared statements, disconnect the network link, and release any memory allocated to the association at the client and server.

Errors

<code>SQLSRV_CONNTIMEOUT</code>	The connection to the server could not be completed within the specified time limit.
<code>SQLSRV_DLL_ADDR_ERR</code>	Windows application <code>GetProcAddress</code> call error.
<code>SQLSRV_DLL_LOAD_ERR</code>	Windows application <code>LoadLibrary</code> call error.
<code>SQLSRV_EXEINTERR</code>	The executor has encountered an internal or other error condition.
<code>SQLSRV_GETACCINF</code>	Client authentication or authorization failed.
<code>SQLSRV_HOSTERR</code>	An attempt to access TCP/IP host files failed.
<code>SQLSRV_INTERR</code>	Internal error.
<code>SQLSRV_INV_CLS</code>	Invalid or unknown service name specified.
<code>SQLSRV_INVARG</code>	Invalid routine parameter.
<code>SQLSRV_INVASCSTR</code>	Invalid parameter in <code>ASSOCIATE_STR</code> .
<code>SQLSRV_INVBUFSIZ</code>	Invalid read or write buffer size.
<code>SQLSRV_INVSQLCA</code>	Invalid SQLCA structure.

SQLSRV_NETERR	Network transport returned an error.
SQLSRV_NO_MEM	API memory allocation failed.
SQLSRV_NO_PRC AVL	No executor processes are available to service the connection.
SQLSRV_OPNLOGFIL	Unable to open log file.
SQLSRV_PWD_EXPIRED	The password has expired.
SQLSRV_SQLNET_BADCONNECT	Oracle Net is unable to connect to the server.
SQLSRV_SQLNET_BADINIT	Unable to initialize Oracle Net.
SQLSRV_SQLNET_BADSERVICE	Oracle Net is unable to resolve the service name being specified.
SQLSRV_SVCNOTRUN	The specified service is not running.
SQLSRV_SVC_SHUTDOWN	The specified service has been shut down.
SQLSRV_TOOMANYCONNECTS	The maximum number of network connections has been reached at the server.
SQLSRV_XPT_MISSING	The specified network transport is not installed or is not available on the client node operating system.

sqlsrv_get_associate_info

The `sqlsrv_get_associate_info` routine returns attributes of the association structure. The information is copied to a user buffer when `sqlsrv_get_associate_info` is called.

C Format

```
extern int sqlsrv_get_associate_info(
    ASSOCIATE_ID associate_id,
    unsigned short int info_type,
    unsigned short int buf_len,
    char *info_buf,
    SQS_LONGWORD *info_num);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

info_type

Specifies the type of information to be returned. The values of the `info_type` parameter are shown in [Table 6-5](#).

Table 6-5 Values of the info_type Parameter

Value	Description
SQLSRV_INFO_SQL_VERSION	Gets the version of SQL used by the server and returns it as character data.
SQLSRV_INFO_ENGINE	Gets the version of the Oracle Rdb database engine used by the server and returns it as character data.
SQLSRV_INFO_SRV_VERSION	Gets the version of the Oracle SQL/Services server and returns it as character data.
SQLSRV_INFO_PROTOCOL	Gets the protocol level of the server and returns it as a longword.
SQLSRV_INFO_SERVER_PID	Gets the process ID (PID) of the executor and returns it as a longword.
SQLSRV_INFO_TRANSPORT	Gets the transport type in use and returns the information as character data.
SQLSRV_INFO_BUFFER_SIZE	Gets the negotiated client buffer size and returns the information as a longword.

Table 6–5 Values of the info_type Parameter(Cont.)

Value	Description
SQLSRV_INFO_SERVICE_ATTRS	Gets the service attributes and returns the value as a bit mask in a 32-bit longword. The bit mask is defined in Table 6–6 .

The values of the SQLSRV_INFO_SERVICE_ATTRS bit masks are shown in [Table 6–6](#).

Table 6–6 Values of the SQLSRV_INFO_SERVICE_ATTRS Bit Masks

Value	Numeric Value	Description
SQLSRV_INFO_SVC_DBSERVICE	1	Set if the service is a database service.
SQLSRV_INFO_SVC_REUSETXN	2	Set if the service is transaction reusable.
SQLSRV_INFO_SVC_TIEDEEXEC	4	Set if the service is transaction reusable and the association is tied to a single executor for the life of the connection. This bit will always be set if the SQLSRV_INFO_SVC_REUSETXN bit is set.

buf_len

The size of a user-supplied buffer for information returned as character data.

info_buf

Address of a user-supplied buffer of type char for information returned as character data. This is required for information returned as character data.

info_num

The address of a variable of type SQS_LONGWORD to be used for information returned as a longword, or for the number of characters returned for information returned as character data. This is required for information returned as a longword, and optional for information returned as character data.

Notes

- The sqlsrv_get_associate_info service returns one attribute per call. To get multiple attributes, your application must call sqlsrv_get_associate_info once for each attribute.

- For information returned as character data, if the actual length of the string is longer than the user-supplied buffer, the returned information is truncated to the size of the buffer.

Errors

SQLSRV_INVARG	Invalid routine parameter.
SQLSRV_INVASC	Invalid association identifier.
SQLSRV_SRVNOTSUP	The server is not supported.

sqlsrv_release

The `sqlsrv_release` routine commits active transactions on the server and requests an orderly termination of the association, which disconnects the network link and frees client association resources.

C Format

```
extern int sqlsrv_release(  
    ASSOCIATE_ID associate_id,  
    char *stats);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

stats (optional)

This parameter must be 0 or NULL.

Notes

- When an association is no longer required, your application calls the `sqlsrv_release` routine to commit any outstanding transactions, release any prepared statements, disconnect the network link, and release any memory allocated to the association at the client and server.

Errors

SQLSRV_CONNTIMEOUT	The connection to the server could not be completed within the specified time limit.
SQLSRV_EXEINTERR	The executor has encountered an internal or other error condition.
SQLSRV_INTERR	Internal error.
SQLSRV_INVASC	Invalid association identifier.
SQLSRV_MULTI_ACT	A batched <code>sqlsrv_execute_in_out</code> or <code>sqlsrv_fetch_many</code> context is active.
SQLSRV_NETERR	Network transport returned an error.

SQLSRV_SVC_SHUTDOWN The specified service has been shut down.

6.3.2 SQL Statement Routines

SQL statement routines prepare and execute SQL statements, and release prepared SQL statement resources. These routines map to the dynamic SQL interface. SQL statement routines include the following routines:

- sqlsrv_prepare routine (see [sqlsrv_prepare](#))
- sqlsrv_execute_in_out routine (see [sqlsrv_execute_in_out](#))
- sqlsrv_execute_immediate routine (see [sqlsrv_execute_immediate](#))
- sqlsrv_release_statement routine (see [sqlsrv_release_statement](#))

sqlsrv_prepare

The `sqlsrv_prepare` routine prepares the input SQL statement and returns a value that identifies the prepared statement. It also optionally allocates and initializes `SQLDA` or `SQLDA2` parameter markers and select list items associated with the SQL statement.

C Format

```
extern int sqlsrv_prepare(  
    ASSOCIATE_ID associate_id,  
    SQS_LONGWORD database_id,  
    char *sql_statement,  
    SQS_LONGWORD *statement_id,  
    SQLDA_ID *parameter_marker_sqlda,  
    SQLDA_ID *select_list_sqlda);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

database_id

This parameter must be 0. Databases are referenced within the SQL statement syntax.

sql_statement

Address of a null-terminated string containing the SQL statement to be prepared.

statement_id

Address of a variable of type `SQS_LONGWORD` into which the API writes the identifier used in all subsequent references to the prepared statement.

parameter_marker_sqlda

A pointer to a variable of type `SQLDA_ID`.

Oracle Corporation recommends that you let the Oracle SQL/Services client API allocate memory for each parameter marker `SQLDA` or `SQLDA2`, in which case your application should store `NULL` in the parameter marker `SQLDA_ID` before calling `sqlsrv_prepare`. If your application provides its own memory for each parameter marker `SQLDA` or `SQLDA2`, your application must store the address of that memory in the parameter marker `SQLDA_ID` before calling `sqlsrv_prepare`.

If the SQL statement is prepared successfully, Oracle SQL/Services allocates memory for the SQLDA or SQLDA2, stores the address in the SQLDA_ID, if necessary, and writes metadata information about all the parameter markers contained in the SQL statement to the parameter marker SQLDA or SQLDA2.

select_list_sqlda

A pointer to a variable of type SQLDA_ID.

Oracle Corporation recommends that you let the Oracle SQL/Services client API allocate memory for each select list SQLDA or SQLDA2, in which case your application should store NULL in the select list SQLDA_ID before calling sqlsrv_prepare. If your application provides its own memory for each select list SQLDA or SQLDA2, your application must store the address of that memory in the select list SQLDA_ID before calling sqlsrv_prepare.

If the SQL statement is prepared successfully, Oracle SQL/Services allocates memory for the SQLDA or SQLDA2, stores the address in the SQLDA_ID, if necessary, and writes metadata information about all the select list items contained in the SQL statement to the select list SQLDA or SQLDA2.

Notes

- Oracle Corporation recommends that you let the Oracle SQL/Services client API allocate memory for each parameter marker and select list SQLDA or SQLDA2. To check for the presence of parameter markers or select list items in this situation, your application tests the respective SQLDA_ID for a non-NULL value. If the SQLDA_ID does contain a non-NULL value, the number of parameter markers or select list items may be obtained from the SQLD field of the SQLDA or SQLDA2 using the sqlsrv_sqlda_sqld, sqlsrv_sqlda_sqld73, sqlsrv_sqlda2_sqld or sqlsrv_sqlda2_sqld73 routines.
- If your application provides its own memory for each parameter marker and select list SQLDA or SQLDA2, it must initialize the SQLDAID field to "SQLDA" or "SQLDA2"; the SQLDABC field to the total size, in bytes, of the SQLDA; the SQLD field to zero; and the SQLN field to the total number of SQLVARs or SQLVAR2s in the SQLDA or SQLDA2. Upon successful completion of a call to sqlsrv_prepare, the presence and number of parameter markers or select list items is indicated by a non-zero value in the SQLD field of the SQLDA or SQLDA2.
- To enable your application to distinguish between different types of SQL statements, Oracle Rdb stores the statement type in the SQLERRD[1] field of the SQLCA. The statement types, as defined by Oracle Rdb, are as follows:
 - 0: statement is an executable statement other than a CALL statement
 - 1: statement is a SELECT statement
 - 2: statement is a CALL statement

You can retrieve this value using the `sqlsrv_sqlca_sqlerrd` routine.

- If the prepared statement is a `CALL` statement, the metadata for any input or input/output arguments is written to the parameter marker `SQLDA` or `SQLDA2`, while the metadata for any output or input/output arguments is written to the select list `SQLDA` or `SQLDA2`. Note that metadata for each input/output argument is written to both the parameter marker and select list `SQLDA`s or `SQLDA2`s. However, in all other respects, your application processes a `CALL` statement in the same manner as any other executable `SQL` statement.

Errors

<code>SQLSRV_CONNTIMEOUT</code>	The connection to the server could not be completed within the specified time limit.
<code>SQLSRV_EXEINTERR</code>	The executor has encountered an internal or other error condition.
<code>SQLSRV_INTERR</code>	Internal error.
<code>SQLSRV_INVARG</code>	Invalid routine parameter.
<code>SQLSRV_INVASC</code>	Invalid association identifier.
<code>SQLSRV_INVSQDA</code>	Invalid <code>SQLDA</code> , <code>SQLDA2</code> , or <code>SQLDA_ID</code> .
<code>SQLSRV_NETERR</code>	Network transport returned an error.
<code>SQLSRV_NO_MEM</code>	API memory allocation failed.
<code>SQLSRV_SVC_SHUTDOWN</code>	The specified service has been shut down.

sqlsrv_execute_in_out

The `sqlsrv_execute_in_out` routine executes any prepared, executable SQL statement. The prepared statement may accept input from a parameter marker `SQLDA` or `SQLDA2`, or return output in a select list `SQLDA` or `SQLDA2`, or both. The `sqlsrv_execute_in_out` routine supersedes the `sqlsrv_execute` routine.

C Format

```
extern int sqlsrv_execute_in_out(  
    ASSOCIATE_ID associate_id,  
    SQS_LONGWORD database_id,  
    SQS_LONGWORD statement_id,  
    short int execute_flag,  
    SQLDA_ID parameter_marker_sqlda,  
    SQLDA_ID select_list_sqlda);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

database_id

This parameter must be 0. Databases are referenced within the SQL statement syntax.

statement_id

The statement ID returned previously by `sqlsrv_prepare` when the statement was prepared. If you start batched execution for a particular statement ID using the `SQLSRV_EXE_BATCH` flag, you must end batched execution for that statement ID using one of the `SQLSRV_EXE_W_DATA`, `SQLSRV_EXE_WO_DATA`, or `SQLSRV_EXE_ABORT` flags before you can execute any other prepared statement.

execute_flag

For a prepared statement that contains parameter markers, this parameter specifies whether the API sends single or multiple sets of parameter marker values to the server for processing (see [Section 4.1](#) for more information on batched execution). For all other prepared SQL

statements, this value must be 0 (SQLSRV_EXE_W_DATA). The values of the `execute_flag` parameter are shown in [Table 6-7](#).

Table 6-7 Values of the `execute_flag` Parameter in `sqlsrv_execute_in_out`

Flag Name	Value	Description
SQLSRV_EXE_W_DATA	0	Builds an execute request message in the message buffer using the current values in the parameter marker <code>SQLDA</code> or <code>SQLDA2</code> , then sends the message to the server for execution. If batched execution is currently in effect for the statement, this parameter appends the new message to the previous messages in the message buffer, and sends all the messages to the server for execution along with any requests already queued at the server.
SQLSRV_EXE_BATCH	1	Starts or continues batched execution by building an execute request message in the message buffer using the current values in the parameter marker <code>SQLDA</code> or <code>SQLDA2</code> . If batched execution is already in effect for the statement, this parameter appends the new message to the previous messages in the message buffer. Using batched execution, no messages are sent to the server until the message buffer fills up, whereupon the messages in the message buffer are sent to the server to be queued up for subsequent execution behind any previously queued requests.
SQLSRV_EXE_WO_DATA	2	Ends batched execution by sending the current contents of the message buffer to the server for execution along with any previously queued requests. Note that the current values in the parameter marker <code>SQLDA</code> or <code>SQLDA2</code> are <i>not</i> sent to the server when batched execution is ended using the <code>SQLSRV_EXE_WO_DATA</code> flag.
SQLSRV_EXE_ABORT	3	Aborts batched execution by discarding the current contents of the message buffer and sending a message to the server directing it to discard any previously queued requests.

parameter_marker_sqlda

An SQLDA_ID that identifies the parameter marker SQLDA or SQLDA2 containing any parameter marker values or input and input/output argument values for the SQL statement to be executed.

select_list_sqlda

An SQLDA_ID that identifies the select list SQLDA or SQLDA2 to receive any select list items or output and input/output argument values returned by the SQL statement to be executed.

Notes

- On successful completion of a call to `sqlsrv_execute_in_out`, Oracle SQL/Services stores the total number of database rows inserted, updated, or deleted in the `SQLERRD[2]` field of the `SQLCA`. Because multiple rows may be updated or deleted when you execute an `UPDATE` or `DELETE` statement, this value may be higher than the number of times that you called `sqlsrv_execute_in_out` for a particular batched execution. You can retrieve the row count from the `SQLCA` using the `sqlsrv_sqlca_count` routine. Note that Oracle Rdb does not return a row count value if you use the `CALL` statement to invoke a stored procedure, or if you execute a compound statement.
- If an error occurs executing a request queued for batched execution, then the server discards any remaining requests in the batch execution queue and returns the error to the client. Currently, there is no way to determine precisely which request caused the failure. Therefore, client applications will typically roll back the transaction in this situation.
- If you use batched execution to execute an SQL statement containing both parameter markers and select list items, such as `UPDATE . . . RETURNING`, then only the results from the execution of the last queued request are returned to the client. The results from the execution of all previously queued requests are lost.
- Once you start batched execution for a particular statement ID, you cannot call any API routines other than `sqlsrv_execute_in_out`, nor can you execute any other prepared statements until you end batched execution for the current statement ID using one of the `SQLSRV_EXE_W_DATA`, `SQLSRV_EXE_WO_DATA`, or `SQLSRV_EXE_ABORT` flags.
- SQL describes the metadata for any items specified in the `RETURNING` clause of an `INSERT` statement into the end of the parameter marker `SQLDA` or `SQLDA2`. Note that columns, output arguments, and other values returned by a statement are normally described in the select list `SQLDA` or `SQLDA2`. The server does not normally return data values from a parameter marker `SQLDA` or `SQLDA2` to the client; therefore, the server must explicitly check each parameter marker `SQLDA` or `SQLDA2` to determine

if an INSERT statement contains a RETURNING clause. To do so, it checks the name of the last column described in the parameter marker SQLDA or SQLDA2 for the value DBKEY. Therefore, the only value that can be returned from an INSERT statement is the DBKEY, because the server is unable to detect any other returned value. For example:

```
INSERT INTO EMPLOYEES VALUES ( ?,?,?,,?,,?,,? ) RETURNING DBKEY INTO ?;
```

SQL describes the metadata for any items specified in the RETURNING clause of an UPDATE statement into the select list SQLDA or SQLDA2 as expected.

Errors

SQLSRV_CONNTIMEOUT	The connection to the server could not be completed within the specified time limit.
SQLSRV_DATA_TOO_LONG	The Oracle SQL/Services executor determined that the length of a data value in an SQLDA exceeded the maximum allowed for the value's data type.
SQLSRV_EXEINTERR	The executor has encountered an internal or other error condition.
SQLSRV_INTERR	Internal error.
SQLSRV_INVARG	Invalid routine parameter.
SQLSRV_INVASC	Invalid association identifier.
SQLSRV_INVEXEFLG	Invalid execute flag.
SQLSRV_INVSELLST	Invalid SQLDA or SQLDA2 select list.
SQLSRV_INVSQDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.
SQLSRV_INVSTMID	Invalid statement identifier.
SQLSRV_MULTI_ACT	A batched sqlsrv_execute_in_out or sqlsrv_fetch_many context is active.
SQLSRV_NETERR	Network transport returned an error.
SQLSRV_SVC_SHUTDOWN	The specified service has been shut down.

sqlsrv_execute_immediate

The `sqlsrv_execute_immediate` routine prepares and executes an SQL statement that does not contain parameter markers or select list items.

C Format

```
extern int sqlsrv_execute_immediate(  
    ASSOCIATE_ID associate_id,  
    SQL_LONGWORD database_id,  
    char *sql_statement);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

database_id

This parameter must be 0. Databases are referenced within the SQL statement syntax.

sql_statement

Address of a null-terminated string containing the SQL statement to be prepared and executed by dynamic SQL.

Notes

- `sqlsrv_execute_immediate` provides an efficient mechanism, using a single request/response message pair, for executing an SQL statement that does not contain any parameter markers or select list items where the statement is to be executed only once. However, if the same SQL statement is to be executed multiple times, it is more efficient to prepare the statement and execute it as necessary, even if the statement contains no parameter markers or select list items.
- On successful completion of a call to `sqlsrv_execute_immediate`, Oracle SQL/Services stores the total number of database rows updated or deleted in the `SQLERRD[2]` field of the `SQLCA`. You can retrieve the row count from the `SQLCA` using the `sqlsrv_sqlca_count` routine. Note that Oracle Rdb does not return a row count value if you use the `CALL` statement to invoke a stored procedure, or if you execute a compound statement.

Errors

SQLSRV_CONNTIMEOUT	The connection to the server could not be completed within the specified time limit.
SQLSRV_EXEINTERR	The executor has encountered an internal or other error condition.
SQLSRV_INTERR	Internal error.
SQLSRV_INVARG	Invalid routine parameter.
SQLSRV_INVASC	Invalid association identifier.
SQLSRV_MULTI_ACT	A batched sqlsrv_execute_in_out or sqlsrv_fetch_many context is active.
SQLSRV_NETERR	Network transport returned an error.
SQLSRV_SVC_SHUTDOWN	The specified service has been shut down.

sqlsrv_release_statement

The `sqlsrv_release_statement` routine frees all resources associated with one or more prepared statements at both the client and server. The `sqlsrv_release_statement` routine implicitly invokes `sqlsrv_free_sqllda_data` or `sqlsrv_free_sqllda2_data` to free dynamically allocated `SQLDA` or `SQLDA2` structures.

C Format

```
extern int sqlsrv_release_statement (  
    ASSOCIATE_ID associate_id,  
    short int statement_id_count,  
    SQLS_LONGWORD *statement_id_array);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

statement_id_count

The number of statement identifiers passed in the `statement_id_array`.

statement_id_array

An array containing the identifiers (`statement_id` parameters returned by the `sqlsrv_prepare` routine) of the statements to free.

Notes

- You cannot release a statement that has an open cursor.
- If you call `sqlsrv_allocate_sqllda_data` or `sqlsrv_allocate_sqllda2_data` to allocate memory for parameter marker and select list item data and indicator variables, Oracle SQL/Services automatically frees the memory when you call `sqlsrv_release_statement`. If you let `sqlsrv_prepare` allocate memory for the parameter marker and select list `SQLDA` or `SQLDA2` structures, Oracle SQL/Services automatically frees the memory when you call `sqlsrv_release_statement`.
- If Oracle SQL/Services encounters an error validating or releasing a particular statement ID, it discards any subsequent statement IDs and returns the error to the client application. Oracle SQL/Services stores the total number of statements released in the `SQLERRD[2]` field of the `SQLCA`. You can retrieve the count from the `SQLCA` using the `sqlsrv_sqlca_count` routine.

Errors

SQLSRV_CONNTIMEOUT	The connection to the server could not be completed within the specified time limit.
SQLSRV_EXEINTERR	The executor has encountered an internal or other error condition.
SQLSRV_INTERR	Internal error.
SQLSRV_INVARG	Invalid routine parameter.
SQLSRV_INVASC	Invalid association identifier.
SQLSRV_INVSTMID	Invalid statement identifier.
SQLSRV_MULTL_ACT	A batched sqlsrv_execute_in_out or sqlsrv_fetch_many context is active.
SQLSRV_NETERR	Network transport returned an error.
SQLSRV_SVC_SHUTDOWN	The specified service has been shut down.

6.3.3 Result Table Routines

Result table routines allow the caller to fetch data from the server by providing calls to open a cursor, fetch from an open cursor, and close an open cursor. Result table routines include the following routines:

- sqlsrv_declare_cursor routine (see [sqlsrv_declare_cursor](#))
- sqlsrv_open_cursor routine (see [sqlsrv_open_cursor](#))
- sqlsrv_fetch routine (see [sqlsrv_fetch](#))
- sqlsrv_fetch_many routine (see [sqlsrv_fetch_many](#))
- sqlsrv_close_cursor routine (see [sqlsrv_close_cursor](#))

sqlsrv_declare_cursor

The `sqlsrv_declare_cursor` routine declares a dynamic cursor. If you do not use the `sqlsrv_declare_cursor` routine, Oracle SQL/Services implicitly declares all cursors as type table and mode update within the `sqlsrv_open_cursor` call.

C Format

```
extern int sqlsrv_declare_cursor(  
    ASSOCIATE_ID associate_id,  
    char *cursor_name,  
    SQS_LONGWORD statement_id,  
    short int cursor_type,  
    short int cursor_mode);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

cursor_name

Address of a null-terminated string used to identify the cursor.

statement_id

The statement ID returned previously by `sqlsrv_prepare` when the SELECT statement was prepared. The `sqlsrv_declare_cursor` routine maps the `cursor_name` to the prepared statement.

cursor_type

A value indicating the type of list cursor to declare. You can declare table or list cursors:

- Table
Declare table cursors by specifying the `SQLSRV_TABLE_CURSOR` literal.
- List
Declare list cursors by specifying the `SQLSRV_LIST_CURSOR` literal.

For detailed information about SQL list and table cursors, refer to the *Oracle Rdb7 Guide to SQL Programming* and the *Oracle Rdb SQL Reference Manual*.

cursor_mode

A value indicating the mode of table or list cursors. Table cursors have four modes:

- Update-only
To declare table cursors in update-only mode, specify the literal `SQLSRV_MODE_UPDATE_ONLY`.
- Update
To declare table cursors in update mode, specify the literal `SQLSRV_MODE_UPDATE`.
- Read-only
To declare table cursors in read-only mode, specify the literal `SQLSRV_MODE_READ_ONLY`.
- Insert-only
To declare table cursors in insert-only mode, specify the literal `SQLSRV_MODE_INSERT_ONLY`.

List cursors have three modes:

- Read-only
To declare list cursors in read-only mode, specify the literal `SQLSRV_MODE_READ_ONLY`.
- Insert-only
To declare list cursors in insert-only mode, specify the literal `SQLSRV_MODE_INSERT_ONLY`.
- Scroll
To declare list cursors in scroll mode, specify the literal `SQLSRV_MODE_SCROLL`.

For detailed information about SQL cursor modes, refer to the *Oracle Rdb7 Guide to SQL Programming* and the *Oracle Rdb SQL Reference Manual*.

Notes

- When designing applications, you should avoid using cursor names starting with the prefix "SQLSRV_"; this is a reserved prefix and is used by the Oracle SQL/Services product.
- The cursor type and cursor mode literals are defined in the `sqlsrv.h` file.
- Within SQL, executing a commit or rollback statement implies that all open cursors are closed unless you are using the Oracle Rdb Hold Cursors feature; this assumption is not

true for Oracle SQL/Services. Because Oracle SQL/Services does not parse the SQL statements it passes, it does not know when a commit or rollback operation is executed. Instead, Oracle SQL/Services requires that the `sqlsrv_close_cursor` call be issued to release the cursor-related data structures prior to a commit or rollback operation. To reuse the same cursor name, you must close that cursor before executing a commit or rollback statement.

Errors

SQLSRV_DUPCRSNAM	Duplicate cursor name.
SQLSRV_INTERR	Internal error.
SQLSRV_INVARG	Invalid routine parameter.
SQLSRV_INVASC	Invalid association identifier.
SQLSRV_INVCURNAM	Invalid cursor name.
SQLSRV_INVSTMID	Invalid statement identifier.
SQLSRV_MULTI_ACT	A batched <code>sqlsrv_execute_in_out</code> or <code>sqlsrv_fetch_many</code> context is active.
SQLSRV_NETERR	Network transport returned an error.

sqlsrv_open_cursor

The `sqlsrv_open_cursor` routine opens a cursor for a prepared SELECT statement. The `sqlsrv_declare_cursor` routine optionally determines the type and mode of the cursor.

C Format

```
extern int sqlsrv_open_cursor(  
    ASSOCIATE_ID associate_id,  
    char *cursor_name,  
    SQS_LONGWORD statement_id,  
    SQLDA_ID parameter_marker_sqlda);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

cursor_name

Address of a null-terminated string identifying the cursor. All cursor operations, including positional INSERT, UPDATE, and DELETE statements, must use the cursor name to identify the cursor.

statement_id

The statement ID returned previously by `sqlsrv_prepare` when the SELECT statement was prepared. The `sqlsrv_open_cursor` routine maps the `cursor_name` to the prepared statement.

parameter_marker_sqlda

An SQLDA identifier defining the parameter marker values for the prepared SELECT statement.

Notes

- After a successful call to `sqlsrv_open_cursor` to open a table cursor, Oracle Rdb stores the following information in the SQLCA:
 - Estimated result table cardinality in the SQLERRD[2] field.
 - Estimated I/Os in the SQLERRD[3] field.

These values are retrieved using the `sqlsrv_sqlca_sqlerrd` routine.

- After a successful call to `sqlsrv_open_cursor` to open a list cursor, Oracle Rdb stores the following information in the SQLCA:
 - Length of the largest actual segment in the `SQLERRD[1]` field.
 - Total number of segments in the `SQLERRD[3]` field.
 - Total length of all the segments as a quadword value in the `SQLERRD[4]` and `SQLERRD[5]` fields, which contain the low-order 32 bits and high-order 32 bits, respectively.

These values are retrieved using the `sqlsrv_sqlca_sqlerrd` routine.

- Within SQL, executing a commit or rollback statement implies that all open cursors are closed unless you are using the Oracle Rdb Hold Cursors feature; this assumption is not true for Oracle SQL/Services. Because Oracle SQL/Services does not parse the SQL statements it passes, it does not know when a commit or rollback operation is executed. Instead, Oracle SQL/Services requires that the `sqlsrv_close_cursor` call be issued to release the cursor-related data structures prior to a commit or rollback operation. To reuse the same cursor name, you must close that cursor before executing a commit or rollback statement.

Errors

<code>SQLSRV_CONNTIMEOUT</code>	The connection to the server could not be completed within the specified time limit.
<code>SQLSRV_DATA_TOO_LONG</code>	The Oracle SQL/Services executor determined that the length of a data value in an <code>SQLDA</code> exceeded the maximum allowed for the value's data type.
<code>SQLSRV_EXEINTERR</code>	The executor has encountered an internal or other error condition.
<code>SQLSRV_INTERR</code>	Internal error.
<code>SQLSRV_INVARG</code>	Invalid routine parameter.
<code>SQLSRV_INVASC</code>	Invalid association identifier.
<code>SQLSRV_INVCURNAM</code>	Invalid cursor name.
<code>SQLSRV_INVSQDA</code>	Invalid <code>SQLDA</code> , <code>SQLDA2</code> , or <code>SQLDA_ID</code> .
<code>SQLSRV_INVSTMID</code>	Invalid statement identifier.
<code>SQLSRV_MULTI_ACT</code>	A batched <code>sqlsrv_execute_in_out</code> or <code>sqlsrv_fetch_many</code> context is active.
<code>SQLSRV_NETERR</code>	Network transport returned an error.

sqlsrv_open_cursor

SQLSRV_SVC_SHUTDOWN The specified service has been shut down.

sqlsrv_fetch

The `sqlsrv_fetch` routine fetches a row of data into a select list `SQLDA`.

C Format

```
extern int sqlsrv_fetch(
    ASSOCIATE_ID associate_id,
    char *cursor_name,
    short int scroll_option,
    SQS_LONGWORD position,
    SQLDA_ID select_list_sqlda);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

cursor_name

Address of a null-terminated string used to identify the open cursor.

scroll_option

The values of the `scroll_option` parameter are shown in [Table 6–8](#).

Table 6–8 Values of the scroll_option Parameter

Value	Description
SQLSRV_NO_SCROLL	No scroll option.
SQLSRV_SCROLL_FIRST	Fetch first segment.
SQLSRV_SCROLL_LAST	Fetch last segment.
SQLSRV_SCROLL_PRIOR	Fetch prior segment.
SQLSRV_SCROLL_NEXT	Fetch next segment.
SQLSRV_SCROLL_ABSOLUTE	Fetch an absolute segment of the list cursor.
SQLSRV_SCROLL_RELATIVE	Fetch a relative segment relative to the current list cursor position.

For table cursors, the scroll option must be 0 (`SQLSRV_NO_SCROLL`). For scrollable list cursors, a value of `SQLSRV_SCROLL_ABSOLUTE` indicates an absolute segment within

the segmented string, while a value of `SQLSRV_SCROLL_RELATIVE` indicates a segment relative to the current cursor position. When a parameter value of `SQLSRV_SCROLL_ABSOLUTE` or `SQLSRV_SCROLL_RELATIVE` is specified, the value specified for the position argument indicates the position value.

position

Indicates the position value for an absolute or relative scroll option. For an absolute scroll option, this parameter value indicates the *n*th absolute list segment of the list cursor. For a relative scroll option, this parameter value (positive or negative) indicates the *n*th list segment relative to the current list cursor position. For example, a value of `-5` for the position parameter for a relative scroll option results in a fetch of the 5th segment previous to the current cursor position. The position parameter value must be `0` if the `scroll_option` parameter is not a relative or absolute scroll option.

select_list_sqlda

The select list SQLDA identifier in which to store the row.

Notes

- A return value of `SQL_EOS` indicates end of data, that is, the result table is empty, or no more rows remain in the result table. A call to the `sqlsrv_fetch` routine that returns a status code of `SQL_EOS` does not return any data in the SQLDA.
- Although it returns only one row to the application for each call, the `sqlsrv_fetch` routine can request that the server send multiple rows of data from the server when called within an `sqlsrv_fetch_many` context. See [Fetching Multiple Rows in Chapter 4](#), and [sqlsrv_fetch_many](#).
- To scroll read-only list cursors, the `scroll_option` argument must specify a value as indicated in [Table 6–8](#), and the position argument must specify the position value when an absolute or relative `scroll_option` value is specified. Otherwise, the position argument must be `0`.
- After a successful call to `sqlsrv_fetch`, Oracle SQL/Services stores the number of the current row within the result table in the `SQLERRD[2]` field of the `SQLCA`. This value can be retrieved using the `sqlsrv_sqlca_sqlerrd` routine.

Errors

<code>SQLSRV_CONNTIMEOUT</code>	The connection to the server could not be completed within the specified time limit.
<code>SQLSRV_EXEINTERR</code>	The executor has encountered an internal or other error condition.

SQLSRV_INTERR	Internal error.
SQLSRV_INVARG	Invalid routine parameter.
SQLSRV_INVASC	Invalid association identifier.
SQLSRV_INVCURNAM	Invalid cursor name.
SQLSRV_INVSQDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.
SQLSRV_MULTI_ACT	A batched sqlsrv_execute_in_out or sqlsrv_fetch_many context is active.
SQLSRV_NETERR	Network transport returned an error.
SQLSRV_SVC_SHUTDOWN	The specified service has been shut down.

sqlsrv_fetch_many

The `sqlsrv_fetch_many` routine directs the `sqlsrv_fetch` routine to transfer multiple rows of data from the server, as described in [Fetching Multiple Rows](#) in [Chapter 4](#). Frequently, this reduces the number of client/server messages required to retrieve data from the server. By default, `sqlsrv_fetch` retrieves one row of data at a time from the server.

C Format

```
extern int sqlsrv_fetch_many(  
    ASSOCIATE_ID associate_id,  
    char *cursor_name,  
    short int increment,  
    short int repeat_count);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

cursor_name

Address of a null-terminated string used to identify the open cursor.

increment

For a scrollable list cursor, the client API implicitly enables relative scroll mode (`SQLSRV_SCROLL_RELATIVE`) to fetch segments and uses the value in the `increment` argument to specify the relative position. Therefore, to fetch all segments in a segmented string, specify an `increment` value of 1. See [sqlsrv_fetch](#) for more information on scroll modes and relative positions. This argument is ignored for cursors other than scrollable list cursors.

repeat_count

The number of rows to fetch. A value of 0 fetches the entire result table. A value other than 0 fetches that number of rows. For example, an application might fetch enough rows to fill one screen.

Notes

- To achieve the best performance, Oracle Corporation recommends that you specify a `repeat_count` of 0 to fetch all records.

- When you specify a `repeat_count` other than 0, your application must call the `sqlsrv_fetch_many` routine again once the specified number of rows have been fetched. Otherwise, the API returns to the default behavior (one row for each call to the `sqlsrv_fetch` routine). See [Fetching Multiple Rows](#) in Chapter 4, for more information.
- Because the `repeat_count` parameter is a 16-bit integer, the maximum number of rows a client can specify is 65535. If a larger number is specified, no error is detected. Rather, the repeat count wraps around and a smaller repeat count is used. For example, if a repeat count of 65536 is specified, the value in the 16-bit repeat count parameter is 0.
- Once you initiate an `sqlsrv_fetch_many` operation, you must fetch the specified number of rows using `sqlsrv_fetch` or close the cursor using `sqlsrv_close_cursor` before you call other API routines. You can call `sqlsrv_close_cursor` at any time to close the cursor and end the `sqlsrv_fetch_many` operation before all the rows have been fetched. Otherwise, you must call `sqlsrv_fetch` the necessary number of times to fetch all the rows from the result table if you specify a repeat count of zero or the specified number of rows if you specify a non-zero repeat count before you can call any other API routine.
- A call to the `sqlsrv_close_cursor` routine completes an `sqlsrv_fetch_many` operation.
- By default, the `sqlsrv_fetch` routine fetches only one row of data from the server. That way, your application can execute SQL statements `INSERT . . . WHERE CURRENT OF cursor-name`, `UPDATE . . . WHERE CURRENT OF cursor-name`, and `DELETE . . . WHERE CURRENT OF cursor-name`.
- The `sqlsrv_fetch_many` routine initiates an `sqlsrv_fetch_many` operation; however, it does not fetch any rows. Therefore, `sqlsrv_fetch_many` returns a success status even if there are no rows in the result table. In this situation, `sqlsrv_fetch` returns a status of `SQL_EOS` the first time it is called to fetch a row from the result table.

Errors

<code>SQLSRV_FTCMNYACT</code>	An <code>sqlsrv_fetch_many</code> context is already active for this cursor.
<code>SQLSRV_INTERR</code>	Internal error.
<code>SQLSRV_INVARG</code>	Invalid routine parameter.
<code>SQLSRV_INVASC</code>	Invalid association identifier.
<code>SQLSRV_INVCURNAM</code>	Invalid cursor name.
<code>SQLSRV_MULTI_ACT</code>	A batched <code>sqlsrv_execute_in_out</code> or <code>sqlsrv_fetch_many</code> context is active.

sqlsrv_close_cursor

The `sqlsrv_close_cursor` routine closes an open cursor.

C Format

```
extern int sqlsrv_close_cursor(  
    ASSOCIATE_ID associate_id,  
    char *cursor_name);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

cursor_name

Address of a null-terminated string used to identify the open cursor.

Errors

SQLSRV_CONNTIMEOUT	The connection to the server could not be completed within the specified time limit.
SQLSRV_EXEINTERR	The executor has encountered an internal or other error condition.
SQLSRV_INTERR	Internal error.
SQLSRV_INVASC	Invalid association identifier.
SQLSRV_INVCURNAM	Invalid cursor name.
SQLSRV_NETERR	Network transport returned an error.
SQLSRV_SVC_SHUTDOWN	The specified service has been shut down.

6.3.4 Utility Routines

Utility routines provide local service to the caller. Utility routines include the following routines:

- [sqlsrv_allocate_sqllda_data](#) or [sqlsrv_allocate_sqllda2_data](#) routine (see [sqlsrv_allocate_sqllda_data](#) or [sqlsrv_allocate_sqllda2_data](#))
- [sqlsrv_free_sqllda_data](#) or [sqlsrv_free_sqllda2_data](#) routine (see [sqlsrv_free_sqllda_data](#) or [sqlsrv_free_sqllda2_data](#))
- [sqlsrv_set_option](#) routine (see [sqlsrv_set_option](#))

sqlsrv_allocate_sqlda_data or sqlsrv_allocate_sqlda2_data

The `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` routine dynamically allocates memory for data and indicator variables. Your application passes an `SQLDA_ID` identifier to `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data`, which allocates buffers of the appropriate size and writes the addresses of the newly allocated buffers into the `SQLDATA` and `SQLIND` fields in the `SQLVAR` or `SQLVAR2` array.

Note: You must not modify the `SQLDATA` and `SQLIND` fields in the `SQLVAR` or `SQLVAR2` fields if you call `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` to allocate memory for data and indicator variables. The operation and results of other client API routines will be unpredictable if you modify these fields. The format, parameters, description, notes, and errors for the `SQLDA` or `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_allocate_sqlda_data(
    ASSOCIATE_ID associate_id,
    SQLDA_ID sqlda_str);

extern int sqlsrv_allocate_sqlda2_data(
    ASSOCIATE_ID associate_id,
    SQLDA_ID sqlda_str);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

sqlda_str

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2` for which to allocate data and indicator variables.

Notes

- You can free buffers allocated by the `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` routine explicitly by calling the `sqlsrv_free_sqlda_data` or `sqlsrv_free_`

sqllda2_data routine, or implicitly by calling the sqlsrv_release_statement or sqlsrv_release routine.

- The sqlsrv_allocate_sqlda_data or sqlsrv_allocate_sqlda2_data routine allocates additional memory for certain data types, as shown in [Table 6–9](#).

Table 6–9 Special Requirements of Data Types to Determine Extra Byte Lengths to Allocate

Data Type	Extra Memory to Allocate
SQLSRV_ASCII_STRING	+1 for null-terminating select list item values; note that parameter marker values are not treated as null-terminated strings
SQLSRV_GENERALIZED_DATE	+1 for null terminator
SQLSRV_INTERVAL	+1 for null terminator
SQLSRV_GENERALIZED_NUMBER	+6 for null terminator and to allow input in scientific notation [for example, 9999E+123]
SQLSRV_VARCHAR	+2 for SQLDAs or +4 for SQLDA2s for leading length field
SQLSRV_VARBYTE	+2 for SQLDAs or +4 for SQLDA2s for leading length field

Errors

SQLSRV_INTERR	Internal error.
SQLSRV_INVARG	Invalid routine parameter.
SQLSRV_INVASC	Invalid association identifier.
SQLSRV_INVDATYYP	Invalid data type.
SQLSRV_INVSQlda	Invalid SQLDA, SQLDA2, or SQLDA_ID.
SQLSRV_NO_MEM	API memory allocation failed.
SQLSRV_USRDATAALL	The user, not Oracle SQL/Services, has allocated data buffers.

sqlsrv_free_sqlda_data or sqlsrv_free_sqlda2_data

The `sqlsrv_free_sqlda_data` or `sqlsrv_free_sqlda2_data` routine frees buffers that hold data and indicator variables that were dynamically allocated by the `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` routine. Your application passes an `SQLDA_ID` identifier to the API, which frees the buffers and writes zeros into the `SQLDATA` and `SQLIND` fields of the `SQLVAR` or `SQLVAR2` array.

Note: The `sqlsrv_release_statement` and `sqlsrv_release` routines implicitly call the `sqlsrv_free_sqlda_data` or `sqlsrv_free_sqlda2_data` routine for each prepared statement's dynamically allocated `SQLDA` or `SQLDA2` structure. The format, parameters, description, notes, and errors for the `SQLDA` or `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_free_sqlda_data(
    ASSOCIATE_ID associate_id,
    SQLDA_ID sqlda_str);

extern int sqlsrv_free_sqlda2_data(
    ASSOCIATE_ID associate_id,
    SQLDA_ID sqlda_str);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

sqlda_str

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2` for which to deallocate data and indicator variables.

Errors

<code>SQLSRV_ACTSTM</code>	The statement id already has an active cursor.
<code>SQLSRV_INTERR</code>	Internal error.

SQLSRV_INVASC	Invalid association identifier.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.
SQLSRV_MULTIACT	A batched sqlsrv_execute_in_out or sqlsrv_fetch_many context is active.
SQLSRV_SQLDA_NOTALL	Attempt to deallocate static memory.
SQLSRV_USRDATAALL	The user, not Oracle SQL/Services, has allocated data buffers.

sqlsrv_set_option

The `sqlsrv_set_option` routine sets the option that determines whether the Oracle SQL/Services client and server use the standard SQLDA or the extended SQLDA2 format for new statements that the application prepares.

C Format

```
extern int sqlsrv_set_option(  
    ASSOCIATE_ID association,  
    SQS_LONGWORD option,  
    SQS_LONGWORD value,  
    void *rsv);
```

Parameters

association

An identifier used to distinguish one association from all others.

option

The option to set. The option parameter takes the argument `SQLSRV_OPT_SQLDA_TYPE`.

value

The value determines whether the SQLDA or SQLDA2 is set.

The value parameter takes either of the arguments described in [Table 6–10](#) when the option parameter argument `SQLSRV_OPT_SQLDA_TYPE` is specified.

Table 6–10 Value Parameter Arguments If the Option Parameter Argument Is `SQLSRV_OPT_SQLDA_TYPE`

Argument	Description
<code>SQLSRV_OPT_SQLDA_SQLDA</code>	Use standard SQLDA format
<code>SQLSRV_OPT_SQLDA_SQLDA2</code>	Use extended SQLDA2 format

rsv

Argument reserved for future use. The value of this argument must be `NULL`.

Notes

- If you do not call the `sqlsrv_set_option` routine to set the `SQLDA` format, Oracle SQL/Services uses the standard `SQLDA` format. To use the extended `SQLDA2` format, you must call the `sqlsrv_set_option` routine, specifying the option as `SQLSRV_OPT_SQLDA_TYPE` and the value as `SQLSRV_OPT_SQLDA_SQLDA2`, before you call `sqlsrv_prepare` to prepare an SQL statement.

Errors

<code>SQLSRV_INVARG</code>	Invalid routine parameter.
<code>SQLSRV_INVASC</code>	Invalid association identifier.

6.3.5 Functional Interface Routines

Functional interface routines provide access to data and metadata stored in SQLCA, SQLDA, and SQLDA2 structures. These routines replace the need for making direct references to structure fields in API applications. Functional interface routines include the following routines:

- sqlsrv_sqlca_error routine (see [sqlsrv_sqlca_error](#))
- sqlsrv_sqlca_error_text routine (see [sqlsrv_sqlca_error_text](#))
- sqlsrv_sqlca_count routine (see [sqlsrv_sqlca_count](#))
- sqlsrv_sqlca_sqlerrd routine (see [sqlsrv_sqlca_sqlerrd](#))
- sqlsrv_sqlca_sqlstate routine (see [sqlsrv_sqlca_sqlstate](#))
- sqlsrv_sqlda_sqld or sqlsrv_sqlda2_sqld routine (see [sqlsrv_sqlda_sqld](#) or [sqlsrv_sqlda2_sqld](#))
- sqlsrv_sqlda_sqld73 or sqlsrv_sqlda2_sqld73 routine (see [sqlsrv_sqlda_sqld73](#) or [sqlsrv_sqlda2_sqld73](#))
- sqlsrv_sqlda_column_name or sqlsrv_sqlda2_column_name routine (see [sqlsrv_sqlda_sqld73](#) or [sqlsrv_sqlda2_sqld73](#))
- sqlsrv_sqlda_column_name73 or sqlsrv_sqlda2_column_name73 routine (see [sqlsrv_sqlda_column_name73](#) or [sqlsrv_sqlda2_column_name73](#))
- sqlsrv_sqlda_column_type or sqlsrv_sqlda2_column_type routine (see [sqlsrv_sqlda_column_type](#) or [sqlsrv_sqlda2_column_type](#))
- sqlsrv_sqlda_column_type73 or sqlsrv_sqlda2_column_type73 routine (see [sqlsrv_sqlda_column_type73](#) or [sqlsrv_sqlda2_column_type73](#))
- sqlsrv_sqlda_bind_data or sqlsrv_sqlda2_bind_data routine (see [sqlsrv_sqlda_bind_data](#) or [sqlsrv_sqlda2_bind_data](#))
- sqlsrv_sqlda_bind_data73 or sqlsrv_sqlda2_bind_data73 routine (see [sqlsrv_sqlda_bind_data73](#) or [sqlsrv_sqlda2_bind_data73](#))
- sqlsrv_sqlda_unbind_sqlda or sqlsrv_sqlda2_unbind_sqlda routine (see [sqlsrv_sqlda_unbind_sqlda](#) or [sqlsrv_sqlda2_unbind_sqlda](#))
- sqlsrv_sqlda_unbind_sqlda73 or sqlsrv_sqlda2_unbind_sqlda73 routine (see [sqlsrv_sqlda_unbind_sqlda73](#) or [sqlsrv_sqlda2_unbind_sqlda73](#))
- sqlsrv_sqlda_ref_data or sqlsrv_sqlda2_ref_data routine (see [sqlsrv_sqlda_ref_data](#) or [sqlsrv_sqlda2_ref_data](#))

- `sqlsrv_sqlda_ref_data73` or `sqlsrv_sqlda2_ref_data73` routine (see [sqlsrv_sqlda_ref_data73](#) or [sqlsrv_sqlda2_ref_data73](#))
- `sqlsrv_sqlda_unref_data` or `sqlsrv_sqlda2_unref_data` routine (see [sqlsrv_sqlda_unref_data](#) or [sqlsrv_sqlda2_unref_data](#))
- `sqlsrv_sqlda_unref_data73` or `sqlsrv_sqlda2_unref_data73` routine (see [sqlsrv_sqlda_unref_data73](#) or [sqlsrv_sqlda2_unref_data73](#))
- `sqlsrv_sqlda_get_data` or `sqlsrv_sqlda2_get_data` routine (see [sqlsrv_sqlda_get_data](#) or [sqlsrv_sqlda2_get_data](#))
- `sqlsrv_sqlda_get_data73` or `sqlsrv_sqlda2_get_data73` routine (see [sqlsrv_sqlda_get_data73](#) or [sqlsrv_sqlda2_get_data73](#))
- `sqlsrv_sqlda_set_data` or `sqlsrv_sqlda2_set_data` routine (see [sqlsrv_sqlda_set_data](#) or [sqlsrv_sqlda2_set_data](#))
- `sqlsrv_sqlda_set_data73` or `sqlsrv_sqlda2_set_data73` routine (see [sqlsrv_sqlda_set_data73](#) or [sqlsrv_sqlda2_set_data73](#))
- `sqlsrv_sqlda_set_sqllen` or `sqlsrv_sqlda2_set_sqllen` routine (see [sqlsrv_sqlda_set_sqllen](#) or [sqlsrv_sqlda2_set_sqllen](#))
- `sqlsrv_sqlda_set_sqllen73` or `sqlsrv_sqlda2_set_sqllen73` routine (see [sqlsrv_sqlda_set_sqllen73](#) or [sqlsrv_sqlda2_set_sqllen73](#))
- `sqlsrv_sqlda2_char_set_info` routine (see [sqlsrv_sqlda2_char_set_info](#))
- `sqlsrv_sqlda2_char_set_info73` routine (see [sqlsrv_sqlda2_char_set_info73](#))

sqlsrv_sqlca_error

The `sqlsrv_sqlca_error` routine returns the error codes for the last statement executed.

C Format

```
extern int sqlsrv_sqlca_error(  
    ASSOCIATE_ID associate_id,  
    SQS_LONGWORD *majerr,  
    SQS_LONGWORD *suberr1,  
    SQS_LONGWORD *suberr2);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

majerr

Address of a variable of type `SQS_LONGWORD` into which the API writes the major error code from the `SQLCODE` field of the `SQLCA`.

suberr1

Address of a variable of type `SQS_LONGWORD` into which the API writes the minor error code from the `SQLERRD[0]` field of the `SQLCA`.

suberr2

Address of a variable of type `SQS_LONGWORD` into which the API writes the minor error code from the `SQLERRD[2]` field of the `SQLCA`.

Notes

- After you call the Oracle SQL/Services API routine, the `SQLCA` structure contains the return status.

Errors

<code>SQLSRV_INVASC</code>	Invalid association identifier.
----------------------------	---------------------------------

sqlsrv_sqlca_error_text

The `sqlsrv_sqlca_error_text` routine returns the error text for the last statement executed.

C Format

```
extern int sqlsrv_sqlca_error_text(  
    ASSOCIATE_ID associate_id,  
    short int *msglen,  
    char *msg,  
    short int buflen);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

msglen

Address of a variable of type `short` into which the API writes the length in bytes of the error message text written to the buffer specified by the `msg` parameter.

msg

Address of a buffer of type `char` into which the API writes the error message text.

buflen

Length in bytes of the buffer specified by the `msg` parameter.

Notes

- The error message text is copied into the specified buffers and null-terminated.
- The length of the error excluding the null-terminator is returned in `msglen`.

sqlsrv_sqlca_count

The `sqlsrv_sqlca_count` routine returns the number of rows processed by a statement.

C Format

```
extern int sqlsrv_sqlca_count (  
    ASSOCIATE_ID associate_id);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

Notes

- This call replaces direct access to the `SQLCA.SQLERRD[2]` field.
- The `SQLCA.SQLERRD[2]` field contains a valid row count only when a statement, or all statements in a batch execute operation, executes successfully.

Errors

<code>SQLSRV_INVASC</code>	Invalid association identifier.
----------------------------	---------------------------------

sqlsrv_sqlca_sqlerrd

The sqlsrv_sqlca_sqlerrd routine returns all values from the SQLCA.SQLERRD array.

C Format

```
extern int sqlsrv_sqlca_sqlerrd(  
    ASSOCIATE_ID associate_id,  
    SQS_LONGWORD *sqlerrd_array);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

sqlerrd_array

Address of an array of 6 elements of type SQS_LONGWORD into which the API writes the contents of the SQLERRD array.

Notes

See [Section 7.4](#) for details of information returned in the SQLERRD array.

Errors

SQLSRV_INVASC	Invalid association identifier.
---------------	---------------------------------

sqlsrv_sqlca_sqlstate

The `sqlsrv_sqlca_sqlstate` routine returns the `SQLSTATE` associated with the `SQLCODE` for the last statement executed.

C Format

```
extern int sqlsrv_sqlca_sqlstate(  
    ASSOCIATE_ID associate_id,  
    char *sqlstate);
```

Parameters

associate_id

An identifier used to distinguish one active association from all others.

sqlstate

Address of a buffer of type `char` into which the API writes the `sqlstate`. The buffer's length is `SQLSTATE_LEN`. `SQLSTATE_LEN` is a constant defined in the `sqlsrv.h` header file. The `sqlstate` is not null-terminated.

Errors

<code>SQLSRV_INVASC</code>	Invalid association identifier.
----------------------------	---------------------------------

sqlsrv_sqla_sqld or sqlsrv_sqla2_sqld

The `sqlsrv_sqla_sqld` or `sqlsrv_sqla2_sqld` routine returns the number of parameter markers or select list items in the `SQLDA` or `SQLDA2`.

Note: The format, parameters, description, notes, and errors for the `SQLDA` or `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqla_sqld(  
    SQLDA_ID sqldaid);  
  
extern int sqlsrv_sqla2_sqld(  
    SQLDA_ID sqldaid);
```

Parameters

`sqldaid`

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

Notes

- This call corresponds to referencing the `SQLD` field in an `SQLDA` or `SQLDA2`. The field is set by the API after a statement is prepared.

Errors

<code>SQLSRV_INVSQlda</code>	Invalid <code>SQLDA</code> , <code>SQLDA2</code> , or <code>SQLDA_ID</code> .
------------------------------	---

sqlsrv_sqlda_sqld73 or sqlsrv_sqlda2_sqld73

The `sqlsrv_sqlda_sqld73` or `sqlsrv_sqlda2_sqld73` routine returns the number of parameter markers or select list items in the `SQLDA` or `SQLDA2`.

Note: The format, parameters, description, notes, and errors for the `SQLDA` or `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_sqld73(  
    SQLDA_ID sqldaid,  
    ASSOCIATE_ID associate_id);  
  
extern int sqlsrv_sqlda2_sqld73(  
    SQLDA_ID sqldaid,  
    ASSOCIATE_ID associate_id);
```

Parameters

sqldaid

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- This call corresponds to referencing the `SQLD` field in an `SQLDA` or `SQLDA2`. The field is set by the API after a statement is prepared.
- This call is often more efficient and performs better than the corresponding `sqlsrv_sqlda_sqld` or `sqlsrv_sqlda2_sqld` routine.

Errors

<code>SQLSRV_INVSQLDA</code>	Invalid <code>SQLDA</code> , <code>SQLDA2</code> , or <code>SQLDA_ID</code> .
------------------------------	---

sqlsrv_sqlda_column_name or sqlsrv_sqlda2_column_name

The `sqlsrv_sqlda_column_name` or `sqlsrv_sqlda2_column_name` routine copies the column name for a particular column from the `SQLDA` or `SQLDA2`, respectively, into a program variable.

Note: The format, parameters, description, notes, and errors for the `SQLDA` or `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_column_name(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    char *colnam,  
    short int *colnamlen);  
  
extern int sqlsrv_sqlda2_column_name(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    char *colnam,  
    short int *colnamlen);
```

Parameters

sqldaid

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

colnam

Address of a buffer of type `char` into which the API writes the column name as a null-terminated character string. For an `SQLDA`, the buffer must be at least 30 bytes long; for an `SQLDA2`, the buffer must be at least 32 bytes long.

colnamlen

Address of a variable of type `short` into which the API writes the length in bytes of the column name written to the `colnam` parameter.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- The column name for a particular column is copied from the SQLDA into the variable passed in this call.
- Oracle Rdb does not assign a value to the column name in the following situations:
 - If a select list item, assignment, or comparison involves an arithmetic expression or predicates other than basic predicates.
 - For parameter markers and select list items specified in statements contained in a compound statement.
- The maximum length of a column name in an Oracle Rdb database is 31 characters. However, the maximum length of a column name stored by Oracle SQL/Services in the SQLNAME field of a client SQLDA is 29 characters. This is because the SQLNAME field is only 30 characters long and because Oracle SQL/Services null-terminates the column name in the SQLNAME field of a client SQLDA. The maximum length of a column name in the SQLNAME field of an Oracle SQL/Services client SQLDA2 is 31 characters.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQDLA	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqlda_column_name73 or sqlsrv_sqlda2_column_name73

The `sqlsrv_sqlda_column_name73` or `sqlsrv_sqlda2_column_name73` routine copies the column name for a particular column from the `SQLDA` or `SQLDA2`, respectively, into a program variable.

Note: The format, parameters, description, notes, and errors for the `SQLDA` or `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_column_name73(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    char *colnam,  
    short int *colnamlen,  
    ASSOCIATE_ID associate_id);  
  
extern int sqlsrv_sqlda2_column_name73(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    char *colnam,  
    short int *colnamlen,  
    ASSOCIATE_ID associate_id);
```

Parameters

sqlda_id

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

colnam

Address of a buffer of type `char` into which the API writes the column name as a null-terminated character string. For an `SQLDA`, the buffer must be at least 30 bytes long; for an `SQLDA2`, the buffer must be at least 32 bytes long.

colnamlen

Address of a variable of type short into which the API writes the length in bytes of the column name written to the colnam parameter.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- The column name for a particular column is copied from the SQLDA into the variable passed in this call.
- Oracle Rdb does not assign a value to the column name in the following situations:
 - If a select list item, assignment, or comparison involves an arithmetic expression or predicates other than basic predicates.
 - For parameter markers and select list items specified in statements contained in a compound statement.
- The maximum length of a column name in an Oracle Rdb database is 31 characters. However, the maximum length of a column name stored by Oracle SQL/Services in the SQLNAME field of a client SQLDA is 29 characters. This is because the SQLNAME field is only 30 characters long and because Oracle SQL/Services null-terminates the column name in the SQLNAME field of a client SQLDA. The maximum length of a column name in the SQLNAME field of an Oracle SQL/Services client SQLDA2 is 31 characters.
- This call is often more efficient and performs better than the corresponding sqlsrv_sqllda_column_name or sqlsrv_sqllda2_column_name routine.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQlda	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqlda_column_type or sqlsrv_sqlda2_column_type

The `sqlsrv_sqlda_column_type` or `sqlsrv_sqlda2_column_type` routine returns information about the data type of a column.

Note: The format, parameters, description, notes, and errors for the `SQLDA` and `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_column_type(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    short int *coltyp,  
    unsigned short int *collen,  
    short int *colsc1,  
    void *rsv);  
  
extern int sqlsrv_sqlda2_column_type(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    short int *coltyp,  
    SQS_UNSIGNED_LONGWORD *collen,  
    short int *colsc1,  
    SQS_UNSIGNED_LONGWORD *coloctlen,  
    void *rsv);
```

Parameters

sqldaid

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

coltyp

Address of a variable of type `short int` into which the API writes the Oracle SQL/Services data type of the column.

collen

Address of a variable into which the API writes the length of the column. For an SQLDA, the column length is expressed in an unsigned word as the number of 8-bit bytes. For an SQLDA2, the column length is expressed in an unsigned longword as the number of characters, where a single character might occupy more than one byte in a multibyte character set.

colscl

Address of a variable of type short into which the API writes the scale factor for columns of type SQLSRV_GENERALIZED_NUMBER or the type of date or interval for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively. Undefined for columns of all other data types.

coloctlen (SQLDA2 only)

Address of a variable of type SQS_UNSIGNED_LONGWORD into which the API writes the length of the column in octets or 8-bit bytes.

rsv

Argument reserved for future use. The value of this argument must be NULL.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- See [Chapter 8](#) for information on all Oracle SQL/Services data types.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQlda	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqlda_column_type73 or sqlsrv_sqlda2_column_type73

The `sqlsrv_sqlda_column_type73` or `sqlsrv_sqlda2_column_type73` routine returns information about the data type of a column.

Note: The format, parameters, description, notes, and errors for the `SQLDA` and `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_column_type73(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    short int *coltyp,  
    unsigned short int *collen,  
    short int *colsc1,  
    void *rsv,  
    ASSOCIATE_ID associate_id);  
  
extern int sqlsrv_sqlda2_column_type73(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    short int *coltyp,  
    SQS_UNSIGNED_LONGWORD *collen,  
    short int *colsc1,  
    SQS_UNSIGNED_LONGWORD *coloctlen,  
    void *rsv,  
    ASSOCIATE_ID associate_id);
```

Parameters

sqlda_id

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

coltyp

Address of a variable of type `short int` into which the API writes the Oracle SQL/Services data type of the column.

collen

Address of a variable into which the API writes the length of the column. For an SQLDA, the column length is expressed in an unsigned word as the number of 8-bit bytes. For an SQLDA2, the column length is expressed in an unsigned longword as the number of characters, where a single character might occupy more than one byte in a multibyte character set.

colsci

Address of a variable of type short into which the API writes the scale factor for columns of type SQLSRV_GENERALIZED_NUMBER or the type of date or interval for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively. Undefined for columns of all other data types.

coloctlen (SQLDA2 only)

Address of a variable of type SQS_UNSIGNED_LONGWORD into which the API writes the length of the column in octets or 8-bit bytes.

rsv

Argument reserved for future use. The value of this argument must be NULL.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- See [Chapter 8](#) for information on all Oracle SQL/Services data types.
- This call is often more efficient and performs better than the corresponding sqlsrv_sqllda_column_type or sqlsrv_sqllda2_column_type routine.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqllda_bind_data or sqlsrv_sqllda2_bind_data

The sqlsrv_sqllda_bind_data or sqlsrv_sqllda2_bind_data routine allows programs to allocate their own storage for data and indicator variables for parameter markers and select list items.

Note: The format, parameters, description, notes, and errors for the SQLDA and SQLDA2 routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqllda_bind_data(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    short int coltyp,  
    unsigned short int collen,  
    short int colscl,  
    CHARPTR datptr,  
    SHORTPTR nulptr,  
    void *rsv);  
  
extern int sqlsrv_sqllda2_bind_data(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    short int coltyp,  
    SQS_UNSIGNED_LONGWORD collen,  
    short int colscl,  
    CHARPTR datptr,  
    LONGPTR nulptr,  
    SQS_UNSIGNED_LONGWORD octet_len,  
    SQS_LONGWORD chrono_scale,  
    SQS_LONGWORD chrono_precision,  
    void *rsv);
```

Parameters

sqldaid

The identifier of a parameter marker or select list SQLDA or SQLDA2.

colnum

A column identified by its ordinal position in a parameter or select list.

coltyp

Address of a variable of type short into which the API writes the Oracle SQL/Services data type of the column.

collen

Address of a variable into which the API writes the length of the column. For an SQLDA, the column length is expressed in an unsigned word as the number of 8-bit bytes. For an SQLDA2, the column length is expressed in an unsigned longword as the number of characters, where a single character might occupy more than one byte in a multibyte character set.

colsci

Address of a variable of type short into which the API writes the scale factor for columns of type SQLSRV_GENERALIZED_NUMBER or the type of date or interval for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively. This parameter is undefined for columns of all other data types.

datptr

Address of the data variable of type unsigned char for the column.

nulptr

Address of the indicator variable for the column. For an SQLDA, the indicator variable is of type short. For an SQLDA2, the indicator variable is of type SQS_LONGWORD. See [Section 7.6](#) or [Section 7.7](#) for a description of the indicator variable (SQLIND field) of an SQLDA or SQLDA2, respectively.

octet_len (SQLDA2 only)

Address of a variable of type SQS_UNSIGNED_LONGWORD into which the API writes the length in octets of the column.

chrono_scale (SQLDA2 only)

Address of a variable of type SQS_LONGWORD into which the API writes the specific date-time data type for columns of type SQLSRV_GENERALIZED_DATE or the interval scale for columns of type SQLSRV_INTERVAL.

chrono_precision (SQLDA2 only)

Address of a variable of type SQS_LONGWORD into which the API writes the precision of the date-time value or interval value for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively.

rsv

Argument reserved for future use. The value of this argument must be NULL.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- The sqlsrv_sqlda_bind_data and sqlsrv_sqlda2_bind_data routines provide an efficient mechanism for an application program to provide its own memory for data and indicator variables for parameter markers and select list items. After preparing a statement, the application must examine each column, allocate an appropriate amount of memory for both the data and indicator variables, then bind that memory to the column in the SQLDA or SQLDA2 using the sqlsrv_sqlda_bind_data or sqlsrv_sqlda2_bind_data routine, respectively. Before releasing the statement, the application program must unbind the memory for the column's data and indicator variables from the SQLDA or SQLDA2 using the sqlsrv_sqlda_unbind_data or sqlsrv_sqlda2_unbind_data routine, respectively.
- Applications that use the sqlsrv_sqlda_bind_data and sqlsrv_sqlda2_bind_data routines to provide memory for data and indicator variables in an SQLDA or SQLDA2 must allocate memory for all the parameter markers and select list items in the SQLDA or SQLDA. You cannot use the sqlsrv_allocate_sqlda_data or sqlsrv_allocate_sqlda2_data routines to allocate memory for the same SQLDA or SQLDA2 for which you have bound user memory to data and indicator variables.
- Calling the sqlsrv_sqlda_bind_data and sqlsrv_sqlda2_bind_data routines is equivalent to directly storing pointers and values in the SQLDATA, SQLIND, SQLLEN, and SQLOCTET_LEN fields of a column's SQLVARARY array element in an SQLDA or SQLDA2.

Errors

SQLSRV_INCDATTYP	Incompatible data type with column.
SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVDAATTYP	Invalid data type.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.
SQLSRV_NO_MEM	API memory allocation failed.

sqlsrv_sqlda_bind_data73 or sqlsrv_sqlda2_bind_data73

The sqlsrv_sqlda_bind_data73 or sqlsrv_sqlda2_bind_data73 routine allows programs to allocate their own storage for data and indicator variables for parameter markers and select list items.

Note: The format, parameters, description, notes, and errors for the SQLDA and SQLDA2 routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_bind_data73(
    SQLDA_ID sqlda_id,
    short int colnum,
    short int coltyp,
    unsigned short int collen,
    short int colscl,
    CHARPTR datptr,
    SHORTPTR nulptr,
    void *rsv,
    ASSOCIATE_ID associate_id);

extern int sqlsrv_sqlda2_bind_data73(
    SQLDA_ID sqlda_id,
    short int colnum,
    short int coltyp,
    SQS_UNSIGNED_LONGWORD collen,
    short int colscl,
    CHARPTR datptr,
    LONGPTR nulptr,
    SQS_UNSIGNED_LONGWORD octet_len,
    SQS_LONGWORD chrono_scale,
    SQS_LONGWORD chrono_precision,
    void *rsv,
    ASSOCIATE_ID associate_id);
```

Parameters

sqlda_id

The identifier of a parameter marker or select list SQLDA or SQLDA2.

colnum

A column identified by its ordinal position in a parameter or select list.

coltyp

Address of a variable of type short into which the API writes the Oracle SQL/Services data type of the column.

collen

Address of a variable into which the API writes the length of the column. For an SQLDA, the column length is expressed in an unsigned word as the number of 8-bit bytes. For an SQLDA2, the column length is expressed in an unsigned longword as the number of characters, where a single character might occupy more than one byte in a multibyte character set.

colsci

Address of a variable of type short into which the API writes the scale factor for columns of type SQLSRV_GENERALIZED_NUMBER or the type of date or interval for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively. This parameter is undefined for columns of all other data types.

datptr

Address of the data variable of type unsigned char for the column.

nulptr

Address of the indicator variable for the column. For an SQLDA, the indicator variable is of type short. For an SQLDA2, the indicator variable is of type SQS_LONGWORD. See [Section 7.6](#) or [Section 7.7](#) for a description of the indicator variable (SQLIND field) of an SQLDA or SQLDA2, respectively.

octet_len (SQLDA2 only)

Address of a variable of type SQS_UNSIGNED_LONGWORD into which the API writes the length in octets of the column.

chrono_scale (SQLDA2 only)

Address of a variable of type SQS_LONGWORD into which the API writes the specific date-time data type for columns of type SQLSRV_GENERALIZED_DATE or the interval scale for columns of type SQLSRV_INTERVAL.

chrono_precision (SQLDA2 only)

Address of a variable of type SQS_LONGWORD into which the API writes the precision of the date-time value or interval value for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively.

rsv

Argument reserved for future use. The value of this argument must be NULL.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- The sqlsrv_sqlda_bind_data73 and sqlsrv_sqlda2_bind_data73 routines provide an efficient mechanism for an application program to provide its own memory for data and indicator variables for parameter markers and select list items. After preparing a statement, the application must examine each column, allocate an appropriate amount of memory for both the data and indicator variables, then bind that memory to the column in the SQLDA or SQLDA2 using the sqlsrv_sqlda_bind_data73 or sqlsrv_sqlda2_bind_data73 routine, respectively. Before releasing the statement, the application program must unbind the memory for the column's data and indicator variables from the SQLDA or SQLDA2 using the sqlsrv_sqlda_unbind_data73 or sqlsrv_sqlda2_unbind_data73 routine, respectively.
- Applications that use the sqlsrv_sqlda_bind_data73 and sqlsrv_sqlda2_bind_data73 routines to provide memory for data and indicator variables in an SQLDA or SQLDA2 must allocate memory for all the parameter markers and select list items in the SQLDA or SQLDA. You cannot use the sqlsrv_allocate_sqlda_data or sqlsrv_allocate_sqlda2_data routines to allocate memory for the same SQLDA or SQLDA2 for which you have bound user memory to data and indicator variables.
- Calling the sqlsrv_sqlda_bind_data73 and sqlsrv_sqlda2_bind_data73 routines is equivalent to directly storing pointers and values in the SQLDATA, SQLIND, SQLLEN, and SQLOCTET_LEN fields of a column's SQLVARARY array element in an SQLDA or SQLDA2.
- This call is often more efficient and performs better than the corresponding sqlsrv_sqlda_bind_data or sqlsrv_sqlda2_bind_data routine.

Errors

SQLSRV_INCDATTYP	Incompatible data type with column.
SQLSRV_INVCOLNUM	Column number not within range.

SQLSRV_INVDATYYP	Invalid data type.
SQLSRV_INVSQlda	Invalid SQLDA, SQLDA2, or SQLDA_ID.
SQLSRV_NO_MEM	API memory allocation failed.

sqlsrv_sqla_unbind_sqla or sqlsrv_sqla2_unbind_sqla

The `sqlsrv_sqla_unbind_sqla` or `sqlsrv_sqla2_unbind_sqla` routine releases variables bound with the `sqlsrv_sqla_bind_data` or `sqlsrv_sqla2_bind_data` routine.

Note: The format, parameters, description, notes, and errors for the `SQLDA` or `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqla_unbind_sqla(  
    SQLDA_ID sqldaid);
```

```
extern int sqlsrv_sqla2_unbind_sqla(  
    SQLDA_ID sqldaid);
```

Parameters

sqldaid

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

Notes

- A single call to `sqlsrv_sqla_unbind_sqla` or `sqlsrv_sqla2_unbind_sqla` unbinds the memory provided for all the data and indicator variables in an `SQLDA` or `SQLDA2` bound by one or more calls to `sqlsrv_sqla_bind_data` or `sqlsrv_sqla2_bind_data`.
- Calling the `sqlsrv_sqla_bind_data` and `sqlsrv_sqla2_bind_data` routines is equivalent to directly clearing the pointers in the `SQLDATA` and `SQLIND` fields of a column's `SQLVARARY` array element in an `SQLDA` or `SQLDA2`.

Errors

<code>SQLSRV_INVSQlda</code>	Invalid <code>SQLDA</code> , <code>SQLDA2</code> , or <code>SQLDA_ID</code> .
------------------------------	---

sqlsrv_sqlda_unbind_sqlda73 or sqlsrv_sqlda2_unbind_sqlda73

The `sqlsrv_sqlda_unbind_sqlda73` or `sqlsrv_sqlda2_unbind_sqlda73` routine releases variables bound with the `sqlsrv_sqlda_bind_data` or `sqlsrv_sqlda2_bind_data` routine.

Note: The format, parameters, description, notes, and errors for the `SQLDA` or `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_unbind_sqlda73(  
    SQLDA_ID sqldaid,  
    ASSOCIATE_ID associate_id);  
  
extern int sqlsrv_sqlda2_unbind_sqlda73(  
    SQLDA_ID sqldaid,  
    ASSOCIATE_ID associate_id);
```

Parameters

`sqldaid`

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

`associate_id`

An identifier used to distinguish one active association from all others.

Notes

- A single call to `sqlsrv_sqlda_unbind_sqlda73` or `sqlsrv_sqlda2_unbind_sqlda73` unbinds the memory provided for all the data and indicator variables in an `SQLDA` or `SQLDA2` bound by one or more calls to `sqlsrv_sqlda_bind_data73` or `sqlsrv_sqlda2_bind_data73`.
- Calling the `sqlsrv_sqlda_bind_data73` and `sqlsrv_sqlda2_bind_data73` routines is equivalent to directly clearing the pointers in the `SQLDATA` and `SQLIND` fields of a column's `SQLVARARY` array element in an `SQLDA` or `SQLDA2`.
- This call is often more efficient and performs better than the corresponding `sqlsrv_sqlda_unbind_sqlda` or `sqlsrv_sqlda2_unbind_sqlda` routine.

sqlsrv_sqlda_unbind_sqla73 or sqlsrv_sqlda2_unbind_sqla73

Errors

SQLSRV_INVSQLDA

Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqlda_ref_data or sqlsrv_sqlda2_ref_data

The sqlsrv_sqlda_ref_data or sqlsrv_sqlda2_ref_data routine returns the type, length, scale, or date-time type, and address of the data and indicator variables for a column in an SQLDA or SQLDA2, respectively. In the SQLDA2, the sqlsrv_sqlda2_ref_data routine also returns the octet length, chrono-scale, and chrono-precision for a column.

Note: The format, parameters, description, notes, and errors for the SQLDA and SQLDA2 routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_ref_data(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    short int *coltyp,  
    unsigned short int *collen,  
    short int *colsc1,  
    PTRCHARPTR val,  
    PTRSHORTPTR nullp,  
    void *rsv);  
  
extern int sqlsrv_sqlda2_ref_data(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    short int *coltyp,  
    SQS_UNSIGNED_LONGWORD *collen,  
    short int *colsc1,  
    PTRCHARPTR val,  
    PTRLONGPTR nullp,  
    SQS_UNSIGNED_LONGWORD *octet_len,  
    SQS_LONGWORD *chrono_scale,  
    SQS_LONGWORD *chrono_precision,  
    void *rsv);
```

Parameters

sqlda_id

The identifier of a parameter marker or select list SQLDA or SQLDA2.

colnum

A column identified by its ordinal position in a parameter or select list.

coltyp

Address of a variable of type short into which the API writes the Oracle SQL/Services data type of the column.

collen

Address of a variable into which the API writes the length of the column. For an SQLDA, the column length is expressed in an unsigned word as the number of 8-bit bytes. For an SQLDA2, the column length is expressed in an unsigned longword as the number of characters, where a single character might occupy more than one byte in a multibyte character set.

colsci

Address of a variable of type short into which the API writes the scale factor for columns of type SQLSRV_GENERALIZED_NUMBER or the type of date or interval for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively. Undefined for columns of all other data types.

val

The address of a variable of type CHARPTR into which the API writes the address of the column's data variable.

nullp

Address of a variable into which the API writes the address of the column's indicator variable. For an SQLDA, the indicator variable is of type short. For an SQLDA2, the indicator variable is of type SQS_LONGWORD. See [Section 7.6](#) or [Section 7.7](#) for a description of the indicator variable (SQLIND field) of an SQLDA or SQLDA2, respectively.

octet_len (SQLDA2 only)

Address of a variable of type SQS_UNSIGNED_LONGWORD into which the API writes the length in octets of the column.

chrono_scale (SQLDA2 only)

Address of a variable of type SQS_LONGWORD into which the API writes the specific date-time data type for columns of type SQLSRV_GENERALIZED_DATE or the interval scale for columns of type SQLSRV_INTERVAL.

chrono_precision (SQLDA2 only)

Address of a variable of type SQS_LONGWORD into which the API writes the precision of the date-time value or interval value for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively.

rsv

Argument reserved for future use. The value of this argument must be NULL.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- Use the sqlsrv_sqlda_ref_data or sqlsrv_sqlda2_ref_data routine to access a column's data and indicator variables allocated by the sqlsrv_allocate_sqlda_data or sqlsrv_allocate_sqlda2_data routine. It is equivalent to reading the SQLLEN, SQLTYPE, SQLDATA, and SQLIND fields of the SQLVAR or SQLVAR2 structure, and for SQLDA2, the SQLOCTET_LEN, SQLCHRONO_SCALE, and SQLCHRONO_PRECISION fields of the SQLVAR2 structure for the column.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqlda_ref_data73 or sqlsrv_sqlda2_ref_data73

The `sqlsrv_sqlda_ref_data73` or `sqlsrv_sqlda2_ref_data73` routine returns the type, length, scale, or date-time type, and address of the data and indicator variables for a column in an `SQLDA` or `SQLDA2`, respectively. In the `SQLDA2`, the `sqlsrv_sqlda2_ref_data` routine also returns the octet length, chrono-scale, and chrono-precision for a column.

Note: The format, parameters, description, notes, and errors for the `SQLDA` and `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_ref_data73(
    SQLDA_ID sqldaid,
    short int colnum,
    short int *coltyp,
    unsigned short int *collen,
    short int *colslcl,
    PTRCHARPTR val,
    PTRSHORTPTR nullp,
    void *rsv,
    ASSOCIATE_ID associate_id);

extern int sqlsrv_sqlda2_ref_data73(
    SQLDA_ID sqldaid,
    short int colnum,
    short int *coltyp,
    SQS_UNSIGNED_LONGWORD *collen,
    short int *colslcl,
    PTRCHARPTR val,
    PTRLONGPTR nullp,
    SQS_UNSIGNED_LONGWORD *octet_len,
    SQS_LONGWORD *chrono_scale,
    SQS_LONGWORD *chrono_precision,
    void *rsv,
    ASSOCIATE_ID associate_id);
```

Parameters

sqldaid

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

coltyp

Address of a variable of type short into which the API writes the Oracle SQL/Services data type of the column.

collen

Address of a variable into which the API writes the length of the column. For an SQLDA, the column length is expressed in an unsigned word as the number of 8-bit bytes. For an SQLDA2, the column length is expressed in an unsigned longword as the number of characters, where a single character might occupy more than one byte in a multibyte character set.

colsci

Address of a variable of type short into which the API writes the scale factor for columns of type SQLSRV_GENERALIZED_NUMBER or the type of date or interval for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively. Undefined for columns of all other data types.

val

The address of a variable of type CHARPTR into which the API writes the address of the column's data variable.

nullp

Address of a variable into which the API writes the address of the column's indicator variable. For an SQLDA, the indicator variable is of type short. For an SQLDA2, the indicator variable is of type SQS_LONGWORD. See [Section 7.6](#) or [Section 7.7](#) for a description of the indicator variable (SQLIND field) of an SQLDA or SQLDA2, respectively.

octet_len (SQLDA2 only)

Address of a variable of type SQS_UNSIGNED_LONGWORD into which the API writes the length in octets of the column.

chrono_scale (SQLDA2 only)

Address of a variable of type SQS_LONGWORD into which the API writes the specific date-time data type for columns of type SQLSRV_GENERALIZED_DATE or the interval scale for columns of type SQLSRV_INTERVAL.

chrono_precision (SQLDA2 only)

Address of a variable of type SQS_LONGWORD into which the API writes the precision of the date-time value or interval value for columns of type SQLSRV_GENERALIZED_DATE or SQLSRV_INTERVAL, respectively.

rsv

Argument reserved for future use. The value of this argument must be NULL.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- Use the sqlsrv_sqlda_ref_data73 or sqlsrv_sqlda2_ref_data73 routine to access a column's data and indicator variables allocated by the sqlsrv_allocate_sqlda_data or sqlsrv_allocate_sqlda2_data routine. It is equivalent to reading the SQLLEN, SQLTYPE, SQLDATA, and SQLIND fields of the SQLVAR or SQLVAR2 structure, and for SQLDA2, the SQLOCTET_LEN, SQLCHRONO_SCALE, and SQLCHRONO_PRECISION fields of the SQLVAR2 structure for the column.
- This call is often more efficient and performs better than the corresponding sqlsrv_sqlda_ref_data or sqlsrv_sqlda2_ref_data routine.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqlda_unref_data or sqlsrv_sqlda2_unref_data

The sqlsrv_sqlda_unref_data or sqlsrv_sqlda2_unref_data routine frees resources tied up by the sqlsrv_sqlda_ref_data or sqlsrv_sqlda2_ref_data routine.

Note: The format, parameters, description, notes, and errors for the SQLDA or SQLDA2 routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_unref_data(  
    SQLDA_ID sqldaid,  
    short int colnum);  
  
extern int sqlsrv_sqlda2_unref_data(  
    SQLDA_ID sqldaid,  
    short int colnum);
```

Parameters

sqldaid

The identifier of a parameter marker or select list SQLDA or SQLDA2.

colnum

A column identified by its ordinal position in a parameter or select list.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqlda_unref_data73 or sqlsrv_sqlda2_unref_data73

The sqlsrv_sqlda_unref_data73 or sqlsrv_sqlda2_unref_data73 routine frees resources tied up by the sqlsrv_sqlda_ref_data or sqlsrv_sqlda2_ref_data routine.

Note: The format, parameters, description, notes, and errors for the SQLDA or SQLDA2 routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_unref_data73(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    ASSOCIATE_ID associate_id);  
  
extern int sqlsrv_sqlda2_unref_data73(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    ASSOCIATE_ID associate_id);
```

Parameters

sqldaid

The identifier of a parameter marker or select list SQLDA or SQLDA2.

colnum

A column identified by its ordinal position in a parameter or select list.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- This call is often more efficient and performs better than the corresponding sqlsrv_sqlda_unref_data or sqlsrv_sqlda2_unref_data routine.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqllda_get_data or sqlsrv_sqllda2_get_data

The `sqlsrv_sqllda_get_data` or `sqlsrv_sqllda2_get_data` routine copies column data and indicator variables from the `SQLDA` or `SQLDA2`, respectively, to a program.

Note: The format, parameters, description, notes, and errors for the `SQLDA` and `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqllda_get_data(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    unsigned short int offset,  
    CHARPTR dst,  
    unsigned short int dstlen,  
    SHORTPTR nullp,  
    unsigned short int *bytcpy);  
  
extern int sqlsrv_sqllda2_get_data(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    SQS_UNSIGNED_LONGWORD offset,  
    CHARPTR dst,  
    SQS_UNSIGNED_LONGWORD dstlen,  
    LONGPTR nullp,  
    SQS_UNSIGNED_LONGWORD *bytcpy);
```

Parameters

sqldaid

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

offset

The offset within the column's data variable at which to start the copy. The most typical value for the offset parameter is zero, which means to start the copy at the beginning of the column's data variable. For an `SQLDA`, the offset is of type `unsigned short`. For an `SQLDA2`, the offset is of type `SQS_UNSIGNED_LONGWORD`.

dst

The address of a buffer of type unsigned char to which the data is copied.

dstlen

The length in bytes of the buffer specified as the dst argument. For an SQLDA, the length is of type unsigned short. For an SQLDA2, the length is of type SQS_UNSIGNED_LONGWORD.

nullp

Address of a variable into which Oracle SQL/Services writes the value of the column indicator variable. For an SQLDA, the indicator variable is of type short. For an SQLDA2, the indicator variable is of type SQS_LONGWORD. See [Section 7.6](#) or [Section 7.7](#) for a description of the indicator variable (SQLIND field) of an SQLDA or SQLDA2, respectively.

bytcpy

Address of a variable into which the API writes the number of bytes of data actually copied. For an SQLDA, the variable is of type unsigned short. For an SQLDA2, the variable is of type SQS_UNSIGNED_LONGWORD.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqla.SQLD).
- The sqlsrv_sqla_get_data or sqlsrv_sqla2_get_data routine provides access to SQLDA or SQLDA2 information for languages that do not support explicit type coercion. Note that the use of the sqlsrv_sqla_get_data or sqlsrv_sqla2_get_data routine requires the host language to support some form of type coercion.
- When the sqlsrv_sqla_get_data or sqlsrv_sqla2_get_data routine is used, data is copied between the SQLDA or SQLDA2 and the user's buffer.
- The offset field provides some flexibility to callers, allowing you to take a selected section out of the field in question. The most typical value for the offset field is zero (0), which means to start copying at the beginning of the data. The maximum allowable value for the offset field is the maximum length of the SQLDATA buffer.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
------------------	---------------------------------

sqlsrv_sqlda_get_data or sqlsrv_sqlda2_get_data

SQLSRV_INVSQlda

Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqllda_get_data73 or sqlsrv_sqllda2_get_data73

The sqlsrv_sqllda_get_data73 or sqlsrv_sqllda2_get_data73 routine copies column data and indicator variables from the SQLDA or SQLDA2, respectively, to a program.

Note: The format, parameters, description, notes, and errors for the SQLDA and SQLDA2 routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqllda_get_data73(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    unsigned short int offset,  
    CHARPTR dst,  
    unsigned short int dstlen,  
    SHORTPTR nullp,  
    unsigned short int *bytcpy,  
    ASSOCIATE_ID associate_id);  
  
extern int sqlsrv_sqllda2_get_data73(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    SQS_UNSIGNED_LONGWORD offset,  
    CHARPTR dst,  
    SQS_UNSIGNED_LONGWORD dstlen,  
    LONGPTR nullp,  
    SQS_UNSIGNED_LONGWORD *bytcpy,  
    ASSOCIATE_ID associate_id);
```

Parameters

sqldaid

The identifier of a parameter marker or select list SQLDA or SQLDA2.

colnum

A column identified by its ordinal position in a parameter or select list.

offset

The offset within the column's data variable at which to start the copy. The most typical value for the offset parameter is zero, which means to start the copy at the beginning of the

column's data variable. For an `SQLDA`, the offset is of type unsigned short. For an `SQLDA2`, the offset is of type `SQS_UNSIGNED_LONGWORD`.

dst

The address of a buffer of type unsigned char to which the data is copied.

dstlen

The length in bytes of the buffer specified as the `dst` argument. For an `SQLDA`, the length is of type unsigned short. For an `SQLDA2`, the length is of type `SQS_UNSIGNED_LONGWORD`.

nullp

Address of a variable into which Oracle SQL/Services writes the value of the column indicator variable. For an `SQLDA`, the indicator variable is of type short. For an `SQLDA2`, the indicator variable is of type `SQS_LONGWORD`. See [Section 7.6](#) or [Section 7.7](#) for a description of the indicator variable (`SQLIND` field) of an `SQLDA` or `SQLDA2`, respectively.

bytcpy

Address of a variable into which the API writes the number of bytes of data actually copied. For an `SQLDA`, the variable is of type unsigned short. For an `SQLDA2`, the variable is of type `SQS_UNSIGNED_LONGWORD`.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- Oracle SQL/Services returns an error if the `SQLDA` or `SQLDA2` is invalid or if the column number is greater than the number of parameter markers or select list items (`colnum >= sqlda.SQLD`).
- The `sqlsrv_sqllda_get_data73` or `sqlsrv_sqllda2_get_data73` routine provides access to `SQLDA` or `SQLDA2` information for languages that do not support explicit type coercion. Note that the use of the `sqlsrv_sqllda_get_data73` or `sqlsrv_sqllda2_get_data73` routine requires the host language to support some form of type coercion.
- When the `sqlsrv_sqllda_get_data73` or `sqlsrv_sqllda2_get_data73` routine is used, data is copied between the `SQLDA` or `SQLDA2` and the user's buffer.
- The offset field provides some flexibility to callers, allowing you to take a selected section out of the field in question. The most typical value for the offset field is zero (0), which means to start copying at the beginning of the data. The maximum allowable value for the offset field is the maximum length of the `SQLDATA` buffer.

- This call is often more efficient and performs better than the corresponding sqlsrv_sqlda_get_data or sqlsrv_sqlda2_get_data routine.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQlda	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqllda_set_data or sqlsrv_sqllda2_set_data

The `sqlsrv_sqllda_set_data` or `sqlsrv_sqllda2_set_data` routine copies column information into the `SQLDA` or `SQLDA2`, respectively.

Note: The format, parameters, description, notes, and errors for the `SQLDA` and `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqllda_set_data(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    unsigned short int offset,  
    CHARPTR dst,  
    unsigned short int dstlen,  
    short int nullp,  
    unsigned short int *bytcopy);  
  
extern int sqlsrv_sqllda2_set_data(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    SQS_UNSIGNED_LONGWORD offset,  
    CHARPTR dst,  
    SQS_UNSIGNED_LONGWORD dstlen,  
    SQS_LONGWORD nullp,  
    SQS_UNSIGNED_LONGWORD *bytcopy);
```

Parameters

sqldaid

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

offset

The offset within the column's data variable at which to start the copy. The most typical value for the offset parameter is zero (0), which means to start the copy at the beginning of the column's data variable. For an `SQLDA`, the offset is of type `unsigned short`. For an `SQLDA2`, the offset is of type `SQS_UNSIGNED_LONGWORD`.

dst

The address of a buffer of type unsigned char containing the data to be copied to the SQLDATA buffer.

dstlen

The length in bytes of the buffer specified as the dst argument. For an SQLDA, the length is of type unsigned short. For an SQLDA2, the length is of type SQS_UNSIGNED_LONGWORD.

nullp

The value for the column's indicator variable. For an SQLDA, the indicator is of type short. For an SQLDA2, the indicator is of type SQS_LONGWORD. [See Section 7.6](#) or [Section 7.7](#) for a description of the indicator variable (SQLIND field) of an SQLDA or SQLDA2, respectively.

bytcpy

Address of a variable into which the API writes the number of bytes of data actually copied. For an SQLDA, the variable is of type unsigned short. For an SQLDA2, the variable is of type SQS_UNSIGNED_LONGWORD.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- The sqlsrv_sqlda_set_data or sqlsrv_sqlda2_set_data routine complements the sqlsrv_sqlda_get_data or sqlsrv_sqlda2_get_data routine. It is used to copy values into a column's data and indicator variables.
- The offset field provides some flexibility to callers, allowing you to target a selected section of the field in question. The most typical value for the offset field is zero (0), which means to target the copying at the beginning of the data. The maximum allowable value for the offset field is the maximum length of the SQLDATA or SQLIND buffer.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqllda_set_data73 or sqlsrv_sqllda2_set_data73

The `sqlsrv_sqllda_set_data73` or `sqlsrv_sqllda2_set_data73` routine copies column information into the `SQLDA` or `SQLDA2`, respectively.

Note: The format, parameters, description, notes, and errors for the `SQLDA` and `SQLDA2` routines are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqllda_set_data73(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    unsigned short int offset,  
    CHARPTR dst,  
    unsigned short int dstlen,  
    short int nullp,  
    unsigned short int *bytcpy,  
    ASSOCIATE_ID associate_id);  
  
extern int sqlsrv_sqllda2_set_data73(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    SQS_UNSIGNED_LONGWORD offset,  
    CHARPTR dst,  
    SQS_UNSIGNED_LONGWORD dstlen,  
    SQS_LONGWORD nullp,  
    SQS_UNSIGNED_LONGWORD *bytcpy,  
    ASSOCIATE_ID associate_id);
```

Parameters

sqldaid

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

offset

The offset within the column's data variable at which to start the copy. The most typical value for the offset parameter is zero (0), which means to start the copy at the beginning of

the column's data variable. For an SQLDA, the offset is of type unsigned short. For an SQLDA2, the offset is of type SQS_UNSIGNED_LONGWORD.

dst

The address of a buffer of type unsigned char containing the data to be copied to the SQLDATA buffer.

dstlen

The length in bytes of the buffer specified as the dst argument. For an SQLDA, the length is of type unsigned short. For an SQLDA2, the length is of type SQS_UNSIGNED_LONGWORD.

nullp

The value for the column's indicator variable. For an SQLDA, the indicator is of type short. For an SQLDA2, the indicator is of type SQS_LONGWORD. [See Section 7.6](#) or [Section 7.7](#) for a description of the indicator variable (SQLIND field) of an SQLDA or SQLDA2, respectively.

bytcpy

Address of a variable into which the API writes the number of bytes of data actually copied. For an SQLDA, the variable is of type unsigned short. For an SQLDA2, the variable is of type SQS_UNSIGNED_LONGWORD.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- Oracle SQL/Services returns an error if the SQLDA or SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- The sqlsrv_sqlda_set_data73 or sqlsrv_sqlda2_set_data73 routine complements the sqlsrv_sqlda_get_data73 or sqlsrv_sqlda2_get_data73 routine. It is used to copy values into a column's data and indicator variables.
- The offset field provides some flexibility to callers, allowing you to target a selected section of the field in question. The most typical value for the offset field is zero (0), which means to target the copying at the beginning of the data. The maximum allowable value for the offset field is the maximum length of the SQLDATA or SQLIND buffer.
- This call is often more efficient and performs better than the corresponding sqlsrv_sqlda_set_data or sqlsrv_sqlda2_set_data routine.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.

sqlsrv_sqlda_set_sqlen or sqlsrv_sqlda2_set_sqlen

The `sqlsrv_sqlda_set_sqlen` or `sqlsrv_sqlda2_set_sqlen` routine sets the length of a column by setting the `SQLLEN` field in an `SQLDA` or the `SQLLEN` and `SQLOCTET_LEN` in an `SQLDA2`.

Note: The format, parameters, description, notes, and errors for the `SQLDA` and `SQLDA2` routine are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_set_sqlen(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    unsigned short int len);  
  
extern int sqlsrv_sqlda2_set_sqlen(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    SQS_UNSIGNED_LONGWORD len,  
    SQS_UNSIGNED_LONGWORD octet_len);
```

Parameters

sqlda_id

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

len

The length of the `SQLLEN` field in an `SQLDA` or `SQLDA2`.

octet_len (SQLDA2 only)

Address of a variable of type `SQS_UNSIGNED_LONGWORD` into which the API writes the length in octets of the column.

Notes

- Only columns of the `SQLSRV_ASCII_STRING`, `SQLSRV_VARCHAR`, and `SQLSRV_VARBYTE` data types can have their length changed.

- An `SQLSRV_INVSETLEN` error code is returned if you attempt to set the `SQLLEN` for a column of type `SQLSRV_GENERALIZED_DATE`, `SQLSRV_GENERALIZED_NUMBER`, `SQLSRV_INTERVAL`, or `SQLSRV_LIST_VARBYTE`.
- Use the `sqlsrv_sqlda_set_sqlen` or `sqlsrv_sqlda2_set_sqlen` routine to limit the amount of data returned in a column of a select list `SQLDA`. For example, if only the first few bytes of a column of type `SQLSRV_ASCII_STRING`, `SQLSRV_VARCHAR`, or `SQLSRV_VARBYTE` are required in certain circumstances, you can reduce the size of network messages by limiting the amount of data returned by the `sqlsrv_fetch` routine. When processing a call to `sqlsrv_fetch` or `sqlsrv_execute_in_out`, Oracle SQL/Services sends to the server only the lengths of those columns in a select list `SQLDA` or `SQLDA2` that have changed since the last call.
- Use the `sqlsrv_sqlda_set_sqlen` or `sqlsrv_sqlda2_set_sqlen` routine to modify the length of a column of type `SQLSRV_ASCII_STRING` in a parameter marker `SQLDA`. In this situation, Oracle Rdb truncates or pads the value as necessary to the actual length of the column as specified in the database. Oracle SQL/Services does not need to send to the server the lengths of columns that have changed in a parameter marker `SQLDA` or `SQLDA2`, because the length of each data value is sent to the server along with the data itself.
- [See Chapter 8](#) for more information on how Oracle SQL/Services handles values of each supported data type.
- You can increase or decrease the amount of memory Oracle SQL/Services allocates for a column by calling `sqlsrv_sqlda_set_sqlen` or `sqlsrv_sqlda2_set_sqlen` before you call `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data`. For example, Oracle Rdb allows you to store a segment of any length into a segmented string, regardless of the segment length specified in the database. Therefore, you may need to increase the length of a column of type `SQLSRV_VARBYTE` before you call `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` to allocate the `SQLDA` data memory.
- For the `sqlsrv_sqlda2_set_sqlen` routine, the `octlen` parameter is compared with the `len` parameter to see if they are compatible. For example, the `SQLLEN` of a column of type `SQLSRV_VARCHAR` or `SQLSRV_VARBYTE` does not include the size of the leading 32-bit count field, whereas the `SQLOCTET_LEN` of a column of type `SQLSRV_VARCHAR` or `SQLSRV_VARBYTE` does include the size of the leading 32-bit count field. If they are not compatible, an `SQLSRV_INVSETLEN` error code is returned.

When using a multibyte character set, normally the `SQLLEN` field represents the length in *characters* of a column, excluding the length of any control information, whereas the `SQLOCTET_LEN` represents the length in *bytes* of the column, including the length of any control information. However, Oracle SQL/Services does not send the `SQLOCTET_LEN` value to the server if it is changed; therefore, you must set the

SQLLEN to the new length in *bytes* of the column, excluding the length of any control information.

Errors

SQLSRV_INVCOLNUM	Column number not within range.
SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.
SQLSRV_INVDATYP	Invalid data type.
SQLSRV_INVSETLEN	Unsupported data type or invalid SQLLEN and SLOCTET_LEN combination.
SQLSRV_INVSQLEN	The SQLLEN field in the SQLDA or SQLDA2 has been set to 0 or to a value greater than the size of the column.

sqlsrv_sqlda_set_sqlen73 or sqlsrv_sqlda2_set_sqlen73

The `sqlsrv_sqlda_set_sqlen73` or `sqlsrv_sqlda2_set_sqlen73` routine sets the length of a column by setting the `SQLLEN` field in an `SQLDA` or the `SQLLEN` and `SQLOCTET_LEN` in an `SQLDA2`.

Note: The format, parameters, description, notes, and errors for the `SQLDA` and `SQLDA2` routine are identical unless otherwise specified.

C Format

```
extern int sqlsrv_sqlda_set_sqlen73(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    unsigned short int len,  
    ASSOCIATE_ID associate_id);  
  
extern int sqlsrv_sqlda2_set_sqlen73(  
    SQLDA_ID sqldaid,  
    short int colnum,  
    SQS_UNSIGNED_LONGWORD len,  
    SQS_UNSIGNED_LONGWORD octet_len,  
    ASSOCIATE_ID associate_id);
```

Parameters

sqldaid

The identifier of a parameter marker or select list `SQLDA` or `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

len

The length of the `SQLLEN` field in an `SQLDA` or `SQLDA2`.

octet_len (SQLDA2 only)

Address of a variable of type `SQS_UNSIGNED_LONGWORD` into which the API writes the length in octets of the column.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- Only columns of the `SQLSRV_ASCII_STRING`, `SQLSRV_VARCHAR`, and `SQLSRV_VARBYTE` data types can have their length changed.
- An `SQLSRV_INVSETLEN` error code is returned if you attempt to set the `SQLEN` for a column of type `SQLSRV_GENERALIZED_DATE`, `SQLSRV_GENERALIZED_NUMBER`, `SQLSRV_INTERVAL`, or `SQLSRV_LIST_VARBYTE`.
- Use the `sqlsrv_sqlda_set_sqllen73` or `sqlsrv_sqlda2_set_sqllen73` routine to limit the amount of data returned in a column of a select list `SQLDA`. For example, if only the first few bytes of a column of type `SQLSRV_ASCII_STRING`, `SQLSRV_VARCHAR`, or `SQLSRV_VARBYTE` are required in certain circumstances, you can reduce the size of network messages by limiting the amount of data returned by the `sqlsrv_fetch` routine. When processing a call to `sqlsrv_fetch` or `sqlsrv_execute_in_out`, Oracle SQL/Services sends to the server only the lengths of those columns in a select list `SQLDA` or `SQLDA2` that have changed since the last call.
- Use the `sqlsrv_sqlda_set_sqllen73` or `sqlsrv_sqlda2_set_sqllen73` routine to modify the length of a column of type `SQLSRV_ASCII_STRING` in a parameter marker `SQLDA`. In this situation, Oracle Rdb truncates or pads the value as necessary to the actual length of the column as specified in the database. Oracle SQL/Services does not need to send to the server the lengths of columns that have changed in a parameter marker `SQLDA` or `SQLDA2`, because the length of each data value is sent to the server along with the data itself.
- See [Chapter 8](#) for more information on how Oracle SQL/Services handles values of each supported data type.
- You can increase or decrease the amount of memory Oracle SQL/Services allocates for a column by calling `sqlsrv_sqlda_set_sqllen73` or `sqlsrv_sqlda2_set_sqllen73` before you call `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data`. For example, Oracle Rdb allows you to store a segment of any length into a segmented string, regardless of the segment length specified in the database. Therefore, you may need to increase the length of a column of type `SQLSRV_VARBYTE` before you call `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` to allocate the `SQLDA` data memory.
- For the `sqlsrv_sqlda2_set_sqllen73` routine, the `octlen` parameter is compared with the `len` parameter to see if they are compatible. For example, the `SQLEN` of a column of type `SQLSRV_VARCHAR` or `SQLSRV_VARBYTE` does not include the size of the leading 32-bit count field, whereas the `SQLOCTET_LEN` of a column of type `SQLSRV_VARCHAR` or `SQLSRV_VARBYTE` does include the size of the leading 32-bit count field. If they are not compatible, an `SQLSRV_INVSETLEN` error code is returned.

When using a multibyte character set, normally the `SQLLEN` field represents the length in *characters* of a column, excluding the length of any control information, whereas the `SQLOCTET_LEN` represents the length in *bytes* of the column, including the length of any control information. However, Oracle SQL/Services does not send the `SQLOCTET_LEN` value to the server if it is changed; therefore, you must set the `SQLLEN` to the new length in *bytes* of the column, excluding the length of any control information.

- This call is often more efficient and performs better than the corresponding `sqlsrv_sqllda_set_sqlllen` or `sqlsrv_sqllda2_set_sqlllen` routine.

Errors

<code>SQLSRV_INVCOLNUM</code>	Column number not within range.
<code>SQLSRV_INVSQlda</code>	Invalid <code>SQLDA</code> , <code>SQLDA2</code> , or <code>SQLDA_ID</code> .
<code>SQLSRV_INVDATYP</code>	Invalid data type.
<code>SQLSRV_INVSETLEN</code>	Unsupported data type or invalid <code>SQLLEN</code> and <code>SQLOCTET_LEN</code> combination.
<code>SQLSRV_INVSQLEN</code>	The <code>SQLLEN</code> field in the <code>SQLDA</code> or <code>SQLDA2</code> has been set to 0 or to a value greater than the size of the column.

sqlsrv_sqlda2_char_set_info

The `sqlsrv_sqlda2_char_set_info` routine returns the SQL character set fields from the `SQLDA2`.

C Format

```
extern int sqlsrv_sqlda2_char_set_info(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    CHARPTR name,  
    short int name_len,  
    CHARPTR schema,  
    short int schema_len,  
    CHARPTR catalog,  
    short int catalog_len);
```

Parameters

sqlda_id

The identifier of a parameter marker or select list `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

name

Address of a buffer of type unsigned char into which the API writes the character set name.

name_len

The length of the buffer specified by the name argument into which the API writes the character set name.

schema

Address of a buffer of type unsigned char into which the API writes the schema name.

schema_len

The length of the buffer specified by the schema argument into which the API writes the schema name.

catalog

Address of a buffer of type unsigned char into which the API writes the catalog name.

catalog_len

The length of the buffer specified by the catalog argument into which the API writes the catalog name.

Notes

- Oracle SQL/Services returns an error if the SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- The maximum length of a character set name, schema name, or catalog name is 128 bytes. If a user-supplied buffer is smaller than the actual name, the name is truncated. If a user-supplied buffer is larger than the actual name, the name is padded with spaces.

Errors

SQLSRV_INVSQDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.
SQLSRV_INVCOLNUM	Column number not within range.

sqlsrv_sqlda2_char_set_info73

The `sqlsrv_sqlda2_char_set_info73` routine returns the SQL character set fields from the `SQLDA2`.

C Format

```
extern int sqlsrv_sqlda2_char_set_info73(  
    SQLDA_ID sqlda_id,  
    short int colnum,  
    CHARPTR name,  
    short int name_len,  
    CHARPTR schema,  
    short int schema_len,  
    CHARPTR catalog,  
    short int catalog_len,  
    ASSOCIATE_ID associate_id);
```

Parameters

sqlda_id

The identifier of a parameter marker or select list `SQLDA2`.

colnum

A column identified by its ordinal position in a parameter or select list.

name

Address of a buffer of type unsigned char into which the API writes the character set name.

name_len

The length of the buffer specified by the name argument into which the API writes the character set name.

schema

Address of a buffer of type unsigned char into which the API writes the schema name.

schema_len

The length of the buffer specified by the schema argument into which the API writes the schema name.

catalog

Address of a buffer of type unsigned char into which the API writes the catalog name.

catalog_len

The length of the buffer specified by the catalog argument into which the API writes the catalog name.

associate_id

An identifier used to distinguish one active association from all others.

Notes

- Oracle SQL/Services returns an error if the SQLDA2 is invalid or if the column number is greater than the number of parameter markers or select list items (colnum >= sqlda.SQLD).
- The maximum length of a character set name, schema name, or catalog name is 128 bytes. If a user-supplied buffer is smaller than the actual name, the name is truncated. If a user-supplied buffer is larger than the actual name, the name is padded with spaces.
- This call is often more efficient and performs better than the corresponding sqlsrv_sqllda_char_set_info routine.

Errors

SQLSRV_INVSQLDA	Invalid SQLDA, SQLDA2, or SQLDA_ID.
SQLSRV_INVCOLNUM	Column number not within range.

Data Structures

This chapter describes the data structures that Oracle SQL/Services uses to communicate with the client application. Some of the data structures (the SQLDA, SQLDA2, and SQLCA) are identical in layout (but not in usage) to those in dynamic SQL. Those structures are described in detail in the *Oracle Rdb SQL Reference Manual*. This Oracle SQL/Services manual provides relatively brief descriptions of the data structures and points out the differences in their usage.

7.1 Documentation Format

Each Oracle SQL/Services data structure is documented using a structured format called a template. The sections of the template are shown in [Table 7-1](#), along with the information that is presented in each section and the format used to present the information.

Table 7-1 Sections in the Data Structure Template

Section	Description
Structure Name	Appears at the top of the page, followed by the English equivalent.
Overview	Appears directly below the structure name. The overview explains, usually in one or two sentences, the purpose of the structure.
Definition	Shows the C definition of the structure.
Fields	Gives detailed information about each field.

The Fields section contains detailed information about each field in the data structure. Fields are described in the order in which they appear in the structure.

The following format is used to describe each field:

field-name

data type:	The data type of the specific field (see Table 6-3)
C declaration:	How that field is declared in the Oracle SQL/Services include files
set by:	Whether the value of the field is set by the API, the application program, or both
used by:	Whether the value of the field is used by the API, the application program, or both

In addition, the Fields section contains at least one paragraph of text describing the purpose of the field.

7.2 ASSOCIATE_STR-Association Structure

The association structure is a parameter that is passed to the `sqlsrv_associate` routine to specify the attributes of an association such as the service name, network transport, client logging flags, alternate error buffer, and so forth. `ASSOCIATE_STR` is defined in the include file `sqlsrv.h`. The following is the `SQLSRV_V730` version of the structure.

```
struct ASSOCIATE_STR
{
    unsigned short int  CLIENT_LOG;
    unsigned short      SERVER_LOG;
    short int           LOCAL_FLAG;
    short int           VERSION;
    CHARPTR             (*MEMORY_ROUTINE) ();
    CHARPTR             (*FREE_MEMORY_ROUTINE) ();
    short int           RESERVED;
    short int           ERRBUFLen;
    CHARPTR             ERRBUF;
    CHARPTR             class_name;
    short int           xpttyp;
    unsigned short int  port_id;
    CHARPTR             attach;
    CHARPTR             declare;
    CHARPTR             appnam;
    CHARPTR             objnam;
};
```

Fields

CLIENT_LOG

data type	word (unsigned)
C declaration:	unsigned short int CLIENT_LOG
set by:	program
used by:	API

Specifies the type of client logging to be enabled on the client system (see Section 5.1).

The following constants are defined in the include file `sqlsrv.h`:

<code>SQLSRV_LOG_DISABLED</code>	Disables logging (default)
<code>SQLSRV_LOG_ASSOCIATION</code>	Enables association logging

SQLSRV_LOG_ROUTINE	Enables API routine logging
SQLSRV_LOG_PROTOCOL	Enables message protocol logging
SQLSRV_LOG_SCREEN[1]	Sends logging output to the video display on the client system as well as to the log file
SQLSRV_LOG_OPNCLS	Opens and closes the log file around each log file write and is useful if a client is terminated abnormally
SQLSRV_LOG_FLUSH	Flushes pending output to the log file only at the end of each complete association-level, routine-level, and protocol-level entry and is useful if a client application is terminating abnormally while executing application code.
SQLSRV_LOG_BINARY	Dumps memory in structured format if data contains non-printable characters

[1]See Chapter 5 for more information.

To enable more than one type of logging, add the appropriate constants.

SERVER_LOG

data type:	word (unsigned)
C declaration:	unsigned short int SERVER_LOG
set by:	program
used by:	unused

This feature is deprecated. This field is reserved.

LOCAL_FLAG

data type:	word (signed)
C declaration:	short int LOCAL_FLAG
set by:	program
used by:	unused

This feature is deprecated. This field is reserved.

VERSION

data type: word (signed)
C declaration: short int VERSION
set by: program
used by: API

Specifies the version of the ASSOCIATE_STR structure allocated by the application program. When set to a specific version number, such as SQLSRV_V700, the value of the VERSION field directs the client API to process fields in the ASSOCIATE_STR structure supported by the specified version. The SQLSRV_Vnnn version numbers are defined in sqlsrv.h.

MEMORY_ROUTINE

data type: pointer
C declaration: CHARPTR (*MEMORY_ROUTINE) ()
set by: program
used by: API

A pointer to the entry point of a user-specified routine to be called by the API for allocation of pointer-based memory. This feature is for client environments in which a limited amount of memory is available. The default value is NULL, which causes the API to use the portable C routine malloc() for pointer-based memory allocation.

FREE_MEMORY_ROUTINE

data type: pointer
C declaration: CHARPTR (*FREE_MEMORY_ROUTINE) ()
set by: program
used by: API

A pointer to the entry point of a user-specified routine to be called by the API for deallocation of pointer-based memory. The default value is NULL, which causes the API to use the portable C routine free() for pointer-based memory deallocation.

RESERVED

data type: word (signed)
C declaration: short int RESERVED
set by: program
used by: unused

Must be 0. This field is reserved.

ERRBUFLN

data type: word (signed)
C declaration: short int ERRBUFLN
set by: program
used by: API

The length in bytes of an alternate error buffer specified by the ERRBUF field. Specify zero if you do not provide an alternate error buffer.

ERRBUF

data type: pointer
C declaration: CHARPTR ERRBUF
set by: API
used by: program

The address of an alternate error message buffer in which the API stores error message text. If you do not specify an alternate error message buffer, Oracle SQL/Services uses the 70-byte SQLERRMC field in the SQLCA data structure. However, because the SQLERRMC field is only 70 bytes, it may not be long enough to hold all the possible error messages that can be returned by the Oracle SQL/Services server or Oracle Rdb. Therefore, Oracle Corporation recommends that you allocate a larger message buffer for each association. A buffer of size 512 bytes is sufficient for all possible error messages.

class_name

data type: pointer
C declaration: CHARPTR class_name

set by: program
used by: API

The address of a buffer containing the service name with which to associate.

xpttyp

data type: word (signed)
C declaration: short int xpttyp
set by: program
used by: API

The desired transport type for this association.

The following constants are defined in the include file sqlsrv.h:

SQLSRV_XPT_NOT_CHOSEN	No transport chosen (default); API will select transport
SQLSRV_XPT_DECNET	Enables DECnet transport support (VMS only)
SQLSRV_XPT_TCPIP	Enables TCP/IP transport support
SQLSRV_XPT_SQLNET	Enables Oracle Net transport support (VMS only)

port_id

data type: word (unsigned)
C declaration: short int port_id
set by: program
used by: API

Must be 0 or a TCPIP port number. If non-zero, this value will be used to specify an alternate TCPIP port number to be used for this association. This value will override any SQLSRV\$TCPIP_PORT logical (OpenVMS clients), SQLSRV_TCPIP_PORT environment variable (HP-UX and Linux clients) or TCPIPPortNumber .ini specification (Windows clients).

attach

data type: pointer
C declaration: CHARPTR or an unsigned char*
set by: program
used by: API

Must be NULL, or set to a valid SQL ATTACH statement. You can use the attach field when associating to a universal service to avoid the extra round trip message to the server for an sqlsrv_execute_immediate call to issue the ATTACH statement. The ATTACH statement is executed in the executor after the SQL initialization procedure (if any) is executed.

declare

data type: pointer
C declaration: CHARPTR or an unsigned char*
set by: program
used by: API

Must be NULL, or any SQL statement that can be executed using sqlsrv_execute_immediate. The declare field is designed to specify a DECLARE TRANSACTION statement; however, you can specify any valid SQL statement. You can use the declare field when associating to a service of any type to avoid the extra round trip message to the server for an sqlsrv_execute_immediate call to issue a DECLARE TRANSACTION or other SQL statement. The SQL statement is executed in the executor after the SQL initialization procedure (if any) and ATTACH statement (if any) is executed.

appnam

data type: pointer
C declaration: CHARPTR or an unsigned char*
set by: program
used by: API

Must be NULL, or a string representing the client application name. Note that because the client application can pass any string using this field, the application name cannot be used

for security purposes. The application name is displayed with a system management SHOW CLIENT command.

objnam

data type: pointer
C declaration: CHARPTR or an unsigned char*
set by: program
used by: API

Must be NULL, or a string representing the DECnet object name to be used for this association. This value will override any SQLSRV\$DECNET_OBJECT logical (OpenVMS clients).

7.3 SQLCA-SQL Communications Area

The SQLCA structure is used to store information when an error occurs. This structure is defined in the include file `sqlsrvca.h` along with the error codes generated by Oracle SQL/Services.

struct SQLCA

```
{
char SQLCAID [8];
SQS_LONGWORD SQLCABC;
SQS_LONGWORD SQLCODE;
struct
{
short int SQLERRML;
char SQLERRMC [70];
} SQLERRM;
SQS_LONGWORD SQLERRD [6];
struct
{
char SQLWARN0;
char SQLWARN1;
char SQLWARN
char SQLWARN3;
char SQLWARN4;
char SQLWARN5;
char SQLWARN6;
char SQLWARN7;
} SQLWARN;
char SQLEXT [8];
};
```

The Oracle SQL/Services SQLCA is based on the SQL SQLCA, which is described in detail in the Oracle Rdb SQL Reference Manual.

Fields

SQLCAID

data type:	character string
C declaration:	char SQLCAID [8]
set by:	API
used by:	unused

Structure identification field, present only for compatibility with SQL. Contains the null-terminated string "SQLCA" followed by two reserved bytes.

SQLCABC

data type: SQS_LONGWORD
C declaration: SQS_LONGWORD SQLCABC
set by: API
used by: program

Contains the size, in bytes, of the SQLCA structure. The value of this field is always 128.

SQLCODE

data type: SQS_LONGWORD
C declaration: SQS_LONGWORD SQLCODE
set by: API
used by: program

Contains the error status for the most recently invoked Oracle SQL/Services routine. A positive value indicates a warning, a negative value indicates an error, and a 0 value indicates success. The include file sqlsrv.h contains the error messages that correspond to all of the possible values of SQLCODE returned by the Oracle SQL/Services client API.

SQLERRM.SQLERRML

data type: word (signed)
C declaration: short int SQLERRML
set by: API
used by: program

The length, in bytes, of the error message text returned in SQLERRMC.

SQLERRM.SQLERRMC

data type: character string
C declaration: char SQLERRMC [70]

set by: API
 used by: program

The error message text, if any, that corresponds to the error contained in the SQLCODE field. This field is not used if you specify an alternate error message buffer. See Section 7.2 for more information.

SQLERRD

data type: longword (signed) array
 C declaration: SQS_LONGWORD [6]
 set by: API
 used by: program

An array of six integers as described in Section 7.4.

SQLWARN.SQLWARNn

data type: character string
 C declaration: char SQLWARN0 . . . SQLWARN7
 set by: unused
 used by: unused

A series of eight 1-character state fields as defined by SQL.

SQLEXT

data type: character string
 C declaration: char SQLEXT [8]
 set by: unused
 used by: unused

Not used by the API.

7.4 SQLERRD-Part of SQLCA

The SQLERRD array contains six elements. The content of each element in the SQLERRD array is determined by the routine that is successfully called:

- After a successful call to `sqlsrv_prepare`, the following information is stored in the `SQLERRD` array:

`SQLERRD[1]` contains the statement type.

The statement types, as defined by Oracle Rdb, are as follows:

- 0: statement is an executable statement other than `CALL`
- 1: statement is a `SELECT` statement
- 2: statement is a `CALL` statement

- After a successful call to `sqlsrv_execute_immediate` or `sqlsrv_execute_in_out` with the execute flag set to either `SQLSRV_EXE_W_DATA` or `SQLSRV_EXE_WO_DATA`, the following information is stored in the `SQLERRD` array:

`SQLERRD[2]` element contains the number of rows inserted, updated, or deleted.

See `sqlsrv_execute_immediate` and `sqlsrv_execute_in_out` for more information.

- After a successful call to `sqlsrv_open_cursor` to open a table cursor, the following information is stored in the `SQLERRD` array:

`SQLERRD[2]` element contains the estimated result table cardinality.
`SQLERRD[3]` element contains the estimated I/Os.

- After a successful call to `sqlsrv_open_cursor` to open a list cursor, the following information is stored in the `SQLERRD` array:

`SQLERRD[1]` element contains the length of the largest actual segment.
`SQLERRD[3]` element contains the total number of segments.

The `SQLERRD[4]` and `SQLERRD[5]` elements contain the total length of all the segments as a quadword value where the low-order 32-bit value is stored in `SQLERRD[4]` and the high-order 32-bit value is stored in `SQLERRD[5]`.

- After a successful call to `sqlsrv_fetch`, the following information is stored in the `SQLERRD` array:

`SQLERRD[2]` contains the number of the current row within the result table.

7.5 SQLDA or SQLDA2-SQL Descriptor Area

The `SQLDA` or `SQLDA2` structure contains SQL parameter marker and select list metadata as well as pointers to data and indicator variables. It is defined in the include file `sqlsrvda.h`.

The Oracle SQL/Services SQLDA or SQLDA2 is identical to the SQLDA or SQLDA2 structures, respectively, in SQL. For additional information on the SQLDA or SQLDA2, read the dynamic SQL chapter in the Oracle Rdb7 Guide to SQL Programming and the SQLDA and SQLDA2 appendix in the Oracle Rdb SQL Reference Manual.

```
struct SQLDA
{
    char            SQLDAID[8];
    SQS_LONGWORD   SQLDABC;
    unsigned short SQLN;
    unsigned short SQLD;
    struct SQLVAR   SQLVARARY[1];
};
struct SQLDA2
{
    char            SQLDAID[8];
    SQS_LONGWORD   SQLDABC;
    unsigned short SQLN;
    unsigned short SQLD;
    struct SQLVAR2  SQLVARARY[1];
};
```

Fields

SQLDAID

data type: character string
C declaration: char SQLDAID[8]
set by: API
used by: unused

Structure identification field; contains the null-terminated string "SQLDA" or "SQLDA2" followed by one or two reserved bytes.

SQLDABC

data type: SQS_LONGWORD
C declaration: SQS_LONGWORD SQLDABC
set by: API or program
used by: API

The size, in bytes, of the SQLDA or SQLDA2 structure, including the nested variable length SQLVARARY structure. The SQLDABC field is used by the API to verify the integrity of the SQLDA or SQLDA2.

SQLN

data type: word (signed)
C declaration: short int SQLN
set by: see following text
used by: API

The number of elements in the SQLVARARY. If the API allocated the SQLDA or SQLDA2 structure, this value is the same as the SQLD field. If your application allocated its own SQLDA or SQLDA2 structure, it must supply this value. In that case, the SQLN field specifies the maximum number of select list items or parameter marker items that can exist in an SQL statement that is prepared with a particular SQLDA or SQLDA2; a call to the `sqlsrv_prepare` routine with an SQLVARARY that is too small returns an error.

SQLD

data type: word (signed)
C declaration: short int SQLD
set by: API
used by: program

The actual number of parameter markers or select list items in a prepared SQL statement. In an SQLDA or SQLDA2 structure that was allocated by the API, this value is the same as the SQLN field (the number of elements in the SQLVARARY).

SQLVARARY

data type: structure array
C declaration: struct SQLVAR SQLVARARY[1] (SQLDA),
struct SQLVAR2 SQLVARARY[1] (SQLDA2)
set by: see [Section 7.6](#) and [Section 7.7](#)
used by: see [Section 7.6](#) and [Section 7.7](#)

An array of SQLVAR structures (see [Section 7.6](#)) or SQLVAR2 structures (see [Section 7.7](#)), each of which describes one select list item or one parameter marker item. Because some C

compilers do not support the definition of a varying array within a structure, SQLVARARY is defined as an array of one element. However, Oracle SQL/Services uses as many SQLVAR or SQLVAR2 elements as allocated in an SQLDA or SQLDA2.

7.6 SQLVAR-Parameter Marker or Select List Item

Each SQLVAR structure describes one select list item or parameter marker.

```
struct SQLVAR
{
    short          SQLTYPE;
    unsigned short SQLLEN;
    CHARPTR       SQLDATA;
    SHORTPTR      SQLIND;
    short         SQLNAME_LEN;
    char          SQLNAME[30];
};
```

Fields

SQLTYPE

data type: word (signed)
 C declaration: short int SQLTYPE
 set by: API
 used by: program

The SQL data type for the SQLVAR entry. This value represents the Oracle SQL/Services data type as defined in the include file sqlsrv.h.

```
#define SQLSRV_ASCII_STRING      129
#define SQLSRV_GENERALIZED_NUMBER 130
#define SQLSRV_GENERALIZED_DATE 131
#define SQLSRV_VARCHAR          132
#define SQLSRV_VARBYTE          155
#define SQLSRV_LIST_VARBYTE     159
#define SQLSRV_INTERVAL         168
```

SQLLEN

data type: word (signed)
 C declaration: unsigned short int SQLLEN
 set by: see following text
 used by: program

The value of the `SQLLEN` field is dependent on the data type of the parameter marker or select list item. For more information, see Chapter 8.

SQLDATA

data type: pointer
C declaration: `char *SQLDATA`
set by: program or API
used by: program and API

The address of the data variable for the parameter marker or select list item. If your application allocates data variables by calling the `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` routine, the API initializes this field. If your application allocates its own data variables, it must write the address of each variable into an `SQLDATA` field. In that case, the API returns an error if an `SQLLEN` value is less than the length of the associated data value.

SQLIND

data type: pointer
C declaration: `short int *SQLIND`
set by: program or API
used by: program and API

The address of the indicator variable for the data. If your application calls the `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` routine, the API initializes this field. Otherwise, your application must allocate its own indicator variables and write the address of each variable into an `SQLIND` field.

Your program sets the indicator variable of each parameter marker as follows before calling `sqlsrv_execute_in_out` or `sqlsrv_open_cursor`:

- 0: to indicate the presence of data for the column
- 1: to indicate a NULL value for the column

The API sets the indicator variable of each select list item as follows as part of the successful completion of a call to `sqlsrv_fetch` or `sqlsrv_execute_in_out`:

- 0: to indicate the presence of data for the column

- 1: to indicate a NULL value for the column
- >0: to indicate that a column value was truncated

SQLNAME_LEN

data type: word (signed)
C declaration: short int SQLNAME_LEN
set by: API
used by: program

The length, in bytes, of the name stored in the SQLNAME field.

SQLNAME

data type: character string
C declaration: char SQLNAME[30]
set by: API
used by: program

The name of the parameter marker or select list item. Oracle SQL/Services stores the name as a null-terminated string.

7.7 SQLVAR2-Parameter Marker or Select List Item

Each SQLVAR2 structure describes one select list item or parameter marker.

```
struct SQLVAR2
{
    short                SQLTYPE;
    SQS_UNSIGNED_LONGWORD SQLLEN;
    SQS_UNSIGNED_LONGWORD SQLOCTET_LEN;
    CHARPTR              SQLDATA;
    LONGPTR              SQLIND;
    SQS_LONGWORD         SQLCHRONO_SCALE;
    SQS_LONGWORD         SQLCHRONO_PRECISION;
    short                SQLNAME_LEN;
    char                 SQLNAME [128];
    char                 SQLCHAR_SET_NAME [128];
    char                 SQLCHAR_SET_SCHEMA [128];
    char                 SQLCHAR_SET_CATALOG [128];
};
```

Fields

SQLTYPE

data type:	word (signed)
C declaration:	short int SQLTYPE
set by:	API
used by:	program

The SQL data type for the SQLVAR2 entry. This value represents the Oracle SQL/Services data type as defined in the include file sqlsrv.h.

```
#define SQLSRV_ASCII_STRING      129
#define SQLSRV_GENERALIZED_NUMBER 130
#define SQLSRV_GENERALIZED_DATE 131
#define SQLSRV_VARCHAR          132
#define SQLSRV_VARBYTE          155
#define SQLSRV_LIST_VARBYTE     159
#define SQLSRV_INTERVAL         168
```

SQLLEN

data type: SQS_LONGWORD_UNSIGNED
C declaration: SQS_LONGWORD_UNSIGNED SQLLEN
set by: see following text
used by: program

The value of the SQLLEN field is dependent on the data type of the parameter marker or select list item. For more information, see Chapter 8.

SQLOCTET_LEN

data type: SQS_LONGWORD_UNSIGNED
C declaration: SQS_LONGWORD_UNSIGNED SQLOCTET_LEN
set by: SQL
used by: program and API

A value that indicates the length in octets or 8-bit bytes of the select list item or parameter marker. For more information, see Chapter 8.

SQLDATA

data type: pointer
C declaration: char *SQLDATA
set by: program or API
used by: program and API

The address of the data variable for the parameter marker or select list item. If your application allocates data variables by calling the `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` routine, the API initializes this field. If your application allocates its own data variables, it must write the address of each variable into an SQLDATA field. In that case, the API returns an error if an SQLLEN value is less than the length of the associated data value.

SQLIND

data type: pointer
C declaration: SQS_LONGWORD *SQLIND

set by: program or API
used by: program and API

The address of the indicator variable for the data. If your application calls the `sqlsrv_allocate_sqlda_data` or `sqlsrv_allocate_sqlda2_data` routine, the API initializes this field. Otherwise, your application must allocate its own indicator variables and write the address of each variable into an `SQLIND` field.

Your program sets the indicator variable of each parameter marker as follows before calling `sqlsrv_execute_in_out` or `sqlsrv_open_cursor`:

- 0: to indicate the presence of data for the column
- 1: to indicate a NULL value for the column

The API sets the indicator variable of each select list item as follows as part of the successful completion of a call to `sqlsrv_fetch` or `sqlsrv_execute_in_out`:

- 0: to indicate the presence of data for the column
- 1: to indicate a NULL value for the column
- >0: to indicate that a column value was truncated

SQLCHRONO_SCALE

data type: `SQS_LONGWORD`
C declaration: `SQS_LONGWORD SQLCHRONO_SCALE`
set by: API
used by: program

`SQLCHRONO_SCALE` contains the scale of the interval for columns of type `SQLSRV_INTERVAL`. `SQLCHRONO_SCALE` contains the type of date as shown in Table 8-2 for columns of type `SQLSRV_GENERALIZED_DATE`.

SQLCHRONO_PRECISION

data type: `SQS_LONGWORD`
C declaration: `SQS_LONGWORD SQLCHRONO_PRECISION`
set by: API
used by: program

SQLCHRONO_PRECISION contains the precision for columns of type SQLSRV_INTERVAL and for columns of type SQLSRV_GENERALIZED_DATE with a type of SQLSRV_DT_DATE_ANSI, SQLSRV_DT_TIME, or SQLSRV_DT_TIMESTAMP.

SQLNAME_LEN

data type: word (signed)

C declaration: short int SQLNAME_LEN

set by: API

used by: program

The length, in bytes, of the name stored in the SQLNAME field.

SQLNAME

data type: character string

C declaration: char SQLNAME[128]

set by: API

used by: program

The name of the parameter marker or select list item. Oracle SQL/Services stores the name as a null-terminated string. The maximum length of a name is 31 characters.

SQLCHAR_SET_NAME

data type: character string

C declaration: char SQLCHAR_SET_NAME[128]

set by: API

used by: program

The character set name when the SQLTYPE is a character string type. The maximum length of a character set name is 128 characters. When SQLTYPE is any other data type, this field contains spaces.

SQLCHAR_SET_SCHEMA

data type: character string

C declaration: char SQLCHAR_SET_SCHEMA[128]

set by: reserved for future use

used by: reserved for future use

The schema name when the `SQLTYPE` is a character string type. The maximum length of a schema name is 128 characters. When `SQLTYPE` is any other data type, this field contains spaces.

SQLCHAR_SET_CATALOG

data type: character string

C declaration: `char SQLCHAR_SET_CATALOG[128]`

set by: reserved for future use

used by: reserved for future use

The catalog name when the `SQLTYPE` is a character string type. The maximum length of a catalog name is 128 characters. When `SQLTYPE` is any other data type, this field contains spaces.

Data Types

Oracle SQL/Services supports the full range of SQL data types; however, the values for certain data types are represented in a different format than that used in the database. Each SQL data type has a corresponding Oracle SQL/Services data type, all of which are described in this chapter. The `sqlsrv.h` file provides definitions for each Oracle SQL/Services data type.

8.1 Data Types

[Table 8–1](#) lists the SQL data types along with the corresponding Oracle SQL/Services data types.

Table 8–1 Data Types

SQL Data Type	Oracle SQL/Services Data Type
CHAR	SQLSRV_ASCII_STRING
VARCHAR	SQLSRV_VARCHAR
TINYINT	SQLSRV_GENERALIZED_NUMBER
SMALLINT	SQLSRV_GENERALIZED_NUMBER
INTEGER	SQLSRV_GENERALIZED_NUMBER
QUADWORD	SQLSRV_GENERALIZED_NUMBER
FLOAT	SQLSRV_GENERALIZED_NUMBER
REAL	SQLSRV_GENERALIZED_NUMBER
DOUBLE PRECISION	SQLSRV_GENERALIZED_NUMBER
DATE VMS	SQLSRV_GENERALIZED_DATE
DATE ANSI	SQLSRV_GENERALIZED_DATE

Table 8–1 Data Types(Cont.)

SQL Data Type	Oracle SQL/Services Data Type
TIME	SQLSRV_GENERALIZED_DATE
TIMESTAMP	SQLSRV_GENERALIZED_DATE
INTERVAL	SQLSRV_INTERVAL
LIST OF BYTE VARYING	SQLSRV_LIST_VARBYTE
String segment data type	SQLSRV_VARBYTE

8.2 SQLSRV_ASCII_STRING

Oracle SQL/Services uses the SQLSRV_ASCII_STRING data type to represent the CHAR fixed-length character string data type.

For an SQLDA, the SQLLEN field specifies the length of the string in 8-bit bytes. For an SQLDA2, the SQLLEN field specifies the length of the string in characters and the SQLOCTET_LEN field specifies the length of the string in 8-bit bytes.

If the client application calls either the `sqlsrv_allocate_sqlda_data()` or `sqlsrv_allocate_sqlda2_data()` client API service to allocate the SQLDATA memory, then Oracle SQL/Services allocates an extra byte of memory and null-terminates SQLSRV_ASCII_STRING character strings in select list SQLDAs. The extra byte of memory is not reflected in the SQLLEN or SQLOCTET_LEN fields. If the client application allocates its own SQLDATA memory, then Oracle SQL/Services does not null-terminate SQLSRV_ASCII_STRING character strings.

8.3 SQLSRV_VARCHAR

Oracle SQL/Services uses the SQLSRV_VARCHAR data type to represent the VARCHAR varying-length string data type. An SQLSRV_VARCHAR data value consists of a leading length field immediately followed by the string, which may contain binary data.

For an SQLDA, the leading length field is an unsigned 16-bit word. The SQLLEN field specifies the maximum length of a string in 8-bit bytes, excluding the size of the 16-bit leading length field.

For an SQLDA2, the leading length field is an unsigned 32-bit longword. The SQLLEN field specifies the maximum length of a string in characters, excluding the size of the 32-bit leading length field. The SQLOCTET_LEN field specifies the maximum length of a string in 8-bit bytes, including the size of the 32-bit leading length field.

Be sure to specify the correct length for the SQLSRV_VARCHAR data type in your API applications. Oracle SQL/Services does not issue an error message when the size of the data fields for the SQLSRV_VARCHAR data type exceeds the size of the SQLLEN field in the SQLDA data structure.

8.4 SQLSRV_GENERALIZED_NUMBER

Oracle SQL/Services uses the SQLSRV_GENERALIZED_NUMBER data type to represent the following SQL data types:

- TINYINT
- SMALLINT
- INTEGER
- QUADWORD
- FLOAT
- REAL
- DOUBLE PRECISION

Oracle SQL/Services presents all integer, fixed-point, and floating-point data values to a client application as null-terminated numeric strings in the following format:

```
[-][NNN][.DD][E-][xx]
```

- unary minus
- NNN integer portion of the number
- .DD decimal portion of the number
- E exponent identifier
- unary minus for exponent value
- xx exponent value

The brackets indicate the optional syntax.

When you prepare a statement, the Oracle SQL/Services executor calculates the maximum number of bytes required to represent the most negative and the most positive value for an Oracle SQL/Services generalized number.

For an SQLDA, the low-order byte of the SQLLEN field specifies the maximum number of bytes, excluding the null-terminator. The high-order byte of the SQLLEN field specifies the scale factor.

For an `SQLDA2`, the low-order 16-bit word of the `SQLLEN` field specifies the maximum number of bytes, excluding the null-terminator. The high-order 16-bit word of the `SQLLEN` field specifies the scale factor. The `SQLOCTET_LEN` field specifies the maximum number of bytes, including the null-terminator.

Trailing zeros occur in fixed-point numeric data types with `SCALE FACTOR`. Trailing zeros are included after the decimal point up to the number of digits specified by the `SCALE FACTOR`. For example, a field defined as `INTEGER (3)` would be expressed as `23.400`.

Trailing zeros occur in floating-point data types. Trailing zeros are included in the fraction, and leading zeros are included in the exponent, up to the maximum precision available, for fields assigned the `REAL` and `DOUBLE PRECISION` data types. For example, a `REAL` number would be expressed as `1.2340000E+01` and a `DOUBLE PRECISION` number would be expressed as `5.678900000000000E+001`.

The maximum size of the `TINYINT` data type is 4 and the maximum size of the `REAL` data type is 15.

SQL allows a parameter marker value for an integer or fixed-point data type to be supplied in scientific notation. For example: `-3.2768E4` is equivalent to `-32768`. To support this, the `sqlsrv_allocate_sqlda_data()` and `sqlsrv_allocate_sqlda2_data()` client API services both allocate an additional 5 bytes of memory to account for a possible decimal point (`.`) and exponent (`E+nn`). These 5 extra bytes are not reflected in either the `SQLLEN` or `SQLOCTET_LEN` values.

It is possible for an application that allocates its own memory for parameter marker data variables to send a numeric data value to the server that is a valid number, but that is potentially longer than the server can handle. For this reason, the server allocates an extra 10 bytes of memory for parameter marker variables for all numeric data types, in addition to the minimum required for each data type. If the length of a numeric parameter marker value exceeds the amount of memory allocated for the parameter marker variable, the server returns the `SQLSRV_DATA_TOO_LONG` error to the client. This restriction is imposed on the server by the particular dynamic SQL interface used by the Oracle SQL/Services server.

For example, the server minimally allocates 6 bytes for a column of type `SMALLINT`. This supports values from `-32768` through `+32767`. To handle values expressed in scientific notation, the server allocates an additional 5 bytes for all numeric data types. This supports values from `-3.2768E+04` through `+3.2767E+04`. To support the inclusion of insignificant zeros, the server finally allocates an additional 10 bytes for all numeric data types. This supports values such as `-003.276800E+4` and `+3.2767E+0004`. However, a value of `+00003.27670000E+00004`, although a valid numeric value, is considered too long to be handled by the server.

8.5 SQLSRV_GENERALIZED_DATE

Oracle SQL/Services uses the SQLSRV_GENERALIZED_DATE data type to represent the DATE VMS, DATE ANSI, TIME, and TIMESTAMP data types. An Oracle SQL/Services generalized date is a null-terminated string containing a maximum of 16 digits in the following format:

```
ccyymmdd[hh[mi[ss[ff]]]]
```

cc	century
yy	year
mm	month
dd	day
hh	hour (24-hour format)
mi	minute
ss	second
ff	fractions of a second

If you omit any of the optional fields of a date-time value of type DATE VMS, then SQL pads the string with zeros. Thus, the default time is exactly midnight.

In a select list SQLDA, the century, year, month, and day fields of a date-time value of type TIME are all zeros. In a parameter marker SQLDA, the century, year, month, and day fields of a date-time value of type TIME are ignored, but must be present. Oracle Corporation recommends you set these fields to all zeros.

In a select list SQLDA, the hours, minutes, seconds, and fractions-of-second fields of a date-time value of type DATE ANSI are all zeros. In a parameter marker SQLDA, the hours, minutes, seconds, and fractions-of-second fields of a date-time value of type DATE ANSI are ignored.

All the fields of date-time value of type TIMESTAMP are significant in both select list and parameter marker SQLDAs. For example:

Data Type	Date/Time	SQLSRV_GENERALIZED_DATE
DATE VMS	June 26, 1961 11:04:05 AM	1961062611040500
DATE ANSI	March 22, 1996	1996032200000000
TIME	11:23:06.7 AM	0000000011230670

Data Type	Date/Time	SQLSRV_GENERALIZED_DATE
TIMESTAMP	May 6, 1994 2:34:56.21 PM	1994050614345621

For an SQLDA, the low-order byte of the SQLLEN field specifies the maximum number of digits, including the null-terminator. Thus the value is always 17. The high-order byte of the SQLLEN field specifies the Oracle SQL/Services date-time data type as shown in [Table 8–2](#). The precision of the fractions-of-second field of a date-time value of type TIME or TIMESTAMP value is not available for an SQLDA.

For an SQLDA2, the SQLLEN and SQLOCTET_LEN fields both contain the maximum number of digits, including the null-terminator. Thus both values are always 17. The SQLCHRONO_SCALE field specifies the Oracle SQL/Services date-time data type as shown in [Table 8–2](#). The SQLCHRONO_PRECISION field specifies the precision of the fractions-of-second field. This value is undefined for a date-time value of type DATE VMS.

Table 8–2 Oracle SQL/Services Date-Time Data Types

Value	Oracle SQL/Services Date-Time Data Types	SQL Date-Time Data Types
0	SQLSRV_DT_DATE_VMS	DATE VMS
1	SQLSRV_DT_DATE_ANSI	DATE ANSI
2	SQLSRV_DT_TIME	TIME
3	SQLSRV_DT_TIMESTAMP	TIMESTAMP

It is possible for an application that allocates its own memory for parameter marker data variables to send a date-time data value to the server that is valid, but that is potentially longer than the server can handle. For this reason, the server allocates an extra 10 bytes of memory for parameter marker variables for all date-time data types, in addition to the minimum required for each data type. If the length of a date-time parameter marker value exceeds the amount of memory allocated for the parameter marker variable, the server returns the SQLSRV_DATA_TOO_LONG error to the client. This restriction is imposed on the server by the dynamic SQL interface used by the Oracle SQL/Services server.

For example, the server minimally allocates 16 bytes for a column of type TIMESTAMP. This supports all valid timestamp values expressed in the Oracle SQL/Services generalized date format, such as 1996073009572249 (1996-07-30:09:57:22.49). To support the inclusion of insignificant zeros, the server also allocates an additional 10 bytes for all date-time data types. This supports values such as 199607300957224900. However, a value of

1996073009572249000000000000, although a valid date-time value, is considered too long to be handled by the server.

See the *Oracle Rdb SQL Reference Manual* and the *Oracle Rdb7 Guide to SQL Programming* for more information on the SQL date-time data types.

8.6 SQLSRV_INTERVAL

Oracle SQL/Services uses the SQLSRV_INTERVAL data type to represent the INTERVAL data type. An Oracle SQL/Services interval is a null-terminated string.

When you prepare a statement, the Oracle SQL/Services executor calculates the maximum number of bytes required to represent the most negative and the most positive value for an interval.

For an SQLDA, the low-order byte of the SQLLEN field specifies the maximum number of bytes, excluding the null-terminator. The high-order byte of the SQLLEN field specifies the interval subtype. The scale and precision of the interval are not available for an SQLDA.

For an SQLDA2, the SQLLEN field specifies the interval subtype. The SQLOCTET_LEN field specifies the maximum number of bytes, including the null-terminator. The scale and precision of the interval are specified by the SQLCHRONO_SCALE and SQLCHRONO_PRECISION fields, respectively.

The Oracle SQL/Services interval codes shown in [Table 8-3](#) correspond directly to the SQL interval types.

Table 8-3 Oracle SQL/Services Interval Type

Value	Oracle SQL/Services Interval Type
1	SQLSRV_DT_YEAR
2	SQLSRV_DT_MONTH
3	SQLSRV_DT_DAY
4	SQLSRV_DT_HOUR
5	SQLSRV_DT_MINUTE
6	SQLSRV_DT_SECOND
7	SQLSRV_DT_YEAR_MONTH
8	SQLSRV_DT_DAY_HOUR
9	SQLSRV_DT_DAY_MINUTE

Table 8–3 Oracle SQL/Services Interval Type(Cont.)

Value	Oracle SQL/Services Interval Type
10	SQLSRV_DT_DAY_SECOND
11	SQLSRV_DT_HOUR_MINUTE
12	SQLSRV_DT_HOUR_SECOND
13	SQLSRV_DT_MINUTE_SECOND

It is possible for an application that allocates its own memory for parameter marker data variables to send an interval data value to the server that is valid, but that is potentially longer than the server can handle. For this reason, the server allocates an extra 10 bytes of memory for parameter marker variables for all interval data types, in addition to the minimum required for each data type. If the length of an interval parameter marker value exceeds the amount of memory allocated for the parameter marker variable, the server returns the `SQLSRV_DATA_TOO_LONG` error to the client. This restriction is imposed on the server by the dynamic SQL interface used by the Oracle SQL/Services server.

For example, the server minimally allocates 3 bytes for a column of type `INTERVAL YEAR(3)`. This supports values from `-99` through `99`. To support the inclusion of insignificant zeros, the server also allocates an additional 10 bytes for all interval data types. This supports values such as `+000999`, although SQL may consider insignificant zeros as invalid. However, a value of `-000000000099`, although potentially a valid interval value, is considered too long to be handled by the server.

See the *Oracle Rdb7 Guide to SQL Programming* and the *Oracle Rdb SQL Reference Manual* for more information on the `INTERVAL` data type.

8.7 SQLSRV_VARBYTE

Oracle SQL/Services uses the `SQLSRV_VARBYTE` data type to represent the varying-length string segment data type. An `SQLSRV_VARBYTE` data value consists of a leading length field immediately followed by the string, which may contain binary data.

For an `SQLDA`, the leading length field is an unsigned 16-bit word. The `SQLLEN` field specifies the maximum length of a string in 8-bit bytes, excluding the size of the 16-bit leading length field.

For an `SQLDA2`, the leading length field is an unsigned 32-bit longword. The `SQLLEN` field specifies the maximum length of a string in characters, excluding the size of the 32-bit leading length field. The `SQLOCTET_LEN` field specifies the maximum length of a string in 8-bit bytes, including the size of the 32-bit leading length field.

Be sure to specify the correct length for the `SQLSRV_VARBYTE` data type in your API applications. Oracle SQL/Services does not issue an error message when the size of the data fields for the `SQLSRV_VARBYTE` data type exceeds the size of the `SQLLEN` field in the `SQLDA` data structure.

When dealing with the `SQLSRV_VARBYTE` data type, it is important to know that the length of a segment may exceed the length specified in the metadata for a column. For example, the default segment length is 1 byte; however, segments of any length may be stored in a column defined with the default length. Consider a segmented string defined as `LIST OF BYTE VARYING(80)`.

In a parameter marker `SQLDA`, you can call `sqlsrv_sqlda_set_sqlen()`, `sqlsrv_sqlda_set_sqlen73()`, `sqlsrv_sqlda2_set_sqlen()` or `sqlsrv_sqlda2_set_sqlen73()` to increase the maximum segment length to 132 bytes before you call `sqlsrv_allocate_sqlda_data()` or `sqlsrv_allocate_sqlda2_data()`. You may then insert strings up to 132 bytes in length into the segmented string.

In a select list `SQLDA`, `sqlsrv_prepare()` returns the segment length specified when the column was defined. In this example, the column was defined with a segment length of 80 bytes. However, the length of the longest segment in a particular segmented string may be longer than this value. In this example, it is 132 bytes. To allow your application to allocate sufficient memory for the longest segment, `sqlsrv_open_cursor()` returns the length of the longest segment in the `SQLERRD[1]` field of the `SQLCA` when you successfully open a list cursor to access the segmented string. Therefore, in this example, `sqlsrv_open_cursor()` returns 132 in the `SQLERRD[1]` field. You can then supply this value to `sqlsrv_sqlda_set_sqlen()`, `sqlsrv_sqlda_set_sqlen73()`, `sqlsrv_sqlda2_set_sqlen()` or `sqlsrv_sqlda2_set_sqlen73()` before you call `sqlsrv_allocate_sqlda_data()` or `sqlsrv_allocate_sqlda2_data()`. In this way, you are guaranteed to have sufficient `SQLDATA` memory available to hold the longest segment in the segment string.

See the *Oracle Rdb7 Guide to SQL Programming* and the *Oracle Rdb SQL Reference Manual* for more information on lists (segmented strings).

8.8 SQLSRV_LIST_VARBYTE

Oracle SQL/Services uses the `SQLSRV_LIST_VARBYTE` data type to represent the `LIST OF BYTE VARYING` data type. The `SQLSRV_LIST_VARBYTE` data type is a fixed-length data type that holds the location of a particular segmented string or binary large object (BLOB) in a database.

For an `SQLDA`, the `SQLLEN` field specifies the size in bytes of the `SQLSRV_LIST_VARBYTE`.

For an SQLDA2, both the SQLLEN and SQLOCTET_LEN fields specify the size in bytes of the SQLSRV_LIST_VARBYTE.

See the *Oracle Rdb7 Guide to SQL Programming* and the *Oracle Rdb SQL Reference Manual* for more information on the LIST OF BYTE VARYING data type.

8.9 Deciding Whether to Use SQLDA or SQLDA2

You can develop most client applications using the standard SQLDA SQL descriptor area. However, you must use the extended SQLDA2 SQL descriptor area in the following situations:

- If your application needs to process data in columns that have a multibyte character data type.
- If your application needs the scale or precision of columns of type TIME, TIMESTAMP, or INTERVAL. This metadata information is not accessible if you use a standard SQLDA.
- If your application needs to access the full name of a column where the length of the column name is greater than 29 characters. If you use a standard SQLDA, Oracle SQL/Services truncates column names that are 30 or 31 characters long. The maximum length of a column name is 31 characters.

Obsolete Features

The following Oracle SQL/Services features have been made obsolete. These features are no longer described in the main body of the *Guide to Using the Oracle SQL/Services Client API*, the *Oracle SQL/Services Installation Guide*, and the *Oracle SQL/Services Server Configuration Guide*.

A.1 Obsolete Features

An obsolete feature is a feature that is no longer supported that was described as a deprecated feature in a previous release. These features no longer work.

A.1.1 Obsolete Network Communications Software

The following network communications software is now obsolete and no longer supported.

- NetWare (IPX/SPX) software
The NetWare network transport was supported for MS Windows 3.1 clients, which are now obsolete.
- SQL*Net software on HP Tru64 UNIX
The Oracle Net network transport is now supported on the Open VMS Alpha and Itanium servers and client platforms. It is no longer supported for HP Tru64 UNIX client platforms.
- DECnet software on Windows platforms
The DECnet network transport is no longer supported on Windows platforms. HP support for Pathworks 32 is scheduled to terminate on May 31, 2010.

A.1.2 Obsolete Client Platforms

The following client platforms are now obsolete and no longer supported. These client kits no longer ship with the Oracle SQL/Services client API software kit.

- MS Windows 3.1
- Windows 95
- Windows NT X86
- Windows NT Alpha
- Windows 2000
- Macintosh
- Solaris
- OpenVMS VAX
- HP Tru64 UNIX

A.1.3 Obsolete Server Platforms

The following server platforms are now obsolete and no longer supported.

- OpenVMS VAX
- HP Tru64 UNIX

Index

A

API

- HP-UX, 1-5
 - installing, 1-11
 - library, 1-4
 - Linux, 1-5
 - OpenVMS Alpha, 1-5
 - OpenVMS I64, 1-5
 - Oracle ODBC Driver for Rdb
 - Windows, 1-5
 - using in C applications, 1-10
 - Windows, 1-5
 - writing applications using, 1-4
- ### API routines
- association, 6-3 to 6-14
 - functional interface, 6-46 to ??
 - result table, 6-26 to 6-39
 - SQL statement, 6-14 to 6-26
 - utility, 6-39 to 6-45
- ### Application
- building on HP-UX, 2-17
 - building on Linux, 2-18
 - building on OpenVMS, 2-15
 - building on Windows, 2-16
 - recommendations for developing, 2-13
- ### Application development
- knowledge assumed for Oracle SQL/Services, 1-9
- ### Application programming interface
- See* API
- ### Argument vector
- used in sample application, 3-7
- ### ASCIZ
- See* SQLSRV_ASCII_STRING data type

ASSOCIATE_STR

- attach field, 7-8
 - CLASS_NAME field, 7-6
 - CLIENT_LOG field, 7-3
 - declare field, 7-8
 - description of, 7-3 to 7-8
 - ERRBUF field, 7-6
 - ERRBUFLen field, 7-6
 - execution logging and, 5-2
 - RESERVED field, 7-4, 7-6, 7-7
 - setting up, 3-7
 - summary of, 2-13
 - VERSION field, 7-5
 - xpctyp field, 7-7
- ### Association
- aborting, 6-4
 - creating, 3-6, 6-5
 - creating client/server, 2-8
 - data structure, 7-3
 - declaring variables for, 3-6
 - ending client/server, 2-9
 - logging, 5-2, 5-3, 7-3
 - multiple, 3-6
 - releasing, 3-6
 - summary of routines, 2-8 to 2-9, 6-3 to 6-13
 - terminating, 6-13
- ### Association identifier
- passing, 3-7
- ### Association information
- obtaining value of, 6-10
- ### Association structure
- See* ASSOCIATE_STR

B

- Batched execution, 4-1
- Binary
 - data type, 8-2
- Binary data in logs
 - dumped in structured format, 5-2, 7-4
- Buffer, message
 - binding to association, 6-5
 - role in performance enhancement, 4-1

C

- C, C++, C# programming languages
 - programming, 1-9
 - routine name format, 6-2
- CALL statement
 - using, 2-4
- Client
 - in client/server model, 1-1
 - logging
 - See* Logging
- Client API routines
 - association, 2-8 to 2-9
 - calling from your applications, 1-9
 - data structures used, 2-13
 - functional interface, 2-11 to 2-12
 - overview, 2-8 to 2-12
 - result table, 2-9
 - similarity to dynamic SQL, 1-10
 - SQL statement, 2-9
 - utility, 2-10 to 2-11
- CLIENT_LOG field
 - in sample application, 3-7
- Client/server association
 - creating, 2-8
 - ending, 2-9
- CLOSE statement
 - in dynamic SQL, 2-3
 - using, 2-4
- Committing active transactions on the server
 - sqlsrv_release routine, 6-13
- Communications area
 - See* SQLCA
- Communications software, 1-5

- accessing Oracle SQL/Services through DECnet, 1-5
- accessing Oracle SQL/Services through Oracle Net, 1-5
 - accessing Oracle SQL/Services through TCP/IP, 1-5
 - requirement for installing DECnet, 1-5
 - requirement for installing Oracle Net, 1-6
- Compiling SQL statements
 - sqlsrv_prepare routine, 6-15
- Components of Oracle SQL/Services, 1-4
- Compound statement
 - using, 2-4, 4-7
- Control Panel Device
 - selecting network transport, 1-5
- Counted string
 - data type, 8-2
- Creating and releasing an association, 3-6
- Cursor
 - closing, 3-9, 6-38
 - declaring dynamic, 6-27
 - modes, 6-28
 - opening, 3-9
 - type of, 6-27

D

- Data buffer
 - allocating, 3-13
- Data structure
 - ASSOCIATE_STR, 2-13
 - SQLCA, 2-13
 - SQLDA or SQLDA2, 2-13
 - summary of, 2-13
 - template, 7-1
- Data structures used, 2-13
- Data type
 - include file, 8-1
 - Oracle SQL/Services representation, 8-1
 - SQLSRV_ASCII_STRING, 8-2
 - SQLSRV_GENERALIZED_DATE, 7-17, 8-5
 - SQLSRV_GENERALIZED_NUMBER, 7-17, 8-3
 - SQLSRV_INTERVAL, 8-7
 - SQLSRV_LIST_VARBYTE, 8-9
 - SQLSRV_VARBYTE, 8-8
 - SQLSRV_VARCHAR, 7-17, 8-2
 - SQLTYPE field, 7-17, 7-20

- Database
 - accessing, 1-3
 - Oracle Rdb, 1-1
- Date-time
 - SQLSRV_GENERALIZED_DATE data type, 8-5
- DECLARE CURSOR statement
 - in dynamic SQL, 2-3
 - using, 2-4
- Declaring a cursor
 - List cursor
 - declaring, 6-27
- DECnet software
 - allowing client/server communication, 1-5
 - installing on client and server systems, 1-5
 - use with Oracle SQL/Services, 1-5
- DELETE statement
 - using, 2-4
- DESCRIBE statement, 2-3
 - using, 2-4, 2-7
- Descriptor area
 - See* SQLDA or SQLDA2
- Driver module
 - See* SQLSRV\$DRIVER module
- Dynamic allocation
 - of data buffers and indicator variables, 6-40
 - selecting routine for, 3-7
- Dynamic SQL, 2-1
 - CLOSE statement, 2-3
 - DECLARE CURSOR statement, 2-3
 - DESCRIBE statement, 2-3
 - EXECUTE IMMEDIATE statement, 2-3
 - EXECUTE statement, 2-3
 - FETCH statement, 2-3
 - OPEN statement, 2-3
 - parameter markers, 2-6
 - PREPARE statement, 2-2
 - purpose of SQLDA or SQLDA2, 2-7
 - RELEASE statement, 2-3
 - select list items, 2-3, 2-7
 - similarity to
 - client API routines, 1-10
 - Oracle SQL/Services, 1-4
 - statement names, 2-3
 - use in Oracle SQL/Services, 1-4
- Dynamic SQL processing module, 3-1

E

- ERRBUF field
 - in sample application, 3-7
- ERRBUFLen field
 - in sample application, 3-7
- Error
 - network, 1-11
 - Oracle Rdb, 1-11
 - Oracle SQL/Services, 1-10
 - SQL, 1-11
- Error buffer
 - alternative, 7-3
 - in sample application, 3-7
- Error code
 - value in SQLERRD, 7-13
- Error handling, 3-23
 - SQLCA structure, 7-10
- EXECUTE IMMEDIATE statement, 2-3
 - using, 2-4
- EXECUTE statement, 2-3
 - using, 2-4
- Execute_flag parameter
 - use of, 4-1
- Execution logging, 5-1
 - controlling, 7-3

F

- FETCH statement
 - in dynamic SQL, 2-3
 - purpose of, 2-7
 - using, 2-4
- Fetching a row of data into a select list, 6-33
- Fetching multiple rows, 4-4, 6-36
- Flush to client log file
 - after writing to other logs, 5-2, 7-4
- FREE_MEMORY_ROUTINE field
 - in sample application, 3-7
- Freeing
 - data buffers, 6-42
 - indicator variables, 6-42
- Freeing all resources, 6-24
- Function prototype (C), 6-2
- Functional interface routines, 2-11, 6-46 to ??

G

Get associate information
 sqlsrv_get_associate_info routine returns, 6-10

H

HP-UX API software, 1-5
HP-UX operating system
 building applications on, 2-17
 building sample application on, 3-3

I

Identifier
 declaring SQLDA_ID, 3-12
Include file
 location of, 2-14
 HP-UX, 2-17
 Linux, 2-18
 OpenVMS, 2-15
 use of in application program, 2-14
Indicator variable
 allocating, 3-13
 field in SQLDA, 7-18
 field in SQLDA2, 7-22
INSERT statement
 using, 2-4
Installing API software, 1-11
Interface
 See API (application programming interface)
Interval
 SQLSRV_INTERVAL data type, 8-7
Introduction to Oracle SQL/Services, 1-1
I/O module, 3-1

L

Linking
 on HP-UX, 2-17
 on Linux, 2-18
 on OpenVMS, 2-15
 on Windows, 2-17
Linux API software, 1-5
Linux operating system
 building applications on, 2-18

 building sample application on, 3-4
List
 SQLSRV_INTERVAL data type, 8-7
 SQLSRV_LIST_VARBYTE data type, 8-9
 SQLSRV_VARBYTE data type, 8-8
List cursor
 declaring, 6-27
 modes, 6-28
Local input/output
 controlling, 7-3
LOCAL_FLAG field
 in sample application, 3-7
Logging
 association, 5-3
 in sample application, 3-7
 message protocol, 5-6
 routine, 5-4

M

Memory allocation
 defining routines for, 7-3
MEMORY_ROUTINE field
 in sample application, 3-7
Message buffer
 binding to association, 6-5
 role in performance enhancement, 4-1
Message protocol logging, 5-2, 5-6, 7-4

N

Network
 components, 1-5
 creating link, 6-5
 DECnet, 1-5
 disconnecting link, 6-4, 6-13
 Oracle Net, 1-5
 selecting, with Control Panel Device, 1-5
 TCP/IP, 1-5
NULL character, 8-2
Null-terminated string
 See SQLSRV_ASCII_STRING data type

O

- Obsolete features for Oracle SQL/Services, A-1
- Open and close logging
 - abnormal client termination and, 5-2, 7-4
- OPEN statement
 - in dynamic SQL, 2-3
 - using, 2-4
- Opening a cursor for a prepared SELECT statement, 6-30
- OpenVMS Alpha API software, 1-5
- OpenVMS I64 API software, 1-5
- OpenVMS operating system
 - building applications on, 2-15
 - building sample application on, 3-2
- Options file
 - use of, 2-15
- Oracle Net software
 - allowing client/server communication, 1-5
 - installing on client and server systems, 1-6
 - using with Oracle SQL/Services, 1-5
- Oracle ODBC Driver for Rdb API
 - Windows, 1-5
- Oracle SQL/Services API software, 1-11

P

- Parameter
 - data type, 6-2
- Parameter marker
 - checking for, 3-9
 - definition of, 2-6
 - in batched execution, 4-1
 - processing, 3-14
 - purpose of, 2-4
 - SQLVAR structure, 7-17
 - SQLVAR2 structure, 7-20
 - testing for, 3-13
 - valid SQL statements, 2-5
- Performance
 - enhancing application, 4-1
 - setting buffer sizes, 4-4
- PREPARE statement, 2-2
 - using, 2-4
- Prepared statement

- releasing, 3-25
- Preparing and executing an SQL statement without parameter markers, 6-22
- Program
 - building Oracle SQL/Services applications, 2-14 to 2-18
- Programming
 - knowledge assumed for Oracle SQL/Services, 1-9
- Protocol logging, 5-6

Q

- Question mark in SQL statement
 - See* Parameter marker

R

- Recommended approach to application
 - development, 2-13
- RELEASE statement
 - in dynamic SQL, 2-3
 - using, 2-4
- Releasing
 - data buffers, 6-42
 - indicator variables, 6-42
 - prepared statement resources, 6-24
- Result table
 - creating, 6-30
 - displaying, 3-9
 - fetching from, 6-33
 - fetching multiple rows from, 4-4, 6-34
 - processing, 3-18
 - summary of routines, 2-9 to 2-10, 6-26 to 6-39
- Return value
 - of API routine, 6-2
- Returning
 - error codes, 6-48
 - error text, 6-49
 - list cursor information, 6-51
 - sqlstate, 6-52
 - values of association information, 6-10
- Routine logging, 5-2, 5-4, 7-4
- Routine template
 - description of, 6-1
- Routines, 2-8 to 2-12

- API (application programming interface), 1-4
- association, 2-8
- functional interface, 2-11
- result table, 2-9
- SQL statement, 2-9
- utility, 2-10

S

- Sample executable program, 3-1 to 3-25
 - building on HP-UX, 3-3
 - building on Linux, 3-4
 - building on OpenVMS, 3-2
 - building on Windows X64, 3-3
 - building on Windows X86, 3-2
 - execute_statement routine in, 3-10
 - running, 3-4
 - structure of, 3-9
- Select list
 - checking for, 3-9
 - DESCRIBE statement, 2-7
 - mapping of items to variables, 2-7
 - SQLVAR structure, 7-17
 - SQLVAR2 structure, 7-20
 - valid SQL statements, 2-5
- Select list item
 - testing for, 3-13
- SELECT statement
 - checking for, 3-9
 - in dynamic SQL, 2-6
 - processing, 3-18
 - using, 2-4
- Server
 - in client/server model, 1-1
- Setting buffer sizes, 4-4
- Singleton-SELECT statement
 - using, 2-4
- SQL Communications Area
 - See SQLCA
- SQL data type
 - Oracle SQL/Services representation, 8-1
- SQL Descriptor Area
 - See SQLDA or SQLDA2
- SQL statements
 - CLOSE
 - in dynamic SQL, 2-3
 - DECLARE CURSOR
 - dynamic SQL, 2-3
 - DESCRIBE, 2-3
 - dynamically executable, 2-5
 - EXECUTE, 2-3
 - EXECUTE IMMEDIATE, 2-3
 - FETCH
 - in dynamic SQL, 2-3
 - not dynamically executable, 2-5
 - OPEN
 - in dynamic SQL, 2-3
 - PREPARE, 2-2
 - RELEASE
 - in dynamic SQL, 2-3
 - reuse, 4-8
 - summary of routines, 2-9, 6-14 to 6-26
- SQLCA
 - allocating, 6-7
 - binding to association, 6-5
 - definition of, 2-8
 - description of, 2-13, 7-10 to 7-12
 - execution results in, 6-18, 6-22
 - SQLCABC field, 7-11
 - SQLCAID field, 7-10
 - SQLCODE field, 6-2, 7-11
 - SQLERRD
 - description of, 7-12 to 7-13
 - SQLERRD field, 7-12
 - SQLERRM field, 7-11
 - SQLEXT field, 7-12
 - SQLWARN field, 7-12
- SQLCODE field
 - purpose of, 2-8
- SQLDA
 - allocating
 - data buffers and indicator variables for, 6-40
 - definition of, 2-7
 - description of, 2-13, 7-13 to 7-16
 - initialization of, 6-15
 - parameter marker, 2-6, 6-20, 6-30
 - initialization of, 6-15
 - releasing
 - data buffers, 6-42
 - indicator variables, 6-42

- prepared statement resources, 6-24
- select list, 2-7, 6-33, 6-34
 - initialization of, 6-16
- SQLD field, 7-15
- SQLDABC field, 7-14
- SQLDAID field, 7-14
- SQLN field, 7-15
- SQLVAR structure
 - SQLDATA field, 7-18
 - SQLIND field, 7-18
 - SQLLEN field, 7-17
 - SQLNAME field, 7-19
 - SQLNAME_LEN field, 7-19
 - SQLTYPE field, 7-17
- SQLVARARY field, 7-15
- use by DESCRIBE statement, 2-3
- when to use, 8-10

SQLDA_ID identifier

- declaring, 3-12

SQLDA2

- definition of, 2-7
- description of, 2-13, 7-13 to 7-16
- SQLD field, 7-15
- SQLDAID field, 7-14
- SQLN field, 7-15
- SQLVAR2 structure
 - SQLCHAR_SET_CATALOG field, 7-24
 - SQLCHAR_SET_NAME field, 7-23
 - SQLCHAR_SET_SCHEMA field, 7-23
 - SQLCHRONO_PRECISION field, 7-22
 - SQLCHRONO_SCALE field, 7-22
 - SQLDATA field, 7-21
 - SQLIND field, 7-21
 - SQLLEN field, 7-21
 - SQLNAME field, 7-23
 - SQLNAME_LEN field, 7-23
 - SQLTET_LEN field, 7-21
 - SQLTYPE field, 7-20
- SQLVARARY field, 7-15
- when to use, 8-10

SQLERRD array

- description of, 7-12

SQLSRV\$DRIVER module

- structure of, 3-5

sqlsrv_abort routine

- description of, 6-4

sqlsrv_allocate_sqllda_data routine, 6-42

- description of, 6-40 to 6-41

sqlsrv_allocate_sqllda2_data routine, 6-42

- description of, 6-40 to 6-41

SQLSRV_ASCII_STRING, 7-17

SQLSRV_ASCII_STRING data type

- definition of, 8-2

sqlsrv_associate routine

- ASSOCIATE_STR and, 2-13
- description of, 6-5 to 6-9
- in sample application, 3-7

sqlsrv_close_cursor routine, 2-5, 6-37

- description of, 6-38

sqlsrv_declare_cursor routine, 2-5

- description of, 6-27 to 6-29

sqlsrv_execute routine, 6-18

sqlsrv_execute_immediate routine, 2-5

- description of, 6-23
- use of, 3-9

sqlsrv_execute_in_out routine, 2-5

- batched execution with, 4-1
- description of, 6-17 to 6-21
- use of, 3-9

sqlsrv_fetch routine, 2-5, 6-34

- description of, 6-33 to 6-34

sqlsrv_fetch_many routine, 6-34

- description of, 6-36 to 6-37
- use of, 4-4

sqlsrv_free_sqllda_data routine, 6-41

- description of, 6-42 to 6-43

sqlsrv_free_sqllda2_data routine, 6-41

- description of, 6-42 to 6-43

SQLSRV_GENERALIZED_DATE data type

- definition of, 8-5

SQLSRV_GENERALIZED_NUMBER data type

- definition of, 8-3

sqlsrv_get_associate_info routine

- description of, 6-10 to 6-12

SQLSRV_INTERVAL data type

- definition of, 8-7

SQLSRV_LIST_VARBYTE data type

- definition of, 8-9

sqlsrv_open_cursor routine, 2-6

- description of, 6-30 to 6-31

sqlsrv_prepare routine, 2-6
 description of, 6-15 to 6-17
 use of, 3-9
 sqlsrv_release routine, 6-41
 description of, 6-13
 sqlsrv_release_statement routine, 2-6, 6-41
 description of, 6-24 to 6-26
 use of, 3-9, 3-25
 sqlsrv_set_option routine
 description of, 6-44 to 6-45
 sqlsrv_sqlca_count routine
 description of, 6-50
 sqlsrv_sqlca_error routine
 description of, 6-48
 sqlsrv_sqlca_error_text routine
 description of, 6-49
 sqlsrv_sqlca_sqlerrd routine
 description of, 6-51
 use of, 3-9
 sqlsrv_sqlca_sqlstate routine
 description of, 6-52
 sqlsrv_sqlda_bind_data routine
 description of, 6-63 to 6-65
 sqlsrv_sqlda_bind_data73 routine
 description of, 6-66 to 6-68
 sqlsrv_sqlda_column_name routine
 description of, 6-55 to 6-56
 sqlsrv_sqlda_column_name73 routine
 description of, 6-57 to 6-58
 sqlsrv_sqlda_column_type routine
 description of, 6-59 to 6-60
 sqlsrv_sqlda_column_type73 routine
 description of, 6-61 to 6-62
 sqlsrv_sqlda_get_data routine
 description of, 6-82 to 6-83
 sqlsrv_sqlda_get_data73 routine
 description of, 6-85 to 6-87
 sqlsrv_sqlda_ref_data routine
 description of, 6-73 to 6-75
 sqlsrv_sqlda_ref_data73 routine
 description of, 6-76 to 6-78
 sqlsrv_sqlda_set_data routine
 description of, 6-88 to 6-89
 sqlsrv_sqlda_set_data73 routine
 description of, 6-90 to 6-92
 sqlsrv_sqlda_set_sqlen routine
 description of, 6-93 to 6-95
 sqlsrv_sqlda_set_sqlen73 routine
 description of, 6-96 to 6-98
 sqlsrv_sqlda_sqld routine
 description of, 6-53
 sqlsrv_sqlda_sqld73 routine
 description of, 6-54
 sqlsrv_sqlda_unbind_sqlda routine
 description of, 6-70
 sqlsrv_sqlda_unbind_sqlda73 routine
 description of, 6-71 to 6-72
 sqlsrv_sqlda_unref_data routine
 description of, 6-79
 sqlsrv_sqlda_unref_data73 routine
 description of, 6-80 to 6-81
 sqlsrv_sqlda2_bind_data routine
 description of, 6-63 to 6-65
 sqlsrv_sqlda2_bind_data73 routine
 description of, 6-66 to 6-68
 sqlsrv_sqlda2_char_set_info routine
 description of, 6-99 to 6-100
 sqlsrv_sqlda2_char_set_info73 routine
 description of, 6-101 to 6-102
 sqlsrv_sqlda2_column_name routine
 description of, 6-55 to 6-56
 sqlsrv_sqlda2_column_name73 routine
 description of, 6-57 to 6-58
 sqlsrv_sqlda2_column_type routine
 description of, 6-59 to 6-60
 sqlsrv_sqlda2_column_type73 routine
 description of, 6-61 to 6-62
 sqlsrv_sqlda2_get_data routine
 description of, 6-82 to 6-83
 sqlsrv_sqlda2_get_data73 routine
 description of, 6-85 to 6-87
 sqlsrv_sqlda2_ref_data routine
 description of, 6-73 to 6-75
 sqlsrv_sqlda2_ref_data73 routine
 description of, 6-76 to 6-78
 sqlsrv_sqlda2_set_data routine
 description of, 6-88 to 6-89
 sqlsrv_sqlda2_set_data73 routine
 description of, 6-90 to 6-92
 sqlsrv_sqlda2_set_sqlen routine

- description of, 6-93 to 6-95
- sqlsrv_sqllda2_set_sqlllen73 routine
 - description of, 6-96 to 6-98
- sqlsrv_sqllda2_sqld routine
 - description of, 6-53
- sqlsrv_sqllda2_sqld73 routine
 - description of, 6-54
- sqlsrv_sqllda2_unbind_sqllda routine
 - description of, 6-70
- sqlsrv_sqllda2_unbind_sqllda73 routine
 - description of, 6-71 to 6-72
- sqlsrv_sqllda2_unref_data routine
 - description of, 6-79
- sqlsrv_sqllda2_unref_data73 routine
 - description of, 6-80 to 6-81
- SQLSRV_VARBYTE data type
 - definition of, 8-8
- SQLSRV_VARCHAR data type
 - definition of, 8-2
- sqlsrvca.h file
 - location on
 - OpenVMS, 2-15
- sqlsrvda.h file
 - location on
 - OpenVMS, 2-15
- sqlsrv.h file
 - execution logging and, 5-2
 - location on
 - HP-UX, 2-17
 - Linux, 2-18
 - OpenVMS, 2-15
- SQLVAR
 - description of, 7-17 to 7-19
 - SQLDATA field, 7-18
 - SQLIND field, 7-18
 - SQLLEN field, 7-17
 - SQLNAME field, 7-19
 - SQLNAME_LEN field, 7-19
 - SQLTYPE field, 7-17
- SQLVAR2
 - description of, 7-20 to 7-24
 - SQLCHAR_SET_CATALOG field, 7-24
 - SQLCHAR_SET_NAME field, 7-23
 - SQLCHAR_SET_SCHEMA field, 7-23
 - SQLCHRONO_PRECISION field, 7-22

- SQLCHRONO_SCALE field, 7-22
- SQLDATA field, 7-21
- SQLIND field, 7-21
- SQLLEN field, 7-21
- SQLNAME field, 7-23
- SQLNAME_LEN field, 7-23
- SQLOCTET_LEN field, 7-21
- SQLTYPE field, 7-20
- sqsdyn32.exe
 - built on Windows X86, 3-2
- sqsdyn64.exe
 - built on Windows X64, 3-3
- Statement, prepared
 - releasing, 3-25
- Stored procedure
 - using, 4-7
- String
 - counted
 - data type, 8-2
 - null-terminated, 8-2
- SYSS\$LIBRARY
 - include files in, 2-15
- System management
 - Oracle SQL/Services, 1-11

T

- Table cursor
 - declaring, 6-27
 - modes, 6-28
- TCP/IP software
 - allowing client/server communication, 1-5
 - use with Oracle SQL/Services, 1-5
- Transaction
 - aborting, 6-4
 - committing, 6-13
- Transferring rows of data from the server, 6-36
- Transport
 - DECnet, 7-7
 - Oracle Net, 7-7
 - TCP/IP, 7-7

U

- UPDATE statement

- using, 2-4
- Using SQLDA
 - when to, 8-10
- Using SQLDA2
 - when to, 8-10
- Utility routines, 2-10, 6-39 to 6-45

V

- Variables
 - represented by parameter marker, 2-6
- Video display
 - execution logging and, 5-2, 7-4

W

- Windows API software, 1-5
- Windows operating system
 - building applications on, 2-16
 - building sample application on, 3-2