

**Oracle Utilities Smart Grid Gateway
Adapter for Itron OpenWay**

Configuration Guide

Release 2.0.0.8

E38129-01

November 2012

Copyright © 1999, 2012 Oracle and/or its affiliates. All rights reserved.

Primary Author: TUGBU Documentation

Contributing Author: TUGBU Documentation

Contributor: TUGBU Documentation

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS

Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle America, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Contents

Chapter 1

Overview.....	1-1
What Is This Book?.....	1-2
Other Documentation.....	1-2
Oracle Utilities Application Framework Configuration Tools.....	1-4

Chapter 2

General Configuration	2-1
Understanding the Adapter.....	2-2
Understanding the Adapter Processing.....	2-3
Loading Initial Measurement Data and Device Events	2-3
Device Communication	2-5
Configuring an Itron OpenWay Head-End System.....	2-11
XAI Inbound Services.....	2-11
XAI Senders.....	2-12
Outbound Message Types	2-13
External System.....	2-13
Service Provider	2-14
Processing Methods for Service Provider.....	2-15
Configuring Itron OpenWay Extendable Lookups	2-18
Itron OpenWay Application Group Lookup	2-18
Itron OpenWay Device Event Mapping	2-18
Itron OpenWay UOM Code to Standard UOM Mapping.....	2-19
Itron OpenWay Interval Status Code to Condition Mapping	2-19
Extending the Adapter for Itron OpenWay.....	2-20
The Test Harness.....	2-21
Test Harness Design.....	2-21
Locating the WSDL for the Test Harness	2-22
Web Services.....	2-24

Appendix

Glossary	3-1
-----------------------	------------

Index

Chapter 1

Overview

This chapter provides an overview of this configuration guide and an introduction to the Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay, including the following:

- **What Is This Book?**
- **Other Documentation**
- **Oracle Utilities Application Framework Configuration Tools**

What Is This Book?

This guide describes how to configure the Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay. It is intended for implementers and system administrators responsible for configuration and initial setup of the application.

The Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay is based on the Oracle Utilities Application Framework (OUAF). For information about using and configuring basic Framework functions, see the Oracle Utilities Application Framework documentation. This guide only covers configuration of functions specific to the Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay.

The body of this guide presents conceptual information to help you understand how the system works as well as how the various configuration options affect system functionality. Once you have an understanding of the system's capabilities, you can plan your data setup and design any customizations you want to implement.

When you are ready to implement your design, use **Chapter 2: General Configuration** to guide you through the setup process of admin data. This section lists each object that can be configured, defines any prerequisites for configuration.

This guide includes the following chapters:

- **Chapter 1: Overview** (this chapter) provides an overview of the Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay architecture and of the configuration tools and process used in implementing the product.
- **Chapter 2: General Configuration** provides an overview of some general configuration options used by the Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay.

Other Documentation

This section describes other documentation provided with the Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay.

Installation Documentation

Installation documentation describes the steps involved in the installation and initial set up of the system, and includes the following documents:

- Oracle Utilities Smart Grid Gateway Quick Install Guide
- Oracle Utilities Smart Grid Gateway DBA Guide
- Oracle Utilities Smart Grid Gateway Installation Guide

User Documentation

User documentation provides conceptual information and procedures related to working with the various objects used in the system, and includes the following documents:

- Oracle Utilities Application Framework Business Process Guide
- Oracle Utilities Application Framework Administration Guide
- Oracle Utilities Meter Data Framework User's Guide

Supplemental Documentation

Supplemental documentation provides technical information related to system administration tasks and include the following documents:

- Oracle Utilities Smart Grid Gateway Server Administration Guide
- Oracle Utilities Smart Grid Gateway Batch Server Administration Guide

- Oracle Utilities Smart Grid Gateway Configuration Guide

The Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay uses Oracle Service Bus (OSB) and Oracle Business Process Execution Language (BPEL) as middleware components. These tools are part of the Oracle SOA Suite. See the Oracle SOA Suite Documentation library (<http://www.oracle.com/technetwork/middleware/soasuite/documentation/index.html>) for more information about using these tools.

Embedded Help

Oracle Utilities Smart Grid Gateway, like all Oracle Utilities Application Framework applications, provides extensive internal documentation. For example, detailed descriptions of system objects are included in the objects' maintenance portals. The lifecycle of each business object is described on the Lifecycle tab and depicted in flow diagrams on the Summary tab. This information is extremely useful for implementers and system administrators.

Embedded help is provided for all non-obvious fields in most portals and zones. If a field has associated help text, a ? icon appears next to the field when the zone is displayed.

Online Help

Oracle Utilities Smart Grid Gateway also includes context-sensitive help for all the user interface screens users will typically work with as they use the system. Online help contains conceptual information and procedures related to working with the various objects used in the system.

The online help is divided into the following three sections:

- Oracle Utilities Application Framework: Describes the features and functions of the application framework (F1)
- Oracle Utilities Meter Data Framework: Describes the features and functions provided in the meter data framework (D1)
- Oracle Utilities Smart Grid Gateway: Describes the features and functions provided in the meter data management application (D2)

Oracle Utilities Application Framework Configuration Tools

Please refer to the general configuration guide for information on the Oracle Utilities Application Framework (OUAF) configuration tools that can be used to create and customize system entities, such as business objects, portals, zones, and UI maps. Refer to the Oracle Utilities Application Framework configuration tools documentation for instructions on using tools such as:

- **Configuration Process Overview**
- **Data Areas**
- **Algorithms**
- **Entity Naming Conventions**

This configuration guide does not duplicate the concepts and procedures presented in the Oracle Utilities Application Framework configuration tools documentation; rather, it will identify the specific objects used by the Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay that can be configured and customized using the configuration tools, as well as application parameters and objects that can be managed within the application components themselves.

This guide assumes that all individuals responsible for system configuration and implementation will be familiar with the Oracle Utilities Application Framework and will have completed training on the Oracle Utilities Application Framework Configuration Tools.

Chapter 2

General Configuration

This chapter provides details on the components and configurations required for the Smart Grid Gateway adapter for Itron OpenWay including the following:

- **Understanding the Adapter**
- **Understanding the Adapter Processing**
- **Configuring an Itron OpenWay Head-End System**
- **Configuring Itron OpenWay Extendable Lookups**
- **Extending the Adapter for Itron OpenWay**
- **The Test Harness**

Understanding the Adapter

The Oracle Utilities Smart Grid Gateway Adapter for Itron OpenWay supports communication with the Itron OpenWay application, including measurement data and device event loading, and command messaging in support of commissioning, connect, disconnect, decommissioning, status check, and on-demand read commands.

The adapter uses Oracle Service Bus (OSB) and Oracle Business Process Execution Language (BPEL) to facilitate communication between Oracle Utilities Smart Grid Gateway and the Itron OpenWay application. For additional information about Oracle Utilities Smart Grid Gateway adapters, see **Chapter 11: Smart Grid Gateway Adapters** in the *Oracle Utilities Smart Grid Gateway Configuration Guide*.

The following functionality is included:

Measurement Data and Device Event Loading - data parsing and transformation via Oracle Service Bus from Itron OpenWay format into the Oracle Utilities Meter Data Framework unified format for measurement data and device events.

Schedule Read Commands - Measurement data and device events are not automatically sent to Oracle Utilities Smart Grid Gateway, and must be requested from the Itron head-end system via Scheduled Read commands. Upon receipt of a Scheduled Read command, the Itron OpenWay application deposits a usage and/or device event payload so that Oracle Service Bus can pick up and process the file. See **About Scheduled Read Commands** on page 13 and **Initiating Scheduled Read Commands** on page 19 in the *Oracle Utilities Smart Grid Gateway Adapter for Itron OpenWay User's Guide* for more information about Scheduled Read commands.

Measurement Data and Device Event Processing - configurable mapping for Itron OpenWay status codes and device event names to Oracle Utilities Meter Data Framework standard values.

Smart Meter Command Processing - sending/receiving messages to/from the Itron OpenWay application to initiate smart meter commands from Oracle Utilities Smart Grid Gateway. The Itron OpenWay adapter supports the following types of commands and communications:

- **Meter Commissioning** - business objects and BPEL processes to support issuing meter commissioning commands.
- **Remote Connect** - business objects and BPEL processes to support issuing remote connect commands.
- **Remote Disconnect** - business objects and BPEL processes to support issuing remote disconnect commands
- **Meter Decommissioning** - business objects and BPEL processes to support issuing meter decommissioning commands.
- **On-Demand Read** - business objects and BPEL processes to support issuing on-demand read commands.
- **Device Status Check** - business objects and BPEL processes to support issuing device status check commands for both single and multiple devices.

Understanding the Adapter Processing

This section provides details concerning the OSB processing, BPEL processes, and OUAF objects supplied as part of the base package for the adapter for Itron OpenWay. This information illustrates how the base package objects were designed, and can serve as the basis for any customizations you create as part of your implementation. For additional information about Oracle Utilities Smart Grid Gateway adapter processing, see **Chapter 11: Smart Grid Gateway Adapters** in the *Oracle Utilities Smart Grid Gateway Configuration Guide*.

This section includes:

- **Loading Initial Measurement Data and Device Events**
- **Device Communication**

Loading Initial Measurement Data and Device Events

Initial measurement data and device event loading and processing use OSB to poll for, parse, and transform the head-payloads into the Oracle Utilities Smart Grid Gateway service format. Payloads contain measurements and meter events in some head-end specific format OSB then places each service call into a JMS queue within the Oracle Utilities applications. The JMS client consumes the entries and invokes the respective services in parallel then a service creates initial measurements with data in a common format with head-end-specific processing as needed. A second service creates device events with data in a common format.

As noted above, measurement and device event data must be requested from the Itron OpenWay head-end system via Scheduled Read commands. See **About Scheduled Read Commands** on page 13 and **Initiating Scheduled Read Commands** on page 19 in the *Oracle Utilities Smart Grid Gateway Adapter for Itron OpenWay User's Guide* for more information about Scheduled Read commands.

Initial Measurement

The usage data received from the AMI head-end system as a file in Itron OpenWay XML format is loaded into Oracle Utilities as initial measurement data. The following OSB projects, delivered in the base product, help manage the usage processing:

1. SGG-D8-ITRONXML-BASE contains components responsible for “actual” processing of incoming data. It should not be modified during configuration. This project can be upgraded without affecting the customization and environment settings added to SGG-D8-ITRONXML-CM.
2. SGG-D8-ITRONXML-CM allows for customization and simplifies future upgrades.

The runtime configuration settings for the SGG-D8-ITRONXML-CM project are stored in the xquery file EnvironmentSettings.xq. You can use this file to adjust initial measurement data processing. For example, if you want to load raw data you would specify “true” for the content of the populateRawIMD element.

The following table describes the elements included in the EnvironmentSettings.xq file:

Element	Description
populateRaw	Determines if the initial measurement data is populated as raw data. Valid values are: <ul style="list-style-type: none"> • true • false

Element	Description
callPreProcessing	Determines if the preprocessing proxy service is called. Valid values are: <ul style="list-style-type: none"> true false
callPostProcessing	Determines if the postprocessing proxy service is called. Valid values are: <ul style="list-style-type: none"> true false
destinationRootElementInterval	Holds the name of XAI inbound service for the interval IMD seeder.
destinationRootElementScalar	Holds the name of XAI inbound service for the scalar IMD seeder. In most cases it is the same as destinationRootElementInterval.
destinationRootElementEvent	Holds the name of XAI inbound service for the Device Event seeder.

Base Package Business Objects

The Itron OpenWay adapter base package includes the following initial measurement and device event business objects:

Business Object Name	Description
D8-AppGroupLookup	Itron - Application Group Lookup This extendable lookup table is used to store the application group used by Itron OpenWay.
D8-InterrogateByGroup	Itron - Interrogate By Group Performs a Schedule Read for a group of devices (either Application or Configuration) in the Itron OpenWay API.
D8-InterrogateByGroupResult	Itron - Interrogate by Group Result This BO is the inbound asynchronous response to an Interrogate By Group (Schedule Read) outbound communication.
D8-InitialLoadIMDInterval	Itron - Initial Load IMD - Interval Used when loading Itron OpenWay interval measurements into the system for the first time.
D8-InitialLoadIMDScalar	Itron - Initial Load IMD - Scalar Used when loading Itron OpenWay scalar measurements into the system for the first time.
D8-DeviceEventMappingLookup	Itron - Device Event Mapping
D8-HeadendUOMLookup	Itron - UOM Code to Standard UOM Mapping

Business Object Name	Description
D8-IntStsCodeToCondMapLookup	Itron - Interval Status Mapping This is a child BO of Interval Status Code to Condition Mapping
D8-ScheduleRead	Itron - Schedule Read Requests IMD and Event data from the Itron OpenWay Network. This data will later be returned and placed in files to be uploaded.

Itron OpenWay Device Event Mapping BO

The Itron OpenWay head-end system is capable of sending a large selection of device events. The adapter maps these events into standard Oracle Utilities Smart Grid Gateway event names and categories. To meet this end, a Itron OpenWay-specific extendable lookup business object, D8-DeviceEventMappingLookup, holds device event names specific to Itron OpenWay.

Device Communication

The basic communication for all business processing is essentially the same. A communication request is sent from the Oracle Utilities application to Itron OpenWay. This request would be for a connect/disconnect, commission/decommission, measurement data, device status check, or an on-demand read. The designated BPEL process transforms the request from Oracle Utilities format to Itron OpenWay format and invokes the related Itron OpenWay web service. Itron OpenWay then returns a reply, and the BPEL process transforms the reply message back to the appropriate format so that Oracle Utilities can receive the response.

The following sections describe the key components in this processing, including:

- **Base Package Business Objects**
- **External System**
- **Outbound Message Types**
- **XAI Configuration**
- **BPEL Processes**

Base Package Business Objects

The Itron OpenWay Adapter base package includes the following communication business objects:

Business Object Name	Description
D8-AddMeterDefinitions	Itron - Add Meter Definition (Commission)
D8-DeregisterMeter	Itron - Deregister Meter (Decommission)
D8-DisconnectMeter	Itron - Disconnect Meter (Remote Disconnect)
D8-DisconnectMeterResult	Itron - Disconnect Meter Result
D8-PingByEndpoints	Itron - Ping By Endpoints (Device Status Check)
D8-PingByEndpointsMDResponse	Itron - Multi-Device Ping Response
D8-PingByEndpointsMultiDevice	Itron - Ping By Endpoints Multi-Device

Business Object Name	Description
D8-PingByEndpointsResponse	Itron - Ping By Endpoints Response
D8-ReadInterval	Itron - Contingency Read (Interval)
D8-ReadResult	Itron - Contingency Read Result
D8-ReadScalar	Itron - Contingency Read (Scalar)
D8-ReconnectMeter	Itron - Reconnect Meter (Remote Connect)
D8-ReconnectMeterResult	Itron - Reconnect Meter Result
D8-ScheduleRead	Itron - Schedule Read

Itron OpenWay Event Data Mapping

The Itron OpenWay event file format maps as follows into the business object, D1-DeviceEventMappingLookup:

Itron OpenWay Flat File Field	Device Event Seeder BO Element	Comments
Transaction ID (from Header record)	External Source Identifier	This is the file name.
Device Identifier	External Device Identifier	
Event Name	External Event Name	
Event Creation Date/Time	Event Date/Time	
Device Type	External Device Type	This element has no real bearing on the device type within MDM/SGG. Its valid values include (although the element itself is free-form): Meter Collector Router
Service Location ID	External Service Location ID	
Communication Module Serial Number	External Communication Module Identifier	
Event Category ID	External Event Category	
Event Severity	External Event Severity	Valid values include (although the element itself is free-form): Alert Information
Status Value	External Status Value	This represents additional information that relates to the event itself.

Itron OpenWay Flat File Field	Device Event Seeder BO Element	Comments
Status Date/Time	External Status Date/Time	The date & time at which the additional information referenced above had occurred.

External System

You must create an External System for each external system to which Oracle Utilities Smart Grid Gateway will send messages. Each external system defines a set of outbound message types that will be sent to that system. Each external system outbound message type also specifies the following:

- The processing method used to send the message (Batch, XAI, or Real-time)
- The corresponding XAI senders
- Batch Control (if Processing Method is set to Batch)
- Message XSL, W3C Schema, and Response XSL (as applicable)

Outbound Message Types

Acknowledgement and response messages are sent and received validating that commands have been transmitted.

XAI Configuration

The XML Application Integration (XAI) utility allows you to configure your system to receive information from and to send information to external applications using XML. The Itron OpenWay adapter for Smart Grid Gateway uses one XAI inbound service to map device events. This is the same XAI inbound service used by the D1 application.

XAI Inbound Services

XAI inbound systems define the details of how messages are received from an external system, including the inbound communication business object (or business service or service script) to be invoked when the response message is received. As in the case of inbound communication business objects, the set of XAI inbound services you need to create is based on the types of messages the system is designed to send.

The Oracle Utilities Smart Grid Gateway adapter for Itron OpenWay includes the following XAI inbound services:

XAI Inbound Service	Description
D1-BulkRequestHeader	Bulk Request Header Schema Name: D1-BulkRequestHeader
D1-BulkRequestUpdate	Bulk Request Update Schema Name: D1-BULKUPD
D1-BulkResponse	Bulk Response Schema Name: D1-BulkResponse

XAI Inbound Service	Description
D1-DeviceEventSeeder	<p>Used for upload of device events.</p> <p>Schema Name: D1-DeviceEventSeeder.</p> <p>The Device Event Seeder business object serves as a means of adding device events both from outside the application and from online. Its pre-processing algorithms determine the device event type - which in turn defines the device event BO that should be used to create the device event.</p> <p>If a device event type can't be determined, the device event is created using this BO. Such a device event can then be re-processed - and if successful, a new device event is created.</p>
D1-DeviceStatusCheck	<p>Device Status Check</p> <p>Schema Name: D1-DeviceStatusCheck</p> <p>This service is invoked by the integration layer to instantiate a Device Status Check command.</p>
D1-InitialLoadIMD	<p>Used by OSB to instantiate an IMD</p> <p>Schema Name: D1-IMDSeeder.</p> <p>The IMDSeeder business object is used to determine the type of initial measurement business object to instantiate when receiving usage readings from a head-end system.</p>
D1-RemoteConnect	<p>Remote Connect</p> <p>Schema Name: D1-RemoteConnect</p> <p>This service is invoked by the integration layer to instantiate a Remote Connect command.</p>
D1-RemoteDisconnect	<p>Remote Disconnect</p> <p>Schema Name: D1-RemoteDisconnect</p> <p>This service is invoked by the integration layer to instantiate a Remote Disconnect command.</p>
D8-DisconnectMeterResult	<p>Itron - Disconnect Meter Result Service</p> <p>Schema Name: D8-DisconnectMeterResult</p>
D8-InterrogateByGroupResult	<p>Itron - Interrogate By Group Result XIA</p> <p>Schema Name: D8-InterrogateByGroupResult</p>

XAI Inbound Service	Description
D8-PingByEndpointsMDResponse	Itron - Ping By Endpoints Multi-Device Response XAI Inbound Schema Name: D8-PingByEndpointsMDResponse
D8-PingByEndpointsResponse	Itron - Ping By End Response XAI Inbound Service Schema Name: D8-PingByEndpointsResponse
D8-ReadResult	Itron - Contingency Read Result Schema Name: D8-ReadResult
D8-ReconnectMeterResult	Itron - Reconnect Meter Result Service Schema Name: D8-ReconnectMeterResult

XAI Senders

XAI senders define the details of how messages are sent to an external system. As in the case of outbound communication business objects and outbound message types, the set of XAI senders you need to create is based on the types of messages the system is designed to accept.

BPEL Processes

These processes are responsible for performing the conversion from Oracle Utilities format to Itron OpenWay format, invoking process callouts and invoking the remote endpoint to trigger the device events. BPEL modules are divided into “Composites,” or collections of business logic.

OnDemandRead Composite Process - The OnDemandRead composite invokes a sequence of web methods that call the head-end system to retrieve meter reading data and send it back to the OUAF layer. In the case of Itron OpenWay, this is accomplished using the ContingencyReadByEndpoints/GetContingencyReadByEndpointsResult services defined in the Data service WSDL.

ConnectDisconnect Composite Process - This composite is responsible for triggering the Connect and Disconnect events on the head-end system. A second, asynchronous reply sends the results back into the OUAF layer when the head-end system signals a change in the status of the device. The Itron OpenWay Adapter uses the ReconnectMeter/GetReconnectMeterResult web service pair to connect, and the DisconnectMeter/GetDisconnectMeterResult web service pair to disconnect. Each of these services is defined in the Control service WSDL.

CommissionDecommission Composite Process - Commissioning and Decommissioning of devices, sometimes referred to as “Provisioning,” is handled by the CommissionDecommission composite. Commissioning invokes the AddMeterDefinitions web service and Decommissioning uses the DeregisterMeters web service. Both are defined in the Provisioning service.

DeviceStatusCheck Composite - This composite uses the PingByEndpoints and GetPingByEndpointsResult web services to check the health of a device. These Itron OpenWay services are defined in the Control.Diagnostic service.

Common Composite - The Common composite contains three main classes of operations: Proxies, ProcessCallouts, and utility functions. Proxies are usually simple mediators that forward a web service call to a preset endpoint. In this Adapter they have two additional roles. First, they interrogate a composite property and determine whether the supported version of head-end software is 3.70 or 3.90. Some of the proxies will also append the callback URL for the StatusChanged service. Proxies are convenient because they allow head-end URLs and security to

be set in a single composite. In this case, they also offer a common location to make these checks. ProcessCallouts are points of customization which allow users to modify data and/or initiate some external business process. Utility functions serve as a central location for business logic needed by multiple composites.

Web Services

The following web services are all defined in the Itron OpenWay head-end system:

- **CommissionDecommissionService**
 - **BPEL Process:** CommissionDecommission
 - **Operation:** AddMeterDefinitions
 - **Endpoint URL:** http://<EM_SERVER>:<EM_SERVER_PORT>/soa-infra/services/<EM_PARTITION>/CommissionDecommission/CommissionDecommissionService
- **CommissionDecommissionService**
 - **BPEL Process:** CommissionDecommission
 - **Operation:** DeregisterMeters
 - **Endpoint URL:** http://<EM_SERVER>:<EM_SERVER_PORT>/soa-infra/services/<EM_PARTITION>/CommissionDecommission/CommissionDecommissionService
- **ConnectDisconnectService**
 - **BPEL Process:** ConnectDisconnect
 - **Operation:** ReconnectMeter
 - **Endpoint URL:** http://<EM_SERVER>:<EM_SERVER_PORT>/soa-infra/services/<EM_PARTITION>/ConnectDisconnect/ConnectDisconnectService
- **ConnectDisconnectService**
 - **BPEL Process:** ConnectDisconnect
 - **Operation:** DisconnectMeter
 - **Endpoint URL:** http://<EM_SERVER>:<EM_SERVER_PORT>/soa-infra/services/<EM_PARTITION>/ConnectDisconnect/ConnectDisconnectService
- **DeviceStatusCheckService**
 - **BPEL Process:** DeviceStatusCheck
 - **Operation:** DeviceStatusCheck
 - **Endpoint URL:** http://<EM_SERVER>:<EM_SERVER_PORT>/soa-infra/services/<EM_PARTITION>/DeviceStatusCheck/DeviceStatusCheckService
- **OnDemandReadService**
 - **BPEL Process:** OnDemandRead
 - **Operation:** ContingencyReadByEndpoints
 - **Endpoint URL:** http://<EM_SERVER>:<EM_SERVER_PORT>/soa-infra/services/<EM_PARTITION>/OnDemandRead/OnDemandReadService

Configuring an Itron OpenWay Head-End System

This section outlines the configuration required for the Oracle Utilities Smart Grid Gateway Adapter for Itron OpenWay to communicate with the Itron OpenWay application. This includes:

- **XAI Inbound Services**
- **XAI Senders**
- **Outbound Message Types**
- **External System**
- **Service Provider**
- **Processing Methods for Service Provider**

XAI Inbound Services

XAI inbound services define the details of how messages are received from an external system. This includes incoming usage and device events, as well as messages sent from the Itron OpenWay application in response to a command request.

The following XAI Inbound Services must be configured in your system. If these are not present in your configuration, add them. Refer to the Oracle Utilities Application Framework documentation for more information about creating XAI inbound services.

XAI Inbound Service Name	Description	Schema Type	Schema Name
D1-BulkRequestHeader	Bulk Request Header	Business Object	D1-BulkRequestHeader
D1-BulkRequestUpdate	Bulk Request Update	Business Object	D1-BULKUPD
D1-BulkResponse	Bulk Response	Business Object	D1-BulkResponse
D1-DeviceEventSeeder	Device Event Seeder	Business Object	D1-DeviceEventSeeder
D1-DeviceStatusCheck	Device Status Check	Business Object	D1-DeviceStatusCheck
D1-InitialLoadIMD	Used by OSB to instantiate an IMD	Business Object	D1-IMDSeeder
D1-PayloadErrorNotif	Payload Error Notification	Business Object	D1-PayloadErrorNotif
D1-PayloadStatistics	Payload Statistics	Business Object	D1-PayloadStatistics
D1-PayloadSummary	Payload Summary	Business Object	D1-PayloadSummary
D8-DisconnectMeterResult	Disconnect Meter Result Service	Business Object	D8-DisconnectMeterResult
D8-InterrogateByGroupResult	Itron - Interrogate By Group Result XIA	Business Object	D8-InterrogateByGroupResul
D8-PingByEndpointsMDResponse	Itron - Ping By Endpoints Multi-Device Response XAI Inbound	Business Object	D8-PingByEndpointsMDResponse
D8-PingByEndpointsResponse	Itron - Ping By Endpoints Response XAI Inbound Service	Business Object	D8-PingByEndpointsResponse
D8-ReadResult	Itron - Contingency Read Result	Business Object	D8-ReadResult

XAI Inbound Service Name	Description	Schema Type	Schema Name
D8-ReconnectMeterResult	Itron - Reconnect Meter Result Service	Business Object	D8-ReconnectMeterResult

XAI Senders

XAI senders define the details of how messages are sent to an external system, such as messages containing device command requests. An XAI sender should be configured for each command.

The following XAI Senders must be configured in your system. If these are not present in your configuration, add them. Refer to the Oracle Utilities Application Framework documentation for more information about creating XAI senders.

XAI Sender	Description	Operation	Service
D8-ITRON_IBG	Itron Interrogate By Group	InterrogateByGroup	ScheduledReadService
D8-COMM	Itron Commission	AddMeterDefinitions	CommissionDecommissionService
D8-DCOMM	Itron Decommission	DeregisterMeters	CommissionDecommissionService
D8-IPBE	Itron Ping By Endpoints	DeviceStatusCheck	DeviceStatusCheckService
D8-RCONN	Itron Remote Connect	ReconnectMeter	ConnectDisconnectService
D8-RDCONN	Itron Remote Disconnect	DisconnectMeter	ConnectDisconnectService

Note: The following apply to all of the above XAI senders:

Main Tab:

- **Invocation Type:** Real-time
- **XAI Class:** RTHTTPSNDR (Sender routes message via HTTP real-time)
- **MSG Encoding:** UTF-8 message encoding

Context Tab:

- **HTTP Header:** SOAPAction:http://xmlns.oracle.com/ouaf/Itron/<OPERATION>
- **HTTP Login User:** <USER_ID>
- **HTTP Login Password:** <PASSWORD>
- **HTTP Method:** POST
- **HTTP URL 1:** http://<EM_SERVER>:<EM_SERVER_PORT>/soa-infra/services/Itron/<SERVICE> where:
 - **<OPERATION>**: the operation performed by the XAI Sender (see Operation column in the table above)
 - **<USER_ID>**: the user ID used to log into WebLogic Enterprise Manager
 - **<PASSWORD>**: the password used to log into WebLogic Enterprise Manager
 - **<EM_SERVER_IP>**: the machine name or IP address of server where the WebLogic Enterprise Manager is installed

- **<EM_SERVER_PORT>**: the port where the WebLogic Enterprise Manager is installed
- **<SERVICE>**: the service invoked by the XAI Sender (see Service column in the table above)

How to Use Enterprise Manager to Locate the URL for the XAI Sender

Follow this procedure to find the correct URL for the command associated with an XAI sender:

1. Open Enterprise Manager and use the navigation pane to open the dashboard of the service used by the XAI sender:
2. The top bar of the dashboard contains several buttons and icons. One of these is a “world” icon with a puzzle piece over it. Click this icon to display a list of the WSDLs and endpoint URIs for the service:
3. Click the service’s WSDL URL link to see the WSDL in the browser, or right click and save it to your machine

Outbound Message Types

Outbound message types define specific types of messages sent to an external system, such as messages containing device command requests.

The following outbound message types must be configured in your system. If these are not present in your configuration, add them. Refer to the Oracle Utilities Application Framework documentation for more information about creating outbound message types.

Outbound Message Type	Description
D8-CONREAD	Itron Contingency Read By Endpoints
D8-INTRGRP	Itron Interrogate By Group
D8-COMM	Itron Commission
D8-DCOMM	Itron Decommission
D8-DSC	Itron Device Status Check
D8-DSCMD	Itron Device Status Check Multi Device
D8-RCONN	Itron Remote Connect
D8-RDCONN	Itron Remote Disconnect

Note: The following apply to all of the above outbound message types:

- **Business Object:** D1-OutboundMessage (Outbound Message)
- **Priority:** Priority 50

External System

External systems represent external applications with which the Smart Grid Gateway will exchange messages or data. In the case of the Smart Grid Gateway adapters, external systems represent the head-end systems with which the adapters communicate.

An external system that represents the Itron OpenWay head end must be present in your system. If this is not present in your configuration, add it, along with the following Outbound Message Types. Refer to the Oracle Utilities Application Framework documentation for more information about creating external systems.

External System - Itron OpenWay:

- **External System:** Itron OpenWay
- **Description:** Itron OpenWay
- **Outbound Message Types:**

Outbound Message Type	XAI Sender
D8-INTRGRP	XAI sender associated with the Interrogate By Group Outbound Message Type
D8-COMM	XAI sender associated with the Commission Outbound Message Type
D8-DCOMM	XAI sender associated with the Decommission Outbound Message Type
D8-DSC	XAI sender associated with the Device Status Check Outbound Message Type
D8-DSCMD	XAI sender associated with the Device Status Check Multi Device Outbound Message Type
D8-RCONN	XAI sender associated with the Remote Connect Outbound Message Type
D8-RDCONN	XAI sender associated with the Remote Disconnect Outbound Message Type

Note: The following apply to all of the above outbound message types:

- **Processing Method:** Real-time
- **Message XSL:** D8-Request.xsl
- **Response XSL:** D8-Response.xsl

Service Provider

Service providers represent external entities that serve various roles relative to the application, including head-end systems, billing systems to which the application sends bill determinant data, market participants in a deregulated environment, outage management systems that receive meter event data from the application, or other parties that require or provide information to the system. The head-end systems that collect and send measurement data and meter events to the application are defined as service providers.

A service provider that represents the Itron OpenWay head end must be present in your system. If this are not present in your configuration, add it. Refer to the Oracle Utilities Meter Data Framework documentation for more information about creating service providers.

Service Provider - Itron OpenWay:

- **Service Provider:** Itron OpenWay
- **Description:** Itron OpenWay
- **External Reference ID:** Itron OpenWay
- **External System:** Itron OpenWay
- **Our Name/ID in Their System:**
- **AMI Device ID Type:** Internal Meter Number
- **Pre-Commissioning Device ID Type:**
- **AMI Measuring Component ID Type:** Channel ID

Processing Methods for Service Provider

Processing methods define the format or means by which a service provider receives and/or sends data from and/or to the application, including bill determinants, usage data, or device events. Processing methods are also used to define how to create information internal to the application such as initial measurement data and device events. Processing methods can also be used to define how command requests are sent to Itron OpenWay.

The following types of processing methods must be configured for the Itron OpenWay service provider. Refer to the Oracle Utilities Meter Data Framework documentation for more information about configuring processing methods.

Initial Measurement Creation

Initial measurement creation processing methods define the business objects used to create initial measurements. The IMD Seeder XAI Inbound Service uses this processing method to determine which type of initial measurement business object to instantiate when receiving usage from the Itron OpenWay application.

Processing Method - Initial Measurement Creation

- **Service Provider:** Itron OpenWay
- **Processing Role:** Initial Measurement Creation
- **Description:** Itron OpenWay Initial Measurement Creation
- **Status:** Active
- **Default Processing Method:**
 - **Business Object:** D8-InitialLoadIMDInterval (Itron OpenWay Initial Load IMD - Interval)
- **Override Processing Method:**
 - **Measuring Component Type:** Electric Residential kWh Scalar
 - **Business Object:** D8-InitialLoadIMDScalar (Itron OpenWay Initial Load IMD - Scalar)

Device Event Mapping

Device event mapping processing methods define how head-end-specific device events are mapped to standard device event names. The Device Event Seeder XAI Inbound Service uses this processing method to determine which type of device event business object to instantiate when receiving device events from the Itron OpenWay application.

Processing Method - Device Event Mapping

- **Service Provider:** Itron OpenWay
- **Processing Role:** Device Event Mapping
- **Description:** Itron OpenWay Device Event Mapping
- **Status:** Active
- **Default Processing Method:**
 - **Business Object:** D8-DeviceEventMappingLookup (Itron OpenWay Device Event Mapping)
- **Override Processing Method:** based on implementation-specific requirements

Commands

Command processing methods define how command requests are sent to a head-end system. More specifically, they define the type of outbound communication business object to create for each type of command, and the outbound message type to send to the head-end system.

The following types of command processing methods can be configured for the Itron OpenWay service provider, based on the requirements of each implementation.

Device Commission

- **Service Provider:** Itron OpenWay
- **Processing Role:** Device Commission
- **Description:** Itron OpenWay Device Commission
- **Status:** Active
- **Processing Method:**
 - **Default Business Object:** D8-AddMeterDefinitions (Itron - Add Meter Definition (Commission))
 - **Default Outbound Message Type:** Itron Commissioning Outbound Message Type

Device Decommission

- **Service Provider:** Itron OpenWay
- **Processing Role:** Device Decommission
- **Description:** Itron OpenWay Device Decommission
- **Status:** Active
- **Processing Method:**
 - **Default Business Object:** D8-DeregisterMeter (Itron Deregister Meter (Decommission))
 - **Default Outbound Message Type:** Itron Decommissioning Outbound Message Type

Device Status Check

- **Service Provider:** Itron OpenWay
- **Processing Role:** Device Status Check
- **Description:** Device Status Check
- **Status:** Active
- **Processing Method:**
 - **Default Business Object:** D8-PingByEndpoints (Itron Ping By Endpoints (Device Status Check))
 - **Default Outbound Message Type:** Itron Device Status check Outbound Message Type

Multi Device Status Check

- **Service Provider:** Itron OpenWay
- **Processing Role:** Multi-Device Status Check
- **Description:** Multi-Device Status Check
- **Status:** Active
- **Processing Method:**

- **Default Business Object:** D8-PingByEndpointsMultiDevice (Ping By Endpoints Multi-Device)
- **Default Outbound Message Type:** Itron Device Status Check Multi-Device Outbound Message Type

On-Demand Read

- **Service Provider:** Itron OpenWay
- **Processing Role:** On-Demand Read (Interval)
- **Description:** On Demand Read Interval
- **Status:** Active
- **Processing Method:**
 - **Default Business Object:** D8-ReadInterval (Itron - Contingency Read (Interval))
 - **Default Outbound Message Type:** Itron Contingency Read By Endpoints Outbound Message Type

Remote Connect

- **Service Provider:** Itron OpenWay
- **Processing Role:** Remote Connect
- **Description:** Remote Connect
- **Status:** Active
- **Processing Method:**
 - **Default Business Object:** D8-ReconnectMeter (Itron - Reconnect Meter (Remote Connect))
 - **Default Outbound Message Type:** Itron Remote Connect Outbound Message Type

Remote Disconnect

- **Service Provider:** Itron OpenWay
- **Processing Role:** Remote Disconnect
- **Description:** Remote Disconnect
- **Status:** Active
- **Processing Method:**
 - **Default Business Object:** D8-DisconnectMeter (Itron - Disconnect Meter (Remote Disconnect))
 - **Default Outbound Message Type:** Itron Remote Disconnect Outbound Message Type

Configuring Itron OpenWay Extendable Lookups

This section outlines some of the extendable lookups that must be configured for use with the Itron OpenWay adapter. These include:

- **Itron OpenWay Application Group Lookup**
- **Itron OpenWay Device Event Mapping**
- **Itron OpenWay UOM Code to Standard UOM Mapping**
- **Itron OpenWay Interval Status Code to Condition Mapping**

Refer to the Oracle Utilities Application Framework documentation for more information about working with extendable lookups.

Itron OpenWay Application Group Lookup

The Itron OpenWay head-end system allows users to define addressable groups of meters based on criteria such as a geographic identifier or zip code. These application groups can be represented in Oracle Utilities Smart Grid Gateway by using the Itron OpenWay Application Group Lookup. The groups defined for this lookup are used with Scheduled Read commands.

Each value defined for the Itron OpenWay Application Group extendable lookup should include the following:

- **Application Group:** The application group name as defined in the Itron OpenWay head-end system.
- **Description:** A description of the application group.

Example: The Itron OpenWay “Substation 1” application group could be defined as the “Substation 1” application group lookup as follows:

- **Application Group:** Substation 1
- **Description:** Itron OpenWay application group for meters connected to Substation 1.

Itron OpenWay Device Event Mapping

The Itron OpenWay Device Event Mapping extendable lookup is used to determine which type of device event business object to instantiate when receiving device events from the Itron OpenWay application.

Each value defined for the Itron OpenWay Device Event Mapping extendable lookup should include the following:

- **Head-End System Event Name:** The event name used by the Itron OpenWay application
- **Description:** A description of the device event
- **Status:** The status of the lookup value (can be Active or Inactive)
- **Standard Event Name:** The standard event name for device events of this type, from the “Standard Event Name” extendable lookup.

Example: The Itron OpenWay “Tampering” device event name could be mapped to the “Device Tampering” standard device event name as follows:

- **Head-End System Event Name:** Tampering
- **Description:** Tampering Detected
- **Status:** Active
- **Standard Event Name:** Device Tampering

Itron OpenWay UOM Code to Standard UOM Mapping

Usage received from Itron OpenWay may use utility-specific unit of measures (UOMs). These custom UOMs must be mapped to standard UOM codes. The Itron OpenWay UOM Code to Standard UOM Mapping extendable lookup is used to determine how to map Itron OpenWay UOM codes to standard UOM codes when receiving usage from the Itron OpenWay application.

Each value defined for the Itron OpenWay UOM Code to Standard UOM Mapping extendable lookup should include the following:

- **Head-End Unit of Measure:** The unit of measure code used by the Itron OpenWay application
- **Description:** A description of the unit of measure code.
- **Status:** The status of the lookup value (can be Active or Inactive)
- **Unit of Measure:** The unit of measure defined in the system. See Defining Units of Measure in the *Oracle Utilities Meter Data Framework User's Guide* for more information about creating UOM codes for use with Oracle Utilities Smart Grid Gateway.

Example: The Itron OpenWay “KWH” unit of measure code could be mapped to the “Kilowatt Hours” standard UOM code as follows:

- **Unit of Measure:** Kilowatt Hours
- **Head-end UOM:** kWh
- **Description:** Itron OpenWay Kilowatt Hours

Itron OpenWay Interval Status Code to Condition Mapping

Interval usage received from the Itron OpenWay application can include Itron OpenWay interval status codes that indicate the status or condition of the interval value. These interval status codes must be mapped to standard condition codes in the system. The Itron OpenWay Interval Status Code to Condition Mapping extendable lookup is used to determine how to map Itron OpenWay interval status codes to standard status codes when receiving usage from the Itron OpenWay application.

Each value defined for the Itron OpenWay Interval Status Code to Condition Mapping extendable lookup should include the following:

- **Interval Status:** The Itron OpenWay interval status code
- **Description:** A description of the interval status code.
- **Status:** The status of the lookup value (can be Active or Inactive)
- **Condition:** The condition code to which the interval status code is to be mapped, from the Measurement Condition extendable lookup.

Example: The Itron OpenWay “Missing” interval status code could be mapped to the “Missing” condition code as follows:

- **Interval Status:** Missing
- **Condition:** Missing
- **Description:** Itron OpenWay Missing

Extending the Adapter for Itron OpenWay

The Oracle Utilities Smart Grid Gateway Adapter for Itron OpenWay supports a number of commands, including:

- Commission Device
- Decommission Device
- Device Status Check Multi-Device
- On-Demand Read
- Remote Connect
- Remote Disconnect

The Adapter for Itron OpenWay can be extended to support additional commands provided by the Itron OpenWay application. See **Creating Custom Commands** on page 9-26 of the *Oracle Utilities Smart Grid Gateway Configuration Guide* for more information about adding commands to the Itron OpenWay adapter.

The Test Harness

Oracle Utilities Smart Grid Gateway Adapter for Itron OpenWay includes a test harness that can be configured to simulate a general head-end system for testing the two-way commands. The test harness includes a BPEL composite, web services for standard meter functions, and an XML file that can be used to contain information for one or more meters. This chapter describes the test harness and its components, including:

- **Test Harness Design**
- **Locating the WSDL for the Test Harness**
- **Web Services**

Test Harness Design

The Itron Harness is divided into two main layers. The “front end” set of services implements the Itron-specified interfaces. They receive requests corresponding to the following:

- www.itron.com.ami.2008.10.control
 - ReconnectMeter
 - GetReconnectMeterResult
 - DisconnectMeter
 - GetDisconnectMeterResult
- www.itron.com.ami.2008.10.data
 - ContingencyReadByEndpoint
 - GetContingencyReadByEndpointResult
 - InterrogateByGroup
 - GetInterrogateByGroupResult
- www.itron.com.ami.2008.10.control
 - PingByEndpoints
 - ReconnectMeter
 - GetReconnectMeterResult
 - DisconnectMeter
 - GetDisconnectMeterResult
- www.itron.com.ami.2012.03.control.diagnostic
 - PingByEndpoints
 - GetPingByEndpointsResult
- www.itron.com.ami.2009.08.provisioning
 - AddMeterDefinitions
 - DeregisterMeters

Each of these services calls into the “back end” layer, which defines meters and sets their attributes. These meters are stored in a file within the test harness called meterdb.xml. This file can be modified pre-deployment. Post-deployment changes to the file are not supported. However, the Test Harness retains an in-memory “database” of the meters in the file. The in-memory representation can be modified using the Utility web services. Note that any changes to the in-memory structure will be lost when the server is restarted or the Test Harness composite is redeployed.

Locating the WSDL for the Test Harness


Follow these procedures to locate the test harness WSDL:

How to Use Enterprise Manager to Locate the WSDL


1. Open Enterprise Manager and use the navigation pane to open the dashboard of the test harness composite:



2. The top bar of the dashboard contains several buttons and icons. One of these is a “world” icon with a puzzle piece over it. Click this icon to display a list of the WSDLs and endpoint URIs for the composite:

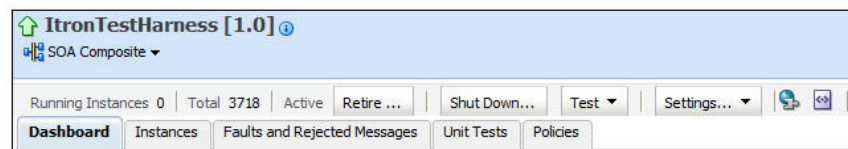

3. Click the UtilService WSDL URL link to see the WSDL in the browser, or right click and save it to your machine

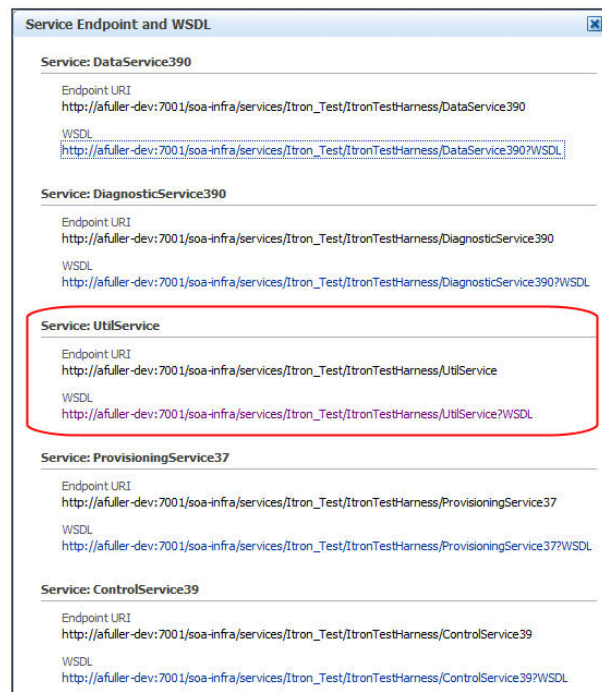

Depending on your requirements, it may be necessary to download the associated schema found in the wsdl:types section. The URL can be pasted into a browser tab and downloaded in the same manner as the WSDL. The main schema has imported schemas that may also be required.

How to Use a Direct URL to locate the WSDL

The WSDL can be accessed without Enterprise Manager by understanding the paths used on the SOA server. In general, they have the following form:

```
http://{server name}:{port number}/soa-infra/services/{partition}/  
{Composite}/{Web Service}?WSDL
```

So by default, the test harness WSDL can be found at

```
http://{server name}:{port number}/soa-infra/services/Itron_Test/  
ItronTestHarness/UtilService?WSDL
```

Web Services

This section describes the web services included in the test harness BPEL composite, including:

- **General Services**
- **Locate Meter Services**
- **Meter Administration Services**
- **Meter Attribute Administration Services**

General Services

This section describes the general services of the test harness composite, including:

- **LoadMeterIndex**
- **ViewAuditTrail**


LoadMeterIndex

This web service loads the data store from the internal file. By default, if the store is already in memory, it will NOT reload. This behavior can be overridden with the forceReload parameter.

Input - LoadMeterIndexInput

Part: payload

Element: LoadMeterIndexRequest



Parameter	Description
forceReload	A switch telling the system whether to reload the meter index from the configuration file. Default is false.

Output - LoadMeterIndexOutput

Part: payload


Element: LoadMeterIndexResult



Parameter	Description
loaded	A boolean value for whether or not the index was reloaded from the configuration file

Fault - UtilityFault

Fault with similar mapping to SGG/OUAF faults:

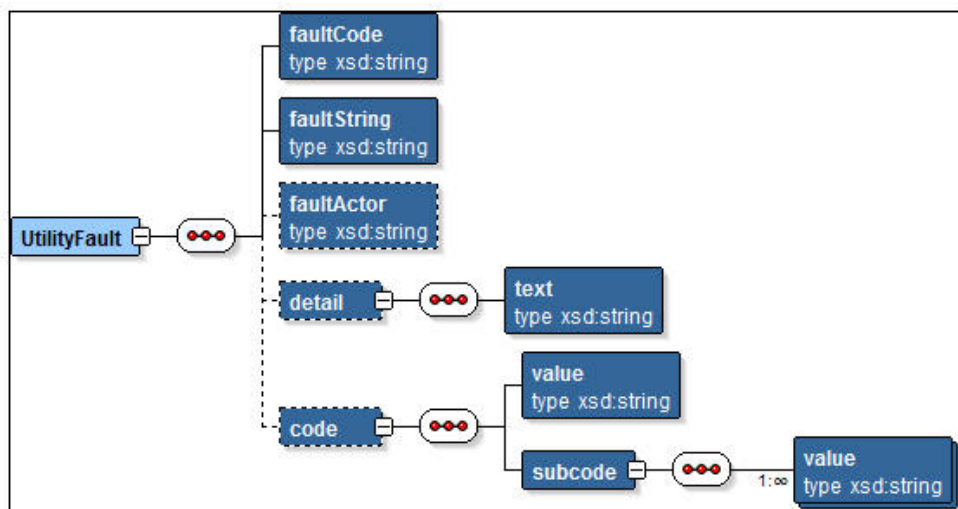

Typically, the `faultCode`, `faultString`, `faultActor`, and `detail/text` elements will be populated.

ViewAuditTrail

This web service returns the audit log for the entire session.

Input - ViewAuditTrailInput

Part: payload


Element: ViewAuditTrailRequest



Output - ViewAuditTrailOutput

Part: payload

Element: ViewAuditTrailResult

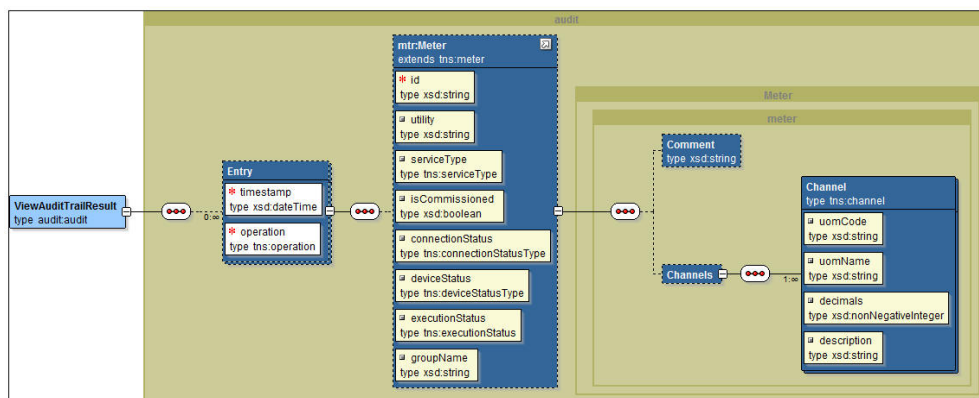

An **Entry** consisting of a timestamp and an **Operation**. Each entry may have an associated meter object showing the latest update.

Fault - See **UtilityFault** on page 2-24.

Locate Meter Services

This section describes the locate meter web services of the test harness composite, including:

- FindMeters
- IsMeterDefined
- GetMeter
- GetGroupMeters


FindMeters

This web service queries the data store for one or more meters. The difference between GetMeter and FindMeters is GetMeter can return at most one meter and it must match the provided ID exactly. GetMeter will throw an error if the ID is not found. FindMeters can return more than one meter (when using the regex) and will not throw an error when the ID does not match any of the meters in the index.

Input - FindMetersInput

Part: payload

Element: FindMetersRequest

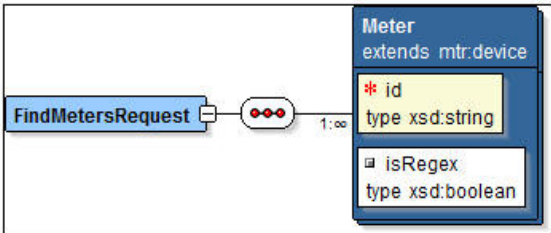


Parameter	Description
id	The meter ID for which to search
isRegex	The provided id can be a regex value when this parameter is true. Hint: to search for all meters in the system, use ".*" for the ID.

Output - FindMetersOutput

Part: payload

Element: FindMetersResult

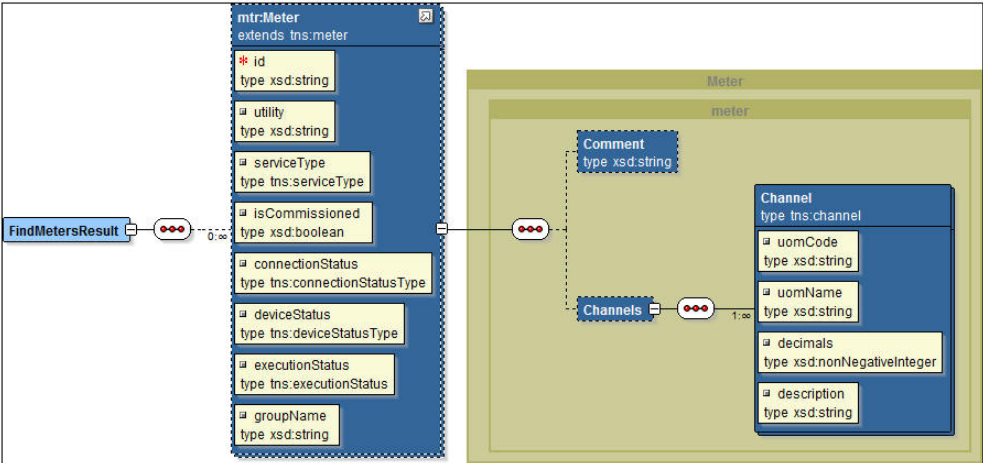

Zero or more meter objects can be returned from the search

Fault - See **UtilityFault** on page 2-24. Unlike other methods, FindMeters does not throw an exception if the meter is not found. As such, it can be used to test for the existence of a Meter prior to querying for it.

IsMeterDefined

This web service queries whether a particular meter is defined in the data store.

Input - IsMeterDefinedInput

Part: payload

Element: IsMeterDefinedRequest




Parameter	Description
id	The meter ID for which to search

Output - IsMeterDefinedOutput

Part: payload

Element: IsMeterDefinedResult



Whether or not the provided ID is part of the index.

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.

GetMeter

This web service returns all the attributes of a single meter from the in-memory data store. The difference between GetMeter and FindMeters is GetMeter can return at most one meter and it must match the provided ID exactly. GetMeter will throw an error if the ID is not found. FindMeters can return more than one meter (when using the regex) and will not throw an error when the ID does not match any of the meters in the index.

Input - GetMeterInput

Part: payload

Element: GetMeterRequest




Parameter	Description
id	The meter ID for which to search

Output - GetMeterOutput

Part: payload

Element: GetMeterResult

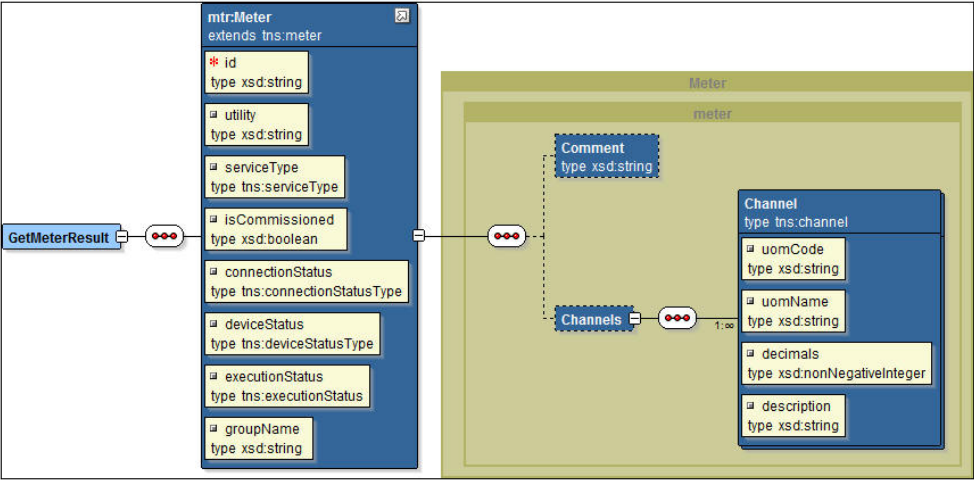

The meter object requested by the ID.

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.


GetGroupMeters

This web service retrieves the set of meters with the specified group name

Input - GetGroupMetersInput

Part: payload

Element: GetGroupMetersRequest




Parameter	Description
id	The group name common to the meters to retrieved

Output - GetGroupMetersOutput

Part: payload

Element: GetGroupMetersResult

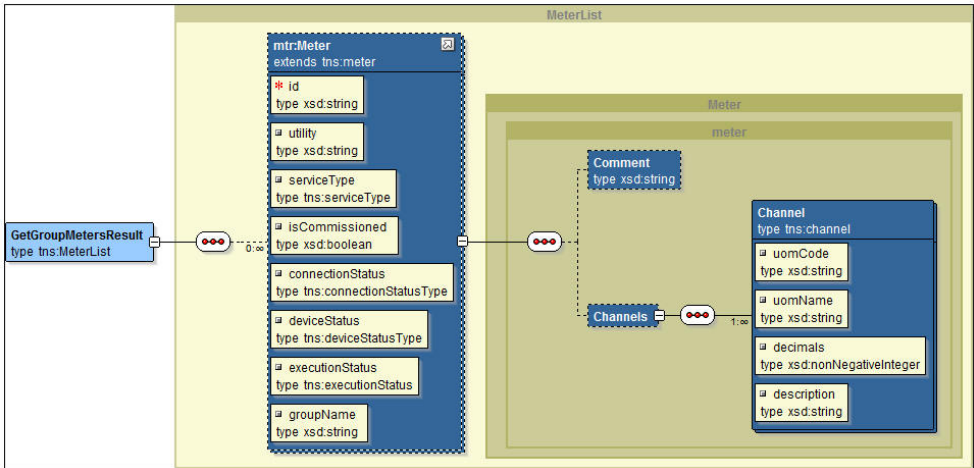

The set of meters with the provided group name.

Fault - See **UtilityFault** on page 2-24. Thrown only in unusual circumstances.

Meter Administration Services

This section describes the meter administration services of the test harness composite, including:

- **AddMeters**
- **RemoveMeter**
- **AddMeterChannel**
- **RemoveMeterChannel**
- **ReadScalarMeter**


AddMeters

This web service adds a set of meters to the in-memory data store. This will not permanently add it to the control file.

Input - AddMetersInput


Part: payload

Element: AddMetersRequest

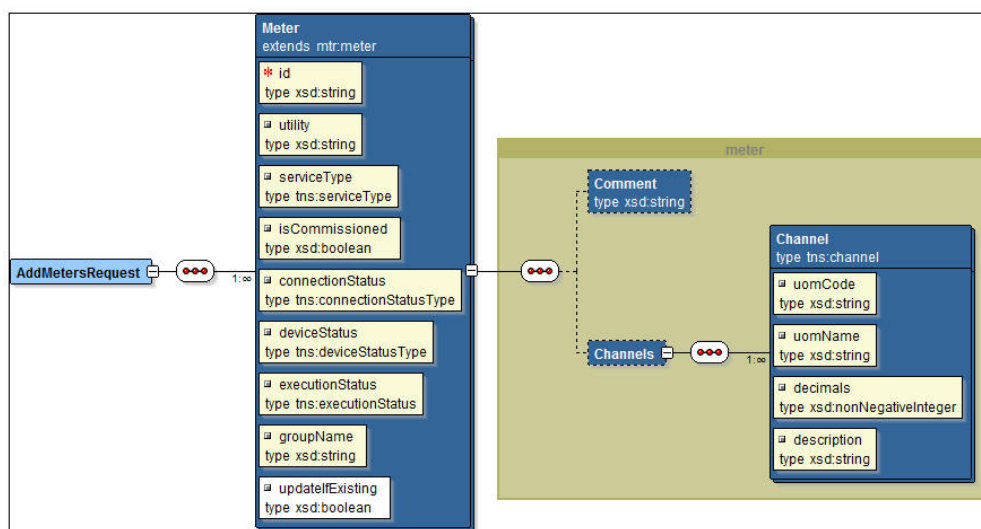

Parameter	Description
id	The identification code for the meter.
utility	An informational string.
serviceType	One of the valid ServiceType values (see schema). "Electric" is the only option at this time.
isCommissioned	Whether or not the meter is in a commissioned state.
loadActionCode	One of the possible LoadActionCode values used in Connect and Disconnect (see schema).
outageEventType	One of the possible OutageEventType values used in Device Status Check (see schema).
executionStatus	One of the possible ExecutionStates (see schema). These values control how the meter will respond to commands.


Parameter	Description
groupName	The name linking multiple meters together into a set.
updateIfExists	Whether or not to update the meter with the provided values if it already exists in the index.
Comment	An informational string describing the purpose of the meter.
Channels	A listing of unit of measures supported by this meter.
uomCode	A code describing the unit of measure for the channel.
uomName	A short string containing the name of the unit of measure.
decimals	The number of digits to the right of the decimal that should be generated when reading the meter.
description	A longer description of the unit of measure.

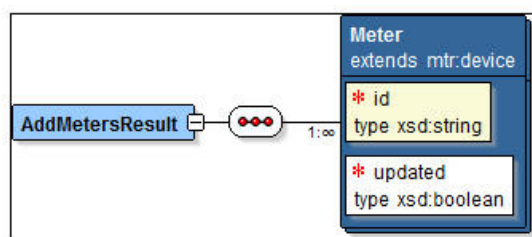Output - AddMetersOutput**Part:** payload**Element:** AddMetersResult

Whether or not each meter was added to the index.

Fault - See **UtilityFault** on page 2-24**RemoveMeter**


This web service removes a meter from the in-memory data store. This will not permanently remove it from the control file.

Input - RemoveMeterInput**Part:** payload**Element:** RemoveMeterRequest

Parameter	Description
id	The ID for the meter to be removed

Output - RemoveMeterOutput**Part:** payload

SElement: RemoveMeterResult



Whether or not the meter was removed from the index.

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.


AddMeterChannel

This web service adds a new channel to a single meter.

Input - AddMeterChannelInput

Part: payload

Element: AddMeterChannelRequest

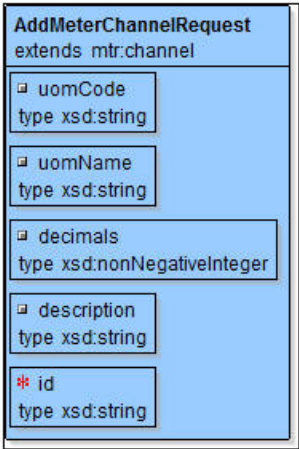


Parameter	Description
id	The identification code for the meter.
uomCode	A code describing the unit of measure for the channel.
uomName	A short string containing the name of the unit of measure.
decimals	The number of digits to the right of the decimal that should be generated when reading the meter.
description	A longer description of the unit of measure.

Output - AddMeterChannelOutput

Part: payload

Element: AddMeterChannelResult



Whether or not the channel was added to the index.

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.


RemoveMeterChannel

This web service removes a Channel from a meter.

Input - RemoveMeterChannelInput

Part: payload

SElement: RemoveMeterChannelRequest

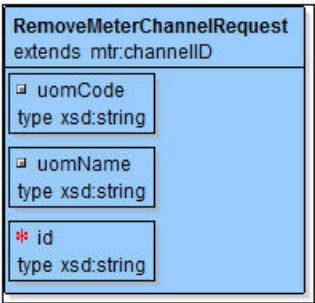


Parameter	Description
id	The ID for the meter to be removed.
uomCode	A code describing the unit of measure for the channel.
uomName	A short string containing the name of the unit of measure.

These three parameters are combined to locate a unique channel

Output - RemoveMeterChannelOutput

Part: payload

Element: RemoveMeterChannelResult



Whether or not the channel was removed from the meter.

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.


ReadScalarMeter

This web service generates a scalar reading for each channel of a given meter.

Input - ReadScalarMeterInput

Part: payload


Element: ReadScalarMeterRequest



Parameter	Description
id	The ID for the meter to be read

Output - ReadScalarMeterOutput

Part: payload

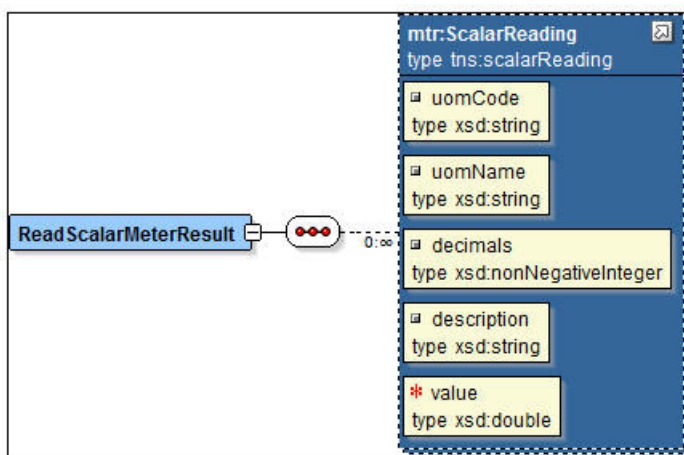Element: ReadScalarMeterResult

Zero or more scalar readings for the given meter.

Parameter	Description
uomCode	A code describing the unit of measure for the channel.
uomName	A short string containing the name of the unit of measure.
decimals	The number of digits to the right of the decimal that should be generated when reading the meter.
description	A longer description of the unit of measure.
value	A random number representing the scalar reading.

Meter Attribute Administration Services

This section describes the meter administration services of the test harness composite, including:

- **GetDeviceStatus**
- **SetDeviceStatus**
- **GetConnectionStatus**
- **SetConnectionStatus**
- **IsCommissioned**
- **SetCommissioned**
- **GetExecutionStatus**
- **SetExecutionStatus**

GetDeviceStatus

This web service queries the device status of a meter. The `OutageEventType` is used by `DeviceStatusCheck`. The possible values of a `deviceStatusType` are:


- **Instantaneous** - The meter responds immediately to the status check
- **SlowResponse** - An `EndpointFailure` with a `FailureReason` of "ErrorResponse" will be returned from the Test Harness
- **NoResponse** - An `EndpointFailure` with a `FailureReason` of "NoResponse" will be returned from the Test Harness

- Unknown - An EndpointFailure with a FailureReason of "Unspecified" will be returned from the Test Harness

Input - GetDeviceStatusInput

Part: payload

Element: GetDeviceStatusRequest




Parameter	Description
id	The ID for the meter for which the status should be retrieved

Output - GetDeviceStatusOutput

Part: payload

Element: GetDeviceStatusResult



The value of the device status for the requested meter.

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.

SetDeviceStatus


This web service updates the device status for a given meter. The possible values of a deviceStatusType are:

- Instantaneous - The meter responds immediately to the status check.
- SlowResponse - An EndpointFailure with a FailureReason of "ErrorResponse" will be returned from the Test Harness.
- NoResponse - An EndpointFailure with a FailureReason of "NoResponse" will be returned from the Test Harness.
- Unknown - An EndpointFailure with a FailureReason of "Unspecified" will be returned from the Test Harness.

Input - SetDeviceStatusInput

Part: payload

Element: SetDeviceStatusRequest




Parameter	Description
id	The ID for the meter for which the device status should be set
value	the new device status to set on the meter

Output - SetDeviceStatusOutput

Part: payload

Element: SetDeviceStatusResult



The boolean response indicates the success or failure of the update (not the current field status).

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.

GetConnectionStatus


This web service queries whether the given meter is connected or disconnected. This method is used by the Connect/Disconnect service. The values for connectionStatusType are:

- Connected
- Disconnected
- Unknown

Input - GetConnectionStatusInput

Part: payload

Element: GetConnectionStatusRequest



Parameter	Description
id	The ID for the meter for which the connection status should be retrieved

Output - GetConnectionStatusOutput

Part: payload

Element: GetConnectionStatusResult



The connection status of the requested meter.

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.

SetConnectionStatus


This web service updates the load action code for a given meter. This method is used by the Connect/Disconnect service. The values for connectionStatusType are:

- Connected
- Disconnected
- Unknown

Input - SetConnectionStatusInput

Part: payload

Element: SetConnectionStatusRequest




Parameter	Description
id	The ID for the meter for which the connection status should be set.
value	The new value of LoadActionCode to set on the meter.

Output - SetConnectionStatusOutput

Part: payload

Element: SetConnectionStatusResult



The boolean response indicates the success or failure of the update (not the current field status).

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.

IsCommissioned

This web service queries the commissioning status for a given meter. This service is used by the Commission/Decommission process. The commissioning attribute can be true or false.

Input - IsCommissionedInput

Part: payload

Element: IsCommissionedRequest




Parameter	Description
-----------	-------------

id	The ID for the meter for which the Commissioned status should be retrieved
----	--

Output - IsCommissionedOutput

Part: payload

Element: IsCommissionedResult



The value of the Commissioned status attribute for the requested meter.

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.


SetCommissioned

This web service updates the commissioning status for a given meter. This service is used by the Commission/Decommission process. The commissioning attribute can be true or false.

Input - SetCommissionedInput

Part: payload

Element: SetCommissionedRequest



Parameter	Description
-----------	-------------


id	The ID for the meter for which the Commissioned status should be set
----	--

value	The new value of Commissioned status to set on the meter
-------	--

Output - SetCommissionedOutput

Part: payload

Element: SetCommissionedResult



The boolean response indicates the success or failure of the update (not the current field status).

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.

GetExecutionStatus

This web service queries the status of the property controlling the overall execution of the command. The possible values of execution status are:

- Success - The command should complete successfully
- ResponseTimeout - The asynchronous response will never arrive
- SyncOperationFail - A simulated fault will occur in the during the initial request
- AsyncOperationFailure - A simulated fault will occur in the asynchronous response

Input - GetExecutionStatusInput

Part: payload

Element: GetExecutionStatusRequest




Parameter	Description
id	The ID for the meter for which the ExecutionStatus should be retrieved

Output - GetExecutionStatusOutput

Part: payload

Element: GetExecutionStatusResult



The value of the ExecutionStatus attribute for the requested meter.

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.

SetExecutionStatus


This web service updates the property controlling the overall completion of the command. The possible values of execution status are:

- Success - The command should complete successfully
- ResponseTimeout - The asynchronous response will never arrive
- SyncOperationFail - A simulated fault will occur in the during the initial request
- AsyncOperationFailure - A simulated fault will occur in the asynchronous response

Input - SetExecutionStatusInput

Part: payload

Element: SetExecutionStatusRequest




Parameter	Description
id	The ID for the meter for which the ExecutionStatus should be set
value	The new value of ExecutionStatus to set on the meter

Output - SetExecutionStatusOutput

Part: payload

Element: SetExecutionStatusResult



The boolean response indicates the success or failure of the update (not the current field status).

Fault - See **UtilityFault** on page 2-24. Thrown when meter id is not found.

Appendix

Glossary

This glossary provides definitions of commonly used terms.

Command Effective Date/Time

The date and time when a device command becomes effective.

Command Expiration Date/Time

The date and time when a device command expires.

Commissioning

A command issued to establish communication between a device and the head-end system. The goal is to ensure connectivity has been established with the device, that any information needed to communicate with the meter has been defined in both Oracle Utilities Smart Grid Gateway and the head end system, and the meter will begin capturing usage and events.

Decommissioning

A command issued to inform the head-end system when a meter needs to be removed from a service point, so that no further reads or events will arrive from the meter. Decommissioning is invoked when a meter must be removed or deactivated. The goal is to stop any communication between the device and the head-end system.

Head-End System

A system that collects measurement data and meter events for eventual submission to the application. Many devices can communicate to the application through a single head-end system. A utility may have numerous head-end systems through which they communicate with devices.

On-Demand Read

A request for the most up-to-date reading from a particular meter. It is not guaranteed to return immediately; it could require a person to manually read the meter. The purposes are to check the meter's operational status and/or obtain a more recent reading than is currently available.

Payload

An upload component which contains measurements and meter events in a format specific to the

head-end. Payloads are part of the initial upload of measurement data.

Remote Connect

A command issued when a meter needs to be connected at a service point.

Index

A

Adapter 2-2
 processing 2-3

B

BPEL Processes 2-9
 CommissionDecommission 2-9
 ConnectDisconnect 2-9
 OnDemandRead 2-9
 ProcessCallout 2-9
Business Objects 2-4, 2-5
 D7-DeviceEventMappingLookup 2-4
 D7-HeadendUOMLookup 2-4
 D7-InitialLoadIMDInterval 2-4
 D7-InitialLoadIMDScalar 2-4
 D7-IntStsCodeToCondMapLookup 2-5

C

Communication Processes 2-5

D

Device Event Mapping 2-5

E

External System 2-7

G

General Configuration 2-1

I

Inbound Services 2-7
 D1-BulkRequestHeader 2-7
 D1-BulkRequestUpdate 2-7
 D1-BulkResponse 2-7
 D1-DeviceEvent 2-8
 D1-DeviceStatusCheck 2-8
 D1-InitialLoadIMD 2-8
 D1-RemoteConnect 2-8
 D1-RemoteDisconnect 2-8
Initial Measurement 2-3

O

Oracle Service Bus 2-3
OUAF 2-5
Overview 1-1

W

Web Services 2-10
 AddMeterReadJobService 2-10
 CommissionDecommissionService 2-10
 ConnectDisconnectService 2-10
 DeviceStatusCheckService 2-10
 OnDemandReadService 2-10

X

XAI
 configuration 2-7
 inbound services 2-7
 senders 2-9

